electronics

A McGRAW-HILL PUBLICATION • PRICE 75 CENTS

JULY • 1956

Transistors In Japan....page 120

Telemetering Missiles.....145

Reducing Noise .148

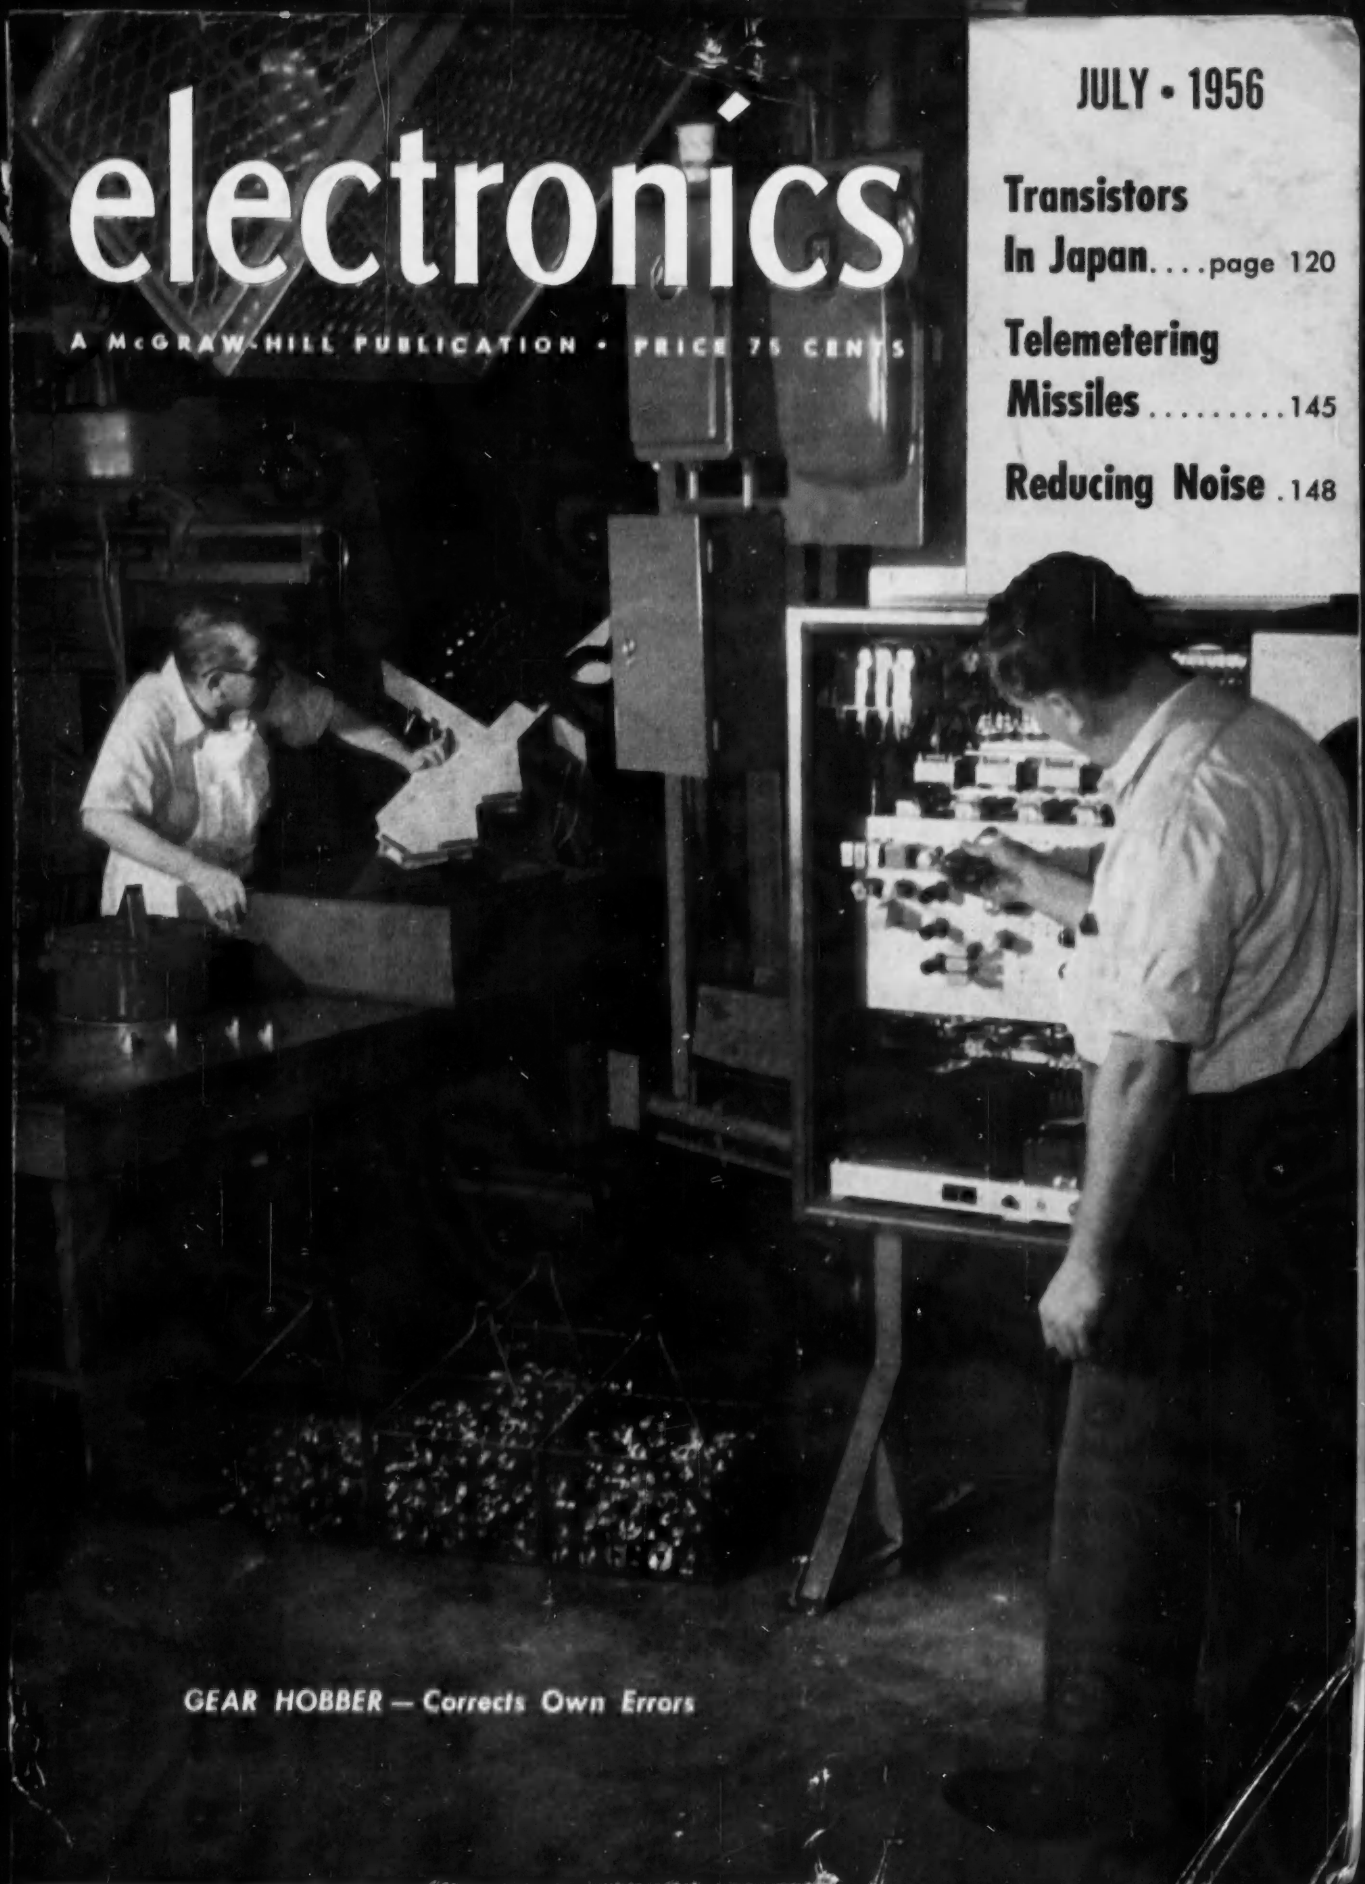

GEAR HOBBER — Corrects Own Errors

NEW HERMETIC POWER COMPONENTS

HIGHEST RELIABILITY FOR MILITARY AND INDUSTRIAL USE



Listed below are just a few of the 50 new **stock items** in the United hermetic power series. These MIL-T-27 power components add to the 200 other hermetic stock items of filter, audio, and magnetic amplifier types. Through the use of proven new materials and design concepts, an unparalleled degree of life and reliability has been attained, considerably exceeding MIL-T-27 requirements. Test proved ratings are provided, not only for military applications but for **industrial, broadcast, and test equipment service (55°C. ambient).**

For complete listing of these new items, write for Catalogue #56.

MIL-T-27 RATINGS IN REGULAR TYPE — INDUSTRIAL RATINGS IN BOLD TYPE

TYPICAL POWER TRANSFORMERS, PRI: 115V., 50-60 cycles.

Type No.	HV Sec. C.T.	Approx* DC volts	DC MA	Fil. Wdg.	Approx* DC volts	MA DC	Fil. Wdg.	MIL Case
H-81	500	L 180	65		L 170	75		
		C 265	55	6.3VCT-3A	C 240	65	6.3VCT-3A	HA
	550	L 200	60	5V-2A	L 190	70	5V-2A	
		C 300	50		C 280	60		
H-84	700	L 255	170		L 240	210		
		C 400	110	6.3V-5A	C 360	150	6.3V-6A	KA
	750	L 275	160	6.3V-1A	L 260	200	6.3V-1.5A	
		C 420	105	5V-3A	C 380	140	5V-4A	
H-87	730	L 245	320		L 210	420		
		C 390	210	6.3V-6A	C 350	310	6.3V-6A	NB
	800	L 275	300	6.3V-2A	L 245	400	6.3V-2A	
		C 440	200	5V-4A	C 400	300	5V-4A	
H-93	1000	L 370	280	6.3V-8A	L 340	340	6.3V-10A	0A
	1200	L 465	250	6.3V-4A	L 455	300	6.3V-5A	
				5V-6A			5V-6A	

*After appropriate H series choke. L ratings are choke input filter, C ratings are condenser input.

United "H" series power transformers are available in types suited to every electronic application. Proven ratings are listed for both high voltage outputs . . . condenser and choke input filter circuits . . . military and **industrial** applications.

United "H" series filter reactors are extremely flexible in design and rating. Listings show actual inductance at four different values of DC. Bold type listings are **industrial** application maximums.

A FEW TYPICAL LISTINGS OF FILTER REACTORS.

Type No.	Ind. @ Hys.	MA DC	Ind. @ Hys.	MA DC	Ind. @ Hys.	MA DC	Ind. @ Hys.	MA DC	Res. Ohms	Max. DCV* Ch. Input	Test V. RMS	MIL Case
H-71	20	40	18.5	50	15.5	60	10	70	350	500	2500	FB
H-73	11	100	9.5	125	7.5	150	5.5	175	150	700	2500	HB
H-75	11	200	10	230	8.5	250	6.5	300	90	700	2500	KB
H-77	10	300	9	350	8	390	6.5	435	60	2000	5500	MB
H-79	7	800	6.5	900	6	1000	5.5	1250	20	3000	9000	9x7x6

*Based on maximum ripple voltage across choke in **choke input** filter circuit, in terms of DC output voltage.

TYPICAL FILAMENT TRANSFORMERS, PRI: 105/115/210/220V., 50-60 cycles.

Type No.	Sec. Volts	Amps. (MIL)	Amps. (Ind)	Test Volts RMS	MIL Case
H-121	2.5	10	12	10000	JB
H-124	5	3	3	2000	FB
H-127	5	20	30	21000	NA
H-131	6.3CT	2	2.5	2500	FB
H-132	6.3CT	6	7	2500	JA
	6.3CT	6	7		
H-136	14, 12, 11CT	10	14	2500	LA

United "H" series filament transformers have multi-tapped primaries, good regulation, and are rated for **industrial** as well as military service.

United "H" series plate transformers incorporate dual high voltage ratings and tapped primaries to provide versatile units for a wide range of military and **industrial** electronic applications. Large units have terminals opposite mounting for typical transmitter use.

TYPICAL PLATE TRANSFORMERS, PRI: 105/115/210/220V., 50-60 cycles.

No. Type	Sec. V. C.T.	Approx.* DC volts	MA DC	Choke No.	MA DC	Choke No.	Case
H-110	1050	380	275	H-75	385	H-77	MB
	1200	465	250	H-75	350	H-77	
H-113	2500	1050	280	H-77	340	H-77	5¼ x 6 x 7
	3000	1275	250	H-76	300	H-76	
H-115	3500	1500	265	H-77	350	H-77	8¾ x 6½ x 8
	4400	1900	225	H-77	300	H-77	
H-117	5000	2125	900	H-79	1100	H-79	13½ x 11 x 14½
	6000	2550	800	H-79	1000	H-79	

*After filter choke. All ratings are for choke input filter.

UNITED TRANSFORMER CO.

150 Varick Street, New York 13, N. Y. • EXPORT DIVISION: 13 E. 40th St., New York 16, N. Y.

CABLES: "ARLAB"

electronics

JULY • 1956

A McGRAW-HILL PUBLICATION

GEAR HOBBER CORRECTS OWN ERRORS—Machine designed at Airborne Instruments Laboratory checks gears for pitch diameter and root fillet buildup and automatically adjusts to compensate for tool wear in Plymouth engine plant (see p 140) ..... COVER

H. W. MATEER, *Publisher*

W. W. MacDONALD, *Editor*
VIN ZELUFF, *Managing Editor*
JOHN MARKUS, *Associate Editor*
ALEXANDER A. McKENZIE, *Associate Editor*
JOHN M. CARROLL, *Associate Editor*
JOHN M. KINN, JR., *Associate Editor*
WILLIAM P. O'BRIEN, *Assistant Editor*
WILLIAM G. ARNOLD, *Assistant Editor*
DAVID A. FINDLAY, *Assistant Editor*
HAIG A. MANOOGIAN, *Assistant Editor*
GLORIA J. FILIPPONE, *Editorial Assistant*
ARLENE SCHILP, *Editorial Assistant*
GLADYS T. MONTGOMERY, *Washington Editor*
HARRY PHILLIPS, *Art Director*

WALLACE B. BLOOD, *Manager*
R. S. QUINT, *Buyers' Guide Manager*
FRANK H. WARD, *Business Manager*
GEORGE E. POMEROY, *Classified Manager*
DONALD H. MILLER, *New York*
JAMES GIRDWOOD, *New York*
THOMAS B. VOUGHT, *New York*
WM. S. HODGKINSON, *New England*
JAMES T. HAUPTLI, *Philadelphia*
CHARLES WARDNER, *Chicago*
BRUCE WINNER, *Chicago*
WALTER M. LUCE, *Chicago*
HENRY M. SHAW, *Cleveland*
T. H. CARMODY, *San Francisco*
R. C. ALCORN, *San Francisco*
CARL W. DYSINGER, *Los Angeles*
WILLIAM KEARNS, *Atlanta*
GORDON L. JONES, *Dallas*
DOUGLAS BILLIAN, *Dallas*
HERBERT LAGLER, *London*

KEITH HENNEY, *Consultant*

SHOPTALK 2

FIGURES OF THE MONTH 6

INDUSTRY REPORT 7

RETMA Sees Increased Volume ... 7
Military Backlogs Hold Up ... 7
CAA Budgets for Electronics ... 8
Broadcasters Set For Politics ... 8
FCC Actions ... 10
Test Equipment Volume Triples ... 10
Hot Tube Made For Circuits ... 12
Tubes Clear Traffic Jams ... 12
Business Failures Up ... 14
Electronics In Weather Bureau ... 14
Tube Testers In Supermarkets ... 16
Kinescope Recorder Sales ... 16
Environment Create Business ... 20
Electron Microscopes Gain ... 20
Wire Makers Size Up Future ... 22
Industry Gets Reactor ... 22
Industry Pushes TV Color ... 24
Noise Gear Has Brisk Sales ... 24
Financial Roundup ... 24
Future Meetings ... 26
Industry Shorts ... 26

CROSSTALK 119

FEATURES

Transistor Circuitry in Japan 120

Designing Storage-Tube Equipment 126
By J. A. Buckbee and A. S. Luftman

Three-Dimensional Radar Video Simulator 131
By Peter Pielich

Automatic Tuning for High-Power Transmitter 134
By V. R. DeLong

USAF Computer Uses Magnetic Amplifiers 138

Gear Gage Controls Automatic Hobber 140
By Raymond C. Miles

Transistors Telemeter Small Missiles 145
By Cecil M. Kortman

Reducing Noise in Communications Systems—Part V 148
By W. R. Bennett

Wide Range Meter Measures Flutter and Wow 152
By H. J. Wirth

CONTINUED ON NEXT PAGE

contents

continued

Four-Place Timer Codes Oscillograph Recordings 154
By Samuel E. Dorsey

Telemetering Demodulator for Wide-Band F-M Data 157
By T. D. Warzecha

Regulator Stabilizes Infrared Detector 160
By Henry B. Weisbecker

Digital Storage Using Neon Tubes 162
By Martin S. Raphael and Arthur S. Robinson

Superregenerative Transistor Oscillator 166
By R. J. Kircher and I. P. Kaminow

Regulating Amplifier Corrects Slope and Level 168
By W. S. Chaskin and H. R. Kimball

Multipath Simulator Tests Communications 171
By A. F. Deuth, H. C. Ressler, J. W. Smith and G. M. Stamps

Design Chart for Selective Cathode Traps 174
By K. Hillman

ELECTRONS AT WORK 178

New Carrier Communications 178
Shock-Velocity Measurement 178
Construction Of DEW Line 178
Tesla Centenary 180
New Wind Tunnel Uses TV 182
Man-Made Diamonds 182
Radio Paging 182
Siting UHF Stations 184
Meteorologists Study Ducts 184
Transhorizon Utilization 186
Nerve Gas Sampler 188
Highway Vehicle Scales 188
Research Publication 188
Higher Pentode Gain 190
By Lester Levy
Magnetic Storm Alarm 196
Cadmium Oxide Electrodes 196
Video Tape Recorder 198
FCC Spectrum Changes 200
Automatic Camera Exposure 202
Transistors Under Test 202
Phase Detector for Synchros 204
By G. S. Copper
Antennas Scan Chromosphere 208
Bistable Circuits 210
By H. L. Armstrong
Forms Burster 214
Color Tape Head 216

PRODUCTION TECHNIQUES 218

Wire Brush on Drill 218
Lamps Indicate Wiring Errors 218
Anchoring Leads with Nylon Rods 220
Motorized Soldering Wheel 222
Ultrasonic Dicing of Germanium 224
Automatic Etching of Transistors 226
Coining of Waveguide Flanges 236
Ultrasonic Soldering of Leads 238
Tube Printer 242
Aluminum-Foil Focus Coils 244
Automatic Screwdriver for Coils 252
Magnetic Lamp with Magnifier 254

NEW PRODUCTS 256

LITERATURE 322

PLANTS AND PEOPLE 340

NEW BOOKS 366

THUMBNAIL REVIEWS 370

BACKTALK 372

INDEX TO ADVERTISERS 429

SHOP

►**COMMUNICATIONS** . . . Editors on ELECTRONICS staff have one advantage over the editors of many other publications—they can pursue their editorial interests at home as a hobby.

Half the staff currently hold FCC licenses, mostly amateur, and nearly all have at some time or another held ship and broadcast operator licenses.

The publishing business being what it is, the amateurs on the staff do not spend much time operating. They do, considerable experimenting, though, some of it on amateur equipment.

Seven editors have commercial communications receivers, several have more than one. We exclude Command sets from this category, but there are two dozen of these scattered throughout the staff.

There are five tape recorders and two wire recorders in editors' homes. These have had an increasing amount of use in the past year or two and there has been some duplicating of tape for other editors.

Television sets average 2.4 per editor. Sizes range very widely and include 3, 5, 7, 10, 12, 16, 17, 19, and 21-inch picture tubes. Two are the proud possessors of color sets.

Table model radio receivers, with and without clocks, average 3.1 per editor.

Ten f-m receivers, or tuners and amplifiers, are used by ELECTRONICS editors.

electronics

JULY, 1956 Vol. 29, No. 7

Member ABC and ABP

TALK

Some rather odd pieces of gear turned up in our survey. These came from surplus which, right after the war, was a boon to those of us who admire odd pieces of electronic gear. Included are two radio teleprinters.

Three of us admit that, although we have no practical use for them, it was because of purely academic interest and admiration that we picked up Gibson Girls.

▶DISTANCE NO PROBLEM . . . A subscriber in Durban, South Africa floored us last month. He wrote that he noticed in December *Shoptalk* the troubles faced by another reader packing and moving his 120 copies of ELECTRONICS from the east to the west coast.

He, J. W. Orner, states, "I am up against much the same trouble as I have a collection dating back to mid 1948 and am leaving South Africa for the U. S. shortly. In my case the problem seems to be a bit tougher and I have not yet succeeded in solving the first of his two troubles, convincing my wife that the issues are really going with us."

▶CHIROGRAPHY . . . Editors are often called upon to interpret foreign letters (sometimes in the original non-English) because of their technical knowledge that helps clarify individual words from their context. Recently, however, a different technique was necessary.

ELECTRONICS Washington editor Gladys Montgomery handles our affairs with the various agencies in the nation's capital but has never been in New York when photos of the staff were taken for Shoptalk. She appears at left, in the photo above. It was taken at the annual dinner of the Women's National Press Club and includes Mrs. Eisenhower, other members of the club and President Eisenhower

An English-speaking author sent in some typed copy that was obviously very much garbled. After a moment of headscratching, the editor decided that a typist had put down what she saw instead of what the author meant when he scribbled it down.

Fortunately, he was familiar with the author's writing. So he scribbled "nook" in a simulated hand, and sure enough, the letters also looked like "mask".

The word fitted the context most perfectly!

▶NO END TO NOISE . . . "Reducing Noise in Communications Systems", page 148 this issue, concludes Bill Bennett's series on electrical noise. This is not the last word ELECTRONICS has to say on the subject, however. We will continue to follow the subject closely and to publish other worthwhile articles in future issues.

Published monthly with an additional issue in June by McGraw-Hill Publishing Company, Inc.; James H. McGraw (1860-1948), Founder. **Executive, Editorial and Advertising Offices: McGraw-Hill Building, 330 W. 42 St., New York 36, N. Y.** Longacre 4-3000. Publication Office, 99-129 North Broadway, Albany 1, N. Y. Donald C. McGraw, President; Paul Montgomery, Executive Vice-President; Joseph A. Gerardi, Vice-President and Treasurer; John J. Cooke, Secretary; Nelson Bond, Executive Vice-President, Publications Division; Ralph B. Smith, Vice-President and Editorial Director; Joseph H. Allen, Vice-President and Director of Advertising Sales; J. E. Blackburn, Jr., Vice-President and Circulation Director.

Subscriptions: Address correspondence to Electronics—Subscription Service, 330 W. 42nd St., New York 36, N. Y. Allow one month for change of address. Subscriptions are solicited only from persons engaged in theory, research, design, production, maintenance and use of electronic and industrial control components, parts and products. Position and company connection must be indicated on subscription orders.

Single copies 75¢ for United States and possessions, and Canada; $1.50 for Latin America; $2.00 for all other foreign countries. Buyers' Guide $3.00. Subscription rates—United States and possessions, $6.00 a year; $9.00 for two years. Canada, $10.00 a year; $16.00 for two years. Other western hemisphere countries and the Philippines, $15.00 a year; $25 for two years. All other countries $20.00 a year; $30.00 for two years. Three-year rates, accepted on renewals only, are double the one-year rate. Entered as second-class matter August 29, 1936, at the Post Office at Albany, N. Y., under act of Mar. 3, 1879. Printed in U.S.A. Copyright 1956 by McGraw-Hill Publishing Co., Inc.—All Rights Reserved.

BRANCH OFFICES: 520 North Michigan Avenue, Chicago 11, Ill.; 68 Post Street, San Francisco 4; McGraw-Hill House, London, E. C. 4; Washington, D. C. 4; Philadelphia 3; Cleveland 15; Detroit 26; St. Louis 8; Boston 16; 1321 Rhodes-Haverty Bldg., Atlanta 3, Ga.; 1125 West Sixth St., Los Angeles 17; 919 Oliver Building, Pittsburgh 22. ELECTRONICS is indexed regularly in The Engineering Index.

CHECK ALL B SUPPLIES

YOU WILL CHOOSE

SORENSEN B-NOBATRONS*

PERFORMANCE • DEPENDABILITY • PRICE

SORENSEN B-NOBATRONS (B Power Supplies) were designed specifically to provide an economical answer for a very wide range of technical requirements.

Look them over. Five catalog models, available from stock, give you choice of outputs from 0-325, 0-500, 0-600, and 0-1000 VDC, accurately regulated. High grade engineering, high grade materials, and Sorensen's unequaled know-how in designing and manufacturing regulated power equipment combine to assure you top performance, dependability, and fair price.

**Reg. U.S. Pat. Off.*

Your inquiries for further information will receive prompt attention. Contact your local Sorensen representative, or write to General Sales Department, Sorensen & Co., Inc., 375 Fairfield Ave., Stamford, Conn.

DC POWER SUPPLY SPECIFICATIONS

Model	325BB	560BB	500BB	600B	1000BB
AC input range (50-60 cps, 1Ø)	105-125	105-125	105-125	105-125	103-125
Output range (VDC)	0-325	0-500	0-500	0-600	200-1000
Output current (Ma)	0-125	0-200	0-300	0-500	0-500
Regulation accuracy	±0.5%	±0.5%	±0.5%	±0.25%	±0.5%
Ripple (MV-RMS)	5 max.	5 max.	5 max.	3 max.	20 max.
Bias supply (VDC at 0-5Ma)	0-150	0-150	0-150	0-150	—
Internal impedance (max.)	2 ohms	2 ohms	2 ohms	2 ohms	2 ohms
AC voltage (C.T., unreg.)	6.3 at 10 amp.	6.3 at 10 amp.	6.3 at 10 amp.	6.3 at 15 amp.	—
Max. bias circuit impedance	25000 ohms	25000 ohms	25000 ohms	50000 ohms	

CONTROLLED POWER FOR Sorensen RESEARCH AND INDUSTRY

SORENSEN & COMPANY, INC. • 375 FAIRFIELD AVENUE • STAMFORD, CONNECTICUT

Hourly Stability Better than ±0·02%

NO IDLE BOAST—this is the normal performance of the **D-695 MUIRHEAD-WIGAN decade oscillator**

Other outstanding features of this unique instrument include . . . .

Extreme Simplicity of Control

just set the frequency dials and adjust to the required level on the output meter

Frequency Accuracy

±0·2% and better, within five minutes of switching on

204

THE D-695 MUIRHEAD-WIGAN DECADE OSCILLATOR

Low Harmonic Content

obtained by using controlled negative feedback in the oscillatory section

PUBLICATION 4718 sent on request

SPECIFICATION

FREQUENCY RANGE
10 c/s-31 200 c/s (continuously variable) in two ranges (×1 and ×10)

FREQUENCY ACCURACY (within 5 minutes of switching on)
±0·2% (or better) above 100 c/s, decreasing to ±0·3 c/s at 10 c/s

HOURLY STABILITY Better than ±0·02%

RESETTING ACCURACY 0·1 c/s on ×1 range : 1·0 c/s on ×10 range

HARMONIC CONTENT AT AN OUTPUT LEVEL OF 10 mW
30 c/s-30 kc/s 0·2% into 600 ohm balanced or unbalanced; 0·5% into 10 k ohm unbalanced.
Below 30 c/s Increasing gradually to about 0·6% in the two unbalanced conditions and about 4% in the 600 ohm balanced condition at 10 c/s

HUM LEVEL WITH RESPECT TO 10 mW
—70dB (0·03% of the output voltage at 10 mW)

VARIATION OF OUTPUT LEVEL WITH FREQUENCY
50 c/s-10 kc/s Flat within ±0·1dB 20 c/s-30 kc/s Flat within ±0·5dB
Below 30 c/s ±1dB

MAXIMUM UNDISTORTED OUTPUT POWER 10 mW

POWER SUPPLY
190-250V, 50 c/s (D-695-A) 95-125V, 60 c/s (D-695-A/100)

OVERALL DIMENSIONS
17¼ in. wide × 12¼ in. high × 8 in. deep (44·5 cm × 31·8 cm × 20·3 cm)

WEIGHT 37 lbs (17 kg)

MUIRHEAD

MUIRHEAD INSTRUMENTS Inc · 677 Fifth Avenue · New York 22 · N.Y.

United States Sales & Service for **MUIRHEAD & CO. LIMITED** · Beckenham · Kent · England

Want more information? Use post card on last page.

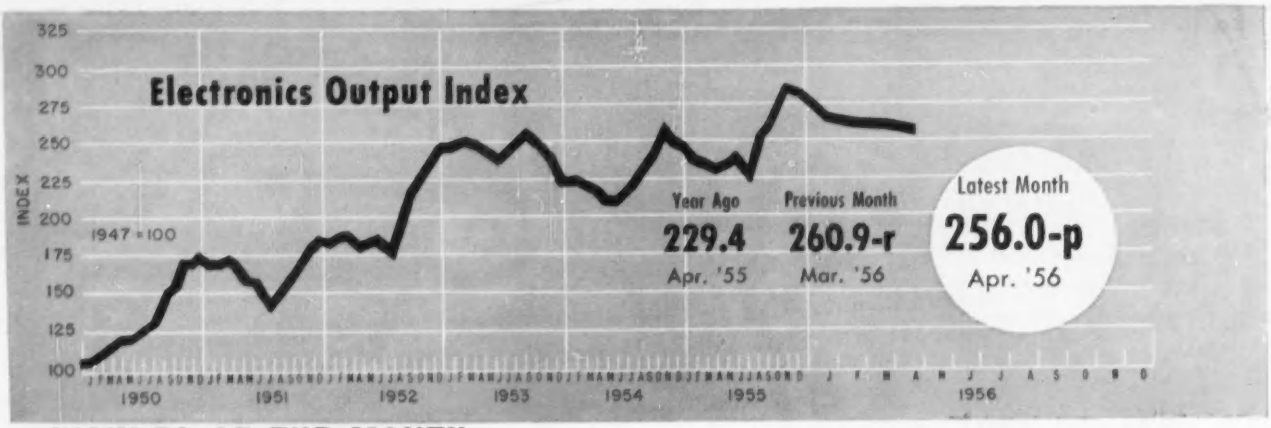

FIGURES OF THE MONTH

RECEIVER PRODUCTION

(Source: RETMA)	Latest Month Apr. '56	Previous Month Mar. '56	Year Ago Apr. '55
Television sets, total	549,632	680,003	583,174
With UHF	74,102	82,805	103,088
Color sets	nr	nr	nr
Radio sets, total	992,982	1,360,113	1,099,755
With F-M	nr	833	13,894
Auto sets	299,253	478,272	567,876

RECEIVER SALES

(Source: RETMA)	Apr. '56	Mar. '56	Apr. '55
Television sets, units	347,630	544,411	411,748
Radio sets (except auto)	471,193	527,649	367,841

RECEIVING TUBE SALES

(Source: RETMA)	Apr. '56	Mar. '56	Apr. '55
Receiv. tubes, total units	35,184,000	42,525,000	35,426,153
Receiv. tubes, value	$28,616,000	$34,849,000	$26,779,586
Picture tubes, total units	830,902	848,055	788,317
Picture tubes, value	$15,141,461	$15,714,365	$14,620,075

INDUSTRIAL TUBE SALES

(Source: NEMA)	Quarterly Figures: Latest Quarter 4th '55	Previous Quarter 3rd '55	Year Ago 4th '54
Vacuum (non-receiving)	$9,967,411	$9,027,845	$9,338,181
Gas or vapor	$3,251,621	$3,438,835	$3,498,123
Magnetrons and velocity modulation tubes	$13,726,323	$10,998,967	$15,249,651
Gaps and T/R boxes	$1,578,767	$1,421,138	$1,788,780

MILITARY PROCUREMENT

(Source: Defense Dept.)	1st '56	4th '55	1st '55
Army	$40,490,000	$48,477,000	$2,833,000
Navy	$28,700,000	$20,378,000	$43,147,000
Air Force	$124,828,000	$131,938,000	$133,503,000
Total—Electronics	$194,018,000	$200,793,000	$179,483,000

BROADCAST STATIONS

(Source: FCC)	Latest Month May '56	Previous Month Apr. '56	Year Ago May '55
TV stations on air	495	489	454
TV stations CPs—not on air	112	114	124
TV stations—new requests	41	29	16
A-M stations on air	2,890	2,872	2,711
A-M stations CPs—not on air	118	118	103
A-M stations—new requests	273	275	217
F-M stations on air	532	534	540
F-M stations CPs—not on air	15	13	12
F-M stations—new requests	4	6	4

COMMUNICATION AUTHORIZATIONS

(Source: FCC)	Apr. '56	Mar. '56	Apr. '55
Aeronautical	46,739	45,488	42,045
Marine	55,580	55,175	49,261
Police, fire, etc.	20,339	20,216	17,827
Industrial	28,946	28,454	24,045
Land transportation	9,001	8,849	7,499
Amateur	148,648	146,699	134,720
Citizens radio	17,046	16,262	11,193
Disaster	327	327	313
Experimental	690	666	600
Common carrier	2,219	2,185	1,917

EMPLOYMENT AND PAYROLLS

(Source: Bur. Labor Statistics)	Mar. '56	Feb. '56	Mar. 55
Prod. workers, comm. equip.	378,300-p	385,400-r	352,300
Av. wkly. earnings, comm.	$75.14 -p	$74.93 -r	$70.80
Av. wkly. earnings, radio	$72.00 -p	$70.84 -r	$68.68
Av. wkly. hours, comm.	40.4 -p	40.5 -r	40.0
Av. wkly. hours, radio	40.0 -p	40.0 -r	39.7

SEMICONDUCTOR SALES ESTIMATES

	Mar. '56	Feb. '56	Jan. '56*
Transistors, Units	707,817	616,818	572,674

STOCK PRICE AVERAGES

(Source: Standard and Poor's)	May '56	Apr. '56	May '55
Radio-tv & electronics	424.0	450.0	471.4
Radio broadcasters	492.1	524.0	537.0

p—provisional r—revised nr—not reported
*1955 not available

FIGURES OF THE YEAR

TOTALS FOR FIRST FOUR MONTHS	1956	1955	Percent Change	1955 Total
Television set production	2,394,264	2,771,426	—13.6	7,756,521
Radio set production	4,525,225	4,739,919	— 4.5	14,894,695
Television set sales	2,036,808	2,355,740	—13.5	7,421,084
Radio set sales (except auto)	1,984,915	1,609,182	+23.3	6,921,384
Receiving tube sales	155,604,000	152,762,000	+ 1.9	479,802,000
Cathode-ray tube sales	3,469,405	3,427,745	+ 1.2	10,874,234

INDUSTRY REPORT

RETMA Sees Increased Volume

Predicts rise of $250 million in equipment sales this year, higher military and radio sales

DURING the 1955-56 RETMA fiscal year ending in August, electronics manufacturers will sell equipment valued at $5.5 billion as against $5.25 billion during 1954-55 fiscal year, according to estimates by F. W. Mansfield of Sylvania, chairman of RETMA's statistics committee. The total billing of the industry should exceed $10 billion with distribution, service, installation and broadcast revenue.

The total factory sales of all amusement devices (radios, television sets, phonographs, etc) was estimated at $1.434 billion compared with $1.495 billion in the last fiscal year. Industrial and commercial products are up from $625 million to $775 million. Military products exceed $2.5 billion versus $2.375 billion in the preceding fiscal year. Replacement parts reach $780 million this year compared with sales of $725 million.

► **Units**—Radios gain 14 percent with 14,300,000 units sold by factories during 1955-56 compared with the 12,576,138 in 1954-55. Auto radios account for 6,400,000 units versus 5,704,983 for a gain of 12 percent. Factory sales of all other radios were estimated at 7,900,000 versus 6,871,155, a 15-percent growth.

Television set factory sales show a decline of 6 percent, from 7,959,389 to 7,450,000 units.

► **Multiple Ownership**—According to the RETMA report, it is to be expected that the television industry is on the threshold of a new upswing even though 75 percent of American households have one or more television sets and 91 percent may have them by 1960. Multiple set ownership and replacement sales will account for the rise. During 1954, the number of television sets sold to those already having at least one set in working order was 925,000. During 1955, another 1,700,000 were sold as second sets.

In 1950, replacement television sales were only 102,000. Last year, they were 2,366,000. By 1960, it is estimated that annual television sales to replacement buyers will be 6,100,000.

Magnet Material Burns

PURIFIED manganese-bismuth ignites when exposed to air. Expected to yield powerful permanent magnets, it has been perfected by Westinghouse for the Air Research and Development Command. Resistance to demagnetization is about ten times greater than present magnets

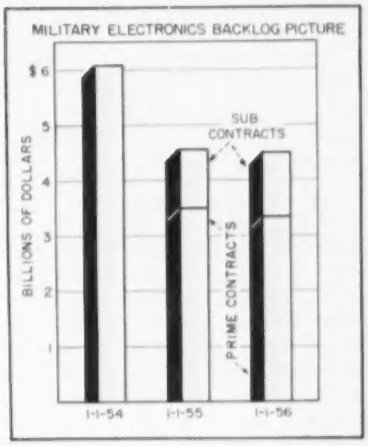

FROM peak in 1954 . . .

Military Backlogs Hold Up

Companies have big business on the books and orders are increasing

MANY firms are well set for a big year in the military electronics business. This is indicated by the industry's military backlog. Individual firms report sharp increases in unfilled orders.

At the beginning of 1956, the industry had a total military backlog of $4,503.5 million representing a decline of only $23 million from the $4,526.4 million a year earlier. Recent reports for individual firms indicate that by the beginning of 1957, the backlog of military orders may approach the total of 1954.

► **Rise**—One company reports that its current $58-million backlog is the highest month-end total since December, 1954. Reports from other

firms indicate increases ranging from 25 percent to 100 percent over backlogs of a year ago. For ten companies, backlogs, on the average, are some 60 percent higher than they were a year ago.

► **Why**—Increased emphasis on guided missile and other aircraft procurement this year is an important reason for the rising backlog. Some manufacturers who planned to deemphasize military business in favor of civilian sales have changed plans and are staying with military electronics.

The Navy's survey of electronic production capabilities (ELECTRONICS, June, p 8, 1956) showed that this year 99 companies of those surveyed plan 100 percent military production compared to 73 in 1955. However, the number of companies who planned 100-percent civilian production also increased, from 79 in 1955 to 97 at the beginning of 1956.

CAA Budgets for Electronics

Program calls for $250 million expenditure for equipment in the next five years

ELECTRONICS looms large in CAA plans to provide adequate air navigation, communications and traffic control for the nation's growing aircraft population. For electronics manufacturers the program may mean new business in the next five years of close to $250 million.

► **Major Units**—Airport Surveillance Radar (ASR) with a range of 50 to 60 miles will be increased by an additional 44 locations through fiscal 1961 bringing the total number to 89. As of June 30, 1955, a total of 45 had been planned with 31 commissioned and 14 under installation.

By 1957 the CAA hopes to have 13 Radar Approach Control (RAPCONS) units in operation increasing to 20 by 1958. Cost for the program through 1961, excluding maintenance and operation, would be about $19.6 million.

► **Long-Range Radar**—This equipment, for obtaining information on aircraft en route rather than in terminal areas, is to be increased by 51 additional installations through fiscal 1961 at a total establishment cost of $42.2 million.

► **Secondary Radar**—Used to detect and identify aircraft within a range of 200 miles, secondary radar or ATC Radar Beacon System depends on transmitted replies from aircraft. A total of 162 is contemplated through 1961 of which 28 will be furnished by the military. This will mean expenditure of $15.2 million for the equipment during the period.

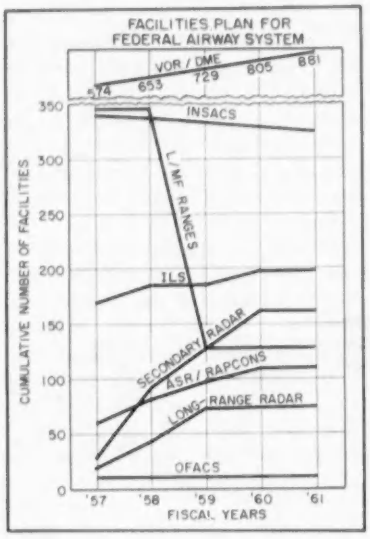

► **VOR/DME**—This equipment provides track guidance and position information for air navigation. As of June 30, 1955 214 DME's had been commissioned for use with VOR's, 141 more had been installed but not commissioned, 73 installations were under way and 4 projects were unassigned. There has not been a DME establishment program since fiscal 1955.

Federal agencies on the Air Coordinating Committee agreed last year on military implementation of a tactical air navigation system (TACAN) and the continued use of VOR/DME until some succeeding "common system" has been adopted and installed.

If TACAN is adopted, VOR would continue in use until 1965 and DME until 1960. However, if VOR/DME continue as part of the overall "common system" CAA estimates that 383 additional VOR/DME facilities will be required through 1961 with a $49.7 million establishment cost. If TACAN is adopted an estimated 814 TACAN units will be required through 1961.

► **ILS**—An additional 28 instrument Landing Systems will be required through 1961. As of June 30, 1955, 170 were programmed, 157 commissioned, 5 unassigned and 8 underway. New ILS will cost about $11.4 million to establish.

► **Other**—Other equipment planned that may provide additional business for electronics manufacturers includes INSACS or interstate airway communications systems and OFACS, overseas-foreign aeronautical communications stations.

Broadcasters Get Set For 1956 Politics

Elaborate tv facilities are planned by networks for convention coverage

THREE tv networks will have tons of equipment on hand for coverage of the Republican National Convention in San Francisco Aug. 21-24 and the Democratic National Convention in Chicago Aug. 13 to 20.

► **ABC** — American Broadcasting plans to build two 14-room units, one in San Francisco and one in Chicago.

The network will use 25 cameras in addition to five pool cameras. ABC newsmen will be equipped with portable tv cameras, two-way communications sets and thirty magnetic paging receivers will be available. (ELECTRONICS, p 210,

(Continued on page 10)

TRIPOLAR CRYSTAL DIODES
For your microwave applications, first diode to provide a simplified approach to front-end design in broadband microwave circuitry.

V.L.I. DIODES
For computer applications, very low impedance diode capable of high forward conductance with excellent stability and fast recovery time.



IN77A PHOTODIODE
Combines high sensitivity with compact design. Covers the visible spectrum and extends to the infrared region.

POWER TRANSISTORS
Low thermal resistance design offers dissipation up to 4 watts with heat sink. Current gain is as much as 3½ times more than comparable types. Both 30 and 60 volt versions are available.

HIGH FREQUENCY TRANSISTORS
NPN high frequency transistors built to high standards of uniformity. Feature low collector capacitance and ease of neutralization in rf and if circuits.

HIGH GAIN AUDIO TRANSISTORS
One of the standards for low frequency, high gain applications.

Semiconductors

created with your product in mind

Each of these semiconductor developments was created to introduce improvements in the product you're designing, whether it's a simple transistorized radio or a complex computer system. Whether it calls for higher transistor power ratings or faster diode recovery time.

Since producing the first commercially available germanium diode in 1942, Sylvania has maintained its semiconductor leadership by meeting the needs of designers with imaginative, new semiconductor applications.

Consult with Sylvania for your needs. A new plant at Hillsboro, N. H. is devoted exclusively to the manufacture of semiconductors to provide you with production quantities. Write for technical data.

SYLVANIA®

SYLVANIA ELECTRIC PRODUCTS INC.
1740 Broadway, New York 19, N. Y.
In Canada: Sylvania Electric (Canada) Ltd.
University Tower Bldg., Montreal

LIGHTING · RADIO · ELECTRONICS · TELEVISION · ATOMIC ENERGY

Want more information? Use post card on last page.

Newsman for NBC-TV's convention coverage holds experimental RCA transceiver, left, and a portable tv camera powered by a pack on his back

June 1956). Three mobile units will operate in each convention city.

► **CBS**—Approximately 22 tons of equipment will be used by CBS to cover the Chicago convention. It will then be moved to San Francisco for the Republican convention. High-speed computers, new two-way radios weighing about 5 pounds each and a new tv camera will be included in the equipment.

The network also hopes to have Ampex video recorders available for convention coverage. (ELECTRONICS, p 7, May, 1956).

► **NBC**—Staffs at each convention for NBC will number close to 400 persons. Three mobile units and over 40 cameras will be used at each site. On the convention floors, a team of reporters will be equipped with two-way radios. Roving mobile units and portable one-man cameras will be used. Film units equipped with high-speed developing equipment will be on the scene.

The network will use Porto-Vision, portable tv receivers that will enable politicians to see each other by split-screen techniques while they talk to each other. The tv audience will have a view of the conversation at the same time. Hip pocket wire recorders with tie-clasp microphones will also be used.

FCC Actions

► **Announced** reception of 50 comments overwhelmingly in favor of proposed unlimited remote control for a-m and f-m stations. Present rules allow remote control of non-directional a-m and f-m of 10 kw or less.

► **Stayed** arc welding rules until further information is available about the characteristics of radio-frequency arc stabilizers that cause interference to communications.

► **Amended** tv rules to permit operation of uhf translator stations in channels 70 to 83 to serve areas without good tv signals. Translators will pick up programs from existing stations and rebrodcast them with an effective 100 watts. More than one remotely controlled translator can be used per program, but each on a different channel with its own call letters.

► **Created** a Domestic Radio Facilities Division in the Common Carrier Bureau to handle radio services and facilities of domestic common carriers.

► **Established** the radio-frequency band 10,500 to 10,550 mc for land and mobile radio-positioning stations using c-w emission.

► **Sought** information to formulate rules for experimental tropospheric over-the-horizon "scatter" assignments, which Commission believes may replace or supplement conventional radio systems.

► **Received** Stromberg-Carlson petition to establish selective radio paging service for certain industrial radio users.

► **Deferred** to Dec. 1 the requirement that field intensity measurements of spurious radiation be submitted with requests for equipment type acceptance.

Test Equipment Volume Triples

Value of shipments nears $190 million with oscilloscopes showing biggest gain

MANUFACTURERS of test equipment for electrical, radio and communication circuits shipped over $188.1 million worth of products in 1954, according to an advance report on the 1954 Census of Manufacturers by the Commerce Department. The total represents more than a threefold increase over 1947 shipments worth $54.8 million.

► **Types**—Four types of test instruments registered the largest percentage gain in shipments during the 7-year period between 1947 and 1954. Oscilloscopes (high frequency types) rose from $766,000 to $7.0 million during the period, followed by radio - frequency measuring equipment which increased from $1.8 million in 1947 to $13.7 million in 1954. Electronic volt-ohm-milliammeters registered a gain of $2.9 million in annual dollar volume of

(Continued on page 12)

Sprague on request will provide you with complete application engineering service for optimum results in the use of electrolytic capacitors.

Sprague LITTL-LYTICS* for transistor circuitry

HERE ARE THE SMALLEST *aluminum electrolytic capacitors ever made to Sprague's rigid quality standards.* Add to that their low leakage current, high reliability, and moderate price, and you have a new series of *miniature* electrolytic capacitors ideal for use in transistorized pocket radio receivers, wireless microphones, personal-style wire recorders, and similar equipment.

Their ultra-low leakage current is particularly important for it means minimum drain and long battery life when used in filtering applications across a battery, and excellent circuit performance when used in coupling applications.

Sprague Littl-Lytics are available in a full range of capacitance ratings from 1 to 110 mf, and in standard working d-c voltages of 1, 3, 6, 10, 12, and 15. Sizes range from 3/16"D x 1/2"L to 3/8"D x 3/4"L. Maximum operating temperature of the new Type 30D capacitors is 65°C.

Performance and size data on metal encased, hermetically sealed Littl-Lytics, in more ratings than ever before, are all provided in NEW Engineering Bulletin 320A, available on letterhead request to the Technical Literature Section, Sprague Electric Company, 22 Marshall Street, North Adams, Massachusetts.

typical ratings

Cat. No.		30D6	30D16
WVDC		6	6
μF		3	60
Leakage Current (μA Max.)		2.0	3.0
Can Size	D"	3/16	3/8
	L"	1/2	3/4

★Trademark

world's largest capacitor manufacturer

SPRAGUE

Export for the Americas: Sprague Electric International Ltd., North Adams, Massachusetts. CABLE: SPREXINT.

shipments, going from $723,000 in 1947 to $3.6 million in 1954. Signal generator shipments rose from $3.7 million to $15.1 million.

▶ **Leaders**—Shipments for five types of test equipment exceeded $10 million in 1954, according to the Census. They are engine analyzers and auxiliary equipment, $23.1 million; oscilloscopes and oscillographs other than high-frequency types, $16.4 million; signal generators, $15.1 million; radio-frequency measuring equipment $13.7 million; parts for test equipment sold separately, $11.3 million.

▶ **Other**—Volume of shipments for other types of test equipment listed in the Census breakdown in order of value is as follows: microwave test equipment $8.4 million; oscilloscopes (high-frequency types), $7.0 million; receiving tube testers, $5.8 million; electrical volt-ohm-milliammeters, $4.4 million; electronic volt-ohm-milliammeters, $3.6 million; resistor, capacitor and inductor measuring equipment, $3.2 million; broadcast transmitter test equipment, $1.6 million.

Overall volume of shipments for other types of test equipment not listed in the breakdown totaled $73.7 million.

Hot Tube Made For Automatic Circuits

ONE of a new series, the Eimac ceramic receiving tube shown in the photograph is being made as a dual triode and pentode. Such a tube can withstand 15-g acceleration at frequencies up to 2,000 cycles. The tube is undamaged at envelope temperatures up to 300 C. Electrical terminals in the form of flat tabs facilitate incorporation of the tube as part of automatically produced circuit modules

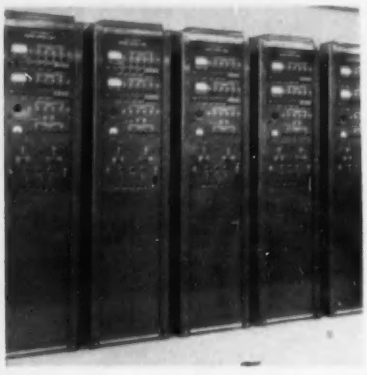

RADAR hanging from stanchion, left, detects cars approaching intersection and sends count to computer, right, that controls traffic lights when . . .

Tubes Clear Highway Traffic Jams

Traffic control systems range from downstown grids to isolated intersections

WITH nearly 62 million registered motor vehicles and new ones rolling off the assembly lines at about nine million annually, traffic congestion has become a serious problem. Engineers working towards more efficient handling of highway traffic are getting help from electronic devices including radar and computers.

▶ **Vehicle Detection**—One way to count cars approaching an intersection is an overhead doppler radar set about the size of a wastepaper basket. Its cone-shaped beam covers one approach. The set emits a pulse each time a vehicle passes through the beam.

Other ways to detect approaching vehicles are pressure or magnetic detectors set in the road. Some engineers prefer radar because it does not require digging up the pavement when it is installed.

▶ **Computers**—Pulses from the vehicle detectors go to preset counters that establish the traffic-signal cycle. At the traffic signal, electron tubes control the green-amber-red light cycle.

At so-called semiactuated intersections, two detectors on side-road approaches count vehicles while the traffic signal is set to favor traffic on the arterial highway. At fully actuated intersections four or more detectors count vehicles approaching in all directions and allocate green time on the traffic signal to favor the heaviest traffic flow. It costs from $3,000 to $15,000 to control an intersection depending upon the equipment required and the problems arising in installing cables and detectors.

▶ **Master Control**—In downtown areas master units controlling many lights automatically set up signal patterns to favor the heaviest traffic flow. In Philadelphia, for example, there will be five master units. On Broad St., three units will control about 60 intersections.

Baltimore plans to control more than 300 intersections. About two dozen cities including Atlanta, Denver, Houston, Los Angeles and New Orleans have some form of electronic traffic signal control. In five years, an estimated 1,000 cities will have electronic control systems.

The radar detector and master control unit shown are made by Eastern Industries, Norwalk, Conn.

▶ **Speed Control**—Doppler radar is doing a big job helping police tag speeders. About 1,500 units are in use.

Another application is a radar unit installed on Connecticut's Merritt Parkway that tells officers at State Police headquarters the speed of vehicles passing the monitor. Police can thus foretell impending con-

(Continued on page 14)

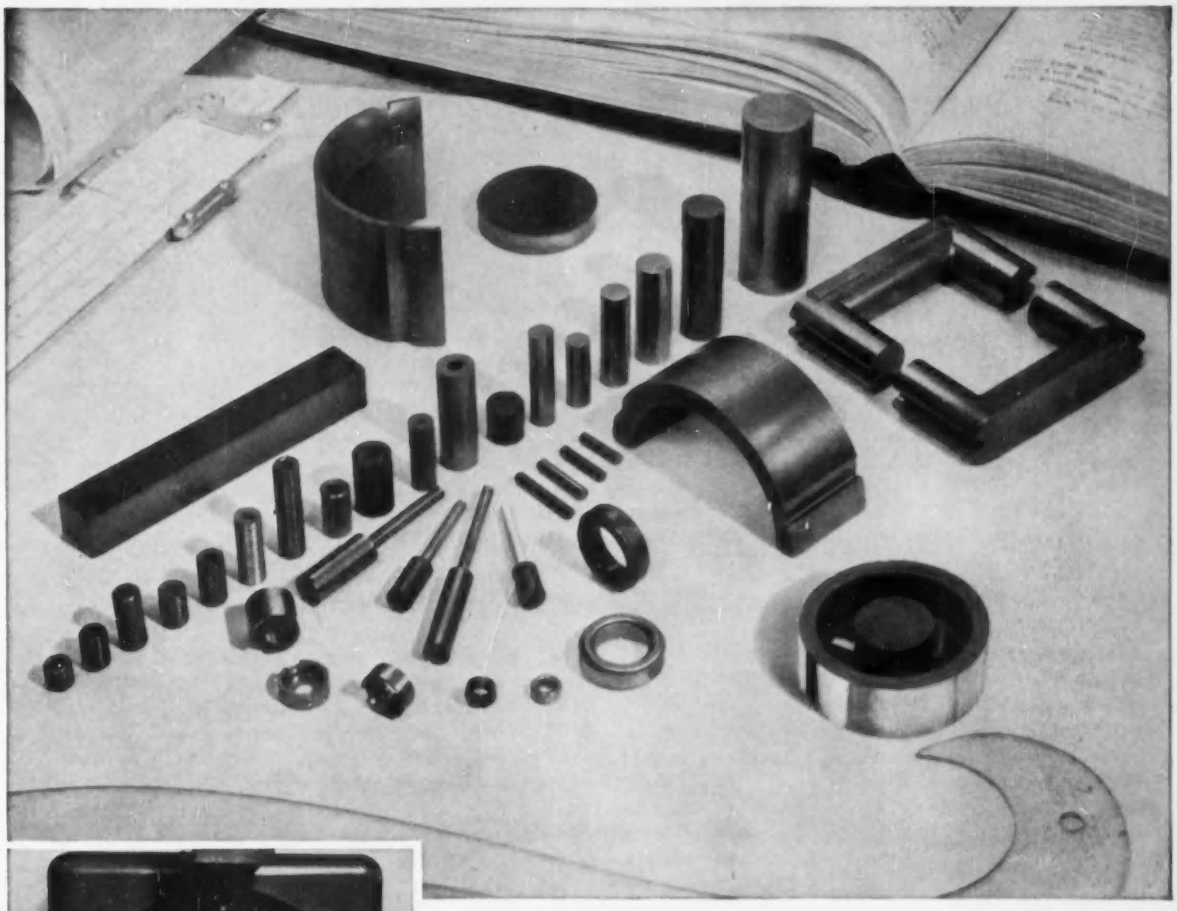

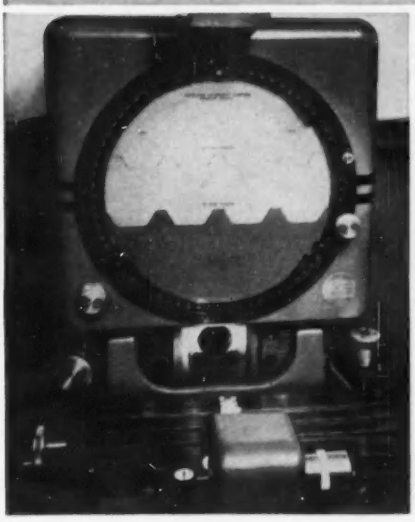

COMPARATOR-CHECKED
to insure precision parts

Threaded cores are checked on an optical comparator at 100-x magnification to assure exact conformance. Arnold quality control of iron powder cores includes the maintaining of rigid electrical, physical and dimensional specifications unmatched in the industry.

Write for a copy of Bulletin PC-109

Contains essential data on processing, control methods, applications, types, sizes, suggested use frequencies, etc. of Arnold iron powder cores.

ADDRESS DEPT. E-67

IRON POWDER CORES
to meet your highest requirements

★ *For Quality*

★ *For Dimensional Accuracy*

Here are the essential facts to keep in mind about iron powder cores—and Arnold. As illustrated above, we make a wide selection of cores, from simple cylinders to special cores of complicated design. That includes all standard types and sizes of threaded cores, cup, sleeve, slug and cylindrical insert cores you may require: for use in antenna and RF coils, oscillator coils, IF coils, perm tuning, FM coils, television RF coils, noise filter coils, induction heating and bombarder coils, and other low frequency applications. Also, a standard series of iron powder toroids is being engineered at this time, which will conform to the standard sizes proposed by the Metal Powder Association. • We'll appreciate the opportunity to supply your needs . . . *let us quote on your requirements.*

WSW 6044

THE ARNOLD ENGINEERING COMPANY

SUBSIDIARY OF ALLEGHENY LUDLUM STEEL CORPORATION

General Office & Plant: Marengo, Illinois

DISTRICT SALES OFFICES . . . New York: 350 Fifth Ave.

Los Angeles: 3450 Wilshire Blvd. Boston: 200 Berkeley St.

Antenna on fire chief's car controls traffic signals

gestion, get to the scene and get traffic moving again.

► **Emergency Vehicles**—The device shown in the photograph allows emergency vehicles to turn traffic signals red on side roads while speeding along a highway. The antennas radiate a 200-ft beam. Made by Standard Coil Products, the equipment consists of a transmitter in the vehicle and receiver in each traffic-signal control box.

Business Failures Up In Electronics

Slight increase in number of failures is offset by decrease in total liabilities

DURING the year ending in April, 29 manufacturers of electronic equipment or products failed in business compared with 26 in the previous year. Total liabilities of the 29 companies were approximately $11,055,000 as against $14,460,000 for the 26 firms a year ago, according to RETMA's credit committee.

► **Types**—Twenty of the troubled companies are continuing in business under the supervision of creditors' committees and nine have gone out of business completely with little or no recovery to creditors.

Seventeen of the firms were producers of components; eight were manufacturers of electronic equipment; two manufactured phonographs; one produced recorders, and one manufactured electronic organs.

Electronics Aids Weather Bureau

Radar for hurricane and tornado warning grows as $10 million is programmed for more equipment

HURRICANE season which started in June and reaches its height in September will be under closer watch this year than ever before. The U.S. Weather Bureau now has 42 radar units in operation in the U. S. representing an investment of nearly $500,000.

Two years ago the Bureau had 22 radar units in operation mainly for use in a tornado picket line in Texas where a line of 14 radar units was established.

► **Equipment**—Most radars now operating are APS 2 or 13 surplus radars turned over to the Bureau by the military. With the units a range of 200 miles is possible.

Soon, however, the Weather Bureau will have new radar units especially designed for its use. Bids are being received for the units which will range in price from $100,000 to $250,000. A contract will be let soon covering about 36 units. The Bureau hopes eventually to have approximately 100 radars in operation throughout the country for storm coverage.

Its overall equipment buying program calls for the expenditure of some $10 million through 1959 of which about $2.5 million has already been approved. A large percentage of the total amount will be used for electronics including the new weather radars, automatic visibility equipment and automatic ceiling cloud height recorders of which more than 100 are planned.

► **Computers**—For the past year the Weather Bureau, in conjunction with the Air Force and Navy, has been using an electronic computer for weather predictions. Ultimately the Bureau hopes to extend its use to tie in with automatic weather observers (ELECTRONICS, p 196, May '56) which will obtain the weather information, transfer it by teletype to a central point where the information will be converted to punched cards for compilation and analysis.

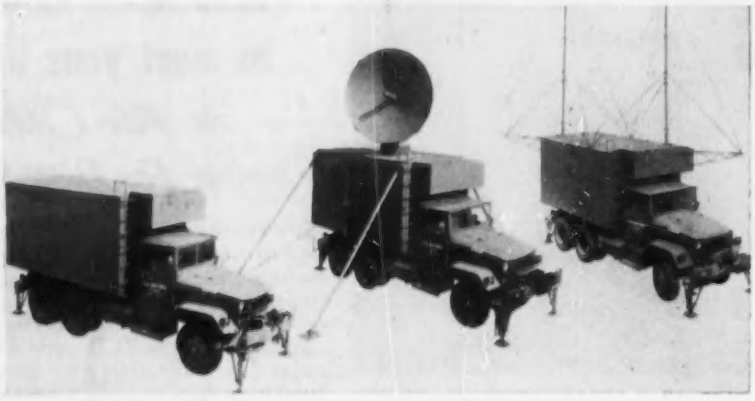

Computer, radar and radio vans, left to right, can go by plane as . . .

Air Force Gets New Radar System

ELECTRONIC close-support ground guidance radar system, designed and built by Reeves Instrument Corp., subsidiary of Dynamics Corp. of America, at a cost of about $40 million, has been delivered to the Air Force.

► **Parts**—The system, designated MSQ-1A Close-Support Control Set, consists of three basic vans: radar, computer and communications. The radar tracks friendly aircraft and furnishes continuous data to the

(Continued on page 16)

Most

revolutionary development in vacuums.....

SINCE 1650 A. D.

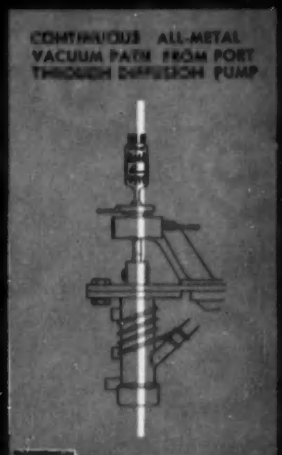

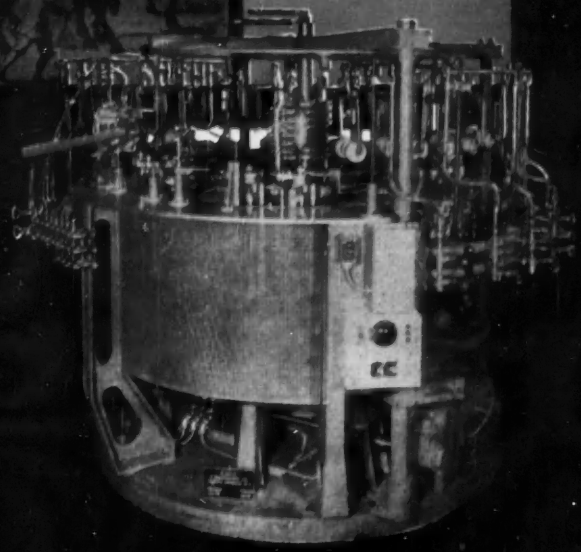

Rotary Exhaust Machine #2694

The Magdeburg Hemispheres Test was the first demonstration of creating a vacuum. That was in 1650 over 300 years ago . . . today Kahle has demonstrated a revolutionary new concept in vacuum . . . a valve-less *rotary Exhaust Machine*.

This rapid-speed, rotary-in-line, automatic *Exhaust Machine* features a *continuous all-metal vacuum path from port through diffusion pump* . . . completely eliminates the conventional slide valve . . . individual automatic leak detector and shut-off valve on each port . . . water cooled compression chucks are automatically operated . . . automatic tipping *torch* and automatic tubulation remover are also employed.

Ultra-high vacuum is achieved with the unique design and rugged construction of Kahle's automatic *Exhaust Machine*. Ideal for exhausting cathode ray tubes, transmitting tubes, receiving tubes, x-ray tubes, and *all* other high-reliability types.

The type *Machine* illustrated is one of a wide selection of sizes and ranges available at Kahle.

Write today for valuable File Folder containing complete specifications and information.

Kahle

ENGINEERING COMPANY 1310 SEVENTH STREET NORTH BERGEN, N. J.

DESIGNERS AND BUILDERS OF AUTOMATIC AND SEMI-AUTOMATIC EQUIPMENT FOR ALL INDUSTRIAL OPERATIONS

computer van for evaluation.

The computer analyzes, interprets and issues all necessary command instructions for tactical guidance of the aircraft. It also provides a continuous plot of the location of any and all airborne weapon systems.

Proper functioning of the system can be checked by a series of built-in automatic test problems and test operations.

Tube Testers Invade Supermarkets

Test-them-yourself stands in 12,000 stores become factor in tube sales

MANUFACTURERS of tube testers of the special quick-setup type have sold a total of 12,000 units, close to $3 million worth, since 1953. The testers go into supermarkets, drugstores and hardware stores for use by customers, and often get the same rough treatment as pinball machines.

▶ **Acceptance** — Though looked upon by many as a fad, the business has taken hold solidly in the west, southwest and southeast. In some areas it accounts for up to 50 percent of all replacement tube sales. The estimated national average of self-service replacement tube sales is around 10 percent.

▶ **Techniques**—Special testers on floor stands, foolproof and easy to operate, are installed in stores without charge by route operators. A favored location is near the liquor counter in a grocery store, because there is usually a clerk to assist with tests and unlock the tube storage rack in the tester base. Some setups carry as many as 125 different tube types. Tubes are checked out and paid for along with groceries.

A location is usually serviced once a week by the owner of the tester. Although many tester routes are owned by parts jobbers and radio servicemen, the majority are owned by pinball and jukebox route operators.

▶ **Profits**—Testers cost from under $200 to around $350. In the best southern California locations, monthly sales can run as high as $1,000 per tester, with average monthly sales per tester hitting $350. The national average of supermarket tube sales is reported to be about $70 per month per outlet.

A consignment contract between the store and the route operator usually gives the location around 25 percent of gross sales. Even with this, the monthly return on the operator's investment runs 15 to 20 percent. After half a year or so, a well-developed route can be sold at profit of 100 to 200 percent, taxed at capital gain rates.

▶ **Manufacturers** — Firms making special tube testers for this market include American Scientific Development Co. of Ft. Atkinson, Wis. and U-Test-M Mfg. Co. of Milwaukee. Initial response to units installed in 1953 in Milwaukee was slow, partly because of antagonism of local servicemen and tube jobbers, but sales picked up in 1954.

Largely resigned to sharing tube sales profits, servicemen in some areas pay as much as $20 a month for the privilege of painting their name on the tester door to get the repair business when a new tube won't fix the set.

Typical grocery supermarket installation. Multiple sockets minimize control settings needed for test

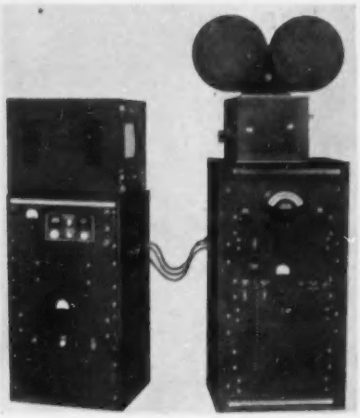

New video film recorder enters market as . . .

Bright Future Seen for Kinescope Recorders

Announcement of video-tape recorder does not appreciably affect film-recorder market

NO SLUMP in sales of video film recorders is anticipated because of a recently announced video tape recorder according to a spokesman for General Precision Laboratory, a supplier of kinescope recording equipment.

▶ **Prices**—Ampex is taking orders for its vtr at $45,000 a unit. Film recorders with optical sound tracks are quoted by GPL at $23,000 and with magnetic-sound-track units for as low as $19,700.

▶ **Other Companies** — Most recently, Univox Eastern made a bid for part of the film recorder market. It is taking orders for a kinescope recorder (see photo). The equipment consists of two units which can be transported, and set-up for operation within a few minutes. Current price is $25,000.

(Continued on page 20)

COURTESY GENERAL ELECTRIC CO

. . . It's G-R Type 970 Potentiometers

where performance and reliability count

The recently announced Carboloy Machinability Computer promises to make the life of the tool engineer much less complicated. This compact instrument provides quick, simple answers to specific metal-cutting problems. Seventeen variables, including cutting speed, depth of cut, tool life, feed, metal removal rate and horsepower, can be determined accurately through use of the Computer.

Every part and component built into this "machining computer" had to meet stringent electrical-performance standards. In particular, General Electric engineers had to be certain that all known quantities would be correctly conveyed to the computer input circuits. That is why General Radio Type 970 Precision Potentiometers were specified for all fifteen of the panel function controls used to establish the input conditions.

Dependable, trouble-free operation is of necessity high on the list of specifications for any computer. Precision G-R Potentiometers are suited for computer use: because, they are sturdy and versatile . . . have superior resistance characteristics...feature a-c performance which is substantially better than that found in higher-precision types...and finally, they are very low in cost for value received.

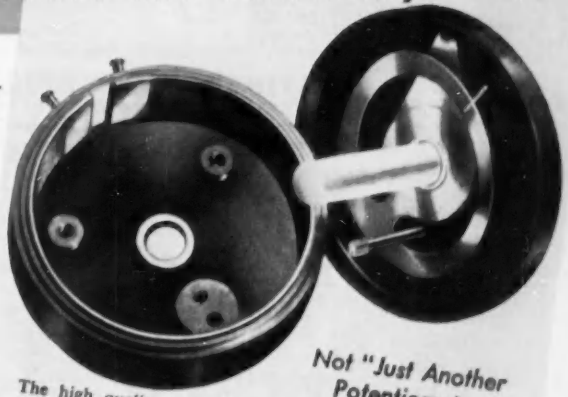

Not "Just Another Potentiometer!"

The high quality built into these Potentiometers at very reasonable prices is a result of a unique simplicity of design. Today's new materials and manufacturing techniques are used to the utmost. This thoroughly engineered product provides performance previously not available at low cost.

★Linearity Better Than ±0.2% for Larger Units
Graded to ±2% for smaller sizes
★Seventeen Stock Resistances
from 2 to 500,000 ohms
★Ratings from 2 to 20 Watts
at 40° Ambient
★1¼" Diameter to 4¼"
★Prices from $3.10 to $10.00
★High Resolution ★Low Electrical Noise ★External Phasing
★Total Enclosure ★No Pressure Connections

VERSATILITY — In addition to potentiometers normally stocked, units will be provided on special order with: 360° mechanical rotation — taps as close as ¼" apart along entire winding — special all-metal or metal-filled shafts — resistance values other than standard — resistance functions other than linear — resistance and linearity tolerances better than standard. Attractive prices can be offered when quantities are sufficient to warrant special production.

Write for POTENTIOMETER Bulletin

GENERAL RADIO Company

275 Massachusetts Avenue, Cambridge 39, Massachusetts, U.S.A.

90 West Street **NEW YORK 6** • 8055 13th St., Silver Spring, Md. **WASHINGTON, D. C.**
1150 York Road, Abington, Pa. **PHILADELPHIA**
920 S. Michigan Ave. **CHICAGO 5** • 1000 N. Seward St. **LOS ANGELES 38**

We Sell Direct. Prices are net, f.o.b. Cambridge or West Concord, Mass.

MILLIONS OF TRANSISTORS with BILLIONS OF HOURS OF SERVICE

far more in use than any other make

A Solid Foundation for Confidence when you Specify

RAYTHEON

TRANSISTORS

Raytheon Transistors offer you the superior electrical performance, reliability and mass production advantages of Raytheon's *fusion-alloy* process.







A



B

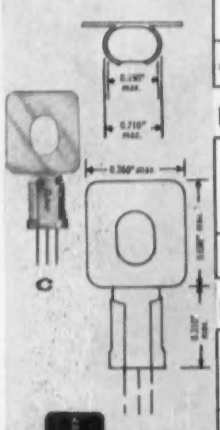

C

RAYTHEON LOW FREQUENCY TRANSISTORS

Type	Size Dwg.	Collector Volts	Collector Meg. ohms	Collector Cutoff μA	Emitter Current mA	Base Resistance ohms	Base Current Ampl. Factor	Max. Noise Factor db	Alpha Freq. Cutoff mc.
2N63	A	−6	2.0	6	−1.0	350	22	25	0.6
2N64	A	−6	2.0	6	−1.0	700	45	22	0.8
2N65	A	−6	2.0	6	−1.0	1500	90	20	1.2
2N106	A	−1.5	1.0	6	−0.5	700	45	12	0.8
2N130	B	−6	2.0	6	−1.0	350	22	25	0.6
2N131	B	−6	2.0	6	−1.0	700	45	22	0.8
2N132	B	−6	2.0	6	−1.0	1500	90	20	1.2
2N133†	B	−1.5	1.0	6	−0.5	700	45	6	0.8

†2N133 with new max. noise factor limit of only 6 db

RAYTHEON RF TRANSISTORS FOR RADIO RECEIVERS

Type	Size Dwg.	Collector Volts	Collector Cutoff μA	Extrinsic Base Resis. Ohms	Base Current Ampl. Factor	Alpha Freq. Cutoff Mc	Collector Capacity μμf	Gain (Maximum Available) at 455 KC db	Gain (Useful) at 455 KC db	Converter Gain db
2N111	A	−6	1	50	25	3	12±6			22
2N112	A	−6	1	55	30	5	12±6			25
***CK766**	A	−6	1	60	45	10	12±6			27
***2N111A**	A	−6	1	50	25	3	12±2	33	28	
***2N112A**	A	−6	1	55	30	5	12±2	36	29	
***CK766A**	A	−6	1	60	45	10	12±2	38	30	

RAYTHEON AUDIO OUTPUT TRANSISTORS

Type	Size Dwg.	Collector Volts	Collector Cutoff μA	Emitter Current mA	Push-Pull Pair Gain db	Push-Pull Pair % Distortion	Power Dissipation Coefficient In Air °/mw	Power Dissipation Coefficient Strapped to Chassis °/mw	Class A Gain db	Class A % Distortion
2N138	B	9	6	1	28 (100 mw)	6	0.45	0.20	30 (10 mw)	7
***CK751**	C	9	6	1	24 (500 mw)	8	—	0.18	23 (50 mw)	9

RAYTHEON COMPUTER TRANSISTORS

Type	Size Dwg.	Collector Volts	Collector Cutoff μA	Emitter Current mA	Extrinsic Base Resis. ohms	Base Current Ampl. Factor	Alpha Freq. Cutoff Mc	Collector Capacity μμf	Grounded Emitter Switching $I_b = -1$ ma $I_c = -20$ ma Rise Time μsec	Storage Time μsec	Decay Time μsec	Saturation Resistance $I_c = -20$ ma $I_b = -1.5$ ma ohms
2N113	A	−6	1	−1	65	45	10	12	0.1	0.6	0.15	25
2N114	A	−6	1	−1	75	75	20	12	0.05	0.7	0.10	25

RAYTHEON SYMMETRICAL TYPE TRANSISTORS

Type	Size Dwg.	Collector Volts	Collector Cutoff μA	Emitter Current mA	Base Current Ampl. Factor (Min.)	Base Current Ampl. Factor** (Min.)	Alpha Freq. Cutoff KC	Alpha Freq. Cutoff** KC	Saturation Impedance $I_b = -1$ ma $I_c = -10$ ma ohms
***CK870**	A	−6	6	−1	10	10	500	500	6
***CK871**	A	−6	6	−1	15	15	600	600	6

**Emitter and Collector interchanged.

MAXIMUM JUNCTION TEMPERATURE FOR GERMANIUM TRANSISTORS, LISTED ABOVE, 85°C.

RAYTHEON NEW HIGH TEMPERATURE SILICON TRANSISTORS

Type	Size Dwg.	Reverse Current at −20v Collector μA (max.)	Reverse Current at −20v Emitter μA (max.)	Beta	Base Resistance ohms	Collector Resistance kilohms	Noise Factor db (max.)	Collector Capacity μμf	Alpha Freq. Cutoff KC
CK790	A	0.2	0.2	14	1200	500	30	30	400
CK791	A	0.2	0.2	24	1400	500	30	30	600
CK793	A	0.2	0.2	16	1300	500	15	30	500

*New type

MAXIMUM JUNCTION TEMPERATURE 150°C. Temperature Rise (free air) 0.50°C/mW

Want more information? Use post card on last page.

such popularity **MUST** be deserved!

Not only on the breadboard but in the field the preference is for

RAYTHEON

FLAT PRESS

RELIABLE SUBMINIATURE TUBES

More *Flat Press* Subminiatures are on the job than button types.

HERE'S WHY:

Flat Press is the *seal of reliability*

Glass to metal seal is *longer*

Glass is heated only *once*
- **— reduced glass strain**
- **— no lead burning**

No harmful electrolysis — Raytheon Reliable Flat Press Subminiatures are life tested at 220° C minimum bulb temperature.

Flexible leads are tinned right up to the glass seal — socketed without strain on the glass.

In-line leads with flat press — the ideal combination for
- **— automation**
- **— printed circuits**
- **— easier socketing**
- **— faster, neater wiring**

Raytheon's Flat Press Subminiature construction is backed by *seventeen years* of manufacturing experience during which *many millions* of Flat Press Tubes have been made.

Reliability. Only one glass failure per *six million tube hours*, based on quality control tests of 4200 tubes operated for 10,000 hours each.

ALL THIS

PLUS

T L C

...Raytheon Reliable Subminiature Tubes are now adding that priceless ingredient T L C.

RAYTHEON mfg. co.

SPECIAL TUBE DIVISION

RELIABLE MINIATURE AND SUBMINIATURE TUBES • VOLTAGE REFERENCE TUBES
VOLTAGE REGULATOR TUBES • PENCIL TUBES • NUCLEONIC TUBES

Boston Home Office: 55 Chapel St., Newton, Mass. • Bigelow 4-7500

For application information write or call the Home Office or:

New York: 589 Fifth Ave., PLaza 9-2800
Chicago: 9501 Grand Ave., Franklin Park, TUxedo 9-5400
Los Angeles: 672 S. La Brea Ave., WEbster 8-3851

Want more information? Use post card on last page.

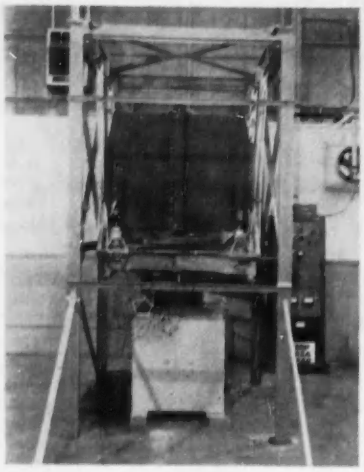

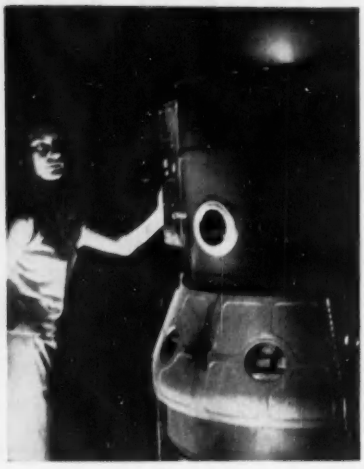

Earthquake Ernie, left, is the name given to Northrop Aircraft's new electronic shaker (arrow). Robot like device, right, is used at GE to simulate desert heat and glare as . . .

larger than a golf-bag, whereas drop towers now used for shock tests require much more space.

A new midget shake-test device has been developed by Northrop aircraft. Less than one cubic foot in size, the device can apply a force of 55 g's to guided missile electronic components weighing more than 1,000 pounds. It produces vibrations ranging from 5 to 600 cps. Prime mover is a vibration exciter composed of the two-stage electrohydraulic servo valve and the hydraulic system. An amplifier-like exciter transmits electronic impulses to the valve's pilot spool. This controls the movements of the piston rod to shake the specimen.

Environment Creates Big Business

More companies buy equipment to meet new extremes in operating conditions

EVER increasing military requirements for electronic equipment that will operate within even wider limits of heat, temperature, humidity, pressure, and other climatic and operating conditions, have boosted the importance of environmental test equipment to the industry.

▶ **Contracts** — Nearly every electronics firm holding military contracts has environmental testing equipment available. One of the largest companies in the environmental field estimates that electronics firms, alone, account for about $10 million in equipment sales a year.

▶ **Equipment**—Depending on the units, many of which are custom made, prices range anywhere from $1,000 to $150,000 per system. Size of the units range from one cu ft dry ice chambers to walk-in rooms, and giant facilities, such as those at an Air Force base where an aircraft hangar has been set up for environmental testing of complete aircraft.

▶ **Range**—Whereas the temperature range for much equipment was from −100 to 350 F, today the range may go from −150 to 500 F, and up to 1,000 C in some special installations.

Temperature and altitude chambers are the biggest sellers but companies supply equipment for nearly every condition, including baths, sand and dust, explosions, fungus, fog and vibration.

▶ **Firms** — There are about two dozen companies that manufacture environmental equipment, according to the Environmental Equipment Institute, although about 15 companies do the bulk of the business. In addition, a number of electronics manufacturers build their own equipment. But as specifications and requirements increase, more firms are buying ready-made equipment.

▶ **Product**—General Dynamics and Consolidated Electrodynamics have set an agreement in which Consolidated will manufacture and market Convair's dynamic shock-testing machine. The device simulates shock experienced by equipment in actual use. It is capable of applying widely varying accelerating and decelerating forces for controlled periods of time. It will be used in shock-testing electronic equipment for missile and aircraft applications. The cylindrical device is no

RESEARCH of petroleum is aided by RCA unit at Atlantic Refining as . . .

Electron Microscopes Keep Gaining

Applications widen as industrial and biological research activities increase

BETWEEN 1,000 and 1,200 electron microscopes are in use throughout the world.

▶ **Market**—RCA estimates that it has produced about 600 units. Many have been manufactured abroad. About two dozen foreign firms are active.

Countries in which the devices

(Continued on page 22)

BARRY ADDS NEW WEST COAST FACILITY

Occupies Plant in Burbank

With its purchase of all physical assets of the United States Sheet Metal Products Company in Burbank, California, Barry Controls Incorporated establishes a Western Division for improved service to the aircraft and missile industry. Operations of the Western Division will include an engineering design section, a shock and vibration test laboratory, a model shop, and production of special designs.

The metal-working facilities of this plant will be used to produce prototypes of vibration-isolating mounting bases and for short-run production of special mounting bases. Stocks of standard isolators will also be maintained here. Barry's present West Coast engineering office will become part of the engineering section of the Western Division.

With the availability of on-the-spot engineering consultation and local model-shop facilities, design and development of complex mounting systems for missiles and jet aircraft will be speeded and valuable lead-time gained for production of prototypes.

CHIVERS TO HEAD WESTERN DIVISION

A. S. Chivers, Sales Manager of Barry Controls Incorporated, has been appointed General Manager of the new Barry Western Division. A graduate of Massachusetts Institute of Technology, Chivers joined Barry in 1952 as administrative assistant with the sales department. He was made Assistant Sales Manager in 1953 and Sales Manager in 1955. As General Manager of the Western Division, he will be responsible for the direction of all its activities.

Here's ALL-ANGL Reliability in Minimum Space for JETS and MISSILES

ALL-ANGL Mounts integral with base of relay interlock assembly built by Diaphlex Division of Cook Electric Company for F-86 and F-100.

The attitude gyro of North American Aviation's F-100 Super Sabre must give reliable indication through every flight attitude — or the pilot won't know which way is up.

F-100 Super Sabre photo courtesy of North American Aviation, Inc.

That's why ALL-ANGL Barry Mounts are chosen to protect the delicate sensing relays in the interlock assembly for this vital instrument. Close-tolerance operation in all attitudes demands the certain isolation of vibration — assured by ALL-ANGL Barry Mounts.

Two added advantages result:

1. Size of the unit is cut 40% by integrating ALL-ANGL mounts, upside down, in the base plate.
2. Short leads replace long cables because the Barry Mounts float the assembly within its case.

When your problem is protection through all flight attitudes, your answer is ALL-ANGL Barry Mounts. Write for Data Sheet #56-01 giving detailed information. For recommendations on specific problems, call your nearest Barry Sales Representative.

Barry's Western Division, **in Burbank, California, will offer engineering facilities, prototype service, and short-run production of "specials".**

BARRY CONTROLS INCORPORATED

BARRY B MOUNT

SALES REPRESENTATIVES IN ALL PRINCIPAL CITIES

707 PLEASANT STREET, WATERTOWN 72, MASSACHUSETTS

are produced include Holland, Switzerland, France, Sweden, Germany, Great Britain and Japan. There are some 12 or 13 different brands of electron microscopes made in Japan. Russia claims that it has several models available.

Industrial and biological research represent large markets for electron microscopes. More than 20 companies in the chemical and processing field have installed the devices. The petroleum and railroad fields also rank high in importance along with the metal fabricators and industrial research institutes.

▶ **Use**—Atlantic Refining Co. recently installed an RCA unit at its research labs. It is being used in research and development of lubricating greases, waxes and catalysts. According to Atlantic, grease technology is being advanced by electron microscopic study of the effects of processing variables such as composition, temperature and degree of mechanical work on the structure and quality of greases.

The electron microscope played a part in the development of the Salk polio vaccine. It is capable of making polio virus visible. It is also aiding law-enforcement agencies. With the device it is said to be possible to detect the origin of incendiary material.

▶ **Power**—Early electron microscopes provided direct magnification of about 20,000 diameters.

North American Philips and Seimens & Halske have models that provide direct magnification up to 100,000 diameters. With photographic enlargement, useful magnification can be extended up to 300,000 diameters.

Prices range from about $9,000 to $45,000, depending on power and auxiliary services.

Wire Makers Size Up Future

Communications equipment accounts for high volume but printed circuits are gaining

WIRE and cable for communications, ranging from wire used in radio and tv sets to railroad signal wire and coaxial cable, account for over 20 percent of the total value of insulated wire and cable produced in the U. S. An estimated $1.5 billion worth of insulated wire and cable was produced and shipped last year with between $300 million and $400 million dollars worth going for communications equipment. In 1953 communications wire and cable shipments totaled about $300 million.

▶ **Sets**—Radio and tv set makers have been major markets for some wire manufacturers. About 20 companies are members of RETMA's wire section.

Last year an estimated 400 million feet of wire, mainly Awg. No. 18, 20 and 22, were used in tv sets. At current prices this represents about $2 million. Add to this, wire used in 14 million radios, computers and military equipment.

▶ **Insulation**—According to a 1955 survey by the Department of Agriculture, the communications wire industry purchased 72 million pounds of plastics material, 35.5 million pounds of paper, 28 million pounds of rubber, 9.6 million pounds of cotton and about 5 million pounds of acetate, asbestos and fibrous glass.

▶ **Printed Circuits**—Increasing use of printed circuits has cut the volume of hookup wire sold for electronics. This year an estimated 70 percent of all radios will use printed circuit boards and some 6 million sq ft of printed circuit boards will be produced for tv sets. In all, a total of 8 million sq ft of printed circuit board may be produced in 1956.

RCA's new color and monochrome sets will use up to six printed circuit boards in each chassis. In the new color sets from 80 to 90 percent of the circuits are on printed circuit boards compared to about 20 percent in previous color sets.

Control board of new nuclear reactor for industrial research is inspected as . . .

Industry Gets Private Nuclear Reactor

Unit for industrial research goes into operation at Armour Research Foundation

PRIVATE nuclear reactor for industrial research goes into operation at a new $1.2 million physics and electrical engineering research building being constructed by Armour Research Foundation of the Illinois Institute of Technology in Chicago. It was built by Atomics International, a division of North American Aviation. The reactor is a neutron and gamma source and is not intended for the generation of electrical power, nor for research on reactors themselves.

▶ **Use**—Probably the most frequent use of the ARF research reactor will be in the production of radioactive samples. The reactor makes possible, structure analysis potentially more powerful than the standard x-ray diffraction techniques.

▶ **Electronics** — The instrumentation consists of circuits which monitor reactor power and the performance of the gas-handling and cooling system. There is provision for area radiation monitoring and similar instrumentation.

▶ **Firms** — Twenty-four industrial companies are participating in the nuclear reactor research program

(Continued on page 24)

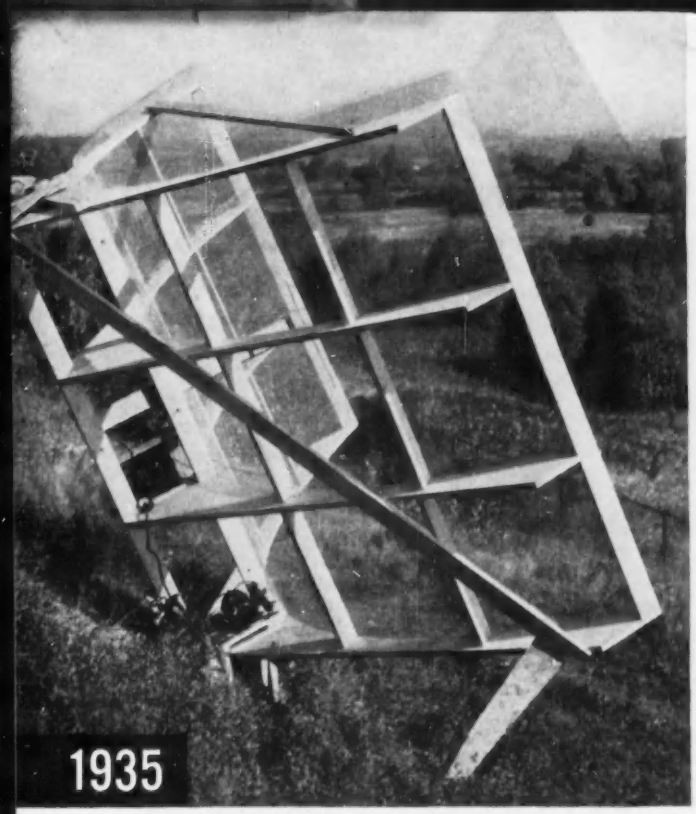

EARLY RESEARCH AND DEVELOPMENT EXPERIENCE with electronic location equipment at G.E. began in 1935 when this first system, with an output of 1½ watts, located planes up to five miles away.

IN USE TODAY, this huge nodding height finder was designed and developed by General Electric to be used with powerful search radar systems and is a major contribution to long-range aircraft location.

How G.E.'s 20-year antenna background can help make your radar system more effective

6 examples show experience in all areas of land- and ship-based antenna work

To give you an outstanding source for reliable, precision radar antenna equipment, General Electric backs modern facilities with the know-how that comes from many years of research, engineering, and manufacturing experience.

For example, early research in electronic location equipment at G.E. began in 1935 and engineering and manufacturing experience includes these six major areas:

1. **Stabilized bases** to compensate for ship pitch and roll were built in large quantity with Navy antennas in World War II.
2. **Small, portable systems** for weather balloon tracking were developed and produced for the Army and Navy in 1948.
3. **Powerful heightfinding antenna,** FPS-6XW1, developed by G.E. for USAF in 1949, was an advancement in long-range detection.
4. **Giant shipboard search antenna,** largest in use today, was G-E developed and produced for Navy early-warning ships.
5. **Long-range search antennas** (FPS-7) were designed and built by G.E. using advanced construction techniques.
6. **One of the first combination antennas** (allows both search and elevation detection), the Navy's SPS-8 was designed and produced to give a precise beam pattern.

This extensive background enables clearer perception of special engineering and manufacturing problems. It is the element that helps give G-E precision antenna equipment the efficiency and reliability to help make your radar system more effective. For more information, contact your G-E Apparatus Sales Office or use coupon below.

Mail to: General Electric Company, Section J223-2
Schenectady 5, N. Y.

Please send me these two bulletins:

GEA-6279, Radar Antennas, Mounts, Components, and Accessories

GED-2494, G.E.'s Naval Ordnance Department Offers Complete Engineering and Manufacturing Services

☐ For immediate project. ☐ For reference only.

Name .....
Position .....
Organization .....
Address .....

Progress Is Our Most Important Product

GENERAL ELECTRIC

at ARF. At least six of the firms are active in the electronics field.

Each firm is contributing $20,000 toward the construction and initial operation of the $700,000 reactor facility. ARF is providing the remaining funds. The companies will share in the benefits of a three-year program aimed at the application of atomics to industrial problems.

TV Industry Pushes Color

More tv broadcasters add color facilities. Two color set makers break $500 prices

NUMBER of tv stations that get network color service over Bell System facilities reached 203 stations in 141 cities as of June 1. At the beginning of the year only 190 stations in 101 cities had the facilities available. At the end of 1954, AT&T cross-country tv routes had been reengineered to carry color to 139 stations in 101 cities.

CBS reports that it now has 117 stations equipped to rebroadcast its color shows. It has 32 stations equipped with color slide equipment, 30 with color film equipment and 8 with color film, slide and studio equipment.

At the beginning of the year 32 NBC affiliates had slide-film equipment and 11 were fully equipped for originating live color shows. The network is surveying its stations for an up-to-date picture of its color facilities.

ABC still holds to its announced policy of not equipping its owned stations for color until color set circulation is sufficient.

▶ **Expansion**—CBS is expanding its color facilities on the West Coast. It is adding two color studios to its tv city in Hollywood and converting an existing studio for color tv. The net now has four color studios in Hollywood.

▶ **Sets**—Admiral and RCA, have broken the $500 color tv price barrier with new color tv table models for the fall market. Admiral's set will sell for $499.95. RCA has established a price of $495 for its model. It is expected that nearly every major tv set manufacturer will have color tv in new fall lines and that some will also offer sets below $500.

Industrial TV Inspects Reactors

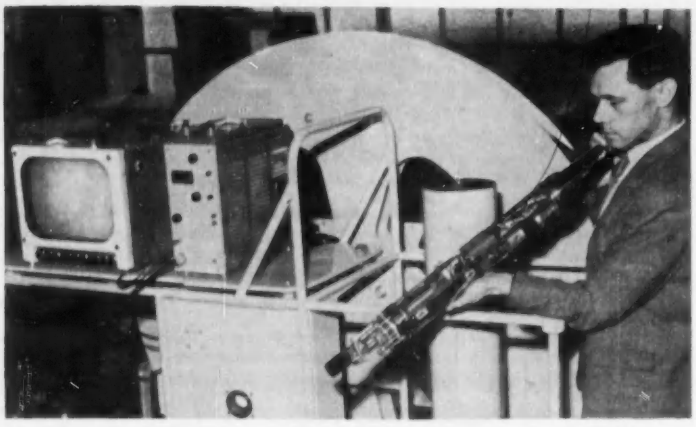

Interiors of nuclear reactors at England's Calder Hall atomic power station are inspected by special industrial-tv camera made by Pye, Ltd. Shown with its stainless-steel casing removed, camera has remotely controlled rotatable mirror that permits all-around viewing and four small bulbs at front that provide sole source of illumination. A similar camera is made by Grundig-Radio-Werke of Bavaria for boiler inspection. Only 47 mm in diameter and 150 mm long, the camera is blown by compressed air through steam pipes and smoke flues

Noise Measuring Gear Has Brisk Sales

Eight-year period produces seven-fold sales increase. Future looks even brighter

IN the past five years noise has been recognized at a deterrent to efficient output and a possible cause of impaired hearing. Some states have laws making impairment of hearing subject to workmen's compensation procedures. Such cases are increasing. In Wisconsin during 1953, 381 workers received a total of $650,373 as compensation for impaired hearing caused by industrial noise.

▶ **Sales** — Noise-measuring equipment sales including sound-level meters, audiometers and related equipment have soared from about $700,000 in 1947 to over $3,000,000 in 1955. Sales of one sound-level meter are more than 20 percent above those for a similar period last year.

Prices of noise-measuring equipment range from $900 to $1,100 while audiometers are available from $350 to $700.

▶ **Latest**—Combining the functions of sound-level meter, octave-band analyzer and narrow-band analyzer, the Soundscope, made by Mine Safety Appliances Co., Pittsburgh, Pa., is a self-contained portable unit.

It can measure from 24 to 150 db and filters the noise into any of eight octave-bands covering the frequency range of 75 to 19,200 cps.

Financial Roundup

First quarter earnings for many firms in the industry were lower than in 1955

NET income of 25 firms in the radio-tv electrical equipment field for the first quarter of 1956 is off 31 percent from the first three months of 1955 and 32 percent from the last quarter of 1955 according to a survey by the First National City

(Continued on page 26)

for VARIABLE CAPACITORS...



"BFC" butterfly-type capacitor with isolated rotor, very low minimum capacity and low inductance. For VHF applications as series capacitor with no rotor connection.

"MAC" Low minimum capacity and very low inductance. Ideal for VHF-UHF applications. Designed for use in miniaturization. Also available as butterfly type "MACBF".



"APC" A compact, high quality air dielectric trimmer. Extremely high resistance to temperature changes, moisture and vibration.

"MAPC" A scaled down version of the "APC". Designed to fill the needs of miniaturization. Suitable for VHF use.



"HF" A high frequency design featuring extra long sleeve bearing and positive contact nickel-plated phosphor bronze wiper. Also available as a dual unit.

naturally,



"HFA" Similar to "HF" model, but with larger air gaps for higher breakdown ratings. Used for high-frequency, low-power transmitting. Also available as dual unit.

"MC" Designed for maximum versatility in mountings, connections and capacity characteristics. Rotor stop permits 180° clockwise rotation with increasing capacity. Also available as dual unit.



"RMC" Similar to "MC-S" but featuring extra rigid design. Heavy frame of aluminum tie rods and end plates.



"NZ" Compact transmitting neutralizing capacitor designed for easy and accurate adjustment. Long leakage paths to ground from both rotor and stator.



"VU" Permits use of "lumped constant" circuits up to 500 MC. Two sections in series eliminate rotor wiper. Pyrex glass ball bearings eliminate noise from usual metal-to-metal bearings.

it's HAMMARLUND

For commercial, military and industrial applications, you just can't beat Hammarlund Variable Capacitors for uniformly high quality design, materials and workmanship. The capacitors illustrated here are just a small representative portion of the complete Hammarlund line. In addition to stock designs, Hammarlund offers you unparalleled variable capacitor know-how in development, design and production. Whatever your needs, when it comes to special or standard variable capacitors, naturally, come to Hammarlund.

● *Send for your copy of Bulletin E 756*

HAMMARLUND MANUFACTURING COMPANY, INC.
460 West 34th Street, New York 1, N. Y.

Bank of New York. Total net profit in the first quarter was $55.2 million compared to $80.6 million in the first quarter of last year and $81.0 million in the fourth quarter of 1955.

Following are the net profit reports of companies in the electronics field, as reported in the past month for the fiscal periods indicated plus a roundup of security transactions:

Company	Net Profits 1956	1955
Am. Electronics 3m	$82,216	$81,408
Am. Cable & Radio 3m	318,977	211,446
Amphenol 3m	262,985	204,451
Beckman Inst. 9m	1,144,888	872,082
Clevite 3m	738,000	1,175,000
Du Mont 3m	79,000	27,000
T. A. Edison 3m	382,575	320,457
Electronic Eng. 3m	20,781	14,942
Garret 9m	3,410,810	2,707,309
Gen. Prec. Equip. 3m	346,973	961,986
Hoffmann 3m	467,994	309,996
Magnavox 9m	2,639,000	2,110,000
Minn. Mining 3m	8,632,518	7,452,172
Motorola 3m	2,012,876	2,153,038
Olympic 3m	159,464	82,631
RCA 3m	12,727,000	12,568,000
Siegler 9m	896,276	774,571
Standard Coil 3m	615,285*	116,599
Stewart-Warner 3m	1,718,528	1,116,064
Sylvania 3m	4,323,086	3,247,655
Texas Instruments 3m	540,000	391,000
Van Norman 3m	264,660	107,289
Westinghouse 3m	18,575,000*	12,782,000
Zenith 3m	1,831,165	2,074,960

*loss

► **Securities** — Mohawk Business Machines offered 167,000 shares of common stock, par 10 cents, at 75 cents a share. Proceeds will be used for additional working capital and general corporate purposes.

Norden-Ketay obtained a $6.5 million V-loan and has sold $1 million of debentures. Funds will be used to meet working capital needs arising from increased production demands. The V-loan is guaranteed by the Navy. The $1 million 5-percent convertible, subordinated debentures, are convertible into common stock at a price of $13.33 1-3 per share.

General Electric placed on the market $300 million in 20-year 3.5-percent debentures due May 1, 1976. The debentures are priced at 100.5 percent and accrued interest to yield about 3.47 percent to maturity. Proceeds will be used for retirement of outstanding short-term borrowings, for the replenishment of funds spent in the firm's expansion program and for the improvement, replacement and expansion of plant and other facilities.

FUTURE MEETINGS

AUG. 20-21: National Telemetering Conference, IRE, AIEE, IAS, ISA, Biltmore Hotel, Los Angeles, Calif.

AUG. 21-24: 1956 Western Electronic Show and Convention, Pan-Pacific Auditorium, Los Angeles, Calif.

AUG. 22-SEPT. 1: The 23rd Annual British National Radio Show, Earls Court, London.

AUG. 24-26: Seventeenth Annual Summer Seminar, IRE, Emporium, Pa.

SEPT. 10-12: Information Theory Symposium, IRE, MIT, Cambridge, Mass.

SEPT. 11-12: Second RETMA Conference on Reliable Electrical Connections, University of Pennsylvania, Philadelphia.

SEPT. 14-15: Sixth Symposium, Mellon Institute, Pittsburgh.

SEPT. 17-21: Eleventh Annual International Instrument-Automation Conference and Exhibit, ISA, New York Coliseum, New York, N. Y.

SEPT. 24-25: Industrial Electronics Conference, IRE, AIEE, Hotel Manger, Cleveland, Ohio.

SEPT. 26-30: New York High Fidelity Show, New York Trade Show Building, New York.

OCT. 1-3: IRE Canadian Convention, Automotive Bldg. Exhibition Park, Toronto.

OCT. 1-3: Twelfth Annual National Electronics Conference, Hotel Sherman, Chicago.

OCT. 1-4: Semiconductor Symposium, Electrochemical Society, Statler Hotel, Cleveland, Ohio.

OCT. 8-9: Second National Symposium on Aeronautical Communications, IRE, Hotel Utica, Utica, N. Y.

OCT. 9-10: Third Annual Computer Applications Symposium, Armour Research Foundation, Chicago, Ill.

OCT. 10-11: Engineering Convention of the Central Canada Broadcasters Association, Seaway Hotel, Toronto.

OCT. 10-12: Symposium On Applications of Optical Principles to Microwaves, IRE, George Washington University, Washington, D. C.

OCT. 15-17: Radio Fall Meeting, IRE, RETMA, Hotel Syracuse, Syracuse, N. Y.

OCT. 16-18: Conference On Magnetism & Magnetic Materials, IRE, AIEE, APS, AIMME, Hotel Statler, Boston, Mass.

OCT. 18-19: Third Annual International Meeting of the Institute of Management Sciences, Statler Hotel, Los Angeles, Calif.

OCT. 25-26: Second Annual Technical Meeting of the IRE Professional Group on Electronic Devices, Shoreham Hotel, Washington, D. C.

OCT. 29-30: Third Annual East Coast Conference On Aeronautical & Navigational Electronics, IRE, Fifth Regiment Armory, Baltimore, Md.

NOV. 7-9: Conference on Electronics In Medicine & Biology, IRE, AIEE, ISA, Gov. Clinton Hotel, New York, N. Y.

Industry Shorts

► **Mobile Radio** service contracts will be accepted by General Electric in its own name for the first time under a new sales policy. Authorized service stations will be continued and expanded.

► **Transistor** production is now at an annual rate of 10 million units and will reach 300 million units a year by 1965. Of the 300 million, about 25 million of them will be of the medium and large-power types, according to Minneapolis-Honey-

► **Color** tv service contracts, announced by RCA, range in price from $39.95 for installation maintenance and service for 90-days, to $99.50 for one-year coverage with unlimited service and parts.

► **Mullard** Ltd. was one of the British firms that provided a color tv receiver for the demonstration to CCIR delegates during their visit to London. (ELECTRONICS, p 14, May, 1956)

► **Average** "middle management" executive (those between the policy-making level and that of general foreman or first-line supervisor) was paid $11,347 last year, an overall increase of about 5 percent over the previous year, according to AMA.

► **Canadian** tv and radio set sales totaled 747,988 and 545,590 respectively during the fiscal year ending in April, 1956. During the previous year 679,344 tv sets and 420,632 radios were sold, according to Canadian RETMA.

KAY

Wide Band Sweeps for Aligning Radar IF Amplifiers

A combined sweeping oscillator and crystal marker generator, the Rada-Sweep is designed especially for rapid alignment of radar IF amplifiers. Used with an oscilloscope, it will display response curves of IF amplifiers and mark up to nine frequencies to allow precise adjustment of response.

KAY *Rada-Sweep*

SPECIFICATIONS

Center Frequencies: 30 and 60 megacycles. Others may be added to special order.

Sweep Width: Wide—20 mcs or Narrow—3 mcs selected by a panel switch.

Sweep: All electronic, linear sawtooth. Sweep signal is brought out to terminals for connection to oscilloscope horizontal amplifier. Sweep repetition rate is adjustable around and may be synchronized to the cps line.

Markers: Up to 9 crystal positioned pulse type marks fed directly to scope vertical amplifier. Four supplied standard at 25, 35, 55 and 65 mcs. Others located as specified by purchaser. The standard marks may be replaced with others as specified. Individual on-off of each mark.

Amplitude Modulation While Sweeping: Less than .05 db/mc.

RF Output Voltage: 250 millivolts across 70 ohms.

RF Output Control: Switched Attenuator: 20 db, 20db, 10 db. Continuous Attenuator: Covers approximately 5:1 ratio.

Marker Output Voltage: Positive pulse, approx. 10 V peak.

Marker Output Control: Continuously variable, 0 to maximum.

Power Supply: 105 to 125 volts, 50 to 60 cps. Power input approximately 100 watts. Circuit electronically regulated.

Price: $395.00 f.o.b. plant with standard marks. Any standard mark may be replaced with a special frequency—$10.00 each. Additional marks at $20.00 each.

The Radaligner is a two-band sweeping oscillator designed to be used with a standard oscilloscope to determine frequency response of circuits from 10 to 170 mc. For frequency identification, the Radaligner includes eight narrow, customer-specified, crystal-controlled markers and a single variable marker covering both sweeping oscillator ranges. Center frequencies of sweep ranges also set to customer's requirements.

Write For New Kay Catalog

KAY *Radaligner*

SPECIFICATIONS

Sweep: Regular sawtooth, adjustable around or synchronized with 60 cps power line.

Frequency Range: Center frequencies may be selected at any two points in the 10 to 170 mc band.

Sweep Width: Center frequency below 30 mcs ± 5 mcs Wide Band, ±0.5 mc Narrow Band; Center Frequency above 30 mcs: ±10 mcs Wide Band, ±1.5 mcs Narrow Band.

Amplitude Modulation While Sweeping: Less than 0.05 db/mc.

RF Output Voltage: 250 millivolts into 70 ohms.

RF Output Control: Switched attenuators: 20 db, 10 db and 3 db. Continuous attenuator: approximately 6 db.

Markers: Fixed: Eight, narrow pulse-type, crystal-controlled markers, positioned at customer's option. Available singly or in any combination through individual switches.

Variable: Frequency continuously variable throughout selected sweep ranges. Frequeicy calibration accurate to within 0.5%.

Marker Output Voltage: Positive pulse approximately 10 volts peak.

Marker Output Control: Continuously variable, zero to maximum.

Power Requirements: 105 to 125 volts, 50-60 cps, approx. 110 watts.

Price: $795.00 (rack-mounted), f.o.b. plant. Cabinet **$35.00 extra.**

KAY ELECTRIC COMPANY

DEPT E-7 • 14 MAPLE AVENUE • PINE BROOK, N. J. • CAldwell 6-4000

Electronic Packaging System . . .

Simplifies Circuitry Packaging, Cuts Assembly Costs, Minimizes Servicing Problems

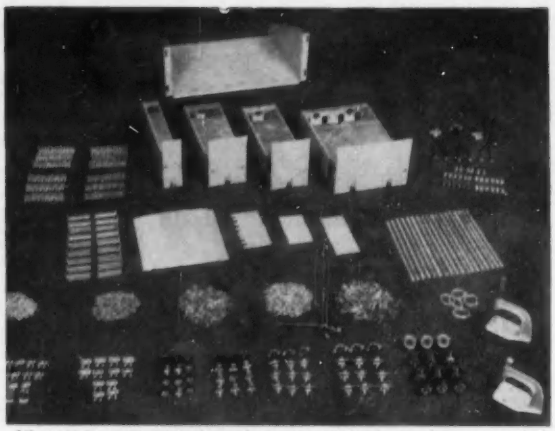

All necessary components to package your electronic circuitry using principles of Plug—in Units Construction are included in this Alden Kit #37.

SUMMARY—"Building Block" plug-in chassis system organizes circuits by function, provides for plug-in replacement and fast servicing by non-technical personnel.

DESCRIPTION

A complete system of integrated terminal card sub-chassis elements designed to snap into plug-in chassis now makes it simple for designers to take full advantage of the new mass production techniques of printed wiring and modular construction in the manufacture of custom-designed systems.

Alden Products Company of Brockton, Mass., is the developer of this system which is based upon standardized pre-punched mounting cards with associated terminals, tube sockets and holding devices which accept resistors, condensers, tubes and other components. The cards may be snapped into place in plug-in chassis units.

This eliminates the usual "rat's nest" point-to-point wiring and facilitates access for assembly and repair.

The terminal cards arrange all the components on sub-chassis in "planes of circuitry" which can be housed in standardized 2", 4", 8" or 17" Alden Basic Chassis. Each chassis contains all the sub-chassis associated with a single electronic function. "Tell-Tale" monitor lights mounted on the plug-in chassis front panel can be employed to give instant indication of service failure.

Plug-in chassis units are arranged in modular metal cabinets called Uni-Racks to make up and house complete systems.

Fig. 1. Circuitry laid out using terminal card mounting system.

ADVANTAGES

There are a number of primary benefits associated with the Alden System. Fundamentally, the break-down of the circuitry by **function** and the modular assembly concept of components and terminal cards means that even complicated electronic-electrical problems are reduced to relatively simple mechanical assembly problems once the theoretical design stage is passed.

The need for prototypes is eliminated since breadboard layouts can be lifted directly onto the terminal card system with the aid of planning sheets furnished by the manufacturer.

The finished system is easy to keep in service—even for non-technical personnel.

Fig. 2. Easy First Level Checks By Non-Technical personnel

"Tell-tale" monitors instantly locate functioning chassis elements and non-technical personnel can replace them with spare plug-in units. The faulty unit can then be repaired and returned to service. In addition, provision for numbered and color-coded in-out leads conveniently grouped at the back of each chassis by Alden Back Connectors enables laymen to make accurate first-level checks.

APPLICATIONS

A leading research institute received an unexpected order for a computer. Using this Basic Chassis System for housing the circuitry as plug-in units, they assembled the computer so rapidly that more than seven weeks was saved in design time and in the packaging and mechanical engineering phase. Moreover, the flexibility of the system permits periodic up-dating of the computer with more modern circuits as these are developed.

Another important advantage lies in the shortening of required lead time on delivery dates. One manufacturer supplying electronic test gear to the Naval Ordnance Bureau on irregular schedules is able to quote extraordinarily fast delivery on custom equipment because the units go together so fast. This firm starts with a series of standard functions to which are added specialized circuit functions. The chassis are then housed in Uni-Racks and rushed to the job.

In addition to speed, costs are held to a level far lower than is usual for special or custom built equipment and one or a hundred can be produced at little cost variance.

"ELECTRONIC PACKAGING" ELEMENTS

Terminal Cards: These cards are pre-cut to size, in lengths up to 3 feet. They are pre-punched with 0.101" holes on ¼" centers for maximum flexibility in circuitry layout.

Mounting Sockets: Available in 7 and 9-pin miniature and octal, sockets mount directly either to the edge or to the side of the terminal card in piggy back or side saddle fashion.

Miniature Ratchet Terminals: Stake into terminal card and provide positive grip for feed-through or single-end connections for all pigtail components. Soldering serves only to establish the electrical connection. Lead dress is simplified—excess pigtails are snipped off at the terminal.

Jumper Strips: Stake under terminals for either jumper or common wiring. These strips and other wiring can be readily replaced with printed or etched wiring.

Plug-in Chassis Units: Built on the modular principle allow organization of circuitry by function and provides housing in replaceable units.

Portable Units: Plug-in Chassis can be carried or shipped conveniently in specially designed padded carrying cases.

SIMPLE TO GET STARTED

Alden Products Company offers a low cost "get started" chassis and terminal card assortment kit containing all components to mount, house, fasten and monitor electronic circuitry—including materials for experimental etched circuitry. (Kit #37 shown above, price $249.50).

This kit will enable you to determine quickly the advantages this system holds for your product development and production.

The Alden Handbook, "Ideas, Techniques, Designs" is supplied with each kit and contains a complete description of the Alden System.

To order your kit or to get further information write to Mr. N. Hearn, Alden Products Co., 7127 N. Main St., Brockton, Mass.





Fig. 3. Circuitry subdivided, function by function into attractive plug-in units. Layman can plug in replacement spare in 30 seconds. Tiny tell-tales spot trouble instantly, eliminate need for trained technicians on spot. All leads are at a single accessible point, numbered and color-coded so layman can make first-level tests.

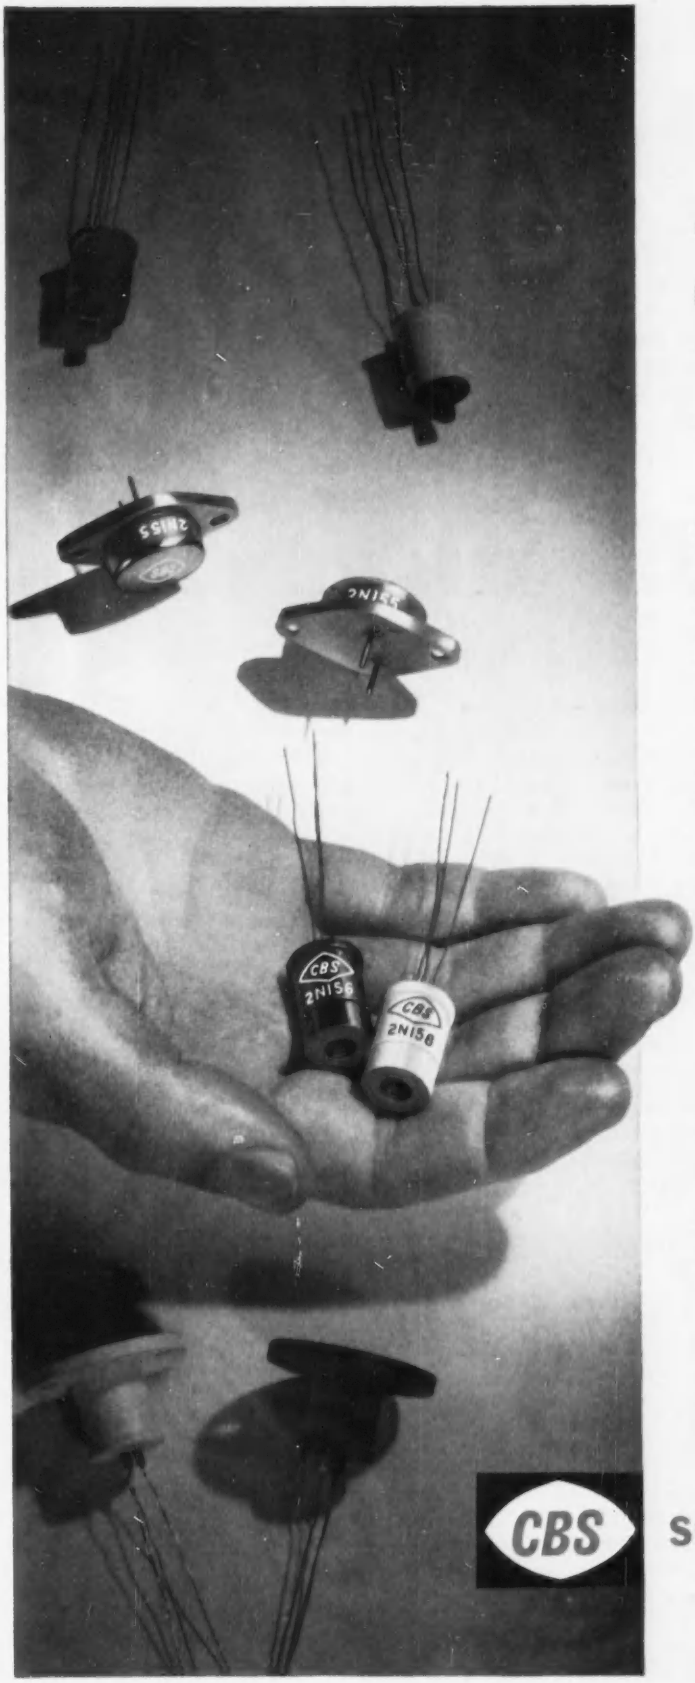

CBS

POWER TRANSISTORS

with uniform characteristics

in mass production

Whether your requirements are for a dozen or a million . . . for standard or special types . . . CBS is prepared to supply you with power transistors. And in a variety of metal cases designed to solve problems of mounting and heat dissipation.

The many advanced-engineering features of the CBS 2N156 (12-volt) and CBS 2N158 (28-volt) are ideally suited to high-power audio amplifiers, servo amplifiers, power converters, and low-speed switches. The CBS type 2N155 is especially designed for optimum performance in single-ended audio output stages of automobile radios.

Note the many features of these PNP junction transistors. Write for free bulletin E-259 giving complete data. Let us help you also with your circuit designs for these versatile and dependable CBS power transistors.

FEATURES OF CBS PNP JUNCTION POWER TRANSISTORS

1. High current gain at high current
2. High power-handling capabilities
3. High peak-back voltages
4. Stable, uniform characteristics (special selection unnecessary)
5. Low input impedance
6. Low saturation voltage
7. Low saturation current
8. Choice of hermetically sealed designs

Reliable products
through Advanced-Engineering

CBS **semiconductors**

CBS-HYTRON
Semiconductor Operations, Lowell, Mass.
A DIVISION OF COLUMBIA BROADCASTING SYSTEM, INC.

Want more information? Use post card on last page.

POLARAD
PROVEN RELIABILITY

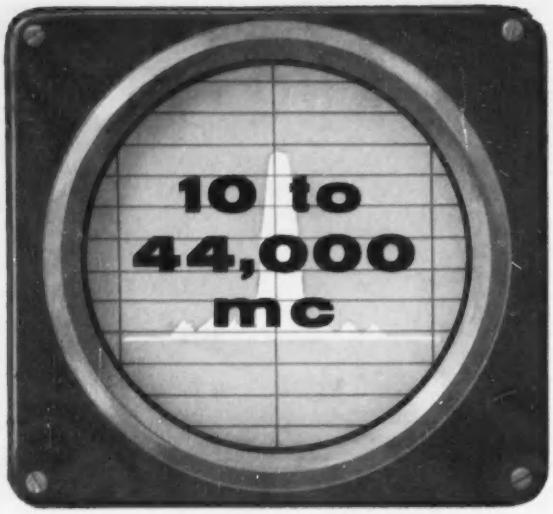

DIRECT READING SPECTRUM ANALYZER

UNI-DIAL CONTROL

Years of day-in, day-out field operation by most exacting users, have proven the Polarad Model TSA Spectrum Analyzer to be a versatile test instrument of highest reliability and accuracy for both laboratory and production applications.

It is a broadband instrument with greatest pulse sensitivity over the band—10 to 44,000 mc. And each of its five interchangeable RF tuning heads operate with utmost simplicity and frequency stability. All tuning is by Uni-Dial control. Frequencies are read with 1% accuracy right on the linear dial as the set is tuned. No mode charts or interpolations necessary.

The Polarad Model TSA has been designed to save engineering manhours. Its 5 inch CRT display of the RF spectrum is bright and easily defined. And its 1 cycle sweep speed makes for fine resolution. For detailed specifications, contact your nearest Polarad Representative, or write directly to the factory.

APPLICATIONS

- **Transmitter characteristics tests**
- **Broadband receiver for AM, FM, CW, MCW, and pulse modulated signals**
- **Component tests**
- **Frequency measurements**
- **Leakage, interference and radiation measurements**
- **Bandwidth measurements**
- **Modulation tests**
- **Adjacent signal channel tests**
- **Attenuation measurements**
- **Filter measurements**
- **Standing wave measurements**

MULTI-PULSE SPECTRUM SELECTOR



MODEL SD-1

Increases the versatility of Polarad Spectrum Analyzers. It displays and allows selection for analysis of a specific train of microwave pulses, as well as any one pulse in the train; selects and gates a group of pulses up to 180 μsec. in length; and is designed to work with fast, narrow pulses; can be adjusted to gate any pulse including the first at zero time. Special circuitry discriminates automatically once pulses have been selected. Operates at any of the frequencies accepted by Polarad Spectrum Analyzers.

FEATURES:

Continuously variable sweep widths; 15 to 180 μsec. • Continuously variable gate widths for pulse selection; 0.4 to 10 μsec. • Continuously variable gate delays for pulse selection; .3 to 180 μsec. • Automatic gating of spectrum analyzer during time of pulse consideration. • Intensified gate (brightening) to facilitate manual pulse selection. • Triggered sweep on first pulse in any train. • No sweep in absence of signal.

SPECIFICATIONS:

Maximum Pulse Train Time 180 μsec. • Pulse Rise Time .05 μsec. Minimum • Minimum Pulse Separation .2 μsec. • Repetition Rate 10—10,000 pps. • Minimum Pulse Width .1 μsec. • Input Power 95 to 130 volts, 50/60 cps., 325 watts. • Input Impedance 50 ohms. • Output Impedance 50 ohms (to match TSA Spectrum Analyzer).

BROADBAND SPECTRUM ANALYZER

FEATURES

- Greatest signal sensitivity over entire frequency band.
- Single frequency control with direct-reading dial accurate to ±1%.
- Complete frequency coverage from 10 mc to 44,000 mc.
- Internal RF attenuator (RF Tuning Unit Models STU-1, STU-2A, STU-3A).
- Adjustable frequency display from 400 kc to 25 mc.
- Frequency differences as small as 40 kc measurable by means of adjustable frequency marker with variable amplitude.
- 25-kc resolution for all bands.
- Stable klystron oscillators using non-contacting plungers to insure longer life.
- No klystron modes to set.
- 5-inch CRT display.
- Portable and completely self-contained.

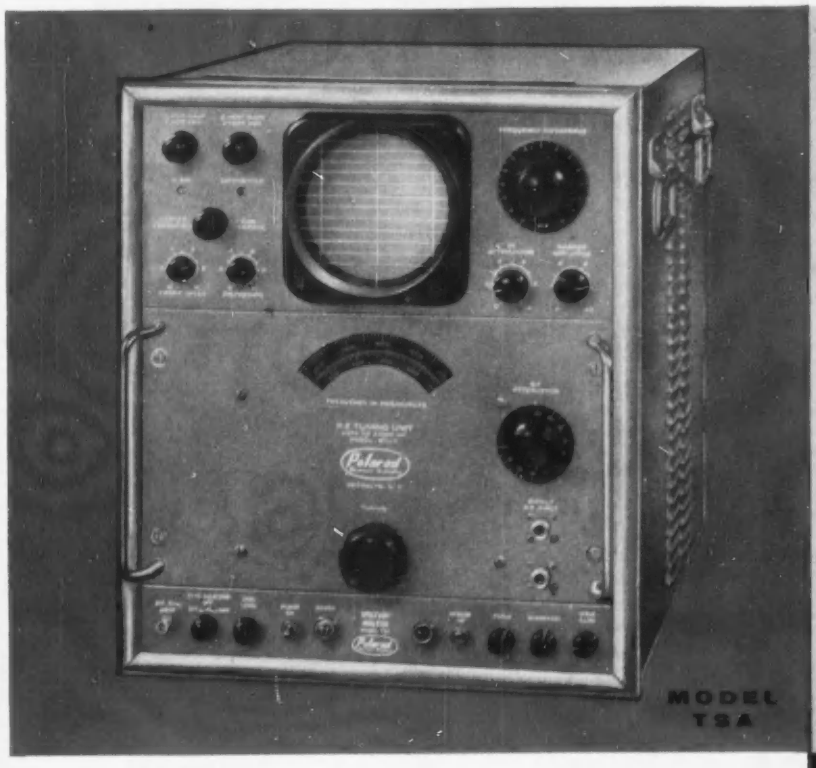

SPECIFICATIONS

Model No.	Equipment
Model Du.....	Spectrum Display and Power Unit
Model STU-1...	RF Tunning Unit 10-1,000 mc.
Model STU-2A.	RF Tuning Unit 910-4, 560 mc.
Model STU-3A.	RF Tuning Unit 4,370-22,000 mc.
Model STU-4	RF Tuning Unit 21,000-33,000 mc.
Model STU-5...	RF Tuning Unit 33,000-44,000 mc.

SPECIFICATIONS:

Frequency Range: 10 mc to 44,000 mc.

Frequency Accuracy: ±1%

Resolution: 25 kc.

Frequency Dispersion: Electronically controlled, continually adjustable from 400 kc to 25 mc per one screen diameter (horizontal expansion to 20 kc per inch)

Input Impedance: 50 ohms—nominal

Sensitivity:*

STU-1 10-400 mcs—89 dbm
400-1000 mcs—84dbm

STU-2A 910-2,200 mcs—87 dbm
1,980-4,560 mcs—77 dbm

STU-3A 4,370-10,920 mcs—75 dbm
8,900-22,000 mcs—60 dbm

STU-4 21,000-33,000 mcs—55 dbm

STU-5 33,000-44,000 mcs—45 dbm

Overall Gain: 120 db

Attenuation:
**RF Internal 100 db continuously variable, IF 50 db continuously variable

Input Power: 400 Watts

*Minimum Discernible Signal

**STU-1, STU-2A, STU-3A

AVAILABLE ON EQUIPMENT LEASE PLAN

FIELD MAINTENANCE SERVICE AVAILABLE THROUGHOUT THE COUNTRY

Consult us on your Spectrum Analysis Problems

Write for your copy of the Polarad "Handbook of Spectrum Analyzer Techniques". 50c per copy. Includes discussion of Spectrum Analyzer operation, applications and formulae for analysis techniques.

POLARAD PROVEN RELIABILITY **ELECTRONICS CORPORATION** 43-20 34th STREET, LONG ISLAND CITY 1, N. Y.

REPRESENTATIVES • Albuquerque • Atlanta • Baltimore • Boston • Buffalo • Chicago • Dayton • Englewood • Fort Worth • Los Angeles • New York Philadelphia • San Francisco • Syracuse • Washington, D. C. • Westbury • Winston-Salem • Canada, Arnprior, Toronto

Want more information? Use post card on last page.

from #24 to 2½"

in 11 colors

BH Flextrude-105

EXTRUDED VINYL TUBING

With BH Flextrude-105, not only do you have the full range of standard sizes, you also have COLOR . . . with this advantage: Whether you use colored or clear, dielectric and physical properties for both have been Underwriter's Laboratory approved for 105°C. operation. In its uncolored form, BH Flextrude-105 is permanently transparent.

BH Flextrude-105 is 100% extruded vinyl. It has served in many transformer applications without contaminating the oil and with unusual oil resistance. Additional advantages are high cut-thru resistance and heat-aging resistance.

Now, from Bentley, Harris it is possible to fill all your tubing and sleeving needs — extruded vinyl, braided Fiberglas*, braided Fiberglas coated with vinyl or silicone. Only you can really tell which is best for your product. We'll be glad to send data sheets and production testing samples. A few facts would help — temperatures to be encountered, physical conditions to be met — then we'll send along the BH Tubing or Sleeving to answer your particular problem.

BENTLEY, HARRIS MANUFACTURING COMPANY
1307 Barclay Street
CONSHOHOCKEN, PA. TELEPHONE: TAYLOR 8-0634

BENTLEY, HARRIS

Extruded **TUBING**

	TRANSPARENT	BLACK
WHITE	GREEN	ORANGE
RED	BROWN	VIOLET
BLUE	GREY	YELLOW

*TM Owens-Corning Fiberglas Corp.

specify OHMITE® *Power Type* **RESISTORS** for high current low resistance applications—

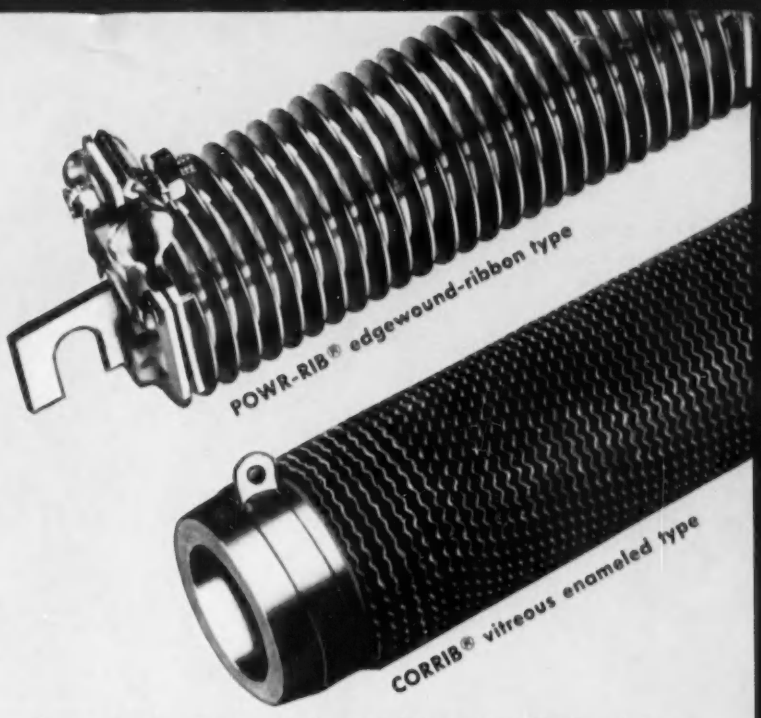

The Ohmite line of specialized CORRIB and POWR-RIB resistors solves your high-current, low-resistance problems. The four basic types of Ohmite units (shown below) handle a wide range of special power resistor needs. They are designed for continuous or intermittent duty and provide dependability for heavy-duty applications. Available in Fixed or Adjustable "DIVIDOHM®" Types.

IN STOCK—22 Corrib Resistance Values in 300 Watt Size (Core 8½" x 1⅛").

IN STOCK—26 Powr-Rib Resistance Values in 5 Section Size (17⅞" long).

Write for Bulletin 144

1. **CORRIB®**
   vitreous-enameled corrugated-ribbon type
   Fixed, tapped, and adjustable types in 25 sizes, 90 to 1500 watts. Resistances from .04 to 110 ohms.
2. **CORRIB®**
   bare threaded tube type
   For continuous or intermittent operation at higher than normal 375°C temperature rise. In two sizes, from 0.36 to 4.25 ohms.
3. **POWR-RIB®**
   edgewound-ribbon type
   Has ceramic core, sectionalized to resist shock. Four sizes. Values .043 to 1.6 ohms; 24 to 95 amps.
4. **POWR-RIB®**
   round-wire type
   Has sectionalized core similar to ribbon type. Four sizes. Values from .69 to 25 ohms; 5.1 to 18.4 amps.

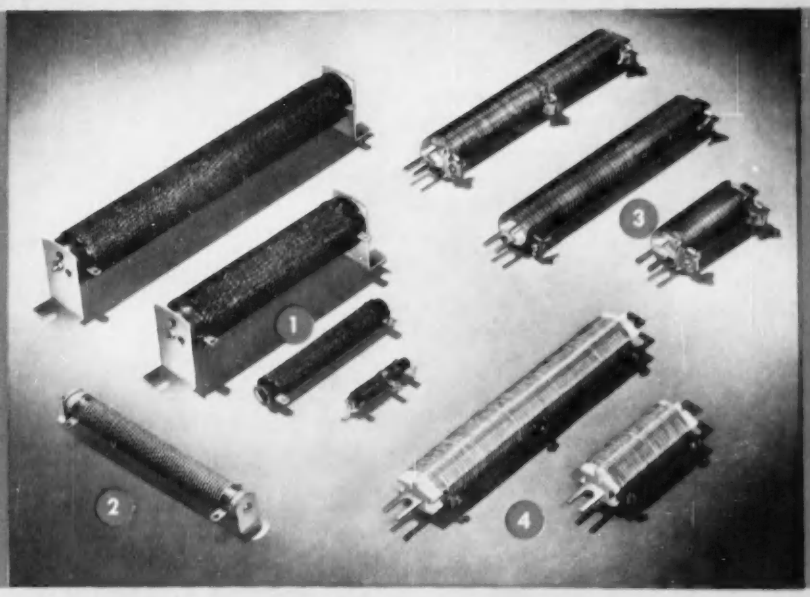

Be Right with OHMITE®

OHMITE MANUFACTURING COMPANY, 3610 Howard Street, Skokie, Illinois (Suburb of Chicago)

RHEOSTATS
RESISTORS
RELAYS
TAP SWITCHES
TANTALUM CAPACITO

6 good reasons why industry prefers

OHMITE®

HIGH CURRENT

ROTARY

TAP SWITCHES

Check the features at right that make Ohmite tap switches preferred by industry everywhere. Shown below are five sizes of high-amperage, multi-point selectors. They are extremely compact, providing up to 12 tap terminals. In addition to the types and sizes shown, Ohmite tap switches are supplied in open, all-ceramic, shorting and non-shorting types. All Ohmite tap switches can be mounted in tandem for multiple-pole operation.

2. **EXTREMELY COMPACT,** yet have many high-current taps, perfectly insulated. Terminals are convenient for wiring. Back-of-panel mounting.

1. **CERAMIC CONSTRUCTION** provides perfect insulation unaffected by arcing. Contacts and mechanism are entirely enclosed and protected (except for Model 111).

3. **"SLOW-BREAK" MECHANISM,** incorporating a positive cam-and-roller, provides "slow-break, quick-make" action, particularly suited to alternating current. Minimizes sparking, extends contact life.

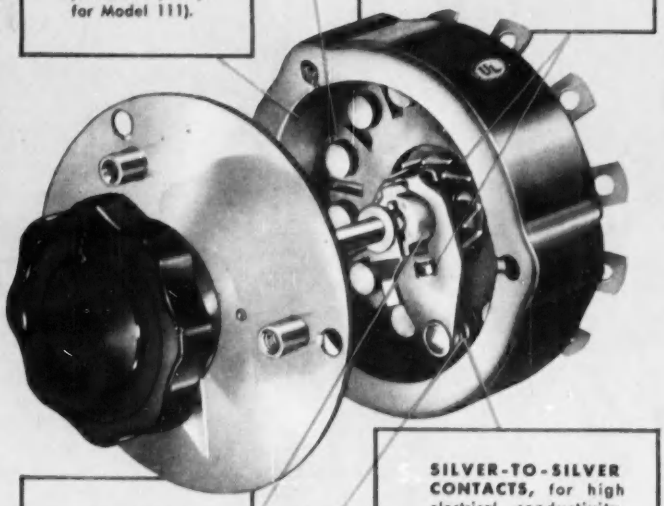

4. **"DEAD" SWITCH SHAFT.** Completely insulated from the load by a high-strength driving hub which will withstand a 2000-volt test.

5. **SILVER-TO-SILVER CONTACTS,** for high electrical conductivity. Have low surface resistance, and eliminate contact maintenance.

6. **SELF-CLEANING ROTOR CONTACT.** Slightly rounded, assures perfect seating and producing slight rubbing motion with every operation.

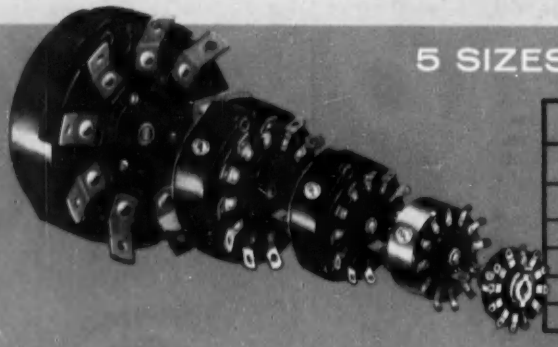

5 SIZES: 10, 15, 25, 50, and 100 AMPS

AC RATINGS		
AMP	VOLTS	NO. TAPS
10	150	2 to 11
15	150	2 to 12
25	300*	2 to 12
50	300*	2 to 12
100	300	2 to 8

*150 Volts between taps.

Write on company letterhead for Ohmite Catalog and Engineering Manual No. 40.

OHMITE MANUFACTURING CO.
3610 Howard St., Skokie, Illinois
(Suburb of Chicago)

Be Right with **OHMITE®**

RHEOSTATS • RESISTORS • RELAYS • TAP SWITCHES
TANTALUM CAPACITORS

PRINTED Circuitry

PROCESS APPROVED BY
UNDERWRITERS' LABORATORIES

EXPERIENCE has no competitors

CRONAME
INCORPORATED

YES - YOU TOO CAN HAVE LABORATORY APPROVED CIRCUITS

Why gamble when you can have the best available. When the designers at the Maico Company, Inc., manufacturer of hearing aids, sought new ways to miniturize and improve their product they naturally turned to the Printed Circuit. The delicate circuit measuring only ½" x 1-1/16" required precision, reliability, and safety. Maico, as so many have done, turned to CRONAME. The circuit produced by our Underwriter's Laboratory approved "Printed Circuitry" process more than met the requirements of Maico. Now—YOU TOO can have Laboratory Approved Circuits. Let CRONAME'S experience bring you the benefits promised by circuitry "revolution." Facilities for etching, plating, printing, screening and machining have served America's industrial leaders for over 50 years. Small or large runs, unassembled or assembled with eyelets, terminal lugs, etc. Consult us today on your circuitry problems.

OTHER PRODUCTS
Nameplates, dials, panels, escutcheons, bezels, mechanisms, light assemblies, masks, decorated glass, control panels, cabinets, CroRoto embossed.

CRONAME INCORPORATED
1737 GRACE STREET
CHICAGO 13, ILL. BI 8-7500

Represented in
Boston, Chicago, Cincinnati, Cleveland, Detroit, Indianapolis
Los Angeles, Louisville, New York, Minneapolis, Syracuse
Croname (Canada) Ltd.

Gentlemen:
Please send me information on Printed Circuitry.
Have your representative call.
Name_____
Firm_____
Address_____
City_____ State_____

Want more information? Use post card on last page.

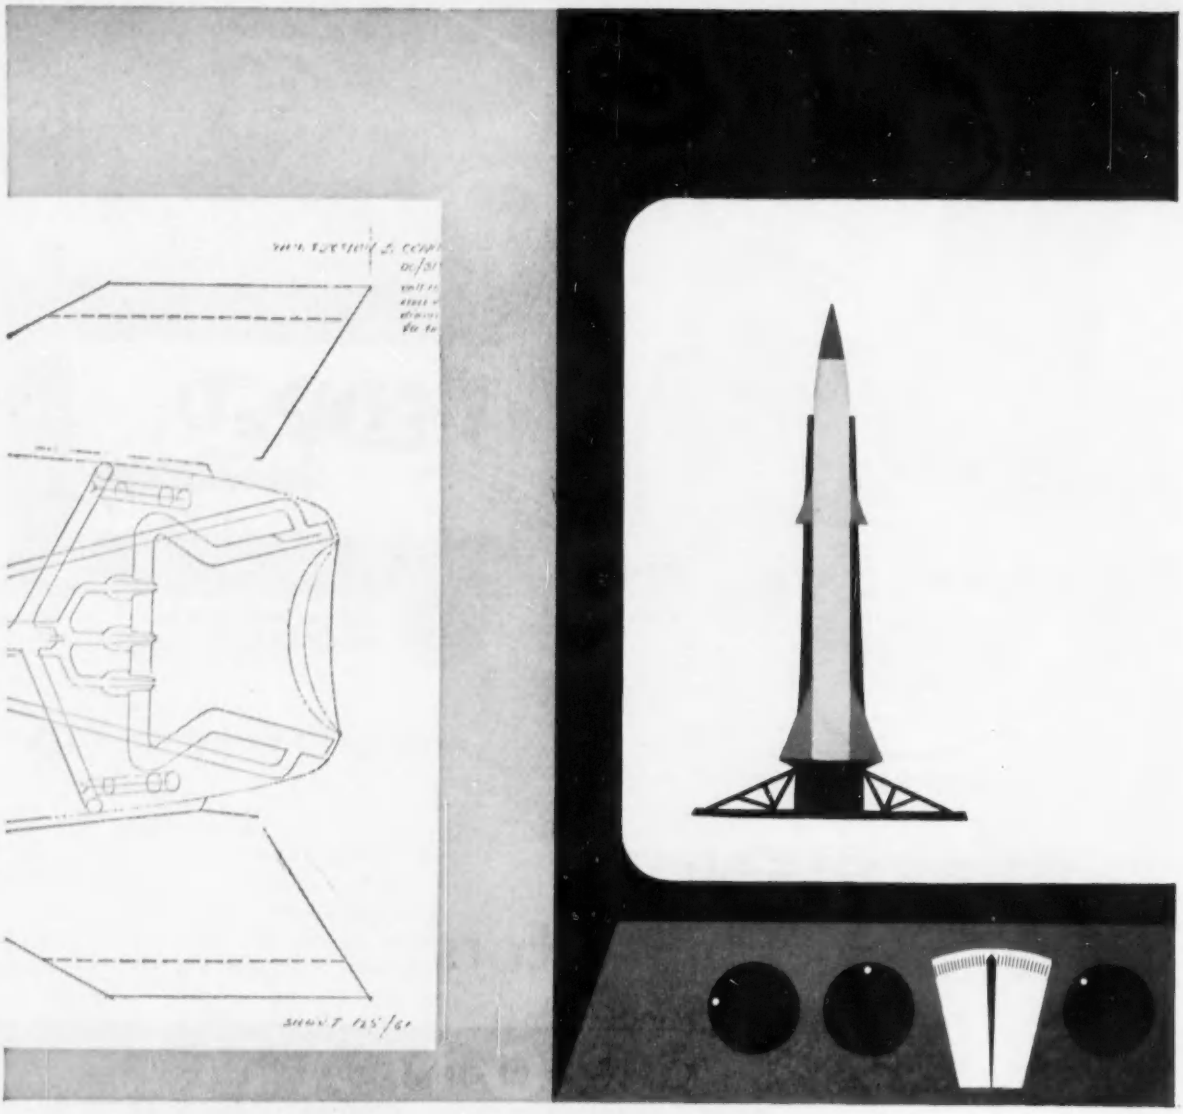

From sketch-out to check-out

AMF has missile experience you can use

● AMF today plays a part in more than half the missile programs under way. One of its subsidiaries, Associated Missile Products Corporation, is the only private firm devoted exclusively to missile support equipment. And AMF activities cover practically every stage of design, development, and production... including mechanical and electronic test equipment... auxiliary power supplies... field and depot handling equipment... launchers... ground and flight control systems ● See for yourself why AMF's experience in missiles, as well as in a host of other fields, has made it the "can do" company.

Research, Development, Production in these fields:
- *Armament*
- *Ballistics*
- *Radar Antennae*
- *Guided Missile Support Equipment*
- *Auxiliary Power Supplies*
- *Control Systems*

Another AMF Product
DEFENSE PRODUCTS

Defense Products Group
AMERICAN MACHINE & FOUNDRY COMPANY
1101 North Royal Street, Alexandria, Va.

Want more information? Use post card on last page.

Raytheon — World's Largest Manufacturer of Magnetrons and Klystrons

see Raytheon

for microwave and special tubes

Here are just six Raytheon Microwave and Special Tubes from the largest, most complete line in the industry. You can add many hours of reliable service to your microwave, radar and special equipment by designating Raytheon Tubes.

Data booklets on Magnetron, Klystron and Special Tubes are available on request – without cost or obligation. Write for your copies today.

For complete details of Raytheon's free Application Engineer Service please contact Power Tube Sales.

Excellence RAYTHEON *in Electronics*

RAYTHEON MANUFACTURING COMPANY

Microwave and Power Tube Operations, Section PT-49

Waltham 54, Massachusetts

Regional Sales Offices: 9501 W. Grand Avenue, Franklin Park, Illinois
622 S. LaBrea Avenue, Los Angeles 36, California

Raytheon makes: Magnetrons and Klystrons, Backward Wave Oscillators, Traveling Wave Tubes, Storage Tubes, Power Tubes, Receiving Tubes, Picture Tubes, Transistors.

QK464
Storage Tube
Magnetic Deflection Type
Resolution—400 lines



6116
Klystron
Ruggedized
Thermally Tuned
Frequency—
8500 to 9660 mc
Power Output—
35 mw



RK3B24W
Half Wave-High Vac.
Diode Rectifier
Max. Peak
Inverse Voltage—
20,000
Max. Peak
Current—300 ma



QK518
Backward-Wave
Oscillator
Frequency Range—
2000 to 4000 mc
Voltage Tunable
Power Output—
0.1 to 1.0 watts

QK329
Square Law Tube
Function Multiplier



RK2J51A
Magnetron
Tunable—
8500 to 9600 mc
Peak Pulse Power—
40 kw min.



Speaking of Cutting Costs

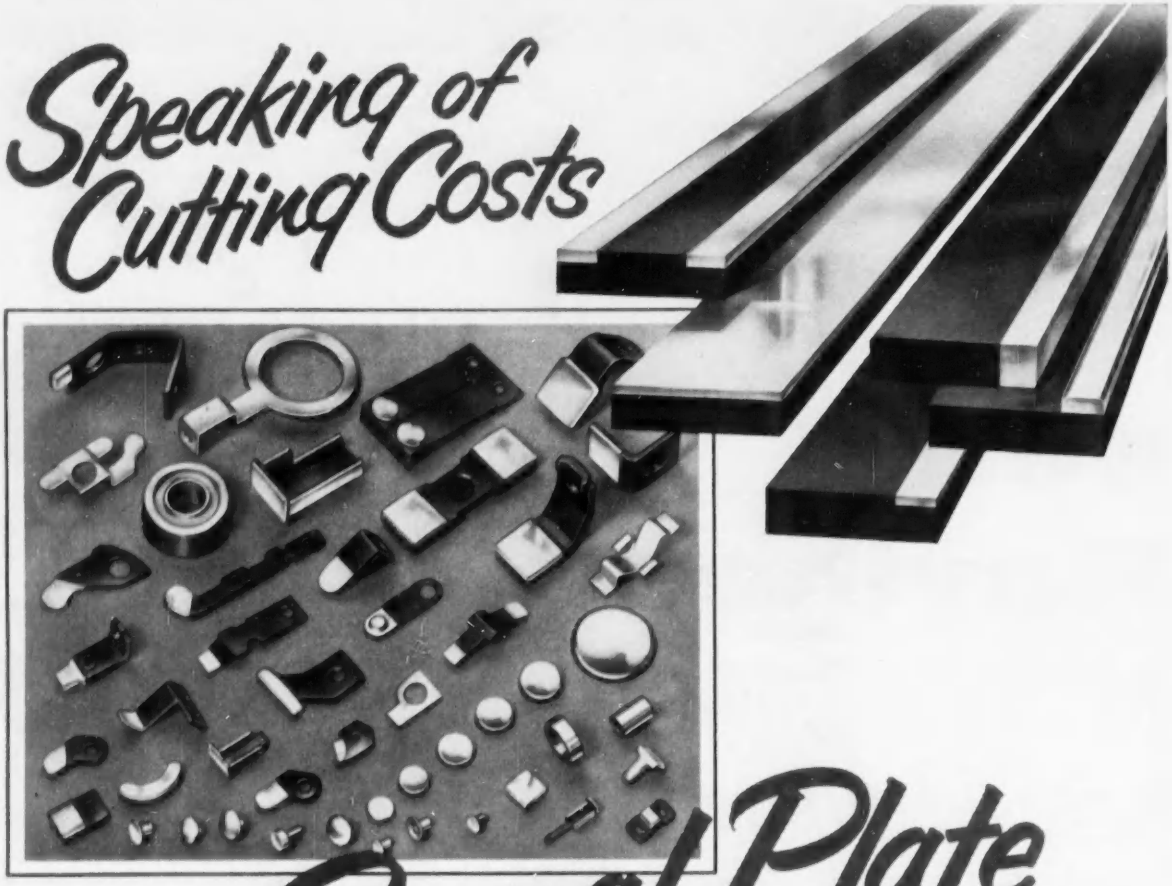

General Plate

COMPOSITE METAL CONTACTS

Save Money and Improve Performance, too!

That's right — time and time again General Plate Division has been able to cut electrical contact costs for customers — while improving product performance.

At General Plate Division customers with contact questions deal directly with a top notch team of Engineers, Production people, and Cost Analysts who specialize in contact activities.

Result? Savings — savings by design for alert customers — with improved performance in the bargain.

Here's what's behind it —

Drawing on forty years of metal cladding experience, General Plate Engineers have developed superior bonded metals which combine the best electrical and mechanical properties of two or more separate metals for greatest contact efficiency and economy.

General Plate Production people have developed the finest facilities available for the manufacture of all kinds of contacts from these materials.

General Plate Application Engineers and Cost Analysts have worked out contact design details which assure you contacts you can count on — at real savings.

You too can earn this double dividend at General Plate Division — why not investigate — today.

METALS & CONTROLS CORPORATION
GENERAL PLATE DIVISION
37 FOREST STREET, ATTLEBORO, MASS.

GENERAL PLATE ELECTRICAL CONTACT KIT FOR LABORATORY AND DEVELOPMENT USE

Kit K11 contains a wide assortment of silver rivet contacts; Kit K12 has representative standard button contacts. Also included are metal strips for fabrication of contact parts. These kits are available at nominal cost. Bulletin available.

You can profit by using General Plate Composite Metals

4 Waldes Truarc Rings Cut Costs Drastically, Increase Versatility of Precision Automatic Drill

Dumore's New Automatic Drill

Dumore Precision Tools, Racine, Wisconsin, uses 4 Waldes Truarc Retaining Rings in their versatile new automatic drill unit. Machining operations have been eliminated, assembly simplified. Great labor savings have resulted from use of Truarc rings.

Drive Spindle Assembly



Bearing is held in position by two Waldes Truarc Rings—Standard (Series 5000) and Bowed (Series 5001). Two grooves are turned and housing rough bored in one operation. Alternate method would require at least two additional machining operations. Bowed Truarc ring takes up accumulated tolerances resiliently.

Actuator Lever Shaft Assembly



A Single Waldes Truarc External Retaining Ring (Series 5100) acts as shoulder, holds the lever in position. Labor savings are tremendous—a simple groove cutting operation replaces turning a shoulder, grinding and polishing.

Piston Assembly



Easy assembly is assured by use of one Waldes Truarc Bowed Ring (Series 5001) to lock the bearing to the piston assembly. When unit is to be used in tapping applications, entire spindle assembly can be removed without disassembly.

Whatever you make, there's a Waldes Truarc Retaining Ring designed to improve your product...to save you material, machining and labor costs. They're quick and easy to assemble and disassemble, and they do a better job of holding parts together. Truarc rings are precision engineered and precision made, quality controlled from raw material to finished ring.

36 functionally different types...as many as 97 different sizes within a type...5 metal specifications and 14 different finishes. Truarc rings are available from 90 stocking points throughout the U.S.A. and Canada.

More than 30 engineering-minded factory representatives and 700 field men are available to you on call. Send us your blueprints today...let our Truarc engineers help you solve design, assembly and production problems...without obligation.

For precision internal grooving and undercutting...Waldes Truarc Grooving Tool!

Send for new catalog supplement

WALDES TRUARC® RETAINING RINGS

Waldes Kohinoor, Inc., 47-16 Austel Place, L. I. C. 1, N. Y.
Please send the new supplement No. 1 which brings Truarc Catalog RR 9-52 up to date.
(Please print)

Name _____
Title _____
Company _____
Business Address _____
City ..... *Zone*.... *State*.....

E 978

WALDES TRUARC Retaining Rings, Grooving Tools, Pliers, Applicators and Dispensers are protected by one or more of the following U. S. Patents: 2,382,948; 2,411,426; 2,411,761; 2,416,852; 2,420,921; 2,428,341; 2,439,785; 2,441,846; 2,455,165; 2,483,379; 2,483,380; 2,483,383; 2,487,802; 2,487,803; 2,491,306; 2,491,310; 2,509,081; 2,544,631; 2,546,616; 2,547,263; 2,558,704; 2,574,034; 2,577,319; 2,595,787, and other U. S. Patents pending. Equal patent protection established in foreign countries.

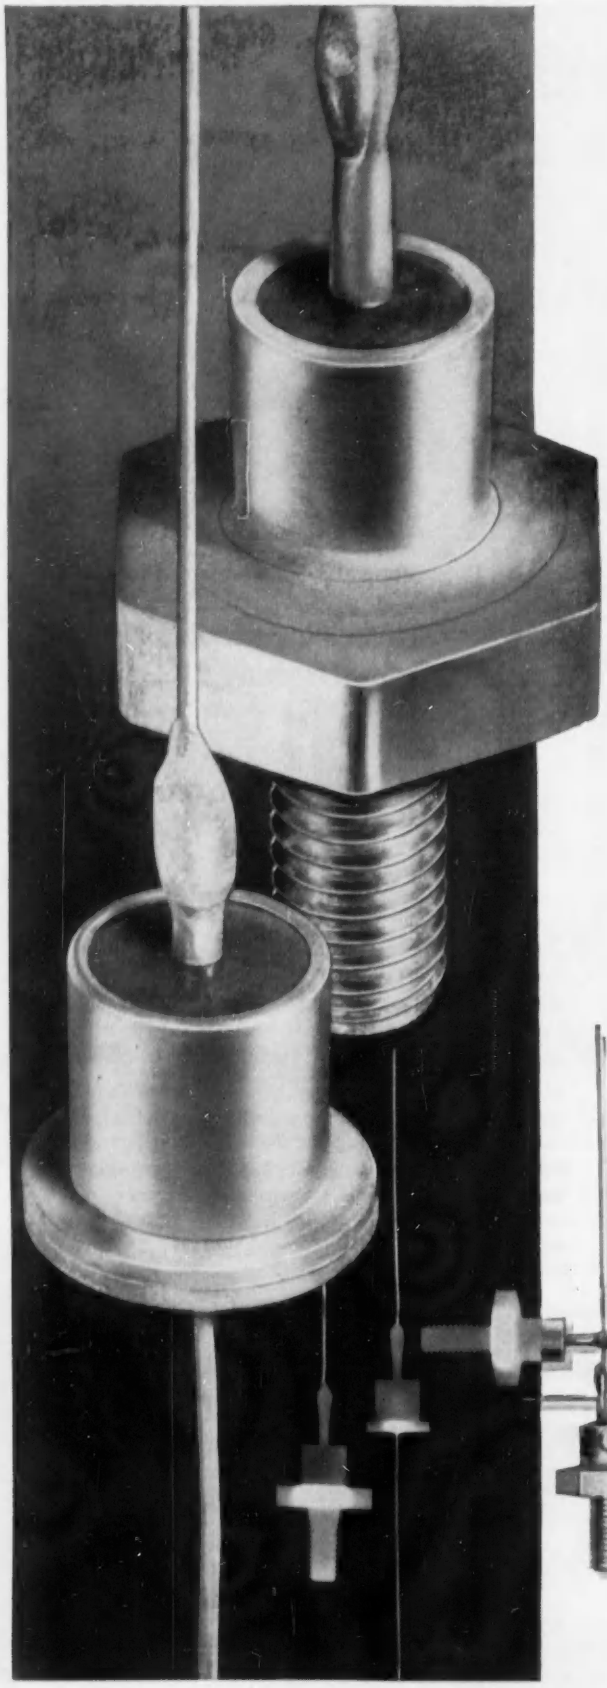

WESTINGHOUSE
SILICON DIODE

High peak inverse voltages . . . extremely low reverse current

The Westinghouse XP-5052 fused-junction silicon diode can handle 500 ma continuous d-c current at peak inverse voltages from 50 to 600 volts.

Leakage at rated voltage is extremely low . . . result is increased efficiency and temperature ranges never before attainable.

This diode is suitable for use in radio and TV, radar, aircraft, magnetic amplifiers, voltage regulators, computers, precipitators, and other industrial applications. Two case designs are immediately available . . . pigtail (XP-5052) and threaded stud (XP-5053).

For more information on the XP-5052, or any other silicon rectifier requirements, regardless of voltage and current, call your nearest Westinghouse apparatus sales office, or write Westinghouse Electric Corporation, 3 Gateway Center, P. O. Box 868, Pittsburgh 30, Pennsylvania. J-09001

WATCH WESTINGHOUSE!

WHERE **BIG** *THINGS ARE HAPPENING* **TODAY!**

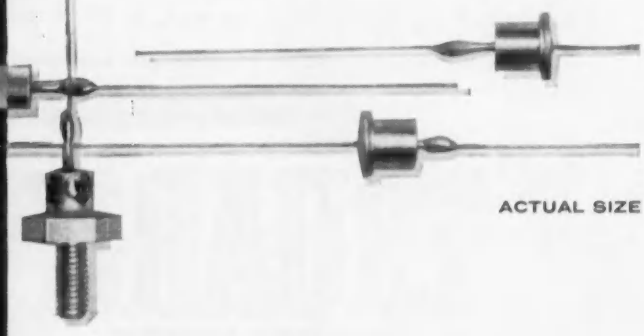

ACTUAL SIZE

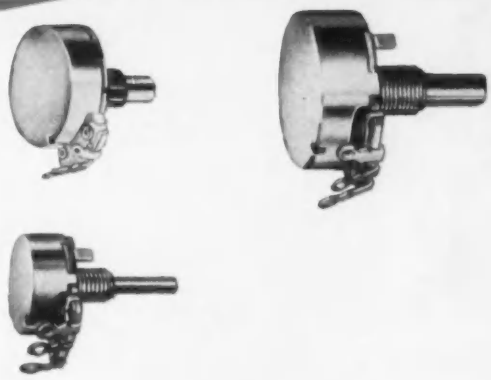

VARIABLE RESISTORS

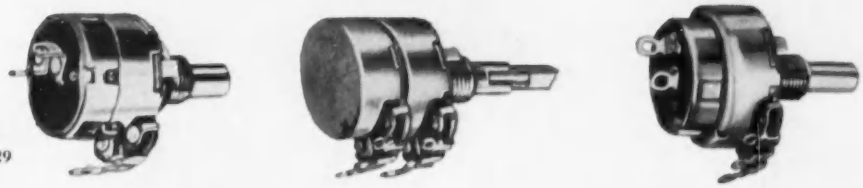

EAST COAST OFFICE
Henry E. Sanders
130 N. Broadway
Camden 2, New Jersey
Phone: Woodlawn 6-1668
TWX No. Camden NJ 380
Phila. Phone: Market 7-3129

WEST COAST OFFICE
Robert A. Stackhouse
928 S. Robertson Blvd.,
Los Angeles 35, Calif.
Phone: Crestview 4-5931
TWX No. BEV H 7666

SOUTHWESTERN U.S.A.
John A. Green Company
6815 Oriole Drive
P.O. Box 7224
Dallas 9, Texas
Phone: Dixon 9918

CANADIAN DIVISION
C. C. Meredith & Co., Ltd.
Streetsville, Ontario
Phone: 310

SOUTH AMERICA
Jose Luis Pontet
Buenos Aires, Argentina
Montevideo, Uruguay
Rio de Janeiro, Brazil
Sao Paulo, Brazil

OTHER EXPORT
Sylvan Ginsbury
8 West 40th Street
New York 18, New York
Phone: Pennsylvania 6-8239

275,000 sq. ft. plant area . . . 1500 employees . . . making ALL TYPES of variable resistors by the million . . . for ALL TYPES of military and commercial applications.

Dependable delivery. Exceptionally good delivery cycle due to enormous mass production facilities.

A CTS control can be tailored to your specific requirement. Refer your control problems to CTS specialists today.

CTS

CHICAGO TELEPHONE SUPPLY
Corporation

ELKHART • INDIANA
FOUNDED 1896

The Exclusive Specialists in Precision Mass Production of Variable Resistors

deep rooted in experience...

with every device produced at OAK goes a plus service which electronic designers and engineers have learned to depend upon in working out their switching and power supply problems... a plus service based on a wealth of experience, 24 years in the making: **OAK ENGINEERING.**

electronic devices designed and produced by OAK...

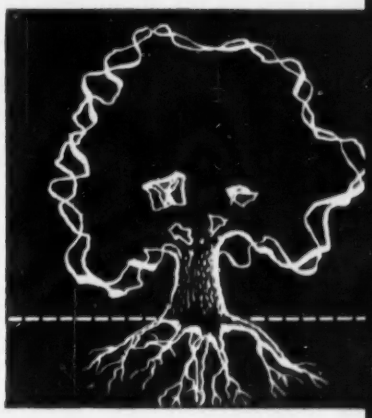

switches — rotary, slider, rotary slider, lever, pushbutton and plug type switches in endless varieties and combinations for every low capacity application.

vibrators — designed for extreme versatility. From four basic designs a broad variety of types have been built to meet widely varying individual requirements.

choppers — features: high temperature operation—high contact rating—unharmed by "no load"—available in any frequency between 15 and 600 cycles—lightweight—low noise—miniature size.

tuners — used in outstanding VHF and UHF television and pushbutton automotive radio installations. Designed from 24 years experience in making switches and electro-mechanical assemblies.

rotary solenoids* — application-engineered and manufactured as solenoid units only, as rotary stepping relays with switch sections or as complete remote control sub-chassis. (*Mfd. under license of G. H. Leland, Inc.)

we invite your inquiry

telephone: MOhawk 4-2222
cable: OAKMANCO

OAK MFG. CO.
1260 clybourn ave. • chicago 10, ill.
factories in Chicago, Ill. • Crystal Lake, Ill. • Elkhorn, Wis.

EASY TO MACHINE!



As manufactured by
INSULATED CIRCUITS, INC., WEST CALDWELL, N. J.

Your printed circuitry is off to a good start when you specify one of C-D-F's Metal-Clad Dilecto grades. Base materials are uniform, almost homogeneous—therefore easier to punch, drill, form...with less waste of expensive time and materials.

EASY TO ETCH!

The closely bonded foil can be etched cleanly and dipped in hot solder to 220°C. (428°F.) for ten seconds with a guarantee of no blistering or separating. HIGH BOND STRENGTH is an all-important virtue of C-D-F Metal-Clads.



As manufactured by
INSULATED CIRCUITS, INC.
WEST CALDWELL, N. J.

FOUR FEATURES YOU GET WITH C-D-F METAL-CLAD LAMINATES

EASY TO ASSEMBLE!

Automatic or hand assembly is speeded when printed circuits are on dimensionally stable C-D-F Dilecto. Minimum warp and twist. Unlike many materials, Dilecto can be dropped, jammed into tight chassis, treated roughly in assembly and service.



As manufactured by
INSULATED CIRCUITS, INC.
WEST CALDWELL, N. J.

EASY TO SELL!

As manufactured by
Regency Division, I.D.E.A., Inc.
Indianapolis 26, Ind.

Manufacturers, like I.D.E.A., Inc., whose Regency transistor radio is pictured, find C-D-F a big, reliable source of supply. C-D-F delivers high-quality laminates on time, to meet exacting production schedules. Result: better products, made and sold at lower costs!

C-D-F Metal-Clad Dilecto

A laminated plastic with copper or aluminum sheet bonded tightly to one or both surfaces. Base materials: paper or woven glass fabric. Resins: phenolic, epoxy, or Teflon*. Good deliveries; expert engineering and fabricating service.

Write for *new* Metal-Clad Technical Bulletin, samples of all grades. The name and address of C-D-F sales engineer nearest you are listed in both Electronics Buyers Guide and Product Design File (Sweet's). *DUPONT TRADEMARK

Improves design . . . simplifies purchasing . . . speeds production!

CDF **CONTINENTAL DIAMOND FIBRE**

CONTINENTAL-DIAMOND FIBRE DIVISION OF THE BUDD COMPANY, INC.
NEWARK 16, DELAWARE

Everywhere—but everywhere—there's a helpful *-hp-* engineer

Throughout North America, in Europe, Australia, and other parts of the Free World, there is a Hewlett-Packard representative to serve you. Each of these men is extensively trained at the *-hp-* plant, periodically retrained, and brought completely up to date on new instrumentation and techniques at an annual engineering seminar.
For your added convenience, factory-level service and repairs are also available at points throughout the U. S. and in Europe. This service is available in cities marked (■) in adjoining column.

HEWLETT-PACKARD COMPANY

3832A PAGE MILL ROAD • PALO ALTO, CALIFORNIA, U.S.A.
CABLE "HEWPACK" DAVENPORT 5-4451

hp means complete coverage in service, too!

-hp- Sales Engineers in:

EASTERN SEABOARD

Asbury Park, N. J., I. E. Robinson Co., 702 Mattison Ave., DU 9-2404. **Bogota, N. J.,** R.M.C. Associates, 114 E. Main St., DI 2-5343. **Bridgeport 8, Conn.,** Yewell Associates, Inc., 1101 E. Main St., FO 6-3456. **Camp Hill, Pa.,** I. E. Robinson Co., 2120 Market St., RE 7-5541. **New York 21, N. Y.,** R.M.C. Associates, 236 E. 75th St., TR 9-2023. **Syracuse 2, N. Y.■,** J. D. Ryerson Associates, Inc., 412 E. Genesee St., SY 76-8344. **Upper Darby, Pa.■,** I. E. Robinson Co., 7404 West Chester Pike, SH 8-1294. **Waltham 54, Mass.■,** Yewell Associates, Inc., 751 Main St., TW 3-7420. **Washington 9, D. C.■,** Horman Associates, Inc., 2017 S St., N. W., DE 2-5705.

SOUTHEASTERN STATES

Atlanta 5, Ga., Bivins & Caldwell, 3133 Maple Dr., N.E., CH 7522. **Fort Myers, Fla.,** Arthur Lynch & Associates, P. O. Box 466, ED 4-4431. **High Point, N. C.,** Bivins & Caldwell, Security Bank Bldg., 3672.

CENTRAL STATES

Chicago 40, Ill.■, Alfred Crossley Associates, Inc., 4501 No. Ravenswood Ave., UP 8-1141. **Cleveland 21, Ohio,** S. Sterling Co., 4311 Mayfield Rd., EV 2-4114. **Dayton 9, Ohio,** Alfred Crossley Associates, Inc., 53 Park Ave., OX 3594. **Detroit 35, Mich.■,** S. Sterling Co., 15310 W. McNichols Rd., BR 3-2900. **Kansas City 30, Mo.,** Harris-Hanson Co., 7916 Paseo Blvd., HI 4-6744. **Pittsburgh 22, Pa.,** S. Sterling Co., 355 Fifth Ave., AT 1-9248. **St. Louis 17, Mo.,** Harris-Hanson Co., 2814 So. Brentwood Blvd., MI 7-4350. **St. Paul 14, Minn.,** Alfred Crossley Associates, Inc., 2388 University Ave., MI 5-4955.

SOUTH CENTRAL STATES

Dallas 9, Tex.■, Earl Lipscomb Associates, P. O. Box 7084, EL 5345. **Houston 5, Tex.,** Earl Lipscomb Associates, P. O. Box 6573, JA 4-9303.

WESTERN STATES

Albuquerque, N. M., Neely Enterprises, 107 Washington St. S. E., 5-5586. **Denver 3, Colo.,** Hytronic Measurements Associates, 446 Broadway, SH 4-2241. **Las Cruces, N. M.,** Neely Enterprises, 126 S. Water St., JA 6-2486. **Los Angeles, Calif.■,** Neely Enterprises, 3939 Lankershim Blvd., No. Hollywood, ST 7-0721. **Phoenix, Ariz.,** Neely Enterprises, 641 E. Missouri, CR 4-5431. **Sacramento 14, Calif.,** Neely Enterprises, 1317 - 15th St., GI 2-8901. **San Diego 6, Calif.,** Neely Enterprises, 1029 Rosecrans St., AC 3-8106. **San Francisco 18, Calif.■,** Neely Enterprises, 2830 Geary Blvd., WA 1-2361. **Seattle 99, Wash.,** Ron Merritt Co., 120 W. Thomas St., GA 6644.

CANADA

Toronto 10, Ontario, Atlas Radio Corp., Ltd., 50 Wingold Ave., RU 1-6174. **Winnipeg, Manitoba,** Atlas Radio Corp., Ltd., 505 McIntyre Bldg.

EUROPE

Belgium, Société Belge Radio—Electrique, 66, Chaussée de Ruisbroek, Forest - Bruxelles. **Denmark,** Tage Olsen A/S, Centrumgarden, Room 133, 6D, Vesterbrogade, Copenhagen V. **Finland,** Into O/Y, 11 Meritullinkatu, Helsinki. **France■,** Radio Equipements, 65, Rue de Richelieu, Paris — 2e. **Germany,** Schneider, Henley & Co. G.M.B.H., Grass - Nabas - Strasse 11, München 59. **Great Britain,** Lithgow Electronics Ltd., 1 Grange Court, Sudbury Hill, Harrow, Middlesex. **Greece,** K. Karayannis, Karitsi Square, Athens. **Italy,** Dott. Ing. Mario Vianello, Via L. Anelli 13, Milano. **Netherlands,** C. N. Rood, 37 Weteringkade, The Hague. **Norway,** P. N. Biorn, Tollbodgt, 4, Oslo. **Sweden,** Erik Ferner, Bjornsonsgatan 197, Bromma. **Switzerland,** Max Paul Frey, Laupenstrasse 2, Bern. **Yugoslavia,** Betram Electronics, 43 Ch. de Charleroi, Brussels, Belgium.

Australia, Geo. H. Sample & Son Pty. Ltd., 17 - 19 Anthony St., Melbourne C.1. Geo. H. Sample & Son Pty. Ltd., 280 Castlereagh St., Sydney. **Japan,** Seki & Co., Ltd., No. 1 Kanda Higashi—Fukudacho, Chiyoda - Ku, Tokyo. **Mexico,** RCA Victor Mexicana, S.A. de C.V., Av. Cuitlahuac 2519, Mexico 16, D. F. **New Zealand,** Geo. H. Sample & Son (N.Z.) Ltd., 431 Mt. Albert Rd., Mount Roskill S.1, Auckland. **Union of South Africa,** F. H. Flanter & Co., 4 Buitencingle St., Cape Town.

(■) Indicates factory-level service available.

Want more information? Use post card on last page.

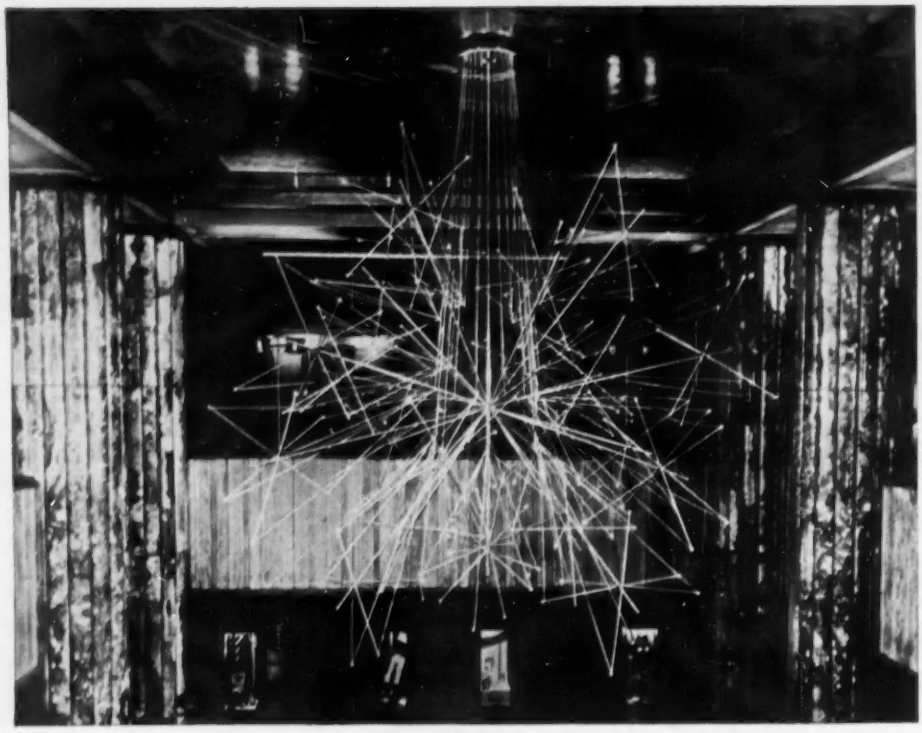

What carries the current in the wireless chandelier of New York City's Barbizon-Plaza Hotel? The fixture is constructed of gleaming Inco Nickel tubing in an intricate pattern — and the tubing carries the current! Nickel tubing is light and rigid, too — so the chandelier can be slowly rotated from above. The chandelier was designed by Richard Kelly and fabricated by Edison Price — both of New York City.

A chandelier without wires!

... *and three other unique designs in* Inco Nickel Alloy *tubing*

There's a similarity in all four tubing applications here.

In each, a needed *combination* of useful properties is provided by Inco Nickel or an Inco Nickel Alloy. For example, in the chandelier above: electrical conductivity *plus* rigidity and light weight. Or in the radar antenna lens at the right: electrical properties *plus* strength and corrosion resistance *plus* brazing facility.

Perhaps *your* design requires a hard-to-find combination of electrical properties with others such as thermal conductivity, non-magnetic properties, resistance to corrosion, or to vibration, shock, and fatigue. With these alloys you also get the advantages of fabricability, high strength-to-weight ratio, hardness, rigidity, or other properties.

So for help in selecting the alloy that fits your needs, call on Inco's Technical Service Section.

And, remember, you can get Inco Nickel Alloy tubing in all useful sizes from your distributor — or from redrawers who supply it as fine as 0.012″ O.D.

The International Nickel Company, Inc.
67 Wall Street New York 5, N. Y.

INCO TRADE MARK **Nickel Alloys**

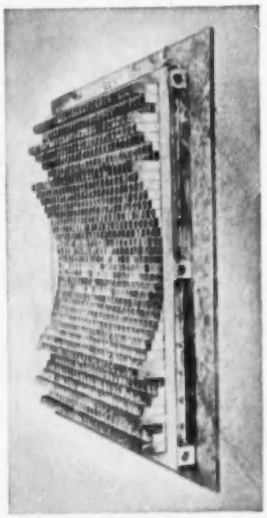

Radar antenna lens uses square seamless tubing of Monel* nickel-copper alloy. Superior Tube Company, Norristown, Pa., recommended Monel to I-T-E Circuit Breaker Company, of Philadelphia, for strength, corrosion resistance, electrical properties, and brazing facility. *Registered Trademark

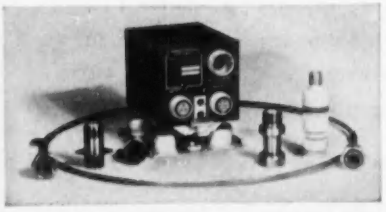

Aircraft fire detector's 0.065-in. diameter Inconel tube encloses two Inconel wires. A special ceramic between them becomes conductive when heated — closes the circuit. The box flashes a warning. Walter Kidde & Company, Inc., Belleville, N. J., uses Inconel nickel-chromium alloy because it withstands temperatures up to 2000°F., resists vibration and shock.

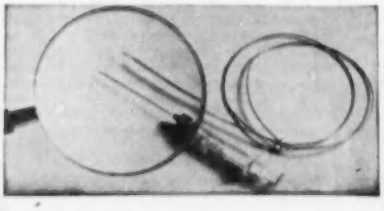

Nuclear reactors' temperatures measured—Inconel* nickel-chromium alloy tube, almost as thin as a hypodermic needle, is both thermocouple unit and thermocouple protection tube. The Inconel tube resists oxidation, which might set up a heat barrier and interfere with accuracy of the reading. Photo courtesy of Argonne National Laboratory, Lemont, Ill.

Federal

THE SELENIUM RECTIFIER WITH THE GREATEST

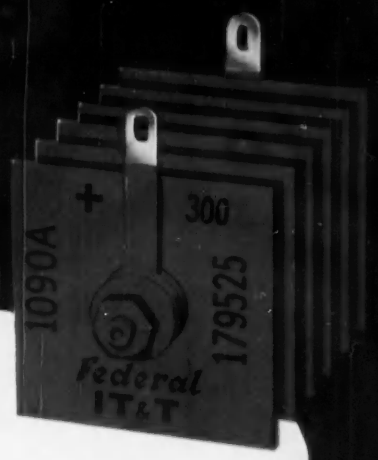

Manufacturer Acceptance

More design and component engineers in the radio-TV industry have placed their approval on Federal Selenium Rectifiers than any other make—

And HERE'S why— point by point:

- **LONGER LIFE**... 5,000 hours life expectancy in approved applications.
- **HIGHER OUTPUT VOLTAGE**...3 to 6½ higher B+ output volts than competitive selenium rectifiers in conventional doubler circuits.
- **LOWER TEMPERATURE RISE**...2° C to 10° C lower average operating temperature than competitive selenium rectifiers.
- **SUPERIOR HUMIDITY RESISTANCE**... passes 1,000-hour life test in 95% relative humidity at 40° C.
- **PROVEN MECHANICAL CONSTRUCTION**... brass eyelet or aluminum stud construction used exclusively. Patented "dead-center" construction allows stack to be tightened until rigid, without affecting the pressure-sensitive selenium characteristic.
- **UNDERWRITERS LABORATORY ACCEPTANCE FOR 85° C OPERATION**... Federal's popular radio-TV types have been tested and accepted by UL for operation at cell temperatures of 85° C.
- **CONSERVATIVE RATINGS**...rectifiers offered to the industry are rated only after exhaustive temperature rise and aging tests on minimal grade units to insure full value and satisfaction.
- **MORE UNIFORM QUALITY**...Federal rectifiers are automatically 100% tested and inspected to meet standard forward and reverse current specifications, as well as for dielectric strength.
- **LARGEST PLANT CAPACITY**...production facilities to satisfy any quantity requirement.
- **MORE ENGINEERING KNOW-HOW**...the research and design facilities of the world-wide, American-owned International Telephone and Telegraph Corporation assure continued product leadership.

For full information, write Dept. F-613

Federal
A DIVISION OF
IT&T

Federal Telephone and Radio Company
A Division of INTERNATIONAL TELEPHONE AND TELEGRAPH CORPORATION
COMPONENTS DIVISION • 100 KINGSLAND ROAD • CLIFTON, N. J.
In Canada: Standard Telephones and Cables Mfg. Co. (Canada) Ltd., Montreal, P. Q.
Export Distributors: International Standard Electric Corp., 67 Broad St., New York

Automatic production at high output per man-hour is obtained from this complete in-line Stokes aluminizing system, used for color TV tube face plates at the RCA tube plant, Lancaster, Pa.

Electronic equipment manufacturers are profiting from other Stokes Vacuum Equipment...



Vacuum Metallizers. Stokes manufactures a complete line of vacuum metallizing equipment to plate selenium rectifiers, printed circuits and other conductive coatings on non-conductive materials.

Vacuum Impregnators. Manufacturers of electronic equipment use Stokes vacuum impregnation systems for obtaining improved characteristics of coils, capacitors and other components.



Vacuum Furnaces. Stokes melting and heat-treating furnaces permit electronic manufacturers to pre-process raw and semi-finished materials with less contamination for increased life and performance.

Aluminized on Stokes high-production in-line system

The first continuous production installation for aluminizing color TV tube face plates is now operating at the RCA tube plant, Lancaster, Pa.—using a Stokes automatic in-line system.

APPLICATION to this unique tube design demonstrates the versatility that is characteristic of Stokes aluminizing systems. These systems are adaptable to all the television tube constructions . . . both for black and white and for color . . . that are now being used or developed in the industry. They are engineered to provide high output and flexibility to meet changes in production rates and tube sizes.

The combination of Stokes high speed "Ring-Jet" vapor pumps and mechanical forepumps gives rapid evacuation, short cycles and fast production. Systems are compact . . . require little floor space. Removable electrodes simplify filament replacement. Internal cooling coils reduce oil temperature rapidly in the booster pump before vacuum is released. Systems are available in a complete range of capacities and prices.

A Stokes engineer will be glad to talk over your specific tube production requirements. He is well qualified to apply Stokes' 30 years of experience in high vacuum engineering and automatic production techniques, to solve your problem on the most efficient and economical basis. For a consultation, or for literature useful in your own applications, write to Stokes today.

Exclusive Stokes twin-tube unit aluminizes two TV tubes at a time. These units can be furnished completely automatic or manually controlled, in-line or stationary . . . in a range of capacities to meet your requirements.

High Vacuum Equipment Division
F. J. STOKES CORPORATION
5517 Tabor Road, Philadelphia 20, Pa.

STOKES

DELAY LINES

by Admiral

. . . fixed and variable, distributed constant, with high temperature stability. Designed for your special application.

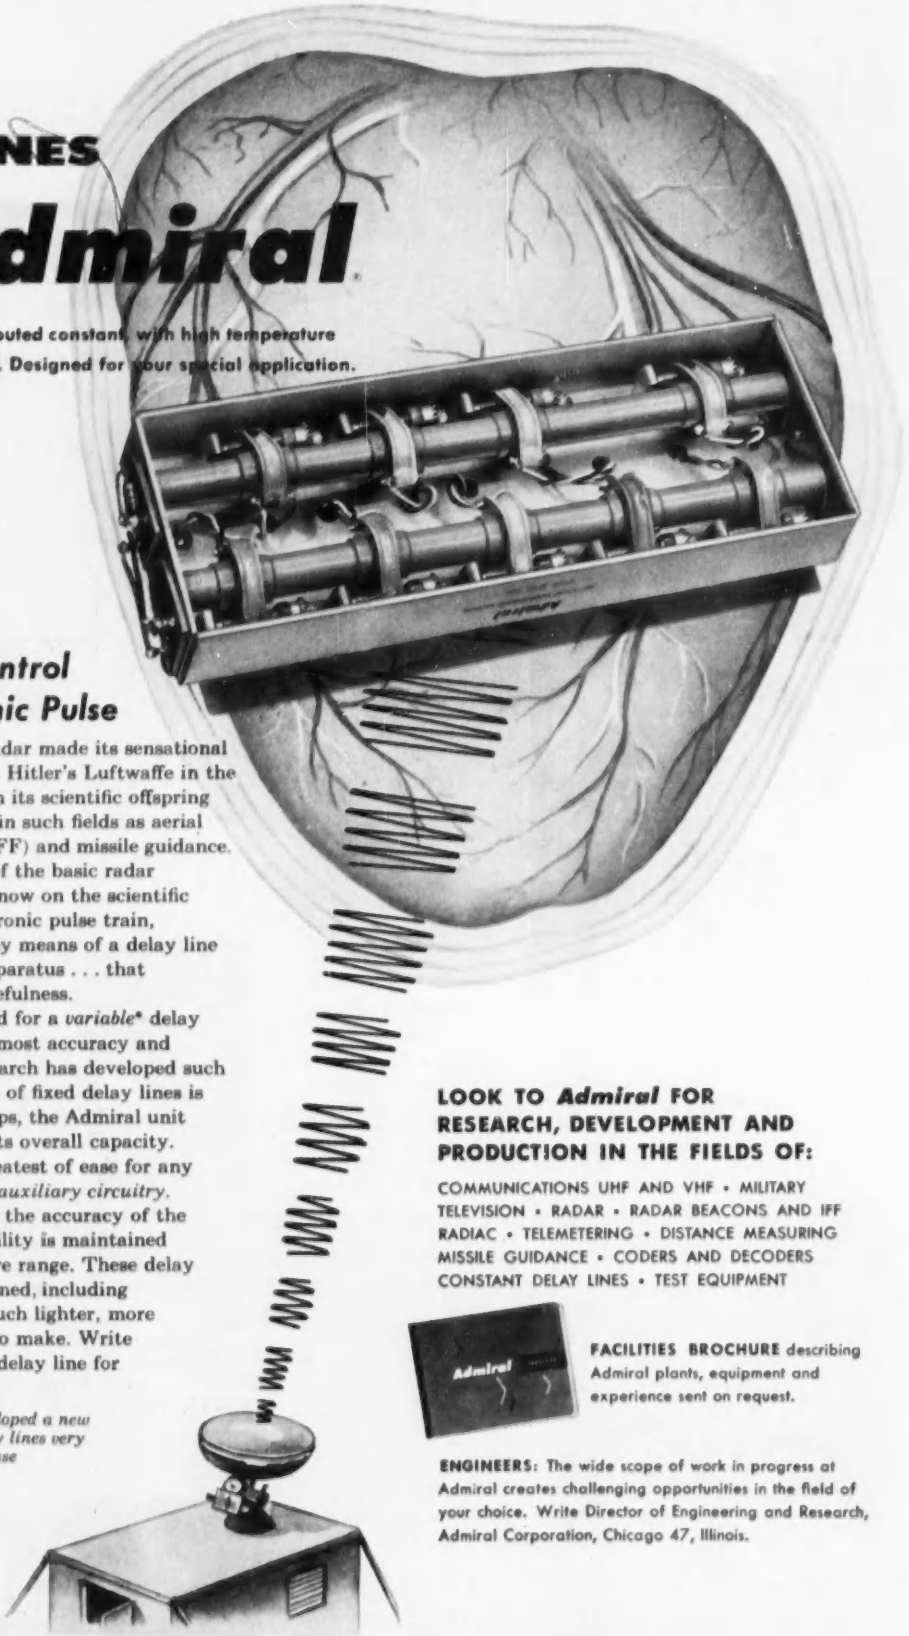

Micro-second Control for an Electronic Pulse

Scarcely fifteen years ago radar made its sensational debut when it helped defeat Hitler's Luftwaffe in the Battle of Britain. Since then its scientific offspring have become commonplace in such fields as aerial navigation, interrogation (IFF) and missile guidance.

All these elaborations of the basic radar principle, and many others now on the scientific horizon, depend on an electronic pulse train, established and controlled by means of a delay line . . . the very *heart* of the apparatus . . . that determines its scope and usefulness.

There was pressing need for a *variable** delay line, self-contained, with utmost accuracy and stability. Now Admiral research has developed such a unit. Where the flexibility of fixed delay lines is limited by the number of taps, the Admiral unit is *infinitely variable* within its overall capacity. It is adjustable with the greatest of ease for any desired interval . . . *without auxiliary circuitry.* Accuracy is limited only by the accuracy of the measuring equipment. Stability is maintained over an extreme temperature range. These delay lines, completely self-contained, including switching apparatus, are much lighter, more compact, and cost far less to make. Write Admiral about designing a delay line for your special application.

**Admiral research has also developed a new procedure for making fixed delay lines very much smaller, with excellent phase characteristics.*

LOOK TO *Admiral* FOR RESEARCH, DEVELOPMENT AND PRODUCTION IN THE FIELDS OF:

COMMUNICATIONS UHF AND VHF • MILITARY TELEVISION • RADAR • RADAR BEACONS AND IFF RADIAC • TELEMETERING • DISTANCE MEASURING MISSILE GUIDANCE • CODERS AND DECODERS CONSTANT DELAY LINES • TEST EQUIPMENT

FACILITIES BROCHURE describing Admiral plants, equipment and experience sent on request.

ENGINEERS: The wide scope of work in progress at Admiral creates challenging opportunities in the field of your choice. Write Director of Engineering and Research, Admiral Corporation, Chicago 47, Illinois.

Admiral Corporation Government Laboratories Division, Chicago 47, Illinois

variable "L" by BURNELL

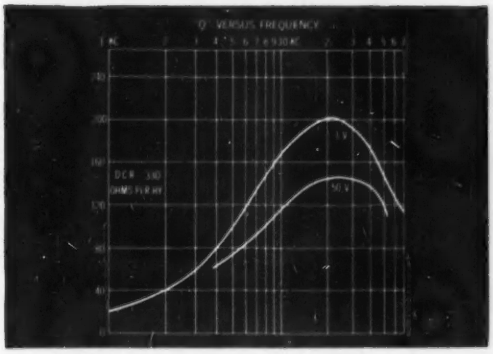

Typical Q vs. frequency characteristics of Adjustoroids.

RANGE OF NORMAL INDUCTANCES FOR STOCK ADJUSTOROIDS

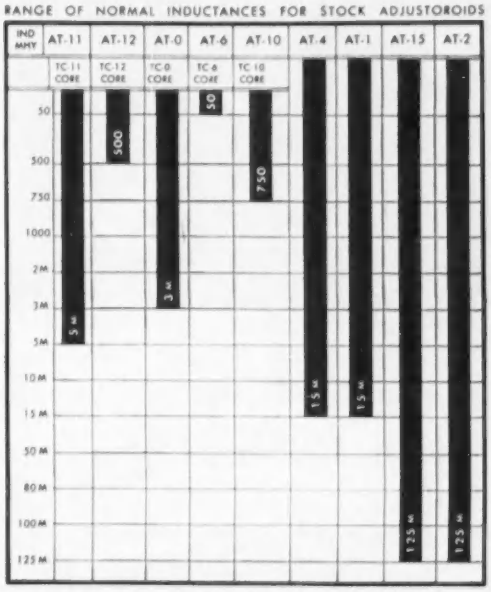

For nominal D. C. R. values refer to Burnell catalog No. 103.

ADJUSTOROIDS®

The Adjustoroid, a low cost adjustable toroid, exclusively developed by Burnell & Company, Inc., contains an actual complete toroid with all the excellent characteristics of the non-adjustable types. Adjustment is obtained by a completely stepless function with magnetic biasing.

The nominal inductance value for an Adjustoroid is the **maximum** value, and the inductance range is the nominal value minus approximately 10%.

Hermetically sealed to meet Government MIL specifications. Many types of networks in tuned circuits are being produced which employ the Adjustoroid in completely hermetically sealed packages.

Intermediate inductance values as well as special taps and extra windings available on special order with minimum delay.

For additional technical data on Adjustoroids, refer to equivalent toroid in catalog.

AT-0, AT-6, AT-10, AT-4

AT-1, AT-2, AT-11, AT-12



ADJUSTOROID & VARIABLE INDUCTOR DIMENSION CHART

	A—LENGTH	B—WIDTH	C—HEIGHT
AT-0, AT-6	1-1/16"		1"
AT-10, AT-4	1-19/64"		1-1/4"
AT-15	1-31/32"		1-7/8"
AT-11, AT-12	45/64"	45/64"	3/4"
AT-1	1-3/4"	1-3/4"	1-1/4"
AT-2	2-3/4"	2-3/4"	2-1/4"
AF-51, AF-52	1-19/64"		2"

COMPLETE TECHNICAL INFORMATION UPON REQUEST
® copyrighted, patent applied for

and now . . .

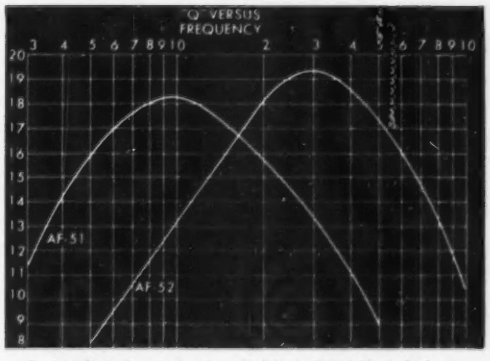

Typical Q vs. frequency characteristics of Variable Inductors.

VARIABLE INDUCTORS

AF-51 AF-52

(20-500 cycles)
Maximum Q at 100 cycles

(50-1000 cycles)
Maximum Q at 250 cycles

Burnell Variable Inductors have the similar characteristics to the Adjustoroid except they are especially designed for low frequency applications or for conditions where high inductance values are required. Variable Inductors are available in all inductance values up to 1000 Hys.

BURNELL & CO., INC.
YONKERS 2, NEW YORK Teletype: Yonkers, N. Y. 3633
Pacific Division: 720 Mission St., S. Pasadena, Calif.

Want more information? Use post card on last page.

You get dependable electrical protection — under all service conditions — with BUSS FUSES

To assure top quality and proper operation, — BUSS fuses are electronically tested. A sensitive device automatically rejects any fuse not correctly calibrated, properly constructed and right in all physical dimensions.

BUSS fuses, by their unfailing dependability, help safeguard the reputation of your product for quality and service.

When there is an electrical fault, BUSS fuses clear the circuit in time to prevent further damage to equipment. And just as important, BUSS fuses eliminate needless blows.

Users of your equipment get protection yet — they are not plagued with irritating, useless shutdowns caused by faulty fuses blowing needlessly.

With a complete line of "trouble-free" BUSS fuses available in all sizes and types, — it is just good business to standardize on BUSS fuses.

If your protection problem is unusual, you can save engineering time by letting the BUSS fuse engineers help you select the fuse or fuseholder best suited to your needs.

Be sure to get the latest information on BUSS and FUSETRON small dimension fuses and fuseholders . . . Write for bulletin SFB.

Bussmann Mfg. Co.

(Div. of McGraw Electric Co.)

UNIVERSITY AT JEFFERSON, ST. LOUIS 7, MO.

ELRC 758

FUSETRON

TRUSTWORTHY NAMES IN ELECTRICAL PROTECTION

BUSS

Makers of a complete line of fuses for home, farm, commercial, electronic, automotive and industrial use.

STABLE MAGNETIC AMPLIFIER

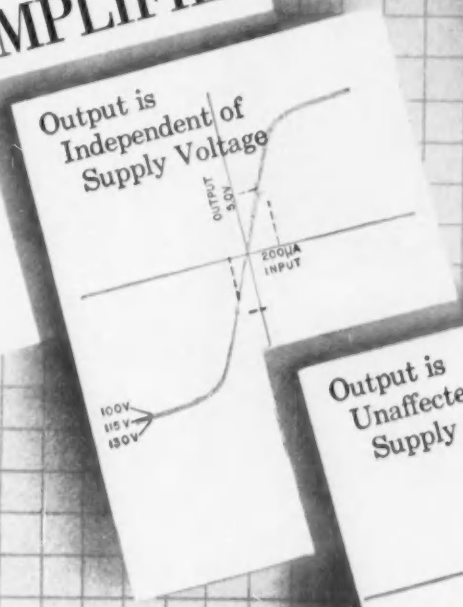

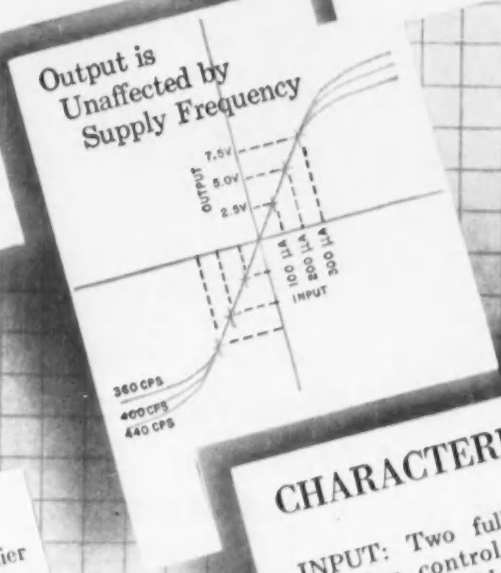

FERRAC

A FERRomagnetic Amplifier for Analog Computers

Ferrac, a self-contained amplifier, is now available for use in computers and controls. Initial stand off error (current into one control coil necessary to accurately zero the out-put) and null error (current into control coil to re-zero the Ferrac during changes in environmental and operating conditions) do not exceed ±5 microamperes.

CHARACTERISTICS

INPUT: Two fully isolated 120-ohm control coils, DC polarity reversible.

OUTPUT: Unfiltered DC linear to 7.5 volts into 1000-ohm load.

GAIN: 2.5 volts output per 100 microamps into either control coil, externally adjustable by feedback.

ENVIRONMENT: Operating range -55 to +85 C, meets MIL-T-27A requirements.

POWER: 115 volts at 400 CPS

AIRPAX

DESIGNERS ENGINEERS

MIDDLE RIVER BALTIMORE 20, MD.

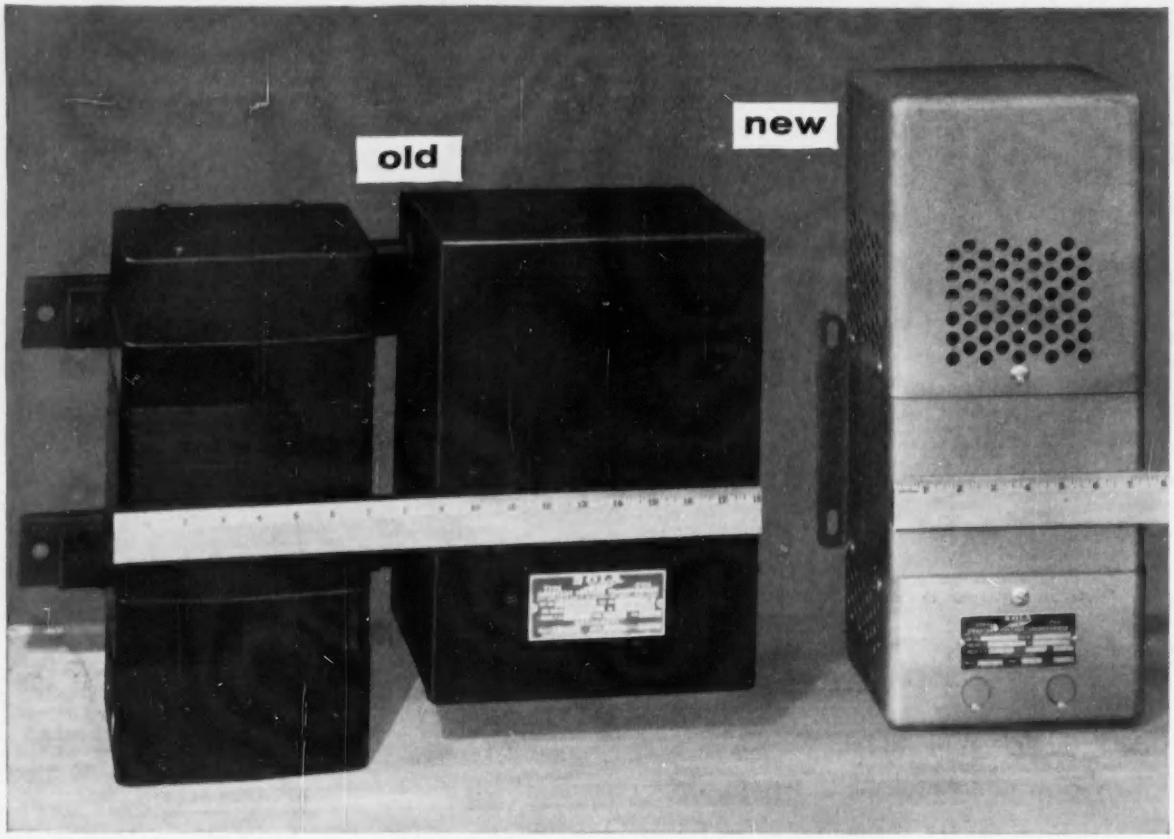

SMALLER SIZE, LIGHTER WEIGHT *of the new Sola Type CVH regulating transformer design is shown by the comparison of 1000va units shown above. The new unit shown at the right utilizes a single, rectangular housing that replaces the core-and-coil-assembly and separate neutralizer component. Also available in the new design are 250 and 500va capacities. Finish is gray hammerloid.*

New Sola Harmonic-Neutralized Constant Voltage Transformers greatly reduced in size and weight

Now the valuable performance features of the Sola Harmonic-Neutralized Constant Voltage Transformer (Type CVH) are offered in a new unit design that provides up to 60% reduced size and 54% lighter weight. In addition to significant size and weight reductions, the new Sola Type CVH regulator design provides the lowest external field of any stock static-magnetic stabilizer available.

Essentially, electrical characteristics of the new Type CVH regulator are unchanged. Stabilization is ±1% regardless of primary voltage swings over a newly-expanded range of 95-130 volts. Sinusoidal output is delivered with less than 3% harmonic distortion at rated load. The nominal output rating has been raised to 118 volts to correspond with similar input reratings of electronic and other equipment.

Sola harmonic-neutralized regulators may be used for the most exacting applications with equipment having elements which are sensitive to power frequencies harmonically related to the fundamental. They are especially suitable for input to a rectifier when close regulation of the dc output is required.

New design Sola Type CVH regulators are available in three capacities — 250, 500, and 1000va. For specific advice on your particular application, consult your Sola representative listed below.

SOLA *Constant Voltage* **TRANSFORMERS**

Request Explanatory Circular

SOLA ELECTRIC CO.
4633 W. 16th Street
Chicago 50, Illinois

CONSTANT VOLTAGE TRANSFORMERS for Regulation of Electronic and Electrical Equipment • **LIGHTING TRANSFORMERS** for All Types of Fluorescent and Mercury Vapor Lamps. • **SOLA ELECTRIC CO., 4633 West 16th Street, Chicago 50, Illinois, Bishop 2-1414** • *NEW YORK 35: 103 E. 125th St., TRafalgar 6-6464* • *PHILADELPHIA: Commercial Trust Bldg., Rittenhouse 6-4988* • *BOSTON: 272 Centre Street, Newton 58, Mass., Bigelow 4-3354* • *CLEVELAND 15: 1836 Euclid Ave., PRospect 1-6400* • *KANSAS CITY 2, MO.: 406 W. 34th St., Jefferson 4382* • *LOS ANGELES 23: 3138 E. Olympic Blvd., ANgelus 9-9431* • *TORONTO 17, ONTARIO: 102 Laird Drive, Mayfair 4554* • *Representatives in Other Principal Cities*

Bendix-Pacific airborne radar systems represent advancement. Highly complex systems are designed into extremely small lightweight units to meet rigid environmental conditions.

This Bendix-Pacific arch-type sub-assembly for a new radar system represents a maximum utilization of space.

Rely on Bendix-Pacific for your airborne radar system requirements. Qualified radar systems engineers are available to call on you at your convenience.

SPECIALIZING IN AIRBORNE RADAR FOR NAVIGATION, TERRAIN CLEARANCE, MAPPING, TAIL WARNING AND MISSILE GUIDANCE.

Bendix
PACIFIC DIVISION
Bendix Aviation Corporation
NORTH HOLLYWOOD, CALIF.

EAST COAST OFFICE: P.O. BOX 391, WILTON, CONN. • **DAYTON, OHIO** – 120 W. 2nd ST. • **WASHINGTON, D.C.** – SUITE 803, 1701 "K" ST., N.W.
CANADIAN DISTRIBUTORS: AVIATION ELECTRIC, LTD., MONTREAL 9 • **EXPORT DIVISION:** BENDIX INTERNATIONAL, 205 E. 42nd ST., NEW YORK 17

Want more information? Use post card on last page.

another first!

MOLCOTE *metallized ceramic coating*

• • •

for use with all types of hard solders!

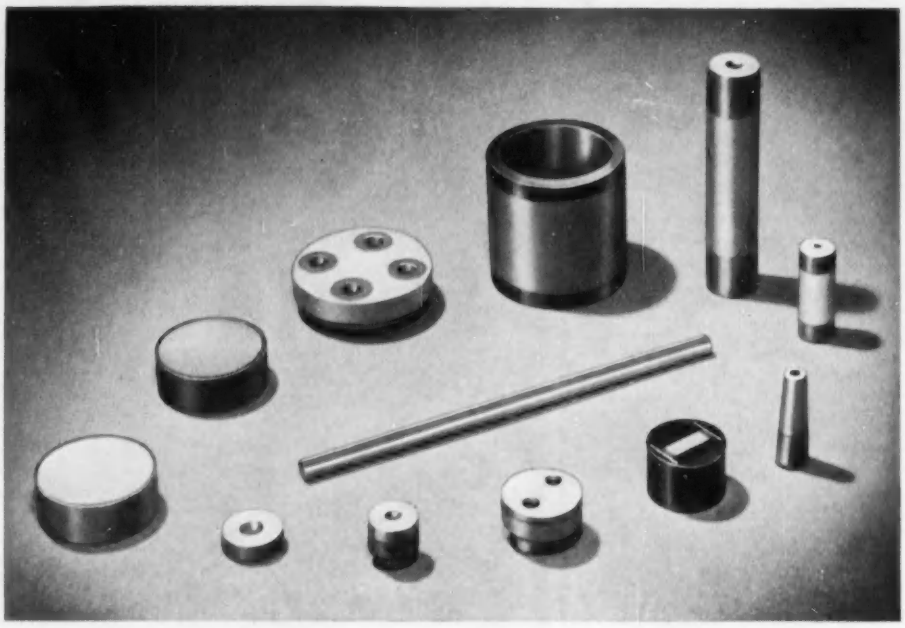

HERE'S *another first* from Frenchtown . . . a firmly bonded metal-to-ceramic coated surface to which a metal or metallized ceramic may be *hard soldered* up to 2200° F.

MOLCOTE, applied to ceramic bodies by a special Frenchtown process and fired at high temperature, offers distinct advantages over existing coatings. Its versatility permits use in a wide latitude of high temperature assembly manipulation. And, its extreme refractory qualities defy the attack of solders of the copper-silver, silver, and pure copper types.

With MOLCOTE, no expensive preliminary processing is required. You may use it immediately for any high temperature solder operation.

MOLCOTE's solder bonds are exceptionally strong to the point of fracture of the ceramic, making it ideal for such applications as vacuum type ceramic envelope electronic equipment assemblies, support insulators, condenser shafts, hermetic seals, wave guide windows and a host of others. We'd like you to know more about the unlimited possibilities of MOLCOTE. Bulletin 1155 contains complete engineering details. Write for your free copy.



Bulletin 1155 contains complete engineering data on MOLCOTE, Frenchtown's metallized ceramic coating for use with all types of hard solders. Write for your copy.

CALIFORNIA REPRESENTATIVE:
Edwin E. Starr,
4101 Rhodes Ave.,
North Hollywood,
Cal. STanley 7-5879

frenchtown PORCELAIN COMPANY

86 MUIRHEAD AVENUE | TRENTON 9, NEW JERSEY

Want more information? Use post card on last page.

New TEKTRONIX WIDE-BAND OSCILLOSCOPE

Small Light Versatile

Small size, light weight, and operating versatility are just three of the many things you'll like about this new Tektronix 5-inch oscilloscope. It is primarily a wide-band laboratory oscilloscope that occupies less bench space and has wider application than many larger instruments. But because of its compactness it is the most convenient oscilloscope for those more exacting field applications. If your work requires a reliable high-performance top-quality oscilloscope, and especially if you must sometimes use it in field applications, the Type 515 merits your consideration.

TYPE 515 BASIC SPECIFICATIONS

VERTICAL RESPONSE

Passband—dc to 15 mc.
Risetime—0.023 μsec.

VERTICAL SENSITIVITY

0.1 v/cm to 125 v/cm, continuously variable.
9 calibrated steps from 0.1 v/cm to 50 v/cm.

SWEEP RANGE

0.04 μsec/cm to 6 sec/cm, continuously variable.
Single control selects any of 22 calibrated steps from 0.2 μsec/cm to 2 sec/cm.
5x magnifier is accurate on all ranges.

TRIGGERING FACILITIES

Internal, external, line, ac or dc-coupled.
Amplitude level selection or automatic triggering.

4-KV ACCELERATING POTENTIAL

DC-COUPLED UNBLANKING

SQUARE-WAVE AMPLITUDE CALIBRATOR

0.25 μsec BALANCED DELAY NETWORK

ELECTRONICALLY-REGULATED POWER SUPPLY

Type 515 — $750
f.o.b. Portland (Beaverton), Oregon

ENGINEERS—interested in furthering the advancement of the oscilloscope? We have openings for men with creative design ability. Please write to Richard Ropiequet, Vice President, Engineering.

For complete specifications please call your Tektronix Field Engineer or Representative, or write to:

Tektronix, Inc.

P. O. Box 831 • Portland 7, Oregon
Phone CYpress 2-2611 • TWX-PD 265 • Cable: TEKTRONIX

Want more information? Use post card on last page.

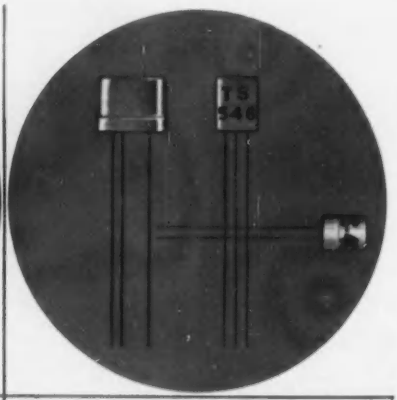

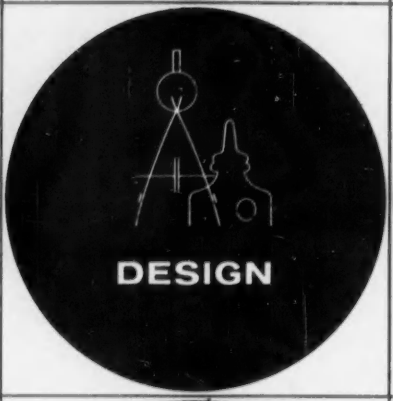

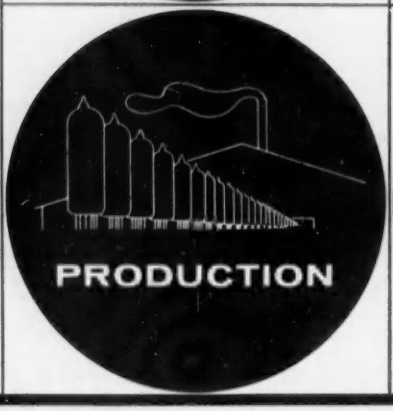

TUNG-SOL®
Electron Tubes and Semiconductors

TUNG-SOL ELECTRIC INC., Newark 4, N. J.

SALES OFFICES: ATLANTA, COLUMBUS, CULVER CITY, DALLAS, DENVER, DETROIT, MELROSE PARK (ILL.), NEWARK, SEATTLE
CABLE ADDRESS: TUNGSOL

NEW!

BK-3300, BK-3500, BK-3700—ultimate in precision made multichannel heads.

BK-1300, BK-1500 series—up to 25 interlaced channels per inch.



BK-1605 series—simple mounting and adjustment, ideal for drum computers.



BK-1501 series—compact, wafer-thin, permit individual adjustment.

BK-900, BK-1000, BK-1200 series—variety of types for single channel applications.

How Brush Magnetic Heads improve product performance

Microscopic inspection is a familiar tool in Brush's manufacturing of magnetic heads. Track width and gap alignment must be held to ten-thousandths; pole faces and tips must be lapped to a surface finish of better than 8 microinches.

This craftsmanship improves product performance. Precision gap alignment assures perfect time phase accuracy. Close tolerances permit greater pulse packing, increased storage capacity, uniform output and frequency response.

Get the facts on Brush's complete line of magnetic heads, including the new precision multichannel heads. Write Brush Electronics Company, Dept. K-60, 3405 Perkins Avenue, Cleveland 14, Ohio.

BRUSH ELECTRONICS COMPANY

3405 Perkins Avenue, Cleveland 14, Ohio

BRUSH ELECTRONICS

DIVISION OF CLEVITE CORPORATION

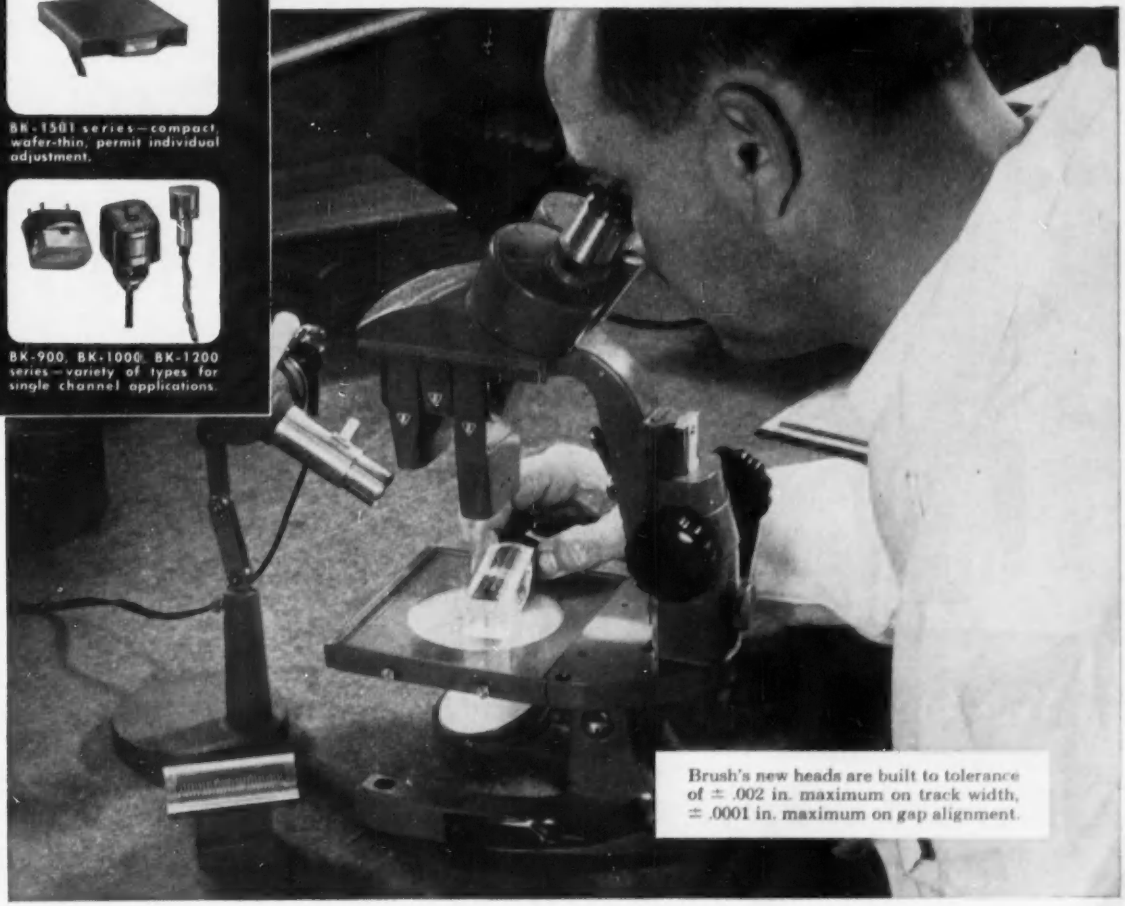

Brush's new heads are built to tolerance of ± .002 in. maximum on track width, ± .0001 in. maximum on gap alignment.

CAMERA PICK-UP TUBES FROM WESTINGHOUSE

Image Orthicon (WL-5820), left

Vidicon (WL-6198), right

For superlative tube performance in your television cameras, you'll find this worth remembering.

The same fine quality you have learned to count on in all other Westinghouse Tubes is available to you in the Vidicons and Image Orthicons that are in production today at Westinghouse. Improved versions for military and industrial applications are under development.

Born of Westinghouse experience and workmanship, these precision-built TV pick-up tubes are absolutely unexcelled for clarity and brightness of image and for long, economical life.

Whether you build TV cameras or use them —for commercial, industrial or defense applications—we invite your inquiries. Simply write our Commercial Engineering Department at the address below.

ENGINEERS: For challenge, security, growth potential, investigate career opportunities now being offered by Westinghouse Electronic Tube Division. Write Technical Placement Director today.

Westinghouse RELIATRON Tubes

6ET-4113

WATCH WESTINGHOUSE *WHERE BIG THINGS ARE HAPPENING FOR YOU!*

WESTINGHOUSE ELECTRIC CORPORATION, ELECTRONIC TUBE DIVISION, ELMIRA, N. Y.

TUNING FORK RESONATORS • THE ULTIMATE IN PRECISION AUDIO FREQUENCY CONTROL

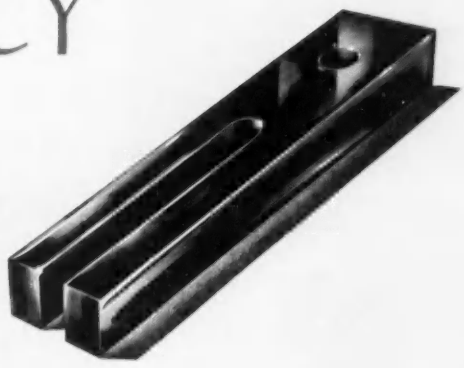

PHONE OR WRITE *for complete information regarding component type Tuning Fork Resonators, or variously packaged Tuning Fork Frequency Standards.*

PHILAMON LABORATORIES INC.
90 Hopper Street, Westbury, Long Island, N. Y. **ED***gewood* **3-1700**

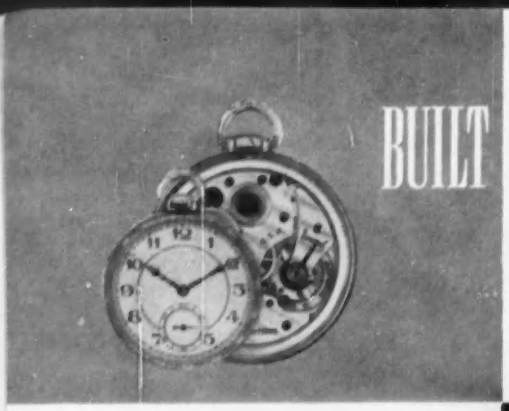

BUILT LIKE A FINE WATCH

YET TOUGH AS HELL!



ACTUAL SIZE

BR-1 and BR-2 SENSITIVE SUBMINIATURE RELAYS

More than a quarter of a million BR-1 and BR-2 Relays have been time-tested and proven in every known application. *Tough and rugged* enough to function unfailingly in all conditions, even extremes of heat, cold, humidity, vibration and shock, they have been approved by the Air Force for use in OQ-19 Aerial Target Drone Receivers. These amazing relays are built to the most exacting standards with the *skill and precision craftsmanship* that identifies BABCOCK PRODUCTS throughout the world.

- Hermetically sealed in tin-plated brass container. Coil bobbin, compression molded plastic.
- Armature balanced both statically and dynamically. Brass bearings and hardened staff virtually friction-free.
- Rhodium-plated contacts, rated at 2 amp., 28 volt non-inductive load, will give a minimum of 100,000 operations.
- Single Pole, Double Throw Type — Operates over 100 cps at 60 milliwatts coil power.
- All ferrous parts associated with magnetic circuit are special magnetic iron annealed for highest magnetic efficiency.
- The BR-2 *high temperature* vertion operates over a temperature range from —65°C to 200°C.

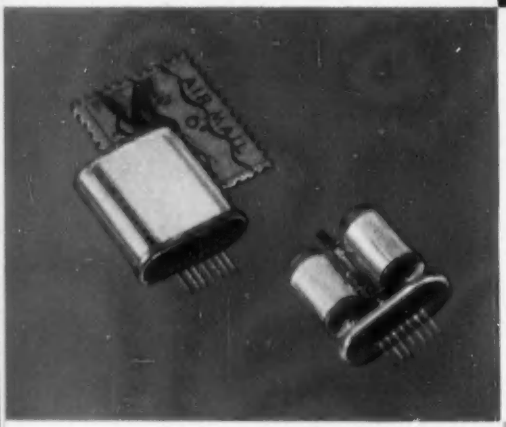

NEW! BR-4 POLARIZED ULTRA-SENSITIVE SUBMINIATURE RELAYS

Here is the answer to your COMPACT sensitive relay requirement! Hermetically sealed in an HC-6 crystal holder measuring 5/16" x 11/16" x 3/4" and equipped with a seven pin base, the BR-4 is no larger than an air-mail stamp, but MAN! IS IT RUGGED! An entirely new principle, for which patents have been applied, has been used in designing this unusual relay. *No springs to fatigue — no adjustments subject to change.* Truly magnetic centering insures trouble-free life and fantastic sensitivity. Many applications will be found for the BR-4 in computers, sensing units, subminiature servos, etc.

- Smallest relay of its type — Light weight, 5/16 oz.
- 180 Microwatt sensitivity — Coil resistances up to 5000 ohms.
- Two separate coils may be connected in series or to two separate sources.
- Magnetic centering — *no springs — no adjustments* — hermetically sealed.
- Single-Pole Double-Throw center-off contact arrangement.
- Operates to 200 CPS — ½ amp. contact rating



ACTUAL SIZE

AMERICA'S *LOWEST PRICED* SENSITIVE RELAY!

The BR-3 RELAY is the last word in low-priced sensitive relays. By use of a balanced armature, the BR-3 may be mounted in any position and yet perform with extreme sensitivity and reliability. The adjustable contacts allow a wide range of pull-in and drop-out sensitivities without adjustment of the armature springs. The extremely small size of the BR-3 will permit use in many places where other designs could not be used. Only the finest of materials are used — 1/8" silver contacts are standard, 3/16" contacts available at slight additional cost.

- Extremely light weight — approximately 7/8 ounce.
- All metal parts are plated — Molded plastic coil forms.
- Balanced armature construction — Adjustable contacts of coin silver.
- The BR-3 is supplied in resistance ranges up to 5000 ohms and as a sensitive or power type.
- Operates on power as low as 10 milliwatts.

Babcock .....RELAYS, INC.

MANUFACTURER'S REPRESENTATIVES! Your Inquiries are Solicited

14743 Lull St., Box 3134, Van Nuys, California

Doelcam

PROPORTIONAL AMPLIFIERS

OFFER GREATEST VERSATILITY FOR LOW LEVEL D-C SIGNAL MEASUREMENTS

D-C INDICATING AMPLIFIER
Model 2HLA-3
Write for Bulletin 1A-7

- COMPARATIVE RESISTANCE MEASUREMENTS
- TEMPERATURE INDICATION AND CONTROL
- INSULATION AND DIELECTRIC TESTING
- PHOTOELECTRIC MEASUREMENTS
- STRAIN GAGE MEASUREMENTS
- NULL DETECTION

Wherever low level d-c signals corresponding to minute chemical or physical changes must be accurately measured, the Doelcam D-C Indicating Amplifier Model 2HLA-3 is ideally suited. This versatile instrument may be used as either a multi-range microvoltmeter or a null indicator in the laboratory and on the production line. The exclusive Doelcam Second Harmonic Magnetic Converter is used in the input stage instead of a mechanical chopper for all around improved performance.

PERFORMANCE CHARACTERISTICS

SENSITIVITY: 4×10^{-15} watt
HIGH GAIN: 10^4 for Model 2HLA-3
10^3 for Model 2HLA-4
LINEAR AMPLIFICATION: Better than 1% on all ranges.
HIGH STABILITY: Zero drift less than 10 microvolts.
RUGGED: Withstands over-range inputs up to 1500 times full scale range.
FREQUENCY RESPONSE: Greater than 20 cps.
INPUT IMPEDANCE: One megohm/volt.
HIGH POWER OUTPUT: Drives most commercial pen motor or galvanometer recorders.

SELECTIVE RANGE D-C AMPLIFIER
Model 2HLA-4
Write for Bulletin SRA-7

Doelcam Model 2HLA-4 is a Selective Range D-C Amplifier with provisions for the following interchangeable range plug-in units: 0-0.1 MV, 0-0.3 MV, 0-1 MV, 0-3 MV, 0-10 MV, 0-30 MV, and 0-100 MV. Model 2HLA-4 is designed for bench mounting and rack mounting as a component part of a control or measuring system.

Doelcam
A DIVISION OF MINNEAPOLIS-HONEYWELL
1400 SOLDIERS FIELD ROAD
BOSTON 35, MASSACHUSETTS

Instruments for Measurement and Control

Synchros • Gyros • Accelerometers • Amplifiers • Microsyns • Servo Motors

Now LARGE WAVEGUIDE

For multi-megawatt radar and scatter communications equipment

You can have early delivery on any large waveguide size from WR-770 up. Available in straight runs, H-plane and E-plane bends, S-bends and other shapes.

This new I-T-E waveguide is now being specified for both commercial and military applications. Accepted for major critical defense programs.

Treated aluminum construction resists corrosion. Waveguide is sealed against all types of weather and is capable of pressurization. Has superior ability to handle highest powers with low attenuation. VSWR 1.03 peak over entire range for straight sections—proportionately low for other configurations. Available with fully engineered waveguide test equipment, plus accessories and hardware. Competitively priced.

Write for complete technical details. I-T-E Circuit Breaker Company, Special Products Division, 601 East Erie Avenue, Philadelphia 34, Pa.

One of the smaller "large" waveguide sizes. Others measure up to 21 in. major dimension.

I-T-E CIRCUIT BREAKER COMPANY
Special Products Division

L. C. Clevenger, Manufacturing Manager, explains below the method used in maintaining lot homogeneity at PSI.

FAMILY HISTORY OF DIODE LOT NO. 273

"At PSI, lot identity is maintained so strictly throughout manufacturing, testing and shipping that, if required, we can trace a diode all the way back to the original semiconductor ingot, as indicated in the accompanying diagram.

"In each serialized production lot, every input parameter is kept unchanged; only one semiconductor ingot section is used, and production time is limited to a specified interval. There is one set of material-input limits, one junction-dope concentration, one prescribed forming pulse.

"Sampling tests of diodes from each lot, particularly life tests under electrical load, are used to qualify a lot for shipment. Maintenance of lot identity and homogeneity assures that control samples are *truly* representative, and that all diodes from the lot will meet PSI's exacting standards of reliability."

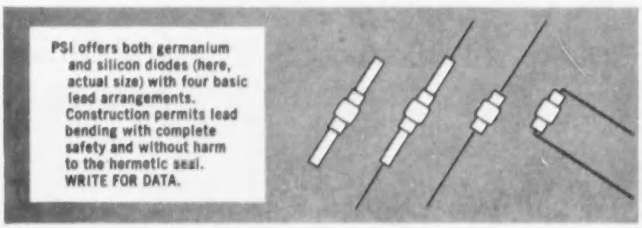
PSI offers both germanium and silicon diodes (here, actual size) with four basic lead arrangements. Construction permits lead bending with complete safety and without harm to the hermetic seal. WRITE FOR DATA.

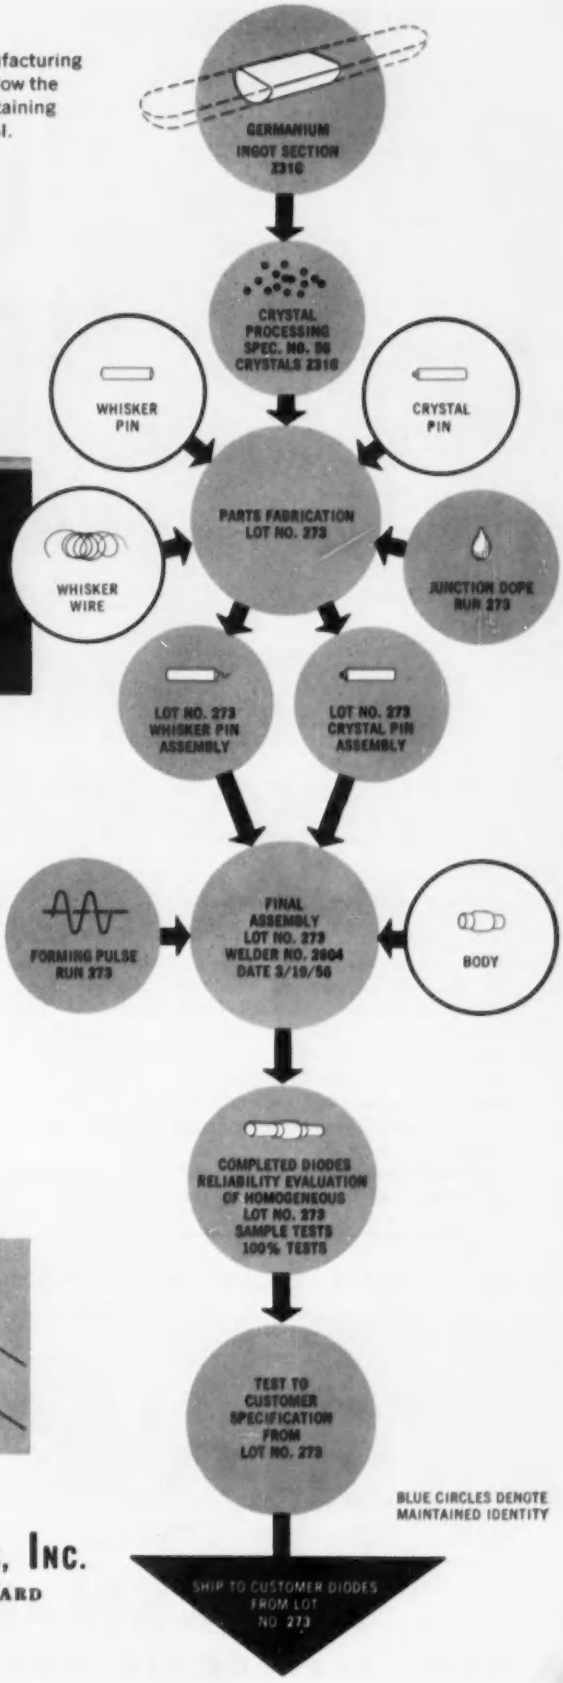
GERMANIUM INGOT SECTION Z316
CRYSTAL PROCESSING SPEC. NO. 56 CRYSTALS Z316
WHISKER PIN
CRYSTAL PIN
WHISKER WIRE
PARTS FABRICATION LOT NO. 273
JUNCTION DOPE RUN 273
LOT NO. 273 WHISKER PIN ASSEMBLY
LOT NO. 273 CRYSTAL PIN ASSEMBLY
FORMING PULSE RUN 273
FINAL ASSEMBLY LOT NO. 273 WELDER NO. 2804 DATE 3/19/56
BODY
COMPLETED DIODES RELIABILITY EVALUATION OF HOMOGENEOUS LOT NO. 273 SAMPLE TESTS 100% TESTS
TEST TO CUSTOMER SPECIFICATION FROM LOT NO. 273
SHIP TO CUSTOMER DIODES FROM LOT NO. 273
BLUE CIRCLES DENOTE MAINTAINED IDENTITY

PACIFIC SEMICONDUCTORS, INC.
10451 WEST JEFFERSON BOULEVARD
CULVER CITY, CALIFORNIA

Want more information? Use post card on last page.

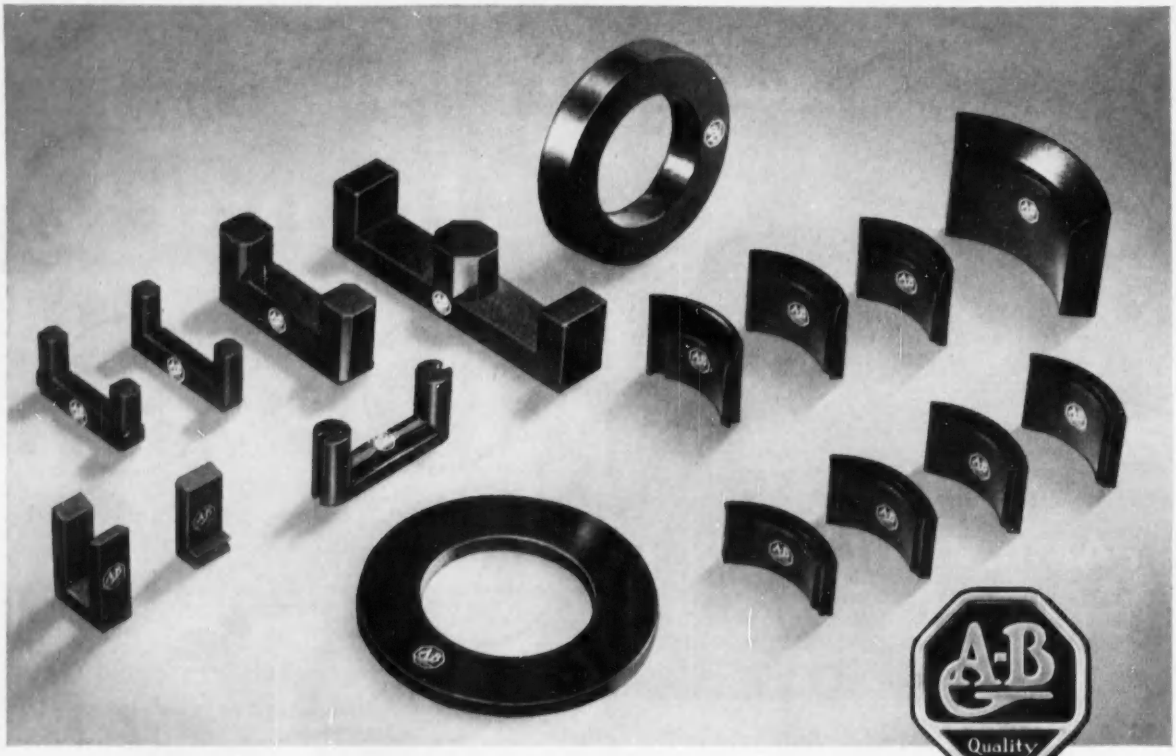

HERE'S GOOD NEWS
about ALLEN-BRADLEY FERRITES!

Allen-Bradley ferrites have been discovered to be superior for deflection component applications in television receivers. As a result, the demand has kept Allen-Bradley in delivery troubles—a situation that has been annoying to both customers and ourselves. Therefore, you will be glad to learn that Allen-Bradley's production capacity has been considerably expanded—our shipment problems should be a thing of the past.

Comprehensive tooling for practically every size and shape of ferrite core currently being used in both black and white and color television receivers, makes Allen-Bradley an ideal source for your ferrite core requirements.

Use Allen-Bradley Class WO-1 ferrites for deflection yoke application and Class WO-3 ferrites for flyback transformer applications and enjoy superior TV receiver performance.

Uniform dimensions of Allen-Bradley ferrites enable low-cost, efficient assembly. Uniform magnetic characteristics eliminate necessity of individual adjustments or compensations.

Allen-Bradley Co., 110 W. Greenfield Ave., Milwaukee 4, Wis. • In Canada—Allen-Bradley Canada Limited, Galt, Ont.

OTHER QUALITY COMPONENTS FOR RADIO, TV & ELECTRONIC APPLICATIONS

Fixed Molded Resistors
1/10, 1/2, 1 & 2 watt



Variable Molded Resistors
1/2 & 2 watt

Stand-off and Feed-thru capacitors



Ceramic Dielectric Capacitors for by-pass and filtering

ALLEN-BRADLEY

RADIO, ELECTRONIC AND TELEVISION COMPONENTS

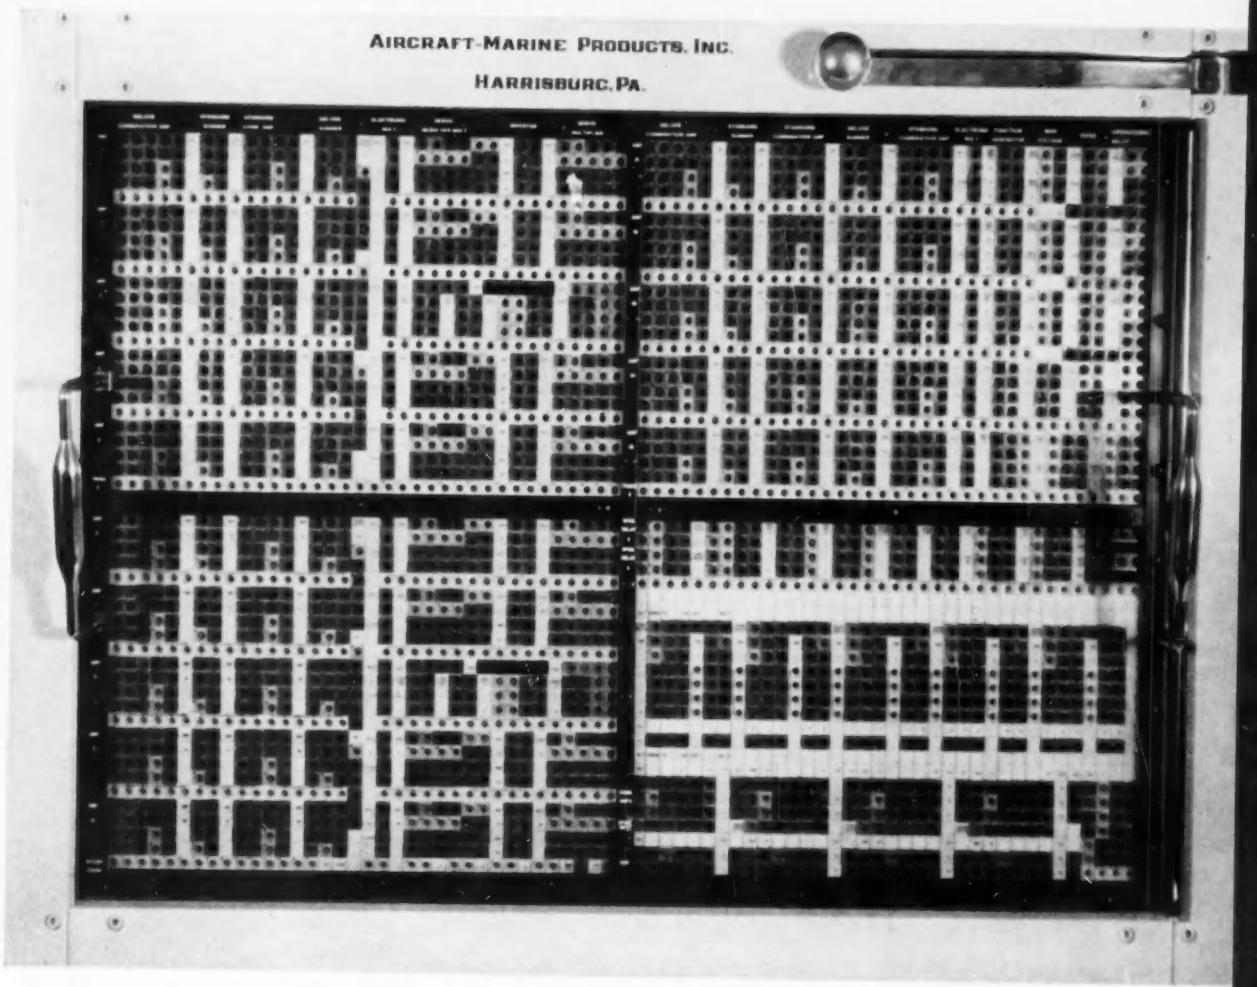

THE NEW AMP CELLULAR, SHIELDED PATCHCORD PROGRAMMING SYSTEM

A-MP's revolutionary Cellular, Shielded Patchcord Programming System

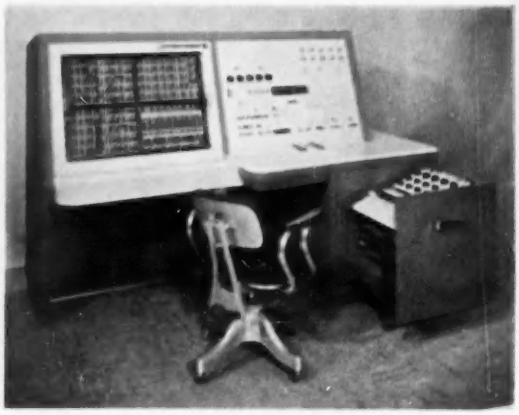

The illustration shows how Berkeley Division of Beckman Instruments, Inc. is using A-MP's new Patchcord System in its new EASE* 1200 Analog Computer.

is constructed of molded nylon blocks alternated with interlocking metal strips. The hole in each block accommodates: standard patchcords, coaxial (shielded) patchcords, or special "L" type shielded patchcords.

This cellular system of construction prevents current leakage from one circuit to another, while providing all the advantages of a metal patchboard. Its insulated surface and flexibility of arrangement, spacing and color coding offer exceptional versatility on computers, test equipment, business machines, and all types of automated industrial and military equipment.

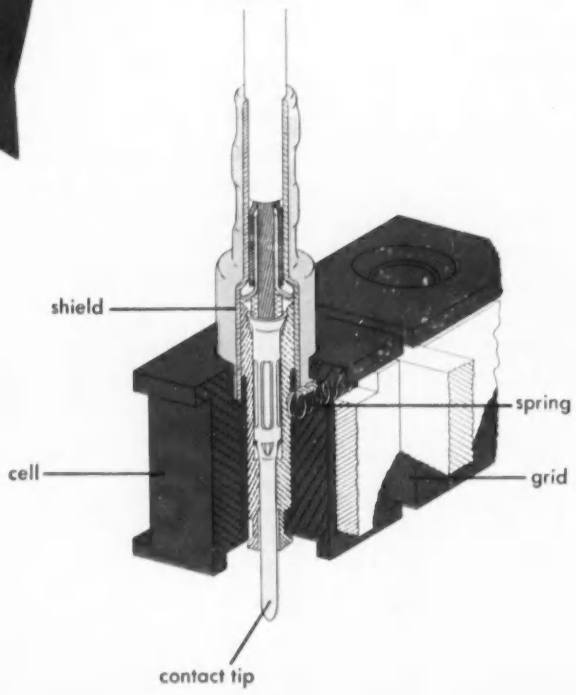

A-MP

Aircraft-Marine Products, Inc.

GENERAL OFFICE: HARRISBURG, PA.

A-MP of Canada, Ltd., Toronto, Canada
A-MP—Holland N.V., 's-Hertogenbosch, Holland
Aircraft-Marine Products (G.B.) Ltd., London, England
Societe A-MP de France, Courbevoie, Seine, France

*Trade mark, Berkeley Division of Beckman Instruments, Inc.

LINCOLN LABORATORY 50kw UHF SCATTER INSTALLATION USES EIMAC KLYSTRONS

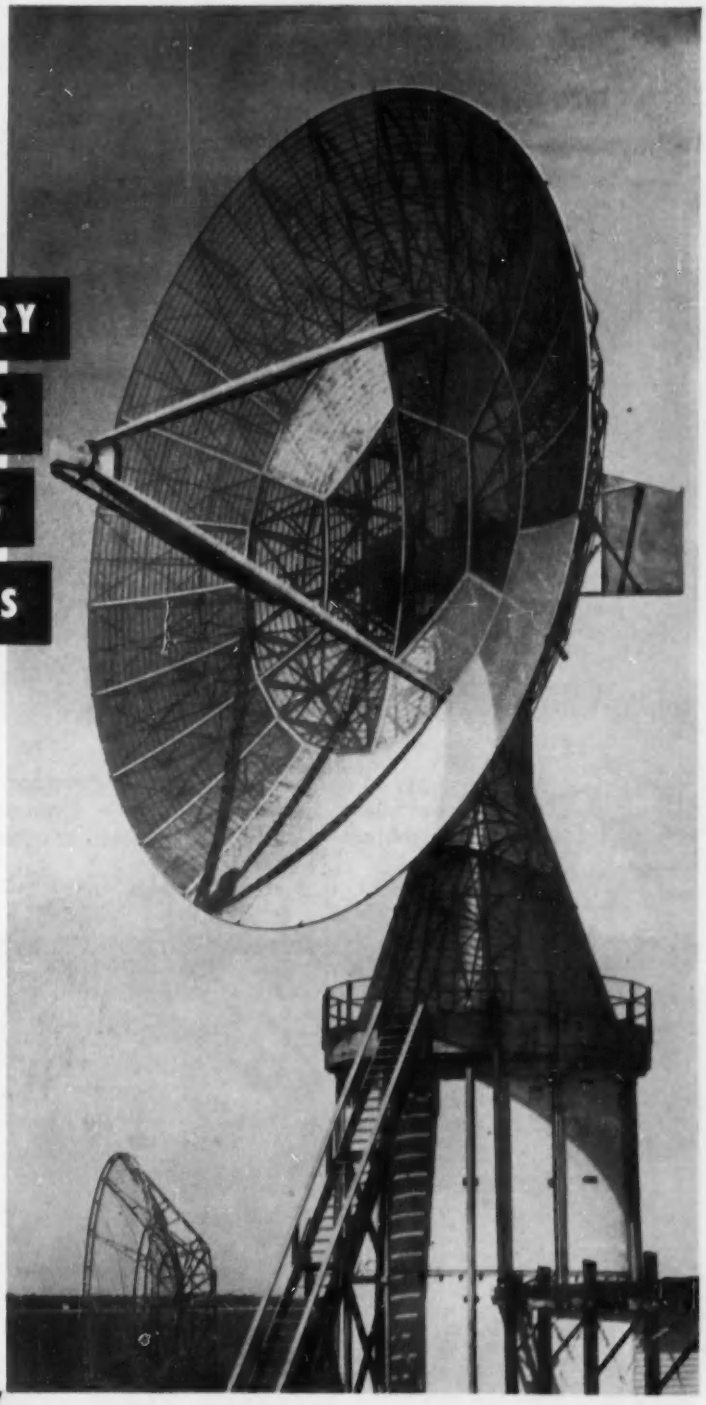

Lincoln Laboratory uses Eimac klystrons again in its 50kw experimental tropospheric scatter installation at Round Hill. As a pioneer in this revolutionary new communication concept, Lincoln Laboratory, of the Massachusetts Institute of Technology, has been instrumental in developments leading to reliable military and commercial scatter networks.

Engineers responsible for advancing the art of tropospheric scatter set forth exacting requirements. Eimac klystrons have met these requirements through each stage of the evolution of high power.

Fourth in a series on the extensive scatter application of Eimac klystrons.

Eimac
THE POWER FOR FORWARD-SCATTER

EITEL-McCULLOUGH, INC.
SAN BRUNO, CALIFORNIA
The World's Largest Manufacturer of Transmitting Tubes

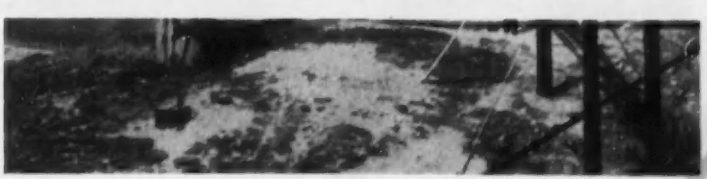

PRECISION DC MOTORS

Designed for Military & Quality Electronic Applications

Oster®


AMR 350 MOD 1


2W-2084


BHG 375 MOD 6

CU 306 MOD 4

QH 312 MOD 6


2N 2103


2P 2104

Can be supplied with single or double governors, gear train, brake or clutch, radio noise filters, thermostats, double commutators, blowers, fans, or any practical combination of these with stated or other voltages.

–55°C to +150°C temperature range.

TYPE	SIZE	POWER	SPEED	VOLTAGE	CURRENT AMPS	ROTATION	DUTY	TYPE of FIELD	SPECIAL FEATURES
AMR 350 MOD 1	1 1/4" dia. Size 13	20 oz. in.	75 RPM	28	0.65	C.W.	CONT.	Permanent Magnet	Planetary Gear Train
2W-2084	1.650 dia. Size 17	.002 HP	6500 RPM	30 FLD 27 1/2 ARM	.05	REV.	CONT.	Servo	D.C. Servo
BU 380 MOD 1	1.672 dia. Size 17	.03 HP	7000 RPM	27	1.75	C.C.W.	CONT.	Series	
BHG 375 MOD 6	1.687 dia. Size 17	.01 HP	5490 RPM	27 1/2	1.2	C.W.	CONT.	Shunt	Governor Controlled Speed to ± 1%
CU 306 MOD. 4	1.937 dia. Size 20	.01 HP	7000 RPM	27 1/2	1	C.W.	CONT.	Series	
QH 312 MOD 6	2.312 dia. Size 24	.1 HP	10,000 RPM	27 1/2	4	C.W.	CONT.	Shunt	
2N 2103	3.929 dia. Size 40	.5 HP	4000 RPM	27 FLD 60 ARM	10	REV.	CONT.	Compound	Has 27 V.D.C. BRAKE
2P 2104	4.670 dia. Size 47	1.0 HP	3000 RPM	27 FLD 60 ARM	16.5	REV.	CONT.	Compound	Has 27 V.D.C. BRAKE

Other DC motors may be designed to fit your specific requirement. Write for further information today, stating requirements.

Other products include actuators, synchros, AC drive motors, servo mechanism assemblies, servos, motor-gear-trains, fast response resolvers, servo torque units, reference and tachometer generators, synchro indicators and motor driven blower and fan assemblies.

John Oster MANUFACTURING CO.
Your Rotating Equipment Specialist
Avionic Division
Racine, Wisconsin

A TYPE FOR EVERY KNOWN APPLICATION . . .

BOMAC gas switching tubes . . .

Bomac designs and manufactures the most complete line of gas switching tubes available anywhere today — TR, ATR, pre-TR, dual or triple TR tubes . . . from 150–70,000 mc . . . fixed-tuned or tunable . . . standard or highly specialized types.
Whatever your requirements, *Bomac* can meet them.
And here's a point to remember about *Bomac* reliability — every *Bomac* tube and component is 100% tested before it leaves our plant.

Bomac Laboratories, Inc.

DEPT. E-7 BEVERLY, MASSACHUSETTS

Offices in major cities — Chicago • Kansas City • Los Angeles • Dallas • Dayton • Washington • Seattle • San Francisco • Toronto

WANT MORE INFORMATION?
Write for Bomac's 6-page, file-size folder containing details and specifications on more than 300 different microwave tubes and components.

Export — Maurice I. Parisier, 1860 Broadway, N.Y.C.

Engineers...

Look ten years ahead!

A Douglas engineer lives here

Will your income and location allow you to live in a home like this... spend your leisure time like this?

They can...if you start your Douglas career now!

Douglas has many things to offer the career-minded engineer!

...there's the stimulating daily contacts with men who have designed and built some of the world's finest aircraft and missiles!

...there's enough scope to the Douglas operation so a man can select the kind of work he likes best!

...there's security in the company's $2 Billion backlog of military and commercial contracts!

...and there's every prospect that in 10 years you'll be where you want to be professionally, and you'll be in both the income level and geographical location to enjoy life to its full.

For further information about opportunities with Douglas in Santa Monica, El Segundo and Long Beach, California and Tulsa, Oklahoma, write today to:

DOUGLAS AIRCRAFT COMPANY, INC.
C. C. LaVene, 3000 Ocean Park Blvd.
Santa Monica, California

DOUGLAS **First in Aviation**

NOW FOR DC OR RESISTANCE INPUT

MODEL 200-A uses an input of 10,000 ohm resistance potentiometers as an input transducer providing 10 to 1 scale expansion and origin positioning. Available standard digital input accessories are essentially inputs of this type. Any resistance potentiometer will provide an analog input for this configuration.

MODEL 200-B, used for D.C. signal input, has full scale sensitivities of 5 millivolts and an input impedance of 1,000 megohms. Utilizing standard reference cells, this model provides drift-free operation. Available external reference voltages may be substituted. A plug connection is provided to facilitate the quick interchangeability of input sections.

NOW FOR SIMPLIFIED OPERATION

Precision Vernier Dials provide an accurate method for obtaining fine adjustment during operation. Optional point plot or continuous line plotting is a feature of both models. Selection is by front panel manual control. A new, simplified pen of one-piece design-used for point or continuous plotting—eliminates bottles and tubes, permits rapid changing of ink colors. Independent action of the X and Y axis is achieved with Librascope's unique "Floating Gear Train." No cables, tapes or lead screws to cause lost motion, cable stretching or drifting out of alignment. The 120° concave cylindrical plotting surface provides full visibility . . . is completely illuminated.

NOW FOR WIDER APPLICATION

These fast, dependable general purpose plotters feature 0.1% accuracy, are suited for wide applications where rapid graphic presentation of data is required, such as: laboratory testing, computers, data handling systems, wind tunnel, missile tracking and quality control testing of transistors and other electronic components. Input selection includes Punched Card and Tape Converters, Decimal Keyboards and Binary Converters. Model 200-A can plot from Flexowriter tape in any code or directly from the Tape Punch cables of many digital computers. Subchassis can be supplied to handle time-shared X versus Y plots, or other special circuitry. Write today for details.

LIBRASCOPE X-Y PLOTTER

HIGHEST ACCURACY FOR GRAPHIC DATA HANDLING

Greater input flexibility | **For desk or rack mounting**

NEW LIBRASCOPE PUNCHED TAPE CONVERTER
Operates from a punched tape reader—Specially designed for Librascope X-Y Plotters—This unit is adaptable to other plotters.

LIBRASCOPE X-Y DECIMAL KEYBOARD
Consists of three-decimal bank for each axis with associated plus minus keys. Features Librascope designed positive-action self-wiping contacts.

LIBRASCOPE PUNCHED CARD CONVERTER
Converts punched card data to analog form for input to X-Y Plotters. Automatic Position for feeding 50 punched cards per minute.

LIBRASCOPE INCORPORATED • 808 WESTERN AVENUE • GLENDALE, CALIFORNIA

more for your money
from the leader in the field!

NEW

Berkeley

MODELS
7350 and 7360

UNIVERSAL EPUT* & TIMERS

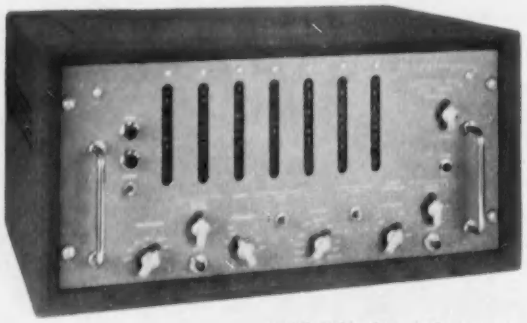

MODEL 7360—0 cps to 1 mc range

DESCRIPTION

These truly universal instruments combine high-speed electronic counting with a precision time base in multi-purpose circuitry. They function as counters, timers, time-interval meters, EPUT* meters, frequency, frequency ratio or period meters, or as secondary frequency standards. No other single instruments yet devised offers their wide range of usefulness in the laboratory or test stand.

All models have provision for standardization against WWV and may be coupled to external frequency standards. Connections are provided for driving Berkeley digital printers, data converters, or in-line remote readout units.

FEATURES

1. *0.1 v rms sensitivity*
2. *Step attenuators; trigger-adjusted noise discriminators*
3. *More stable frequency dividers*
4. *Electronic (not relay) reset*
5. *External frequency standard input connection*
6. *AC or DC coupling of all input circuits; 10 megohm input impedance*
7. *Multivoltage accessory socket to power photocells, etc.*
8. *Binary-coded output with direct connection to digital printers, data converters, inline readouts, etc.*
9. *Crystal-controlled time marker output*
10. *Unitized modular design*
11. *Larger, brighter readout numbers*
12. *Modern-styled all-aluminum cabinets*

BRIEF SPECIFICATIONS

	Model 7350	Model 7360
Ranges—Frequency:	0 cps to 100 kc	0 cps to 1 mc
Time Interval:	10 μ sec to 10^6 sec	1 μ sec to 10^7 sec
Period:	0 cps to 100 kc	0 cps to 1 mc
Time Bases:	10μ sec to 10 sec	1 μ sec to 10 sec
Accuracy:	± 1 count, ± crystal stability	
Crystal Stability:	± 3 parts in 10^6 per week	± 3 parts in 10^7 per week
Input Requirements:	0.1 v rms, 10 megohm impedance, dc or ac—coupled	
Display Time:	Adjustable, 0.1 to 5 seconds (automatic reset). Manual reset also provided.	
Dimensions:	10¼"H x 20¾"W x 16½"D (cabinet mount; rack mount available)	
Price: (f.o.b. factory)	$890.00	$1,175.00



MODEL 7350—0 cps to 100 kc range

MODEL 5916 IN-LINE REMOTE READOUT offers large illuminated in-line figures all on one plane which can be read from any angle. Reduces error and fatigue; ideal for remote observation of data.

MODEL 1452 DIGITAL PRINTER prints data on standard adding machine tape. 7000-Series instruments also drive data converters to operate card punches or electric typewriters.



Accessibility is an important feature of BERKELEY 7000-Series instruments. Modular chassis design permits rapid checking or replacement of components and sub-assemblies.

Technical bulletins and application data files are yours for the asking; please address Department G 7.

Berkeley division—BECKMAN INSTRUMENTS INC. 98

Richmond 3, California • Telephone LAndscape 6-7730

*TRADEMARK REG.

dependable controls

. . . backed by dependable service in matching your specifications and delivery requirements.

Electronic Components Division

STACKPOLE CARBON COMPANY • *St. Marys, Pa.*

Want more information? Use post card on last page.

IRC

OFFERS MORE TYPES OF 1%

Deposited Carbon

Here's 1% accuracy in an extremely stable non-wire wound resistor at a price low enough to permit its use wherever the characteristics of composition carbon resistors are not fully suited. IRC's unmatched experience in producing film type resistors has led directly to the superior reliability and stability of IRC Deposited Carbons. Outstanding characteristics include load, environmental and age stability and ability to operate at higher temperatures than MIL specification requirements, low wattage coefficient, and low capacitive and inductive reactance in high frequency applications.

3 SMALL SIZES—DCC ½ WATT
DCF 1 WATT and DCH 2 WATTS

MEET ALL REQUIREMENTS OF MIL-R-10509A SPECIFICATION

Wherever the Circuit Says

Subsidiaries:
Circuit Instruments Inc., St. Petersburg, Fla. • EMEC, Inc., Sylmar, California • Hycor Company, Inc., Vega Baja, Puerto Rico

Molded Deposited Carbon

Molded Deposited Carbon resistors are now available from IRC in 5 sizes: Types MDA—⅛ watt, MDB—¼ watt, MDC—½ watt, MDF—1 watt, MDH—2 watts. The *molded* plastic housing provides complete mechanical protection, minimizes the effect of moisture and improves load life characteristics. These 1% precision film type units exceed MIL-R-10509A specifications.

COMPARISON SURFACE TEMPERATURE RISE VS. LOAD
Molded vs. Unmolded Deposited Carbon Resistors

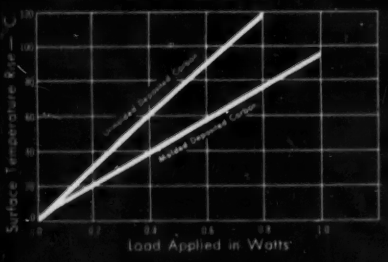



Boron Carbon

Where a high degree of accuracy under widely varying temperatures is required, IRC Boron Carbons offer an ideal combination of characteristics. Their superior temperature stability is provided in 3 sizes: Types BOC—½ watt, BOF—1 watt and BOH—2 watts—all 1% accuracy. Considering weight, size and cost factors, plus lower capacitive and inductive reactance, these film type precision resistors can satisfactorily replace wire wounds.

IRC TYPE	BOC	BOF	BOH
Equivalent MIL Style	RN 20R	RN 25R	RN 30R
Wattage (40°C. Ambient)	½	1	2
Max. Continuous Voltage	350 V.	500 V.	750 V.
Minimum Ohms	10	20	30
Maximum Ohms (IRC)	0.5 meg	2.0 meg	5.0 meg

IRC®

makes them all... can recommend without bias...

HYCOR DIVISION of IRC, Sylmar, Calif.

TOLERANCE RESISTORS than any supplier in the industry

Molded Boron Carbon

Only from IRC can you obtain Boron Carbon resistors with the protection of a *molded* plastic housing. Any risk of mechanical damage to the coating or of insulation breakdown is overcome. Any need for special handling is eliminated, and moisture and load life characteristics are improved. 5 sizes—Types MBA—⅛ watt, MBB—¼ watt, MBC—½ watt, MBF—1 watt, MBH—2 watts. All exceed MIL-R-10509A specifications.

TYPICAL TEMPERATURE COEFFICIENT

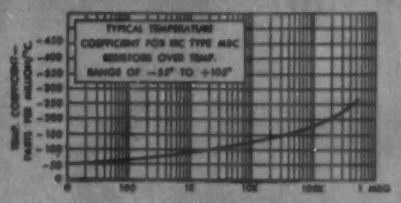

Wire Wound

IRC's winding skills and automatic assembly equipment provide precision windings to exacting standards. Continuous inspections at every stage of manufacture assure maximum reliability in each finished resistor. Available in 7 sizes including tiny Type WW10J—1½" x 9/32". Standard tolerance ±1%; minimum tolerances are shown below.

Minimum Tolerances

Resistance	Types WW2, 3, 4, 5, 8 and 11J	Type WW10J
10 ohms & up	0.1%	
5 ohms & up	0.25%	
1 ohm & up	0.5%	
1500 ohms & up		0.1%
200 ohms & up		0.25%
65 ohms & up		0.5%

Encapsulated Wire Wound

Series "PH" Encapsulated resistors are produced to IRC's high standards and represent many years' experience in the development and manufacture of precision wire-wound resistors. Available in many types and styles, including types for use in printed wiring assemblies and subminiature Type 128A. Standard tolerance ±.1%. Also, ±1%, 0.5%, .25% and .05% can be supplied. Series "PH" offers the most complete selection of Encapsulated precision wire-wound resistors available . . . all designed to meet MIL-R-93A specifications.

MANY COMBINATIONS OF CHARACTERISTICS AND OPPORTUNITIES FOR COST REDUCTION ARE INVOLVED WHEN SPECIFYING CLOSE TOLERANCE RESISTORS. NO OTHER SINGLE SOURCE CAN OFFER YOU THE SCOPE OF TECHNICAL GUIDANCE AVAILABLE FROM IRC.

use coupon for complete data!

In Canada:

International Resistance Co., Ltd., Toronto, Licensee

INTERNATIONAL RESISTANCE COMPANY

Dept. 235, 401 N. Broad St., Philadelphia 8, Pa.

SEND ME TECHNICAL BULLETINS ON—

- ☐ Deposited Carbons
- ☐ Molded Deposited Carbons
- ☐ Boron Carbons ☐ Molded Boron Carbons
- ☐ Type WW Precisions ☐ Series PH

Name_____

Company_____

Address_____

City_____ **State**_____

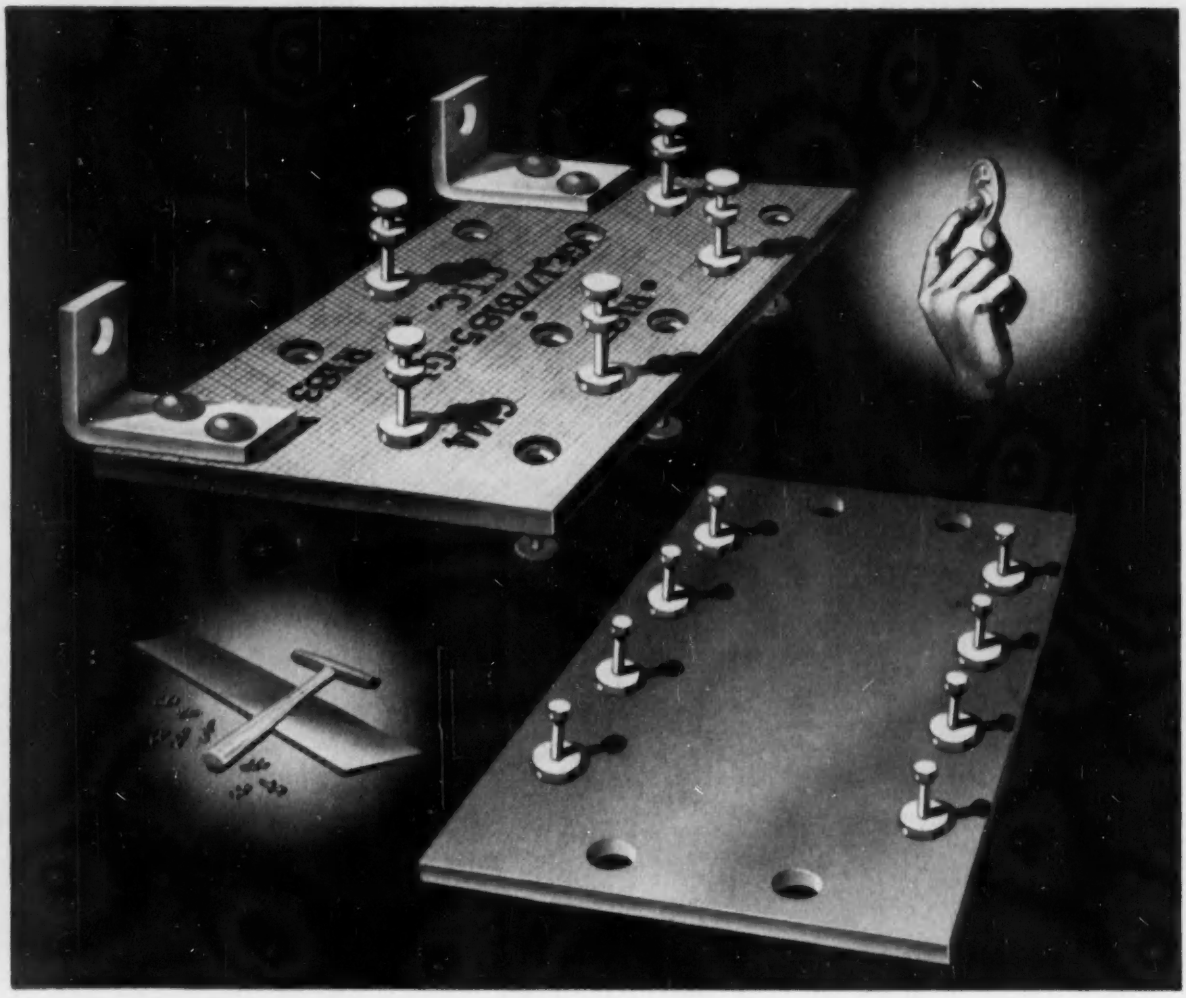

Make or buy — which is best for you?

You'll make out better if you let CTC make your terminal boards. Why? The answer is simple.

CTC is equipped to produce quality terminal boards economically. The two key words in that sentence are "quality" and "economy." Here's how CTC can guarantee both.

Our swaging machines use tools we designed ourselves that prevent cracked boards and "cracked" rivets. Each terminal is fastened securely — *and carefully*. CTC terminal boards have no "weak spots".

Our finishes and coatings are applied smoothly. There are no wrinkles or heavy deposits. CTC terminals are selected from certified stock that is free from defects. CTC guarantees the terminals themselves — even to the thickness of plating!

The result of this is you are *sure* of the finest terminal boards in the quantity you want them in — and at a price you couldn't duplicate if you made them yourself. Get all the facts. Write for specifications and prices. You'll agree, you'll make out better if CTC makes your boards. Cambridge Thermionic Corporation, 437 Concord Ave., Cambridge 38, Mass. On the West Coast contact E. V. Roberts and Associates, Inc., 5068 West Washington Blvd., Los Angeles 16, and 61 Renato Court, Redwood City, California.



A LARGE VARIETY OF CTC SOLDER TERMINALS is available ranging from the miniaturized to the larger regular type. Each can be obtained in a variety of shank lengths and finishes and coated with water dipped lacquer for protection during storage.

CTC

CAMBRIDGE THERMIONIC CORPORATION

makers of guaranteed electronic components
custom or standard

Now Available...

FIRST HF TRANSISTORS

now in production, meeting

Army Signal Corps Standards

A wide variety of military equipment, once impossible to transistorize due to frequency limitations of available transistors, is now being developed with Philco Surface Barrier Transistors.

PHILCO SBT

SURFACE BARRIER TRANSISTORS

(Type 2N128 and 2N129)

Meet MIL-T-12679A Military requirements

Check These Features

- **High frequency performance**
- **Extreme reliability**
- **Uniformity of characteristics**
- **Rigid quality control**
- **Minimum battery drain**
- **Low leakage currents**
- **Low operating voltage**
- **Absolute hermetic seal**
- **Meet MIL-T-12679A Military requirements**

Now available for large volume military and industrial applications . . . the high frequency Philco Surface Barrier Transistors that were developed for the Army Signal Corps to meet the stringent requirements of field use in military electronics equipment. Advanced precision techniques used in fabricating the Philco Surface Barrier Transistors make possible rigidly controlled automatic manufacture with its resultant uniformity, reliability and high volume production. These reliable transistors point the way to new fields in transistorization. Make these reliable high frequency Philco Surface Barrier Transistors part of your forward looking plans.

For complete technical information on these High Frequency transistors write Dept. E-3, LANSDALE TUBE CO., Lansdale, Pa. A DIVISION OF PHILCO CORP.

PHILCO CORPORATION

LANSDALE TUBE COMPANY DIVISION

LANSDALE, PENNSYLVANIA

How BELL TELEPHONE LABORATORIES assure precision in sub-miniature assemblies with 3-D MICRO-VISION



This transistor is enlarged 6 times. You can't see much detail in its actual size, like this . . . That's why Bausch & Lomb Stereomicroscopes are built right into Bell Laboratories' ingenious experimental machine, "Mr. Meticulous," which automatically assembles hair-thin elements in steps involving movements of 1/20,000 of an inch! Without visual fatigue, technicians get vividly magnified views of these tiny parts and intricate operations. We're mighty proud of the part B&L Stereomicroscopes play in helping Bell Laboratories achieve miracles in electronic technology to improve telephone service.

FREE! EXCLUSIVE 3-D MICRO-VISION BOOK

See actual stereo views! Choose exact model from industry's most complete line, with unique Selector-Chart! Write today for manual D-15. Bausch & Lomb Optical Co., 61407 St. Paul St., Rochester 2, New York.

BAUSCH & LOMB
SINCE 1853

America's only complete optical source . . . from glass to finished product

STEREOMICROSCOPES

planning on LONG LIFE?

El-Menco DUR-MICA Capacitors *will match your equipment's life expectancy to at least 15 years!*

A recent series of the toughest trials has proved El-Menco DM15, DM20 and DM30 Dur-Mica Capacitors outlast all others. Accelerated conditions of 1½ times rated voltage at ambient temperature of 125° centigrade found El-Menco capacitors still going strong after 10,000 hours. Similar conditions obtaining under normal usage would equal a lifetime of over 15 years!

Tougher phenolic casing means *longer life, greater stability,* over wide temperature range.

Meet all humidity, temperature, and electrical requirements of both civilian and MIL-C-5 specs.

Parallel leads simplify use in television, electronic brains, miniature printed circuits, computers, guided missiles, and other civilian and military applications.

DM15



Actual Size

DM20



El-Menco Dur-Mica DM15, DM20, and DM30 Capacitors Assure:

1. LONGER LIFE
2. POTENT POWER
3. SMALLER SIZE
4. EXCELLENT STABILITY-SILVERED MICA
5. PEAK PERFORMANCE

Tell us your specific needs. Write for FREE samples and catalog on your firm's letterhead.

Take Your Own Word For It. Test El-Menco Dur-Mica Capacitors Yourself.

El-Menco Capacitors

THE ELECTRO-MOTIVE MFG. CO., INC.

WILLIMANTIC, CONNECTICUT

• molded mica • mica trimmer
• tubular paper • ceramic

Jobbers and distributors write to Arco Electronics, Inc., 103 Lafayette St., New York, N. Y.

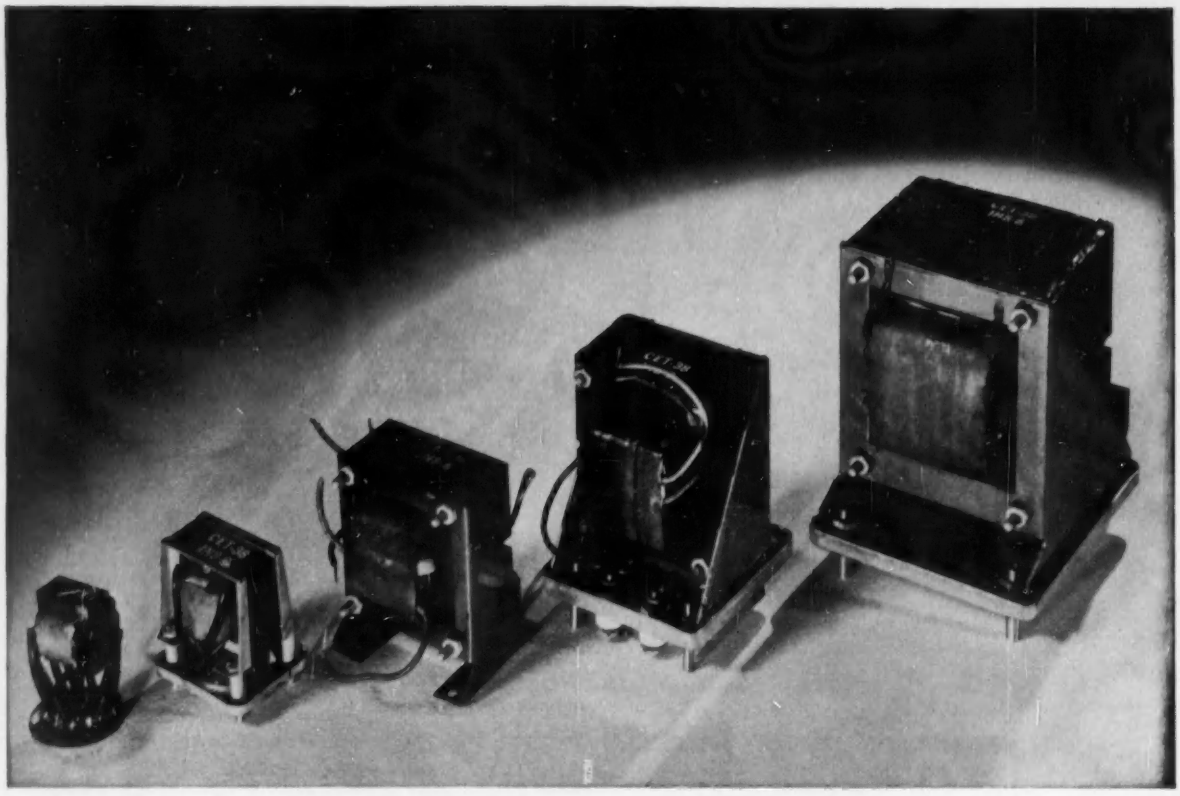

A Transformer becomes a precision device with Allegheny Magnetic Materials in the core

Write for your Copy

"TRANSFORMER LAMINATIONS"

84 pages of valuable technical data on standard and custom-made laminations from all grades of Allegheny Ludlum magnetic core materials. Prepared from carefully checked and certified laboratory and service tests —includes standard dimensions, specifications, weights, etc. Sent free on request . . . ask for your copy.

ADDRESS DEPT. E-79

★ **ALLEGHENY SILICON STEEL**

★ **ALLEGHENY 4750**

★ **ALLEGHENY MUMETAL**

The operation of a transformer is no better than the magnetic core around which it is built. With Allegheny magnetic materials in the core, you get the *best*—uniformly and consistently.

Sure there are reasons why! For one thing, there's the long experience of a pioneer in development and quality control of electrical alloys. But most important, the A-L line offers complete coverage of any requirement you may have, any service specification. It includes all grades of silicon steel sheets or coil strip, as well as Allegheny Silectron (grain-oriented silicon steel), and a wide selection of special high-permeability alloys such as Allegheny 4750, Mumetal, etc.

In addition, our service on magnetic materials includes complete lamination fabrication and heat treatment facilities. What's more, this extensive experience in our own lamination stamping department is a bonus value for all users of A-L electrical sheets or strip. ● Let us supply *your* needs. ***Allegheny Ludlum Steel Corporation, Oliver Bldg., Pittsburgh 22, Pa.***

STEELMAKERS to the Electrical Industry

Allegheny Ludlum

WAD 9353

AL
STEELS FOR THE ELECTRONIC AGE

Patchwork has its place but . . .

The FIRST 6

In an era of stepped up competition, no manufacturer can hope to keep pace with the field while relying on obsolete "patchwork" instrumentation. . . . Almost hourly, electronics research is spawning new instruments designed to perform a specific function better, in less time, at lower cost.

But here's where your independent FIRST SIX* manufacturers' representative enters the picture. He represents what's new, what's right in electronic product design. What's more he's technically qualified to recommend and apply industry's newest product innovations advantageously to your instrumentation problems.

Today, "patchwork" — won't work! Better call in your independent FIRST SIX sales engineer. He'll back up his lines with a full measure of intelligent technical service . . . from recommendation to maintenance!

*** THE FIRST SIX — Six leading, independent manufacturers' representatives functioning cooperatively for the advancement of improved electronic instrumentation in industry.**

A. CROSSLEY ASSOC., INC.
Chicago, Ill.
Dayton, Ohio
St. Paul, Minn.

THE I. E. ROBINSON CO.
Philadelphia, Pa. — (Upper Darby)
Camp Hill, Pa.
Asbury Park, N. J.

S. STERLING CO.
Detroit, Mich.
Cleveland, Ohio
Dayton, Ohio

HORMAN ASSOC., INC.
Washington, D. C.

J. D. RYERSON ASSOC., INC.
Syracuse, N. Y.

YEWELL ASSOC., INC.
Waltham, Mass.
Bridgeport, Conn.

Want more information? Use post card on last page.

versatile

Multi-channel -- telegraph A1 or telephone A3.

FROM GROUND TO AIR OR POINT TO POINT

STABLE

High stability (.003%) under normal operating conditions.

RUGGED

Components conservatively rated. Completely tropicalized.

Model 446 transmitter operates on 4 crystal-controlled frequencies (plus 2 closely spaced frequencies) in the band 2.5-24.0 Mcs (1.6-2.5 Mcs available). Operates on one frequency at a time; channeling time 2 seconds. Carrier power 350 watts, A1 or A3. Stability .003%. Operates in ambient −35° to 45°C. Nominal 220 volt, 50/60 cycle supply. Conservatively rated, sturdily constructed. Complete technical data on request.

Here's the ideal general-purpose high-frequency transmitter! Model 446... 4-channel, 6-frequency, medium power, high stability. Suitable for point-to-point or ground-to-air communication. Can be remotely located from operating position. Co-axial fitting to accept frequency shift signals.

Now! Complete-package, lightweight airborne communications equipment by Aer-O-Com! Write us today for details!

AER -O- COM

3090 DOUGLAS ROAD MIAMI 33, FLA.

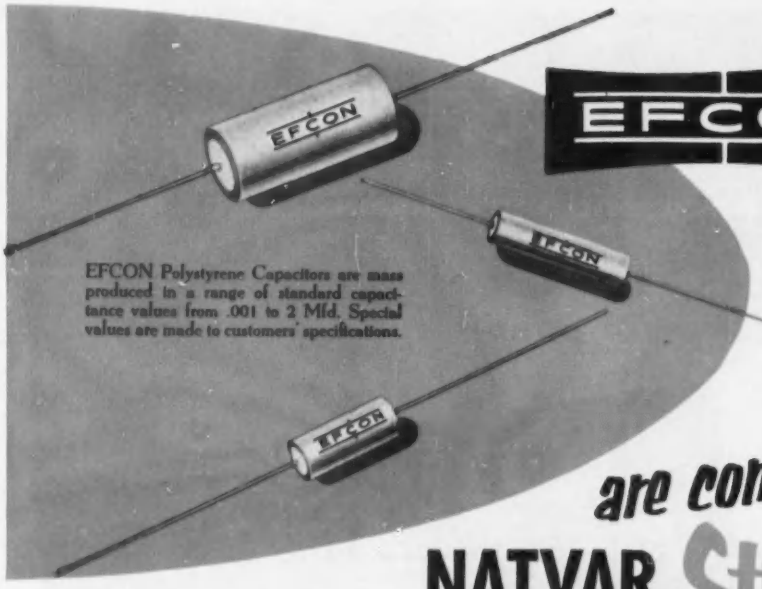

EFCON Polystyrene Capacitors are mass produced in a range of standard capacitance values from .001 to 2 Mfd. Special values are made to customers' specifications.

EFCON

POLYSTYRENE CLOSE TOLERANCE MINIATURE CAPACITORS *are constructed with* NATVAR Styroflex® FILM

EFCON Polystyrene Capacitors manufactured by Electronic Fabricators, Inc., New York, have become standard for the electronic industry. They were developed for uses where high insulation resistance, low power factor and low leakage are necessary. These miniature capacitors are used extensively for filters, timing circuits, computers, and similar applications where close tolerances are essential.

Temperature and humidity are closely controlled in the winding department, and air is filtered to protect against dirt, dust, or other contamination.

Each unit, from start to finish, is checked at least 5 times for voltage and capacitance before being shipped. In this step, capacitors are tested at DC voltages at least 200% of rated voltage at 25°C.

These polystyrene capacitors are made to tolerances closer than ± 1%. Their development was made possible by the application of Natvar Styroflex® dielectric due to its flexibility, toughness, and uniformity.

In fact a distinguishing characteristic of all Natvar flexible insulations is that they are always uniform and always the same no matter where purchased.

Natvar

Natvar Products

- Varnished cambric—cloth and tape
- Varnished canvas and duck
- Varnished silk and special rayon
- Varnished—Silicone coated Fiberglas
- Varnished papers—rope and kraft
- Slot cell combinations, Abaglas®
- Isoglas® sheet, tape, tubing and sleeving
- Vinyl coated—varnished—lacquered tubing and sleeving
- Extruded vinyl tubing and tape
- Styroflex® flexible polystyrene tape
- Extruded identification markers

Ask for Catalog No. 23

NATVAR CORPORATION

FORMERLY THE NATIONAL VARNISHED PRODUCTS CORPORATION

TELEPHONE RAHWAY 7-8800 | CABLE ADDRESS NATVAR: RAHWAY, N. J.

201 RANDOLPH AVENUE • WOODBRIDGE, NEW JERSEY

RMC DISCAPS

for frequency and temperature stability

Type JF



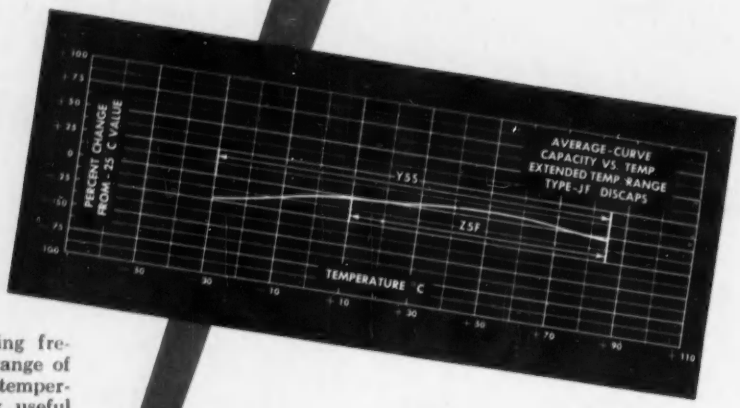

Type JF DISCAPS have outstanding frequency characteristics over a wide range of capacities and incorporate desirable temperature properties over an extremely useful range. Manufactured in capacities from 150 MMF to 10,000 MMF, Type JF DISCAPS extend the range of the RETMA Z5F capacitor between +10°–+85°C and meet Y5S specs from −30° to +85°C. (See graph)

Type JL

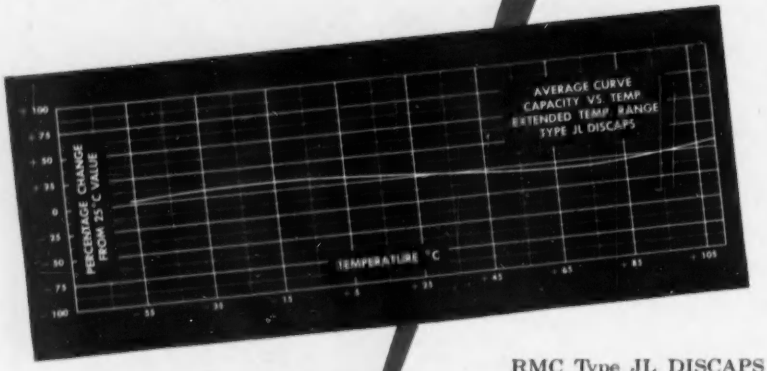

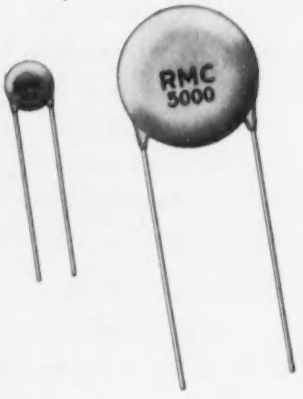

RMC Type JL DISCAPS feature exceptional temperature stability over an extended range. The maximum capacity change between −60° and +110°C is only ±7.5% of capacity at 25°C. With a standard working voltage of 1000 V.D.C., Type JL DISCAPS are the ideal cost saving replacement for paper and general purpose mica capacitors.

DISCAP CERAMIC CAPACITORS

RMC

RADIO MATERIALS CORPORATION
GENERAL OFFICE: 3325 N. California Ave., Chicago 18, Ill.
Two RMC Plants Devoted Exclusively to Ceramic Capacitors
FACTORIES AT CHICAGO, ILL. AND ATTICA, IND.

Another FIRST ...by Reeves

AUTOMATIC PLOTTING
OF RECORDER REFERENCE DATA

. . . the NEW REAC® Six-Channel Pen Recorder

Reeves . . . pioneer in invention and development of electronic analog computers . . . again adds to a growing list of important FIRSTS in this field.

The new REAC Six-Channel Recorder, designed especially for use with analog computers, is FIRST to embody all of the following requirements for efficient, accurate and reliable recording of computer data:

NEW AUTOMATIC CALIBRATION, whereby, for the FIRST time, pen zero set, attenuation setting and offset for each channel are automatically registered, along with a record of the paper speed, at the start of each run.

ZERO TIME MARKER, where a pip marks the point at which recording of each run begins.

COMPLETE OPERATIONAL CONTROL of one or more analog computers from a single recorder station.

ALL CONTROLS directly in line with channels for easy identification.

NEW PAPER DRIVE mechanism with unique electrical speed change and dependable accuracy.

NEW REEVES A-400 SERIES dual DC chopper-stabilized amplifier units identical with those used in REAC 400 Series Computers for stable, balanced performance and simplified maintenance.

SELF-CONTAINED independent plug-in power supply.

Provision for slaving one recorder to another where required, and for control of any number of computer units from one recorder.

A range of special optional accessories, such as electric writing pens, event markers for random phenomena, and Arabic-numeral-coded run designations.

Write for detailed specifications and additional information.

15RV5E

Reeves INSTRUMENT CORPORATION

REEVES INSTRUMENT CORPORATION
A Subsidiary of Dynamics Corporation of America
201 East 91st Street, New York 28, New York

REAC Analog Computers

Precision Floated GYROS

Precision RESOLVERS and PHASE SHIFTERS



SERVO MECHANICAL PARTS

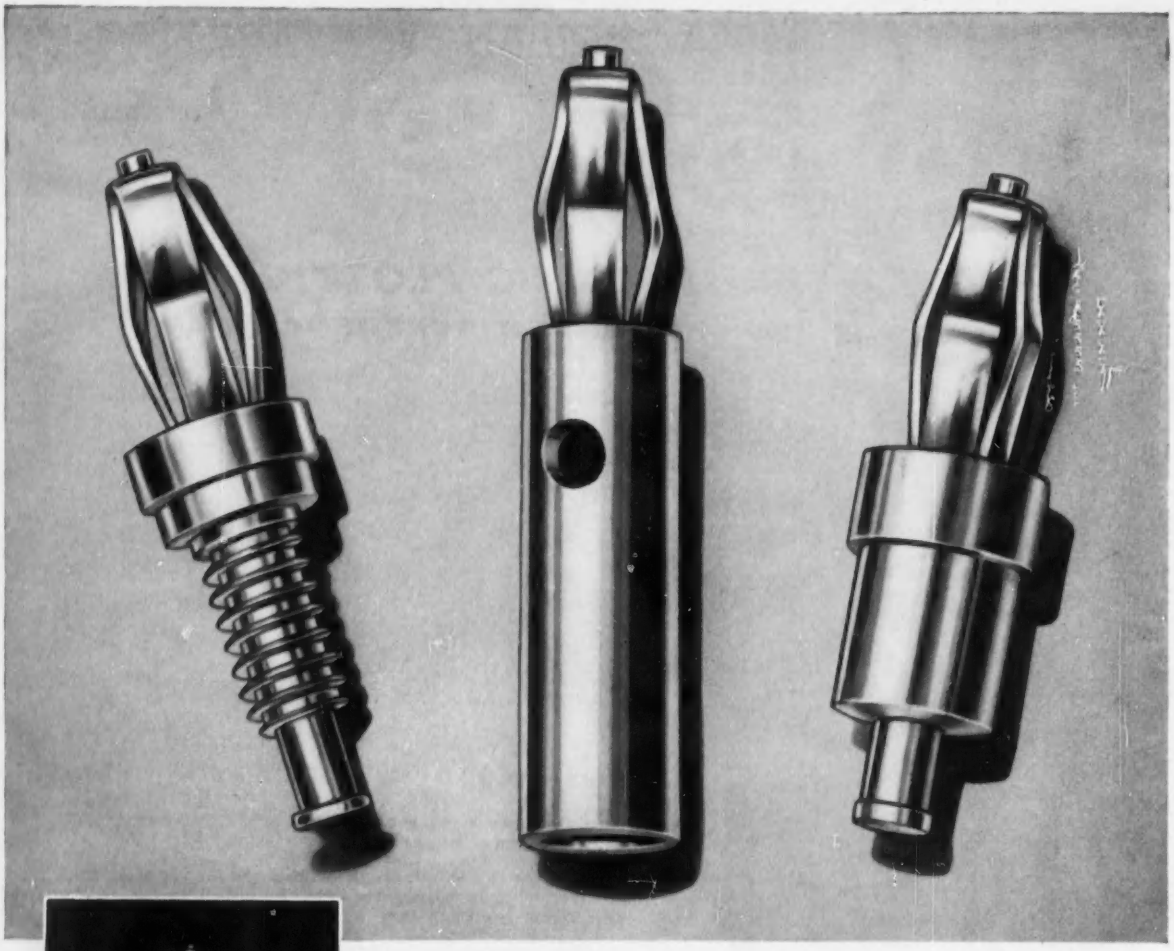

6 times enlargement



Actual size

Ucinite Miniature Banana Pins

Heavy resistance to torque is a big feature of Ucinite miniature banana pins. The springs are mechanically riveted over and the large area around the tip of the pin is bonded by solder.

Pins are available in a variety of types, for assembly by staking . . . with nuts and washers . . . with soldered tails . . . with multiple plug-in features. Springs are designed to fit .093 sockets.

Built to withstand rough usage, Ucinite miniature banana pins are available in cadmium, silver or gold plate.

For further information, call your nearest United-Carr representative or write directly to us.

ELECTRICAL ASSEMBLIES Ucinite RADIO AND AUTOMOTIVE

The UCINITE CO.

Newtonville 60, Mass.

Division of United-Carr Fastener Corp.

Specialists in

ELECTRICAL ASSEMBLIES,

RADIO AND AUTOMOTIVE

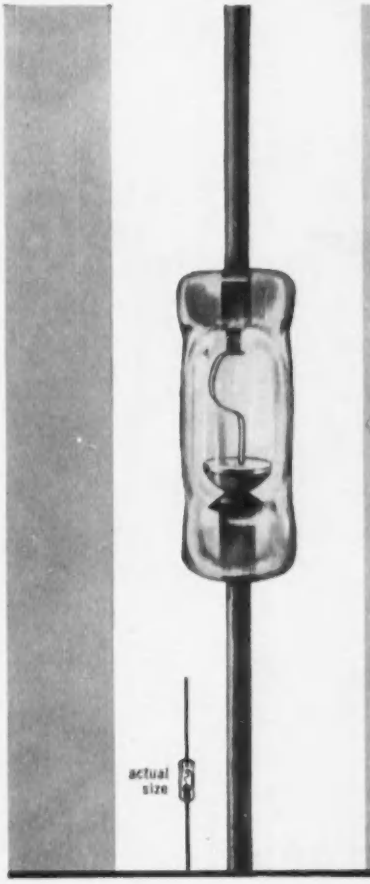

NEWEST MEMBERS OF RADIO RECEPTOR'S GOLD BONDED FAMILY

Fast recovery
High conductance
Germanium

COMPUTER DIODES *in production*

quantities for immediate delivery

TYPE NO.	FORWARD CURRENT (MA)	REVERSE CURRENT§	MAX. INVERSE OPER. VOLTAGE	REVERSE RECOVERY
1N191	5 @ 1 V	400K between 10 & 50V at 55° C	60	50K in .5 usec 400K in 3.5 usec*
DR401	20 @ .5V	400K between 10 & 50V at 55° C	60	50K in .5 usec 400K in 2 usec*
DR403	20 @ .5V	500K between 10 & 50V	60	80K in .3 usec†
DR404	20 @ .5V	500K between 10 & 50V	60	50K in .3 usec†

*Switching from a forward current of 30 MA to a reverse potential of 35V.
†Switching from a forward current of 5 MA to a reverse potential of 40V.
§Test voltage is a continuous 60 cps sine wave.

Radio Receptor's "gold standard" for outstanding diode performance is met by our new group of glass computer diodes. The RRco. controlled gold bonding process produces these diodes with fast reverse recovery and high forward conductance as well as unusual reliability and long life. They are thoroughly tested, both in our factory and in actual computer service under strenuous conditions.

The performance characteristics listed above are typical of RRco. computer diodes. The complete list of types includes many others suitable for receiving equipment, transistor biasing, magnetic amplifiers, modulators, demodulators, pulse circuitry, logic circuitry, metering and varistors as well as computers.

For full information, write today to Dept. R

Really RR Reliable!

Semiconductor Division

RADIO RECEPTOR COMPANY, INC.

Radio and Electronic Products Since 1922

240 Wythe Avenue, Brooklyn 11, N. Y. • EVergreen 8-6000

GERMANIUM AND SILICON DIODES • DIELECTRIC HEATING GENERATORS AND PRESSES
SELENIUM RECTIFIERS • COMMUNICATIONS, RADAR AND NAVIGATION EQUIPMENT

Want more information? Use post card on last page.

SIDELIGHTS ON THE SCIENTISTS *number* **5** *of a series*

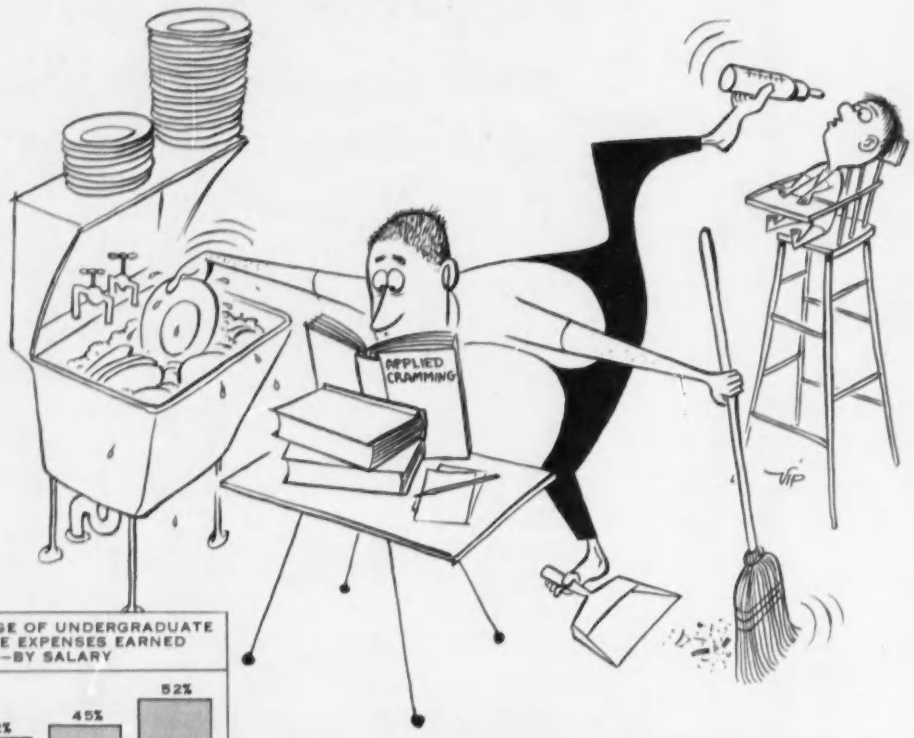

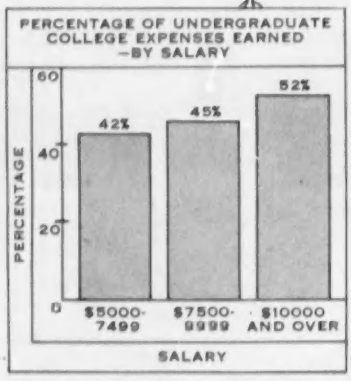

Data obtained from a 20% random sample of the 2400 professional engineers and scientists on the staff of Hughes Research and Development Laboratories.

How to make $10,000 *(and up)*

Here at Hughes we have been analyzing the files of personal data regarding our scientists and engineers. Together with some additional facts cheerfully contributed by individuals, the findings reveal some interesting—and sometimes surprising—group characteristics and relationships. In this series we shall chart and attempt to interpret the results for you.

College Expenses Earned . . . and Present Salaries

The chart shown here represents the percentage of undergraduate college expenses earned—by present salaries at Hughes. The net result of this comparison is, that the higher the present salary of the individual—the more he earned while an undergraduate. College jobs included baby-sitting, "hashing", collecting laundry, lawn-mowing, car-washing, etc., etc. One scientist included in his list of college jobs—"Walking the Dean's rheumatic bulldog."

In the Hughes laboratories more than half of the engineers and scientists have had one or more years of graduate work; one in four has his Master's; one in 15 his Doctorate. Our research program is of wide variety and scope, affording exceptional freedom as well as superior facilities for these people. From every standpoint, it would be difficult to find a more exciting and rewarding climate for a career in science. Too, we are continually stepping up projects which will insure success in commercial as well as military work.

Hughes is pre-eminent as developer and manufacturer of the electronic armament control system now standard equipment on all Air Force all-weather interceptors. Our program also embraces ground systems radar, the Hughes Falcon and other guided missiles, automatic control, synthetic intelligence. Projects of broader commercial and scientific interest include research in and manufacture of semiconductors; electron tubes; digital and analog computation; data handling; navigation; production automation.

Scientific Staff Relations

HUGHES

The Laboratories now have positions open for all phases of work on ground and airborne digital computers—from logical design to production engineering. Why not write us?

RESEARCH AND DEVELOPMENT LABORATORIES
HUGHES AIRCRAFT COMPANY
Culver City, Los Angeles County, California

HUGHES MEMOTRON®

. . . a new concept in retaining transients

- Provides an instant and convenient permanent display of transients
- Displays traces at high brilliance indefinitely, until intentionally erased
- Permits display of successive writings
- Eliminates waste of time and film by eliminating need for taking superfluous photographs
- Can be used as a curve plotter at both high and low writing speeds.

MEMOTRON *is exclusive with Hughes. It is the only cathode ray tube available which makes it possible to combine, in a single piece of equipment, the permanent writing characteristics of a pen recorder together with the high-frequency response of a cathode ray oscillograph.* MEMOTRON *is already incorporated into equipments serving important laboratory functions in many of the country's leading electronics research and manufacturing centers. Descriptive Product literature is available upon request.*

An application of the MEMOTRON is a commercial oscilloscope manufactured by Advanced Electronics Corporation, Los Angeles. MEMOTRON has an over-all length of 18½ inches, and a neck diameter of 2¼ inches. It can replace most conventional 5-inch tubes without revision of space requirements in the equipment.

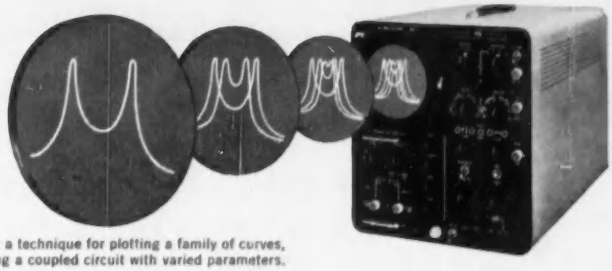

Illustrated: a technique for plotting a family of curves, representing a coupled circuit with varied parameters.

Hughes Products engineers are available for consultation on special MEMOTRON *applications. For literature write to address below.*

HUGHES PRODUCTS

A DIVISION OF THE HUGHES AIRCRAFT COMPANY

ELECTRON TUBES
HUGHES PRODUCTS
Los Angeles 45, California

© 1956, H.A.C.

Now-Stronger Passive Cathodes!

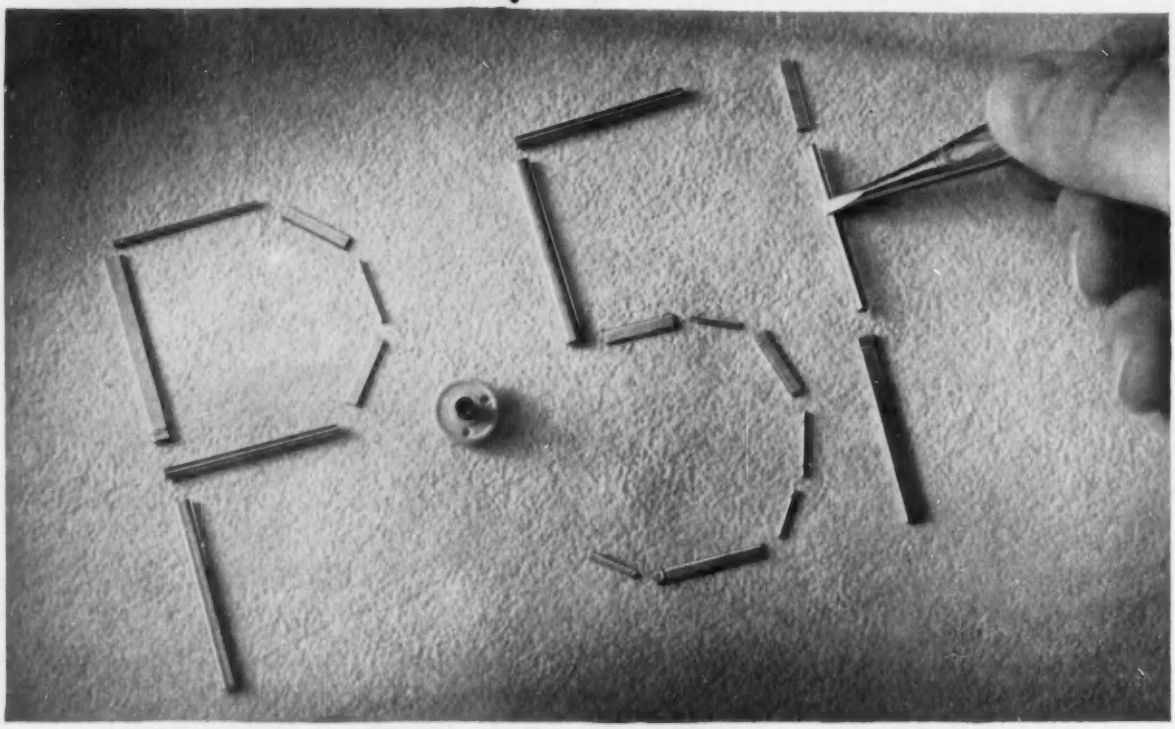

Superior announces Cathaloy P-51

— a new passive cathode material

- *100% stronger than Cathaloy P-50, ideal for ruggedized tubes*
- *Free of sublimation and grid emission troubles; low interface impedance*
- *Available in seamless, Weldrawn® and Lockseam* forms*

Latest addition to Superior Tube's family of Cathaloys is Cathaloy P-51 —a passive cathode material with entirely new properties.

NEW INGREDIENT

Cathaloy P-51 is similar to Cathaloy P-50 in chemical composition and electrical characteristics. But the addition of approximately 4% tungsten greatly increases its strength.

HIGH HOT STRENGTH

Tests prove that Cathaloy P-51 is twice as strong as Cathaloy P-50 at operating temperatures. This means it is especially useful in ruggedized tubes. In all tubes, it reduces the risk of failure from shock and of bowing. As with all Cathaloys, the composition of Cathaloy P-51 is carefully controlled by Superior. Every melt is checked in an electron tube before being approved for production.

UPGRADE YOUR TUBES

Cathodes made from Cathaloy P-51 are available in either seamless, Weldrawn or Lockseam form, and can be fabricated to your exact dimensional specifications. Write for technical information. Superior Tube Company, 2500 Germantown Ave., Norristown, Pa.

*Manufactured under U.S. patents.

NOTE. Cathaloy is a trademark of Superior Tube Co., Reg. U.S. Pat. Off.

Superior Tube

The big name in small tubing

NORRISTOWN, PA.

Johnson & Hoffman Mfg. Corp., Mineola, N. Y.—an affiliated company making precision metal stampings and deep-drawn parts

Want more information? Use post card on last page.

MAGNETIC FREQUENCY DETECTOR

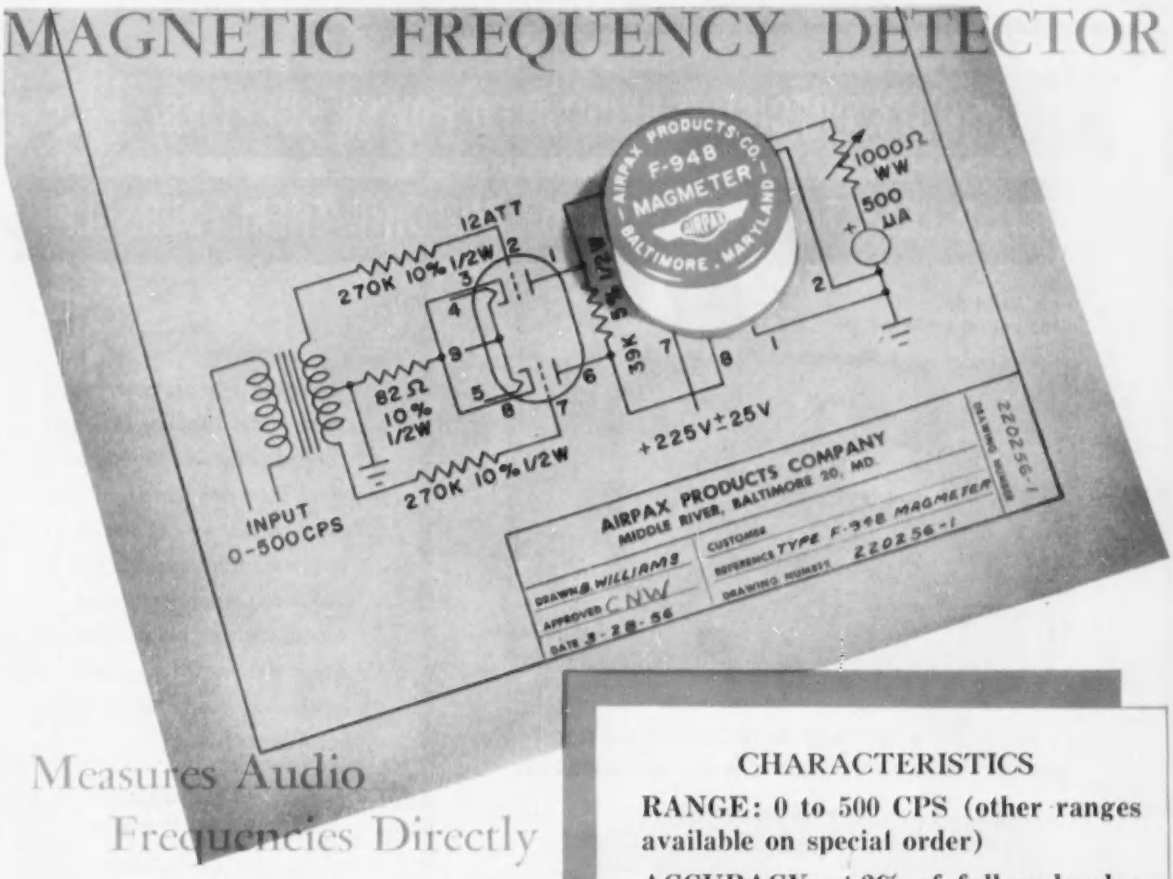

Measures Audio Frequencies Directly

Magmeter is an entirely new product—the result of Airpax leadership in developing magnetic components. The Magmeter produces an output signal directly proportional to the input frequency.

In the circuit shown, the 12AT7 dual triode drives the Type F-948 Magmeter over the rated frequency range of 0 to 500 CPS. A 0-500 microampere meter, connected to the Airpax Magmeter, indicates frequency directly. A resistor in series with the meter calibrates the circuit when it is installed. Once adjusted, the Magmeter holds the calibration for long periods of time to at least 2% of full scale.

The Magmeter is completely contained in a can 1¼ inches high and 1½ inches in diameter with a standard octal base. This compact component weighing only 3.4 oz. can be used wherever frequency is measured: in test equipment, AC servos, speed indicators and controls, and power frequency regulators.

You probably have an application in which this one component can replace considerable circuitry. We have a detailed data sheet ready for you, just write to

CHARACTERISTICS

RANGE: 0 to 500 CPS (other ranges available on special order)

ACCURACY: ±2% of full scale plus temperature variation of 500 ppm/C

WAVEFORM SENSITIVITY: less than 1% change in indication for sine, triangular, and square waves of same rectified average value

SHOCK: 30g shocks of 11± 1 milliseconds duration in each plane, case clamped

VIBRATION: 10g in each plane at 10 to 55 CPS, case clamped

TEMPERATURE: —55C to +72C operate; —65C to +85C storage

LIFE: comparable to that of a well made transformer

ENCLOSURE: hermetically sealed

AIRPAX

DESIGNERS ENGINEERS

MIDDLE RIVER BALTIMORE 20, MD.

HEAVY DUTY, PRECISION REGULATED POWER SUPPLIES

FOR LESS THAN THE COST OF BUILDING THEM YOURSELF

Bench Model 50
0-500 VDC @ 0-500 MA $415.00

LAMBDA'S TWO WIDEST RANGE, MOST VERSATILE POWER SUPPLIES

Rack Model 50-R
0-500 VDC @ 500 MA $395.00

These general purpose, heavy duty power supplies save you time, money and experimentation. They are tested, fully guaranteed, now in use in many leading research and industrial laboratories and manufacturing plants. You get quick delivery, dependable equipment ready for immediate installation.

SPECIAL FEATURES

- Hermetically sealed oil filled capacitors
- Stable 5651 reference tubes
- Easy-to-read 4¼" meters
- Overload circuit breakers (magnetic type)
- Vernier high-voltage control
- Time-delay tube protection

SPECIFICATIONS

INPUT ..... 105-125 VAC, 50-60 C, 800 W (max)

DC OUTPUT NO. 1: (regulated for line and load)

Voltage	0-500 VDC (continuously variable)
Current	0-500 MA (over entire voltage range)
Regulation (line)	Better than 0.15% or 0.1 V
Regulation (load)	Better than 0.5% or 0.3 V
Internal Impedance	Less than 2 ohms
Ripple and Noise	Less than 8 millivolts rms
Polarity	Either positive or negative may be grounded

DC OUTPUT NO. 2: (regulated for line only)

Voltage Ranges	Internal Impedances:
a) 0-50 VDC (no load)	3,300 ohms (max)
b) 0-200 VDC (no load)	17,500 ohms (max)

Regulation (line)	Better than 0.1%
Ripple and Noise	Less than 5 millivolts rms

Polarity: Positive terminal connected internally to negative terminal of DC output No. 1

AC OUTPUTS (unregulated):

Two outputs, isolated and ungrounded. Each is 6.5 VAC at 5A (at 115 VAC input). Allows for drop in connecting leads. May be connected in series for 12.6 V (nominal) at 5A, or in parallel for 6.3 V (nominal) at 10A.

SIZES AND WEIGHTS:

Bench Model 50	Size: 12½" H x 22" W x 15" D Weight: 110 lb. net; 158 lb. shipping
Rack Model 50-R	Size: 10½" H x 19" W x 14¼" D Weight: 89 lb. net; 140 lb. shipping

LAMBDA ELECTRONICS CORP.
11-11 131 STREET COLLEGE POINT 56, N. Y.

Want more information? Use post card on last page.

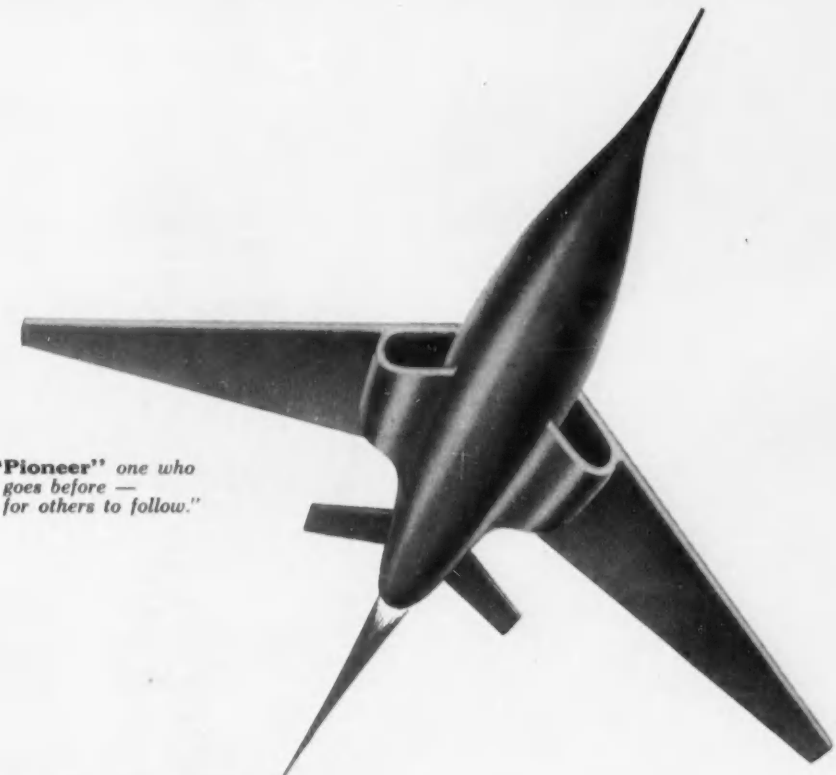

"Pioneer" *one who goes before — for others to follow."*

IF WEBSTER IS RIGHT —
Then Midland Has Done It Again, this time with

glass holders for crystals!

Permanent high vacuum attainable *only* with glass, isolates the crystal from atmospheric factors detrimental to dependable performance. Truly, here are crystals designed with the future in mind — future requirements of application and design as well as the long life of the unit far into the future.

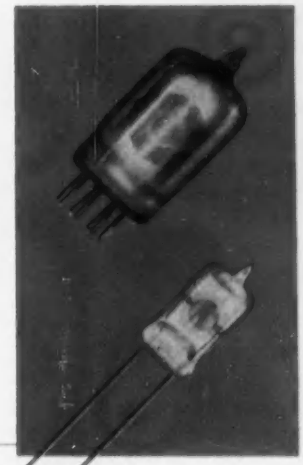

Midland MANUFACTURING COMPANY, INC.

3155 Fiberglas Road • Kansas City 15, Kansas

World's Largest Producer of Quartz Crystals

Want more information? Use post card on last page.

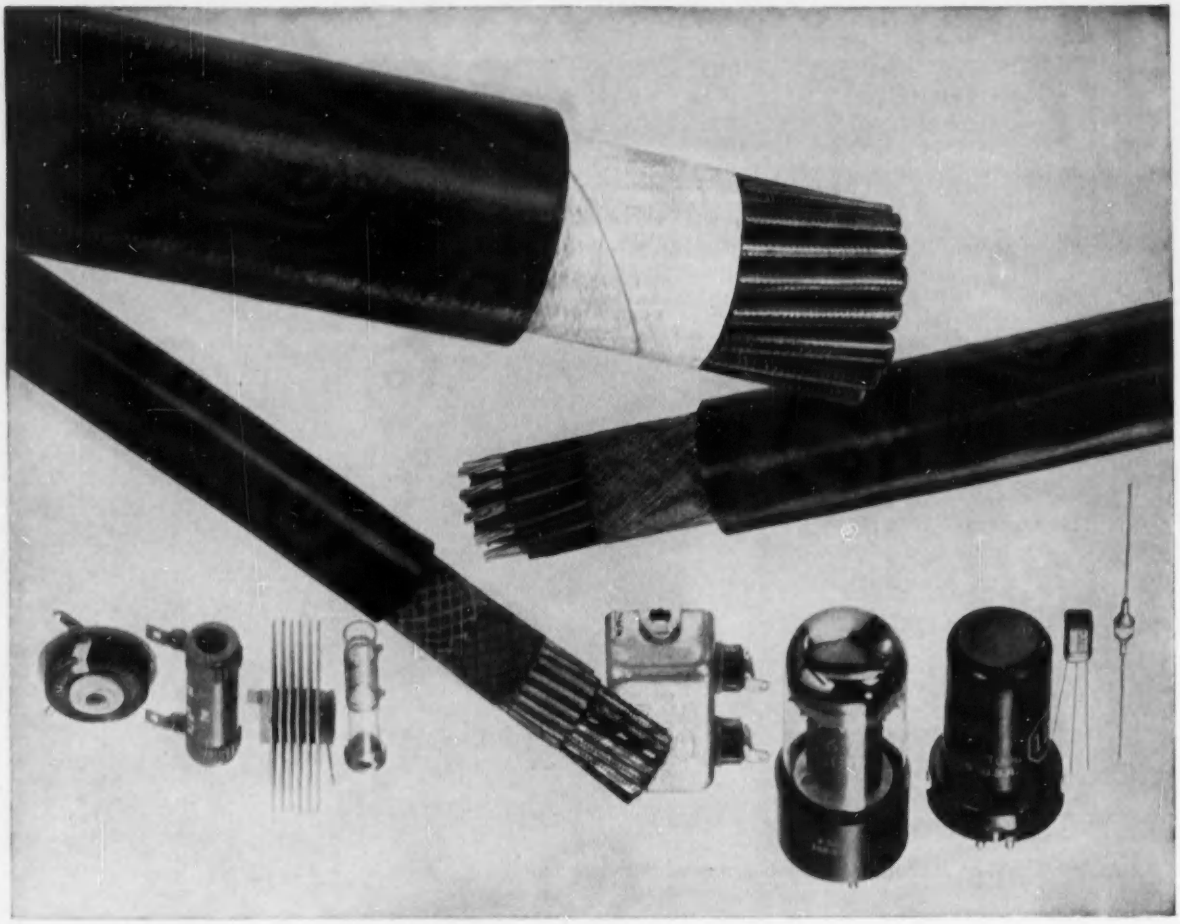

In electronics... **cables are basic**

Proper choice of wiring material for electronic equipment involves a critical decision. As a component, it may well "make or break" product performance or design. Fortunately, there are guide posts to help you in the selection of a qualified supplier.

Look for essentials

Look, first, for *high quality*. Look for such essentials as full-sized copper, uniformly annealed and precisely stranded. Look, too, for insulations and coverings which have been proven to provide good workability and long-lived dependability.

Then, look . . . as *your* customers presumably do . . . for a supplier of responsibility. To qualify, such a supplier should have (1) a thorough knowledge of electronic wiring problems, (2) engineering and research ability in the development of special cable constructions and (3) complete manufacturing facilities of modern design for the production of specification or custom-built cables.

Rome Cable has all of these things

For some 20 years we have served the electronic industry with complete satisfaction. Rome's high product quality and engineering ability have gained wide recognition wherever exacting standards of performance are a requisite.

Fully approved

Rome Cable products, commercial and military, are manufactured in strict compliance with the requirements of approval agencies.

With Rome engineering and manufacturing experience, you get full value from your electronic cable dollar. *We will be happy to serve you.* For more details, write for Bulletin TR-5.

ROME CABLE
Corporation
ROME · NEW YORK
and
TORRANCE · CALIFORNIA

GUDEMAN
Capacitors



"XC" Plastic Film Dielectric Capacitors

The development of the Gudeman "XC" capacitors provides high temperature capacitors that have exceptionally high insulation resistance, low power factor and low dielectric absorption. No voltage derating is required when used within a temperature range from −65°C to +165°C. Bathtub and rectangular case styles also are available.

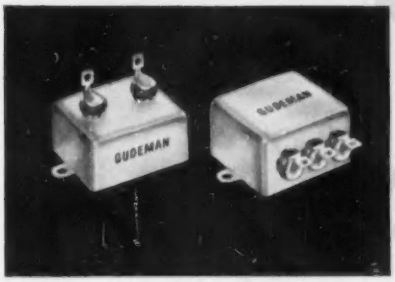

Bathtub Type Military Capacitors

MIL-C-25 Types
CP53, CP54, CP55 Case Styles
Temperature Ranges:
−55°C to +85°C
−55°C to +125°C

Miniature Feed-Through Capacitors

The Gudeman Feed-Thru Capacitor, Types 271 and 272 is a three-terminal component designed to be used for R. F. Interference suppression in a manner similar to a low pass filter. The typical insertion loss characteristics for these Feed-Thru Capacitors when measured in a 50 ohm line are in accordance with MIL-Standard 220.

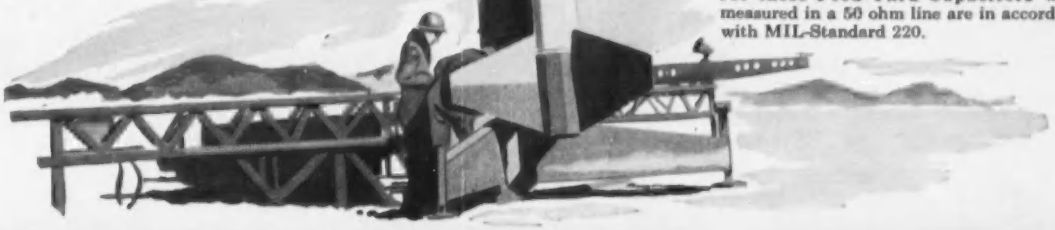

Military Capacitors

MIL-C-25 Types
CP70 Case Styles
Temperature Ranges:
−55°C to +85°C
−55°C to +125°C

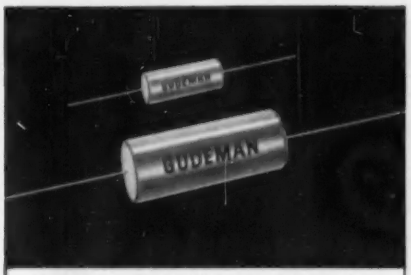

Tubular Laminated Cardboard Capacitors

The 633 series gives extra protection in extremely high humidity applications.
Paper Dielectric: Wax or Oil Impregnated
Resin End Seals
Temperature Range: −40°C to +85°C

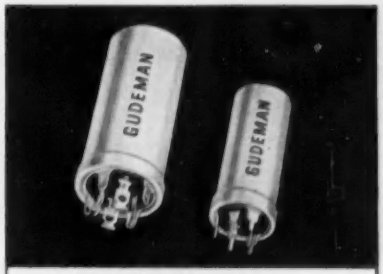

Dry Electrolytic Capacitors

MEand Printed Circuit Types
High Purity (99.99%) Aluminum Foil
Low Leakage
Temperature Range:
−30°C to +85°C

THE GUDEMAN COMPANY

Write for latest technical data

Main Plant & General Offices
340 West Huron St., Chicago 10, Illinois, Dept. C256
Mfg. Branches: Chelsea, Mich.; Sunnyvale and Monrovia, Calif.; Terryville, Conn.

Manufacturers of Electronic Components for Military and Commercial Applications.

Want more information? Use post card on last page.

PERHAPS WE'LL HAVE TO ADD A PINCH, FOR YOU...

Just ask us for an alloy we haven't got — we'll be delighted.

Because that's how each of the more than 112 resistance and electronic alloys Driver-Harris makes had its beginning. Each of these highly specialized alloys is custom-made . . . produced exactly to the specifications of our customers.

The physical and chemical properties of an electrical resistance alloy can be altered greatly by a minute difference in its constituents. Often just a few ounces to the ton can make the difference you need.

One thing you can always rely on in any Driver-Harris alloy: it is made to the most precise metallurgical checks and controls known to the industry. It is these exclusive quality controls that have made Nichrome V and Nichrome* the standard for over 50 years by which all other electrical resistance alloys are measured.

Perhaps in a sense Nichrome is *too* well known. For we don't want people to forget that we make many other resistance alloys of sustained high quality to meet other special needs. And that, as we said at the outset, our engineers will be more than delighted to start afresh tomorrow to devise a new one, custom-made for you. Just tell us as exactly as you can what you wish to accomplish.

NICHROME V and NICHROME are manufactured only by

Driver-Harris Company

HARRISON, NEW JERSEY

BRANCHES: Chicago, Detroit, Cleveland, Louisville, Los Angeles, San Francisco

In Canada: The B. GREENING WIRE COMPANY, Ltd., Hamilton, Ontario.

*T. M. Reg. U. S. Pat. Off.

MAKERS OF THE MOST COMPLETE LINE OF ELECTRIC HEATING, RESISTANCE, AND ELECTRONIC ALLOYS IN THE WORLD

KENNEDY ANTENNAS...
now under way for VANGUARD

THE WORLD'S LARGEST ANTENNAS COME FROM KENNEDY...







TRACKING ANTENNAS ..... RADIO TELESCOPES..... RADAR ANTENNAS..... TROPOSPHERIC SCATTER..... IONOSPHERIC SCATTER

Even as you read these words, Kennedy is already building the antennas whose mission it will be to track the earth satellite on its epoch-making trip through space.
When launching day arrives, these mighty electronic sentinels will be ready to play their vital role in this most momentous adventure of modern times.

ANTENNA EQUIPMENT

D. S. KENNEDY & CO.

COHASSET, MASS. — TEL: CO4-1200

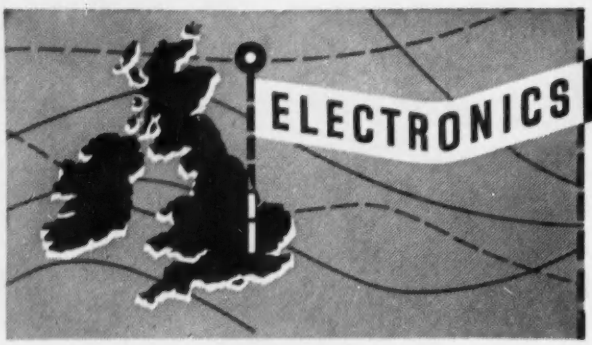

The British Electronics Industry is making giant strides with new developments in a variety of fields. Mullard tubes are an important contribution to this progress.

EF86

Another Mullard contribution to high fidelity

Principal Ratings

Heater	6.3V, 0.2A
Max. plate dissipation	1W
Max. screen dissipation	0.2W
Max. cathode current	6mA

Characteristics

Plate voltage			250V
Screen voltage			140V
Grid voltage			—2V
Plate current			3mA
Screen current	0.6mA	Transconductance	1800 μmhos

Base

Small button noval 9-pin

The Mullard EF86 audio frequency pentode is one of the most widely used high fidelity tubes in Britain today. It has been adopted by the leading British manufacturers whose sound reproducing equipment is enjoying increasing popularity in the United States and Canada.

The marked success of this tube stems from its high gain, low noise and low microphony characteristics.

By careful internal screening, and by the use of a bifilar heater, hum level has been reduced to less than 1.5μV. Over a bandwidth of 25 to 1,000c/s equivalent noise input approximates 2 μV.

When operated below 1,000c/s, internal resonances of the EF86 are virtually eliminated. Even at higher frequencies chassis and tube socket damping are usually sufficient to make vibration effects negligible.

Supplies of the EF86 are now available for replacement purposes from the companies mentioned here.

Supplies available from:—

In the U.S.A. International Electronics Corporation,
Dept. E-7, 81 Spring Street, N.Y.12,
New York, U.S.A.

In Canada Rogers Majestic Electronics Limited,
Dept. IK, 11-19 Brentcliffe Road,
Toronto 17, Ontario, Canada.

Mullard

ELECTRONIC TUBES

used throughout the world

MULLARD OVERSEAS LTD., CENTURY HOUSE, SHAFTESBURY AVE., LONDON, ENGLAND

Mullard is the Trade Mark of Mullard Ltd. and is registered in most of the principal countries of the world.

MEV 34

"A connector for practically every application"
... that's why Cannon Electric is *first in connectors.*
More than 26 lines in 20,000 different assemblies and countless
"specials." Only a pioneer multi-contact connector
manufacturer and the largest exclusive connector
designer and builder in the world could make this claim.

Mil-Spec



Rack/Panel/Chassis

Audio

THREE OF TWENTY-SIX SERIES

cannon connects

Mil-Spec



Rack/Panel/Chassis

Audio

FIREPROOF • MINIATURE • MIL SPEC • EXTERNAL POWER
AUDIO • HERMETIC SEAL • RACK/PANEL/CHASSIS • WEATHERPROOF
WATERTIGHT • VIDEO • COAXIALS • HIGH VOLTAGE
SWITCHING PLUGS • TEST JACKS

CANNON PLUGS

CANNON ELECTRIC

Please Refer to Dept. 120

Cannon Electric Co., 3208 Humboldt St., Los Angeles 31, Calif. Factories in Los Angeles; East Haven; Toronto, Can.; London, Eng.; Melbourne, Australia. Licensees in Paris, France; Tokyo, Japan. Representatives and distributors in all principal cities...see your Telephone Yellow Book.

PHELPS DODGE

THERMALEZE®-

A PROVEN CLASS "B" FILM WIRE!

- Dielectric twist performance establishes Thermaleze as Class "B".
- Suitable for Class "B" insulation system designs.
- Over seven years' practical experience in coils, motors, and transformers.
- Essential balance of mechanical, chemical and electrical properties.

Any time magnet wire is your problem, consult Phelps Dodge for the quickest, easiest answer!

FIRST FOR LASTING QUALITY—FROM MINE TO MARKET !

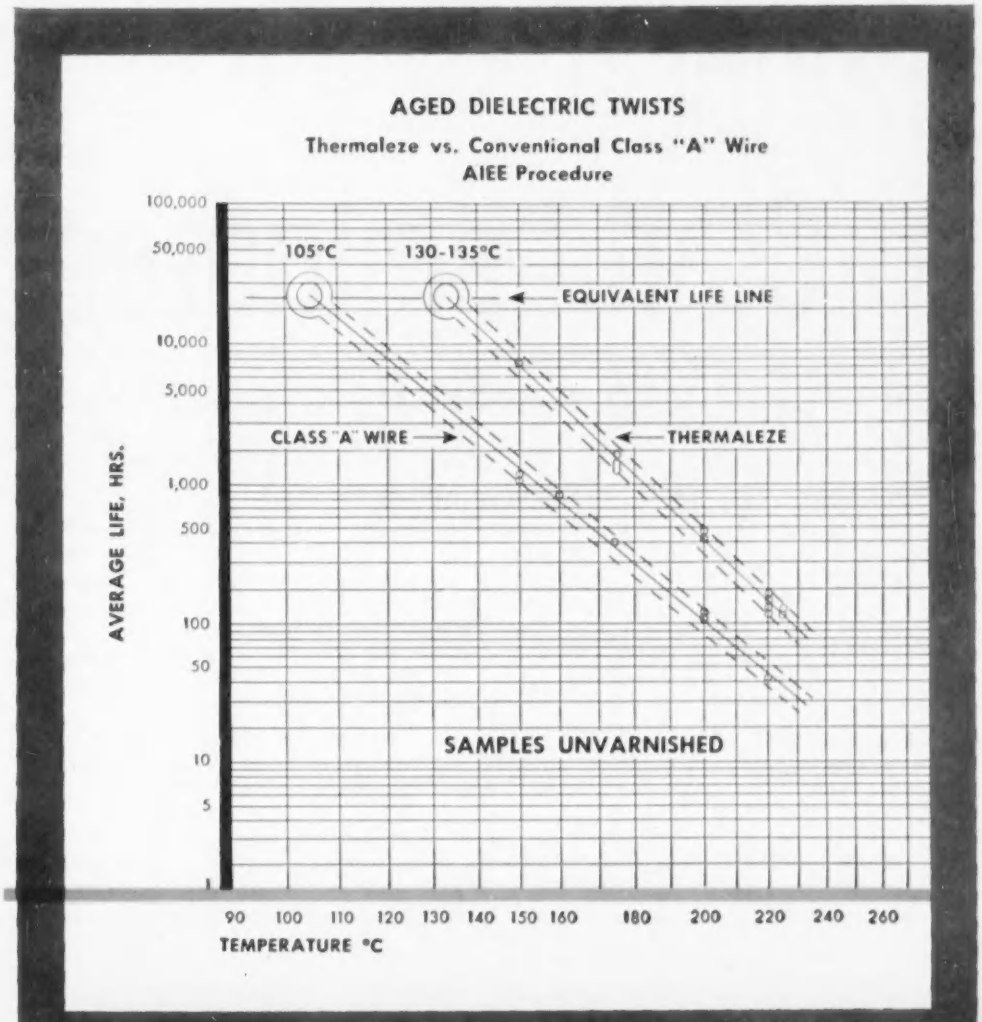

NEMA twist samples aged in oven at various temperatures following AIEE aging procedures.



PHELPS DODGE COPPER PRODUCTS CORPORATION

INCA MANUFACTURING DIVISION

FORT WAYNE, INDIANA

New Taylor Copper-Clad Laminates

now available in production quantities

Why Taylor Copper-Clad Laminates Help Capitalize the Full Potential of Printed Circuits . . .

Taylor's ability to use high purity rolled copper—in weights of one, two or three ounces per square foot—assures production of materials that will more satisfactorily meet industry's needs because...

Rolled copper surface is smoother (freer from pits, pinholes and imperfections) . . . more uniform thickness . . . no sacrifice in conductivity. Result: Consistently satisfactory etching at better production rates.

After months of research and experimentation, Taylor is now in production on two brand new copper-clad laminates that give you opportunity to realize—on a sound basis—the full potentials of printed circuit construction.

Produced by an exclusive Taylor process that permits the use of readily available, high purity rolled copper, these laminates are supplied in two grades—XXXP-242 Copper-Clad, with a premium quality phenol paper base material; and GEC Copper-Clad, with a superior epoxy glass base material.

Taylor makes both of these copper-clad laminates in sheets approximately 37 x 49 inches . . . in thicknesses from .015 to .25 inches . . . with copper on one or both sides.

Whatever your experience with copper-clad laminates . . . whatever your ideas on the subject . . . it will be to your advantage to find out just what the new Taylor materials can do for you. Contact the nearest Taylor sales engineer . . . for more information or for your sample order.

Taylor GEC Copper-Clad provides . . .

- Superior electrical and mechanical qualities for critical applications.
- High electrical stability over wide humidity range.
- High resistance to dip soldering temperatures up to 500 F.
- High insulation resistance and surface resistivity after etching.
- Ready punchability.
- Good, uniform copper-to-laminate bond strength.

Taylor XXXP-242 Copper-Clad provides . . .

- Cold punchability. For intricate punchings—warm to 150 F. max.
- High resistance to dip soldering temperatures up to 500 F.
- High insulation resistance ana surface resistivity after etching.
- Translucence. Permits easy checking of circuit alignment on opposite side.
- Good, uniform copper-to-laminate bond strength.

TAYLOR FIBRE CO. Plants in Norristown, Pa. and La Verne, California

Branch Offices

Atlanta	Detroit*	Philadelphia
Boston*	Indianapolis	Rochester*
Chicago*	Los Angeles	San Francisco*
Cleveland*	Milwaukee*	St. Louis
Dayton*	New York*	Rockville, Conn.

*Teletypewriter service at both plants and these branches.

Distributors

Grand Prairie, Texas
Houston
Miami
Toronto

TAYLOR
Laminated Plastics
Vulcanized Fibre

WARM WELCOME

STEWART SW WARNER ELECTRONICS

a Division of Stewart-Warner Corporation
1300 No. Kostner Ave., Chicago 51, Ill.

Stewart-Warner Electronics today detects the presence of high-performance aircraft, identifies it as friend or foe and can provide a warm missile welcome in an instant.

Research and development at Stewart-Warner Electronics have produced these advanced systems. The program is still expanding, as are the opportunities for the exceptionally well-qualified engineer.

Today as yesterday, Stewart-Warner Electronics safeguards our skies with tomorrow's planning and production.

NEW WESTINGHOUSE
HIGH-POWER
SILICON RECTIFIER

475 amperes d-c . . .
300 volts PIV

Highest power silicon rectifying cell commercially available . . . that's the Westinghouse WN-5082!

Ambient temperatures present no heat problems for these silicon cells—units operate in temperatures up to 175° C. Curve below shows forced air-cooled, three-phase bridge ratings.

This diode is ideally suited for railway, elevator, arc welder, battery charger and other industrial high-power applications.

Production quantities are available immediately. For more information on the WN-5082, or any other silicon rectifier requirements, regardless of voltage and current, call your nearest Westinghouse apparatus sales office. Or write Westinghouse Electric Corporation, 3 Gateway Center, P. O. Box 868, Pittsburgh 30, Pennsylvania. J-09004

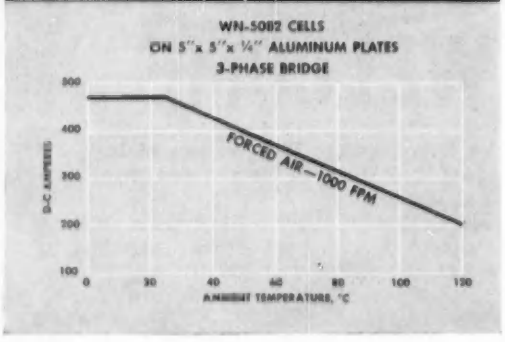

WATCH WESTINGHOUSE!

*WHERE **BIG** THINGS ARE HAPPENING **TODAY!***

ELECTRONIC DIVISION

from the 102-year world leader in elevatoring . . .

THE BRAINS

the brawn

THE VISION

the skills

THE EXPERIENCE

the tools

INTEGRATED for defense electronics



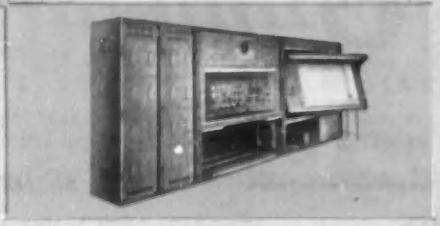

OTIS . . . a proven source for research, development, manufacture and maintenance of large-scale equipment and systems in the fields of:

- missile guidance and control
- gunfire control
- radar and counter measures
- simulators and training aids
- communication
- special electronic devices
- computers
- ultrasonics
- servomechanisms
- magnetic amplifiers
- testing instrumentation
- electro-mechanical components

For engineering achievements, rely on engineering-minded management—rely on Otis.
Write on your letterhead for 32-page history and facilities report.

OTIS ELEVATOR COMPANY
ELECTRONIC DIVISION
35 BYERLON STREET, BROOKLYN 5, N. Y.

Gilfillan pays off on ability, not adaptability

MEMO TO EXPERIENCED ELECTRONIC ENGINEERS

Gilfillan needs both experienced engineers and recent graduates. The significance of Gilfillan advantages will be most apparent to engineers who have experienced a static corporation system.

For example, Gilfillan does not have a rigid hierarchy of juniors, seniors, supervisors and project engineers that changes only at fixed intervals, like musical chairs.

On the contrary, Gilfillan maintains a dynamic organization, with operations under constant modification to meet current research needs. Capable engineers advance from junior to senior to supervisor to project engineer status more rapidly at Gilfillan because this fluid, changing operation means emphasis is placed on ability--rather than on adaptability to a rigid system.

Gilfillan pays higher salaries because, with emphasis on doing rather than on diplomacy, the individual is literally worth more, from the start.

You probably know Gilfillan's reputation for developing practical, simplified solutions to complete systems problems, on time. It is directly due to this Gilfillan method of operating on a basis of professional freedom, rather than under ordinary business methods.

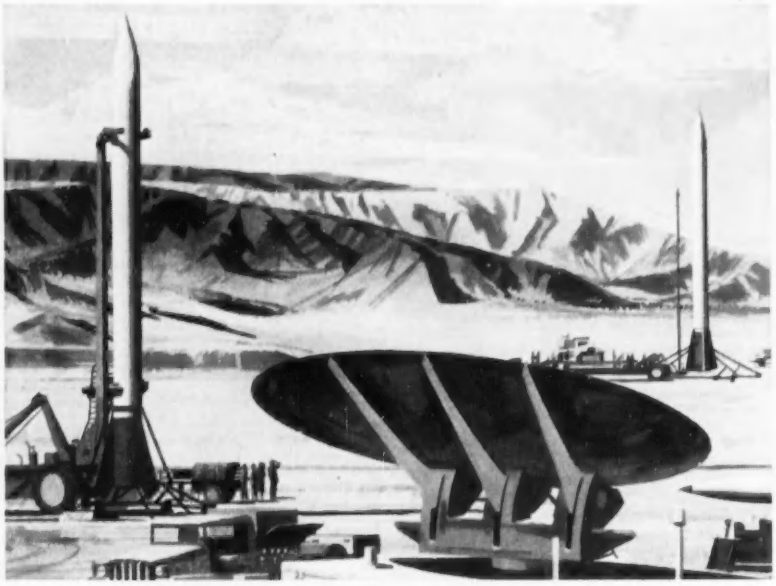

THE ARMY'S CORPORAL: Prime contract for Basic Research and Development—Jet Propulsion Laboratory of California Institute of Technology. Prime contracts for Development (improvement and simplification of ground and airborne electronic systems); and Production (ground guidance systems and airborne electronics)—Gilfillan.

A man who stands still too long at the same job level is moving...backwards. Find out how you can move ahead--and have the satisfaction of working with whole problems, all the way through to production--at Gilfillan.

You'll want to know about other Gilfillan advantages: our patent award program, for example; tuition plan; relocation assistance; Gilfillan aid in publishing papers over your signature. About Gilfillan's record on the Corporal Guided Missile; the new Quadradar; and whatever we can tell you, under security, about our many current research and developmental prime contracts. About the growth of this 50-year-old company--number of plants, facilities, and so on.

Best way to get the answers is to write R. E. Bell, Gilfillan Bros., 1815 Venice Blvd., Los Angeles, Calif. A confidential conference will be arranged. You'll enjoy success at Gilfillan.

Gilfillan
Los Angeles

PRIME CONTRACTORS FOR COMPLETE SYSTEMS

Electronic Countermeasures • Automatic Navigational Aids
Guided Missiles • Airborne Radar • Radar Trainers

Want more information? Use post card on last page.

where you need

– performance that's big

– over-all size that's small

– think first of LEACH relays

Yes, we offer miniaturization, all right . . . for example, our new *System Designed* Avionic Relays require only a fraction of the space needed by round cans. A designer's dream right there . . . but that's not all. In achieving such space saving—vital in today's electronic, aircraft and missile circuits—we haven't sacrificed a single bit of Leach's famous reliability; you can still stake your system's success on a Leach relay.

Our offer is this: buy any of the new *System Designed* Relays (or any other Leach unit, simple or complex), and *test it* against any similar relay on the market. You'll learn in your own laboratory why the electronic and electrical industries have learned to specify Leach when system reliability is a must.

System designed relays...*Leach's newest line*

HERMETIC SEALING . . . every relay checked by mass spectrometer
OPTIONAL LEADS . . . solder terminals, potted leads or plug-in bases
SQUARE CANS . . . 20% more relays can be installed in the space required by round cans
SHOCK RESISTANCE . . . vibration and shock properties exceed the requirements of MIL specs
HIGH TEMPERATURE . . . dependability assured at 120°C ambient

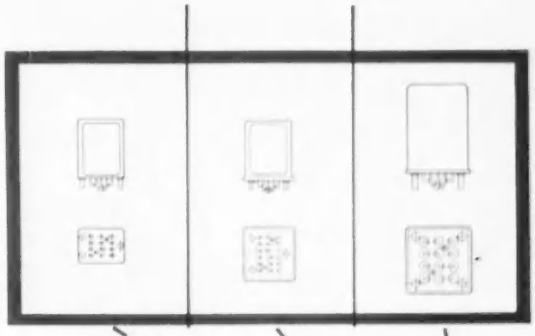

	9220	9226	9230
Contact arrangement	4PDT	6PDT	4PDT
Operating voltage	18-30 VDC	18-30 VDC	18-30 VDC
Contact rating at 28 VDC			
Resistive	5 amp	5 amp	10 amp
Inductive	1.5 amp	1.5 amp	7 amp
Coil resistance	250 ohms	200 ohms	150 ohms
Duty	Continuous	Continuous	Continuous
Weight	.25 lb.	.25 lb.	.5 lb.
Case dimensions, inches	1.3x1x1.7	1.5x1.5x1.7	1.7x1.7x2.6

LEACH CORPORATION

The latest Leach Relay Catalog is your best starting point when selecting ANY *relay—industrial, electronic or aircraft. SEND FOR YOUR COPY TODAY.*

LEACH RELAY DIVISION

5915 AVALON BLVD., LOS ANGELES 3, CALIFORNIA

DISTRICT OFFICES AND REPRESENTATIVES IN PRINCIPAL CITIES OF U.S. AND CANADA

over **100** *designs of* **Grant INDUSTRIAL SLIDES**

to meet **every operating situation!**

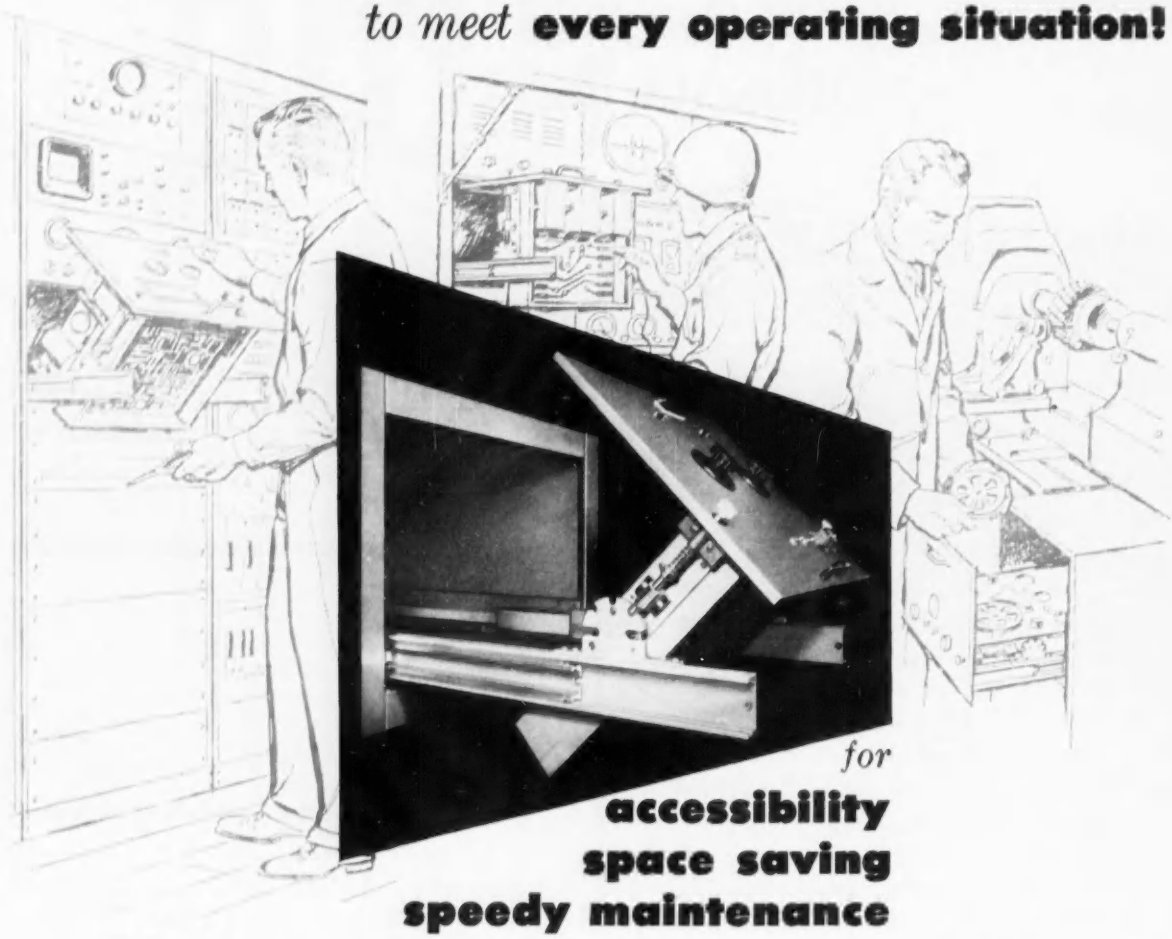

for

accessibility
space saving
speedy maintenance

Grant Industrial Slides afford substantial, practical mountings for nearly all types of assemblies—electronic, hydraulic, pneumatic, mechanical. They allow quick access...the pivoting types permit testing or work on underside as well as top of chassis...also provide for quick release of chassis for bench servicing. Slide mounting usually eliminates need for rear access doors and rear aisles—a very important saving of space. Grant slides are soundly engineered, durable and dependable. Load capacities range up to 500 lbs. and more.

Grant engineers and representatives in all important industrial areas offer specialized experience—will aid in working out custom variations to adapt standard slides to especially exacting requirements.

Ask For This Important Working Data

The Grant Industrial Slide Catalogue is a working manual on built-in accessibility. Ask us to mail your free copy.

Grant INDUSTRIAL SLIDES

Grant Pulley and Hardware Corporation
31-73 Whitestone Parkway, Flushing 54, N.Y.
944 Long Beach Avenue, Los Angeles 21, Calif.

For industrial and high temperature applications!

International Silicon power diodes!

Operating temperature range: —55° C to +150° C
PIV ratings from 50 volts to 600 volts
Rectified DC current range: 100 ma to 1.25 amperes*

*Mounted on cooling fins.

IN FULL PRODUCTION!

International silicon diodes are the result of 8 years experience in the development of advanced rectifier products... all manufactured to the highest standards of reliability in the industry! INTERNATIONAL RECTIFIER... the **complete** line-SELENIUM-GERMANIUM-SILICON

STUD MOUNTED AND PIG TAIL LEAD CONSTRUCTION



ALL-WELDED HERMETICALLY SEALED SHOCK-PROOF HOUSING. No solders or fluxes used in sealing.

TWO STYLES AVAILABLE

Standard type for Industrial Power Supply Application.

Extra Low Leakage type for magnetic amplifier application.

a world of difference Through research!

International Rectifier

CORPORATION

EXECUTIVE OFFICES: EL SEGUNDO, CALIFORNIA • PHONE OREGON 8-6281

NEW YORK: 122 E. 70TH ST., TRAFALGAR 9-3330 • CHICAGO: 205 W. WACKER DR., FRANKLIN 2-3883
IN CANADA: ATLAS RADIO CORP., LTD., 50 WINGOLD AVE. W., TORONTO, ONTARIO, RU 1-6174

THE WORLD'S LARGEST SUPPLIER OF INDUSTRIAL METALLIC RECTIFIERS

putting IDEAS *to work—research at* IBM

- **Multi-Stable Work Horse: By employing a non-linear load, new circuit permits two transistors to do the work of ten. IBM Bulletin No. 200.**
- **Self-Complementary: New Gas Tube Counter subtracts by adding. IBM Bulletin No. 201.**
- **The Soft Touch: Ultrasonic cutting at IBM permits devices to be cut from hard, brittle materials within 0.0002″.**

For bulletins, write to Dept. EL-7, IBM, 590 Madison Ave., N. Y. 22, N. Y.

Multi-Stable Work Horse

As the size and complexity of IBM products increase, we are faced with growing numbers of components—which means increased cost. As part of our continuous search for improvement and ways to reduce the number of components, Robert Henle, one of our Transistor Circuit Research people, undertook to get more work out of a given number of transistors. The result is a two-transistor, multi-stable circuit employing feedback controlled by a non-linear load. Junction transistors are naturally suited to this new kind of circuit.

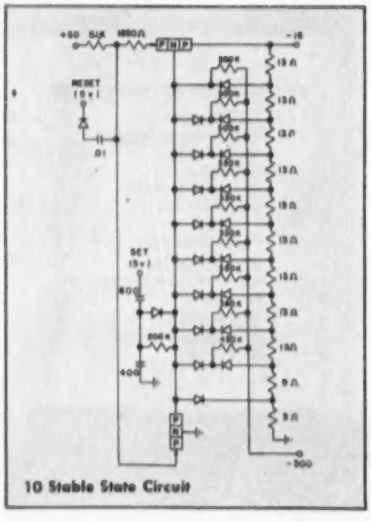

10 Stable State Circuit

A full report on this new idea from IBM contains eight full-page circuit diagrams in addition to mathematical analyses of the operation of the circuit. Write for your copy of IBM Bulletin No. 200.

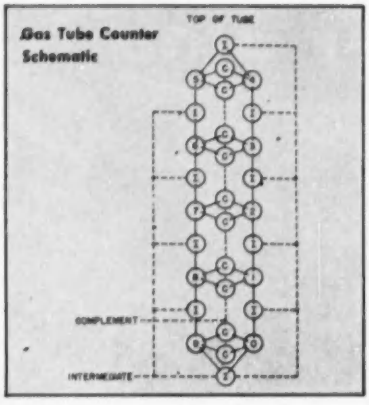

Self-Complementary

Accounting machines these days must be able to do everything—even make decisions. In order to get a machine to do more in a day's time with little or no increase in operating cost, IBM Component Research people studied the idea of using a multi-cathode gas tube. It's good news that they came up with an attractive approach, which Robert Koehler, of our Device Development Group, then reduced to practice; it operates faster than its electro-mechanical predecessor and, furthermore, with simple circuitry, can subtract by adding. It can read out in true number form both positive and negative balances. This is possible because a number stored in the tube may be transposed to its 9's complement (i.e., value subtracted from nine) by a single electrical pulse.

If you'd like more information on the basic principle, physical arrangement of parts, and typical problems solved, write for IBM Bulletin No. 201. If you are fascinated by the theory of numbers, we recommend this Bulletin.

The Soft Touch

In some of our studies of new components, at the IBM Research Laboratories at Poughkeepsie, it is necessary to make many different, small and intricately shaped parts from brittle materials. Following the conventional approach, each of these parts would require laborious and costly machining and fabrication. We turned to ultrasonic cutting; with this tool we can make any shape or size component in approximately a minute—with an accuracy five times greater than previously possible! The ultrasonic cutter has helped us progress faster in our development of new devices. RESEARCH at IBM means IDEAS at work.

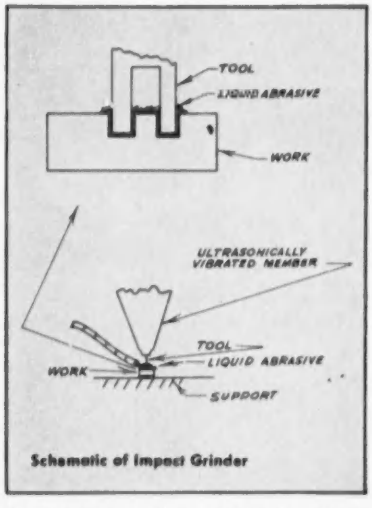

Schematic of Impact Grinder

To learn more about career opportunities available at IBM, write, describing your background, to: W. M. Hoyt, IBM, Room 407, 590 Madison Avenue, New York 22, N. Y.

Laboratories at Endicott, Poughkeepsie and Kingston, N. Y., and San Jose, Calif.

DATA PROCESSING · ELECTRIC TYPEWRITERS · TIME EQUIPMENT · MILITARY PRODUCTS

IBM INTERNATIONAL BUSINESS MACHINES CORPORATION

Want more information? Use post card on last page.

today's most stable voltage control device

silicon junction zener reference elements

national SEMICONDUCTOR

ZENER REFERENCE DIODE

ZENER REFERENCE ELEMENTS

ZENER REFERENCE DIODES & ELEMENTS

Available in production quantities in three standard types

	TYPE 1N821			TYPE 1N823			TYPE 1N825			TYPE 1N827		
	1N821	1N821A	1N821B	1N823	1N823A	1N823B	1N825	1N825A	1N825B	1N827	1N827A	1N827B
SPECIFIED 10% TOLERANCE	6.2V	6.2V	6.2V	6.8V	6.8V	6.8V	8.2V	8.2V	8.2V	10V	10V	10V
DYNAMIC IMPEDANCE (ohms)		10	20		15	30		15	30		20	40
AMBIENT TEMPERATURE (°C)	-65		+200	-65		+200	-65		+200	-65		+200
DISSIPATION AT 25°C AMBIENT (mw) Derate linearly 3.3 mw/°C above 25°C ambient.			250			250			250			250
CHANGE IN VOLTAGE DROP (%/°C) -55°C to +150°C / -55°C to +150°C			±.01			±.01			±.01			±.01

Typical values based on entire production of this type. *Rated at 7.5mA and 25°C. †Rated at 10mA and 25°C.

No voltage control device yet developed compares with the lifetime service and extreme accuracy of rugged National Semiconductor Silicon Junction Zener Reference Diodes and Elements. Precision-built to withstand severe shock, vibration, acceleration, humidity and altitude conditions, these miniature units have a temperature coefficient as low as ±.001% per °C—operate predictably and efficiently from —65°C to +200°C! Today, NS Zeners give trouble-free service in analog computers, missiles, power supplies and scores of other applications requiring critical voltage regulation over a wide temperature range. Dependable NS Zeners may be the answer to your critical voltage regulation needs, too. Write today for complete details.

national SEMICONDUCTOR

a division of Hoffman *electronics corporation · 930 Pitner Avenue · Evanston, Illinois*

MANUFACTURERS OF SILICON JUNCTION DIODES, ZENER REFERENCE ELEMENTS, HIGH POWER RECTIFIERS, SOLAR CELLS AND BATTERIES

Transistorized telephone summons you with a musical tone

Above: Experimental model resembles regular "500" set; the only visible departure is a louver in the base through which the musical tone is radiated.

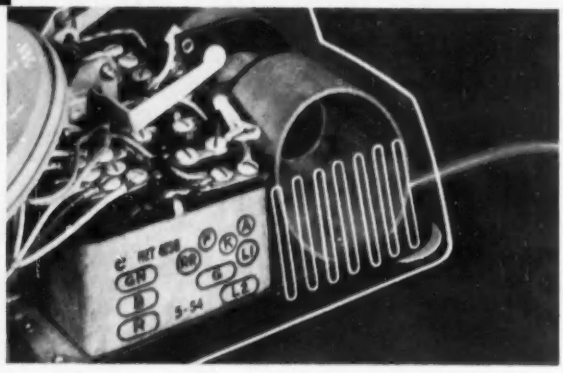

Bell scientists have developed a new musical tone device which may some day replace the telephone bell, if it meets technical standards and customers' approvals.

Because the musical tone equipment uses transistors, the tones will be transmitted with the same amount of power required to transmit a telephone conversation — considerably less than is needed to make a telephone bell ring.

The experimental telephone sets resemble the current "500" sets; the only external difference is a louver at the side of the base through which the tone is radiated by a small loudspeaker mounted inside the telephone's base.

Tests have shown that the musical tone can be heard at great distances. It stands out above general room noise and can be distinguished from such sounds as ringing of doorbells, alarm clocks, and home fire alarms.

This new low-power signaling technique is expected to play an important part in the electronic switching system now under development at Bell Laboratories.

Above: Bell ringer has been displaced by a small loudspeaker in transistorized telephone. Left: L. A. Meacham heads the team of engineers that developed the musical tone ringer. Mr. Meacham holds a B.S. in Electrical Engineering from the University of Washington, Class of '29. He became affiliated with Bell Labs a year after his graduation. In 1939 Mr. Meacham won the "Outstanding Young Electrical Engineer" award of Eta Kappa Nu.

BELL TELEPHONE LABORATORIES

World center of communications research and development

CHASE® NICKEL LEADED COMMERCIAL BRONZE

For making STRONGER PRODUCTS *that have to be machined!*

This is the high-strength leaded commercial bronze you have been looking for! It has *27 percent higher tensile strength, 20 percent higher yield strength* than Leaded Commercial Bronze, yet has a machinability rating that is 80% of that of Free-Cutting Brass.

Chase Nickel Leaded Commercial Bronze is a moderately priced alloy for making longer-lasting pole line hardware, electrical fasteners, nuts, bolts, and other bronze products that require added strength. Order Chase Nickel Leaded Commercial Bronze today. It's available in rod form—round sizes from ¼" to 1" diameter, hexagonal sizes from ¼" to ⅞".

"IN THE CHIPS"—a Chase movie showing Brass Rod and Wire *at work*. Every machine shop can benefit by showing it. Loaned free on request.

Chase

BRASS & COPPER CO.

WATERBURY 20, CONNECTICUT • SUBSIDIARY OF KENNECOTT COPPER CORPORATION

The Nation's Headquarters for Brass, Copper and Stainless Steel

Atlanta • Baltimore • Boston • Charlotte • Chicago • Cincinnati • Cleveland • Dallas • Denver • Detroit • Grand Rapids • Houston • Indianapolis • Kansas City, Mo. Los Angeles • Milwaukee • Minneapolis • Newark • New Orleans • New York • Philadelphia • Pittsburgh • Providence • Rochester • St. Louis • San Francisco • Seattle • Waterbury

It's easy to obtain Precise Measurements with a D-B Standing Wave Detector

—easy because D-B units are built without the usual sources of error. You get perfect parallelism between slot and waveguide axis...between probe travel and waveguide axis. The waveguide is precision-formed in one piece to provide a uniform path for measured waves, thus minimizing residual VSWR. You can use any D-B slotted line to measure adjacent frequency bands. Merely substitute different-size waveguide blocks and probes—the alignment accuracy is guaranteed to remain unimpaired.

Check the unique features below for further proof of D-B convenience and exceptional accuracy. Literature on request.

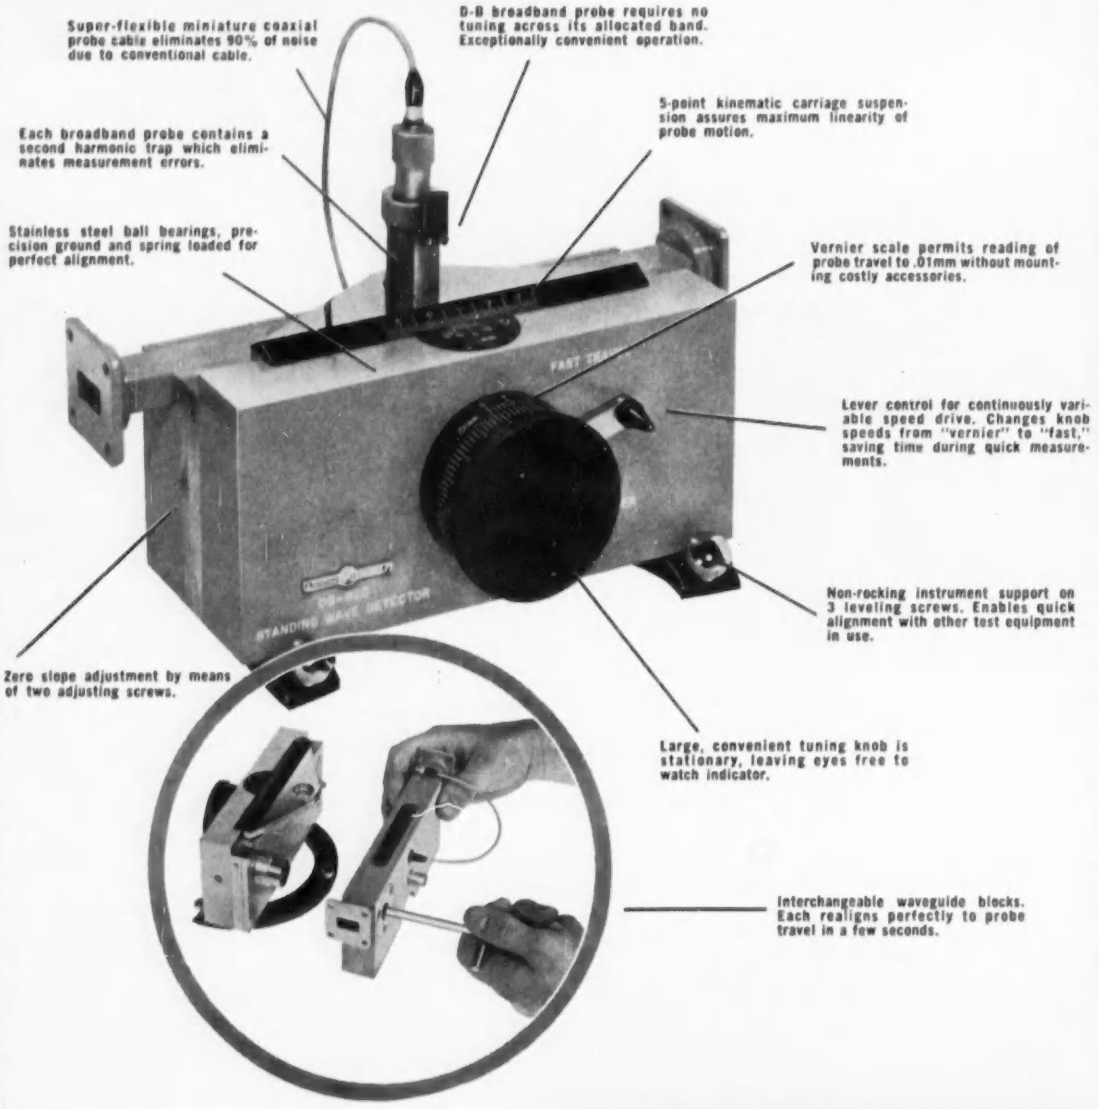
Super-flexible miniature coaxial probe cable eliminates 90% of noise due to conventional cable.
D-B broadband probe requires no tuning across its allocated band. Exceptionally convenient operation.
5-point kinematic carriage suspension assures maximum linearity of probe motion.
Each broadband probe contains a second harmonic trap which eliminates measurement errors.
Stainless steel ball bearings, precision ground and spring loaded for perfect alignment.
Vernier scale permits reading of probe travel to .01mm without mounting costly accessories.
Lever control for continuously variable speed drive. Changes knob speeds from "vernier" to "fast," saving time during quick measurements.
Non-rocking instrument support on 3 leveling screws. Enables quick alignment with other test equipment in use.
Zero slope adjustment by means of two adjusting screws.
Large, convenient tuning knob is stationary, leaving eyes free to watch indicator.
Interchangeable waveguide blocks. Each realigns perfectly to probe travel in a few seconds.

DEMORNAY-BONARDI

780 SOUTH ARROYO PARKWAY · PASADENA, CALIFORNIA

DEMORNAY BONARDI

the Difference is INSIDE the FIL-CAP

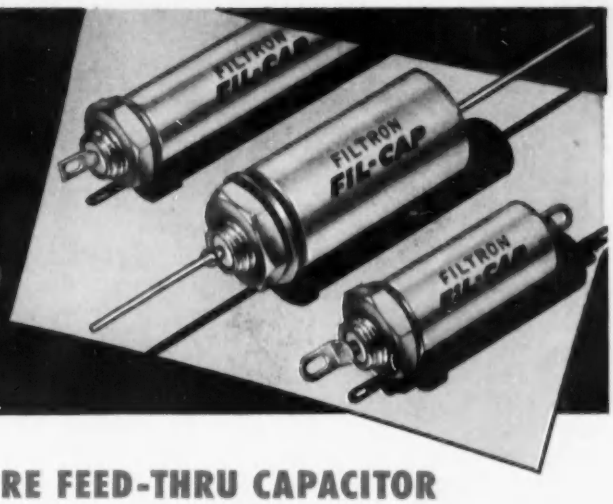

FILTRON'S NEWEST SUBMINIATURE FEED-THRU CAPACITOR
SETS A NEW STANDARD OF RF ATTENUATION PERFORMANCE

1 **For the first time—a complete line, ratings for 5 AMPS & 10 AMPS, continuous duty**

2 **Advanced internal circuit design . . . specially processed impregnant**

3 **Meets Spec MIL-C-11693 (proposed) for suppression capacitors**

4 **Closely matches theoretically ideal attenuation characteristics**

An unusual internal circuit arrangement, precision mechanical components, and a specially processed silicone impregnant combine to afford outstanding electrical characteristics and stability—unobtainable in conventional feed-thru capacitors ordinarily used for interference suppression in electronic equipment.

Basically, FIL-CAPS are a four-terminal network inserted in the current-carrying line. The power line to be filtered must be broken, and each end connected to an insulated terminal of the capacitor. The feed-thru ground-plane mounting prevents mutual impedances between input and output terminals. The FIL-CAP design includes compression glass insulated terminals, and milled flats on the threaded mounting neck, to prevent rotation during installation and under service conditions.

Type FV is rated for 5 amps AC-DC continuous operation, and Type FX is for 10 amps AC-DC continuous operation. Both types are available in operating voltages of 100, 200, 300, 400 and 600 volts DC; 125 and 250 volts AC; 0 to 400 cycles.

All FIL-CAP subminiature feed-thru capacitors are 100% tested and inspected before shipment.

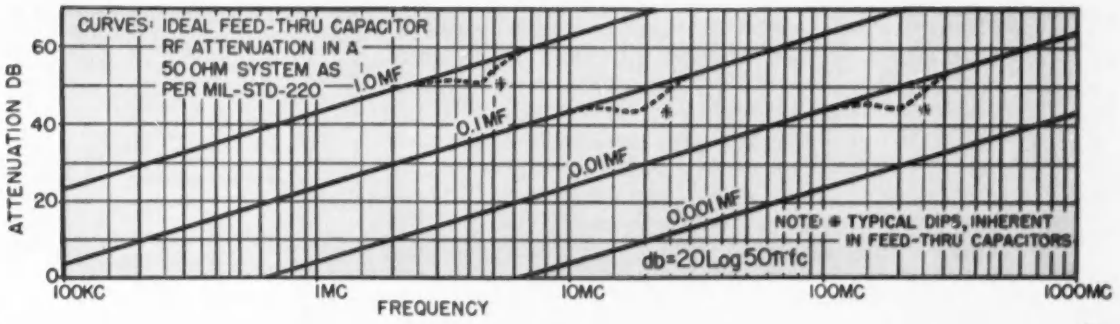

If your requirements call for greater attenuation than is obtainable with feed-thru capacitors, Filtron also manufactures a complete line of RF interference filters. More than 5000 filter types are offered for military, industrial, nuclear and commercial applications. Filtron is the world's largest manufacturer of RF interference filters. Details and literature furnished on request.

For complete engineering data and installation diagram, ask for Filtron Catalog FV, and FV Supplement for FIL-CAP equivalents to MIL-C-11693 military designations.



Main Plant, Flushing, New York

FILTRON CO., INC., FLUSHING, LONG ISLAND, NEW YORK
PLANTS IN FLUSHING, NEW YORK, AND CULVER CITY, CALIFORNIA

Want more information? Use post card on last page.

RCA

ELECTRON TUBES
SEMICONDUCTOR DEVICES
BATTERIES
TEST EQUIPMENT
ELECTRONIC COMPONENTS

DATA

TUBES · FERRITE CORES · SEMICONDUCTOR DEVICES *for DATA PROCESSING*

A number of years ago, RCA introduced a group of electron tubes designed, manufactured, and tested specifically for computer services. These tubes, which maintain their emission capabilities after long periods of operation under cutoff conditions, and therefore provide good consistency of plate current during the "on" periods, have been instrumental in the design of many new and improved data processing devices. Continuing this "pattern of progress"—RCA is constantly exploring the requirements of data processing and computer applications. Currently, RCA offers tubes, ferrite cores, and semiconductor devices for these services. Look to RCA for new developments and progress in the field of data processing.

Flying-Spot Cathode-Ray Tubes . . . RCA-5AUP24, -5WP15, -5ZP16 . . . all feature fine spot, high resolution, aluminized screen, electrostatic focus, magnetic deflection, for film, strip, sheet, or card reading. **Transcriber Kinescope . . . RCA-5WP11** especially designed for use in kinescope film recording.

Display Storage Tube . . . RCA-6866 . . . produces non-flickering display of stored information . . . extraordinary brightness of about 1750 foot-lamberts . . . writing gun . . . viewing gun . . . electrostatic focus and deflection . . . good resolution in halftones.

Radechon . . . RCA-6499 . . . barrier-grid storage tube . . . for use in variety of information-processing systems . . . digital or analogue information may be stored for periods controllable from microseconds to minutes . . . "read-out" rate same as or different from "write-in" rate.

Graphechon . . . RCA-6896/1855 . . . electrostatic charge storage tube . . . for use in scan-conversion equipment . . . writing gun . . . reading gun . . . magnetic deflection . . . electrostatic focus.

Computer Storage Tube . . . RCA-6571 . . . single beam type for use in binary-digital computer systems . . . electrostatic focus and deflection.

FOR DESIGNERS

RCA TYPES FINDING WIDE APPLICATION WITH COMPUTER EQUIPMENT



Miniature types for "Trigger" circuits

RCA-5823* . . . glow-discharge triode, cold-cathode type for use as a relay tube in "on-off" control of low-current circuits.

RCA-2D21* . . . thyratron, heater-cathode tetrode type. Can be operated in high-sensitivity relay-control circuits directly from a high-vacuum phototube.

RCA-5696* . . . thyratron, negative-control heater-cathode tetrode type; for relay applications such as in counter-circuits where low heater-current drain and short deionization time are important considerations.

RCA-5726* . . . twin diode intended for applications where dependable performance is paramount under conditions of shock and vibration.

RCA-6080* . . . low-mu twin power triode designed for use in dc amplifier circuits.

RCA-25L6-GT* . . . beam power tube where requirements are for high power sensitivity at relatively low plate and screen potentials.

Multiplier phototube for light-operated relay circuits

RCA-931-A* . . . is a 9-stage, photosensitive tube of compact design; suited to scanning applications in data-processing devices.

*For data on these types see your RCA Tube Handbook HB-3.

RCA HIGH-QUALITY TRANSISTORS

RCA high-quality transistors are the result of years of experience in research, development, and production of solid-state materials and devices. Rigid standards of quality control assure exceptional uniformity of characteristics and stability throughout long life. Several new types are under development for specific computer applications.

FERRITE CORES • TRANSFLUXOR

RCA-219M1 . . . 0.55-ampere-turn-drive, 165-millivolt output ferrite core; **RCA-216M1** . . . 0.95-ampere-turn-drive, 200-millivolt output ferrite core. Both are toroid-shaped types, characterized by hysteresis loops which provide reversal of magnetic-flux polarity when the correct current combination from two associated magnetized windings are coincidentally energized.

RCA Dev. No. XF-1501 TRANSFLUXOR . . . originated by RCA, is a switching and storage device utilizing a ferrite core. It can control the transmission of ac power according to a level set by a single pulse and furnish an output determined by the stored pulse for an indefinite length of time.

ELECTRON TUBES PRODUCED SPECIFICALLY FOR LONG-LIFE IN COMPUTER SERVICE

RCA computer-type tubes are designed, manufactured, and carefully tested to assure long term dependability and stability of operation in "on-off" electronic computer control applications. All are miniature tubes of the heater-cathode type. The 5963, 5964, 5965, 6197, and 6211 are primarily designed for frequency-divider circuits, the 5915, for gating circuits.

RCA-5915 pentagrid amplifier

RCA-5965 medium-mu twin triode

RCA-5963 medium-mu twin triode

RCA-5964 medium-mu twin triode

RCA-6211 medium-mu twin triode

RCA-6197 power pentode

For sales information on RCA tubes, ferrite cores, and semi conductor devices for your specific equipment designs, call the RCA Field Representative at the district office nearest you.

EAST: HUmboldt 5-3900
744 Broad Street
Newark 2, New Jersey

MIDWEST: WHitehall 4-2900
Suite 1181, Merchandise Mart Plaza
Chicago 54, Ill.

WEST: RAymond 3-8361
6355 East Washington Blvd.
Los Angeles 22, Calif.

For data on any of the RCA products shown here, please write RCA, Commercial Engineering, Section G-19R Harrison, New Jersey.

RADIO CORPORATION of AMERICA RCA

Tube Division, Harrison, N. J.
Semiconductor Division, Somerville, N. J.
Components Division, Camden, N. J.

. . . YOU SHOULD KNOW
THERE IS A MORE ACCURATE
VOM

1½% accuracy . . .

mirror scale

to eliminate any possible parallax and give you readings with the same laboratory accuracy that is built into the instrument.

MODEL 630-A $49.50

This VOM is truly what laboratories buy when they must have the best. Model 630-A is prized in
782 industrial laboratories
115 research laboratories
237 development laboratories
and is owned by over 300 engineering consultants and used for critical production line testing and in the maintenance of automation equipment by over 1100 manufacturers of all types of products.

TRIPLETT FEATURES:

½% resistors—molded mounting for resistors and shunts allows direct connections without cabling. (No chance for shorts—longer life and easy-to-replace resistors in their marked positions.) King sized recessed knob for the single selector switch for both circuit and range—just turn and make reading.
Resistance ranges are compensated for greatest accuracy over wide battery voltage variation.

33 RANGES:

12 D.C.-A.C. Volts (20,000 ohms per volt DC, 5000 ohms per volt AC.); 5 Current Ranges; Resistance from .1 Ohms to 100 Megohms; Decibel and Output readings.

TRIPLETT

TRIPLETT ELECTRICAL INSTRUMENT COMPANY
Bluffton, Ohio

Burton browne advertising

631
Combination V-O-M—VTVM

630-NA
For Best Testing Around the Lab, Production Line or Bench

630
The Popular All-Purpose V-O-M

630-A
A Good Lab and Production Line V-O-M

310
The Smallest Complete V-O-M with Switch

630-T
For Telephone Service

666-HH
Medium Size for Field Testing

625-NA
The First V-O-M with 10,000 Ohms/Volt AC

666-R
Medium Size with 630 Features

15-8028)

MEMO

FROM: THE ENGINEERING STAFF AT NJE

TO: COMPUTER DESIGNERS

SUBJECT: THE **SYMPATHETIC EAR**

If you are building an electronic computer—digital or analogue—it will pay you to talk to NJE about the power supplies.

Why? Four good reasons:

1. NJE has built computer power supplies for almost every major computer facility during the past two years.

2. NJE offers modern techniques not available elsewhere—ZERO-LAG, ELG SEMI-REGULATED, Transistor-forced Mag-amp, high-speed ET Thyratron, etc.

3. NJE knows computers. We offer the services of engineers with computer design experience. They know all about marginal checking, turn-on sequencing, long-term stability, voltage-failure alarms, fail-safe design, turn-down procedures, heater-cycling, interaction prevention, reliability prediction, and all the rest of modern computer practice.

4. NJE offers the advantages of the world's largest custom power supply volume and the industry's largest, most diversified engineering staff—lower costs, quicker delivery, consistently high quality.

Got computer supply problems? Tell us.

Ours is a sympathetic—and experienced—ear.

NJE corporation

Electronic Development & Manufacturing

345 CARNEGIE AVENUE, KENILWORTH, NEW JERSEY

Competent Engineering Representation Everywhere | Rapid, complete, competitive custom quotes from 1000 Amperes (low voltage) to 280 KV (low current.)

POWER SUPPLIES UNLIMITED

MALLORY

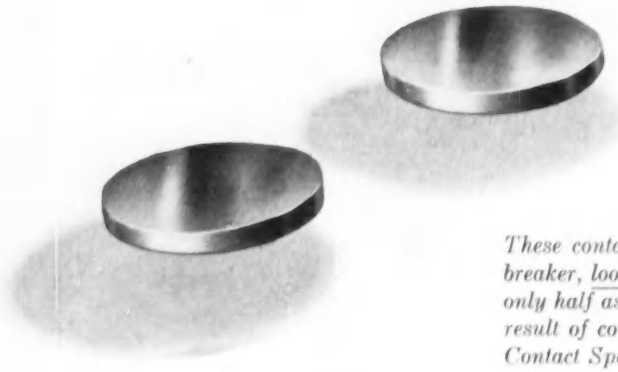

These contacts, for a utility circuit breaker, look alike . . . but one costs only half as much as the other, as a result of consultation with Mallory Contact Specialists.

How Mallory Contact Engineering Balances Performance and Price

Mallory Contact Engineering Offers Five Ways To Improve Economy

1. **The most effective contact material** from the extensive line developed by Mallory. More economical alloys often can satisfy *actual* service conditions.
2. **The most economical contact design . . .** for your purchasing, production and product needs.
3. **The most economical backing material** . . . from a group of Mallory alloys developed for this use.
4. **The most economical backing member design** . . . in relation to contact and product design requirements.
5. **The most economical method of assembly** of contact and backing member.

By coordinating *all* these important elements of contact design, Mallory can help you put into effect a long-range plan for cutting contact cost and assuring peak performance.

CONTACTS can be *too good* for their intended service. Detailed study of a contact application, by Mallory engineers, often uncovers ways to design more closely to actual requirements . . . at substantial savings to the customer.

The contact pictured above is a typical example. Intended for use in a circuit breaker for utility distribution lines, it originally was designed with contacts made of heavy-duty silver ELKONITE®. At first glance, this exceptionally long-wearing, high conductivity metal appeared ideal to meet the customer's original specifications. But further investigation by Mallory contact engineers revealed that while contacts had to operate with absolute dependability, they did not have to function *frequently*.

On the basis of the actual frequency of service expected, Mallory engineers recommended a change to a copper ELKONITE . . . an alloy made of lower priced materials, and more economical to produce. Overall savings to this customer amounted to a 50% cut in contact costs. Moreover, there is no sacrifice in performance for the specific application.

Chances are that consultation by Mallory on your own contact applications can prove the source of interesting savings for you. Mallory engineers are well qualified by years of experience to analyze your requirements, to recommend materials from the extensive line of Mallory alloys, and to assist in overall design of contacts and assemblies. For a discussion, write or call Mallory today.

Expect more . . . get more from

P. R. MALLORY & CO. Inc.

MALLORY

P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA

Serving Industry with These Products:

Electromechanical—Resistors • Switches • Tuning Devices • Vibrators
Electrochemical—Capacitors • Rectifiers • Mercury Batteries
Metallurgical—Contacts • Special Metals • Welding Materials

CROSS TALK

▶**CONSTRUCTIVE . . .** Manufacturers have become very adept at shifting engineers from somebody else to themselves. Migration has been encouraged with every trick in the bag, and particularly the alleged advantages of one geographical area or community over others.

We're realistic enough to know that individual companies must protect themselves against a manpower shortage, even at the expense of other plants. And some engineers do indeed find greater opportunity and a better way of life by moving. But it should be remembered that mere shifting adds nothing to the industry's engineering pool. Like electrons flowing into a circuit and then back to a battery, there is no increase in number by the action.

Several good plans which would permit educational institutions to turn out more engineers have been suggested. Some companies are using technicians to fill jobs formerly held by engineers, and upgrading the engineers. Steps such as these hit the shortage where it needs hitting.

▶**QUOTES . . .** AIEE's Morris D. Hooven says engineers were considered palace nobility in the time of the Pharoahs, notes that they are now being invited into an "intellectual aristocracy."

He notes also that 68 percent of all engineering students pass Selective Service deferment tests as against a 53 percent national average, that less than 2 percent are divorced as against the national average of 25 percent and that there are currently no electrical or electronic engineers in jail in the State of New Jersey.

▶**EXPORT . . .** One of the first needs of underdeveloped nations of Asia, Africa and South America in moving toward an industrial economy and higher standard of living is adequate communications. Inhospitable terrain rules out telephone cable in many cases. One answer is radio-relay networks.

American firms should, at least initially, find a ready market here for equipment. We have had a good deal of experience with such things as multiplexing, scatter, uhf and microwaves, and these all lend themselves ideally to the problem.

▶**TRANSITION . . .** To those who as boys wound wire on oatmeal boxes, the world of waveguide modes and fittings will always be a little alien. And the transition from lumped to distributed constants is still by no means over.

A ferrite plate with "hen scratchings" fired into it may turn out to be the circuit of a distributed-constant phase-shift oscillator. Piezoelectric zirconate slabs laid side by side may become a transformer if driven by magnetostriction.

It is a wise engineer who can pick up a missile component and guess its function.

▶**COLONELS AND CONTRACTORS . . .** Walk into the Kittyhawk Bar of the Hotel Biltmore in Dayton any cocktail hour and you will feel right at home.

The air is full of conversation containing such phrases as "cathode follower" and "output impedance."

LOOKING AHEAD . . . new materials*

Ceramics flexible enough to be used as insulation between coil layers show experimental promise

Plastic mixed with ceramic and then boiled away during firing produces an interesting new end product

Powdered metal wedded in an unusual way to plastic may provide readily moldable permanent magnets

Silicones and epoxy resins in combination with still unpronounceable materials expand the horizon for insulation

*We're working on a Special Report

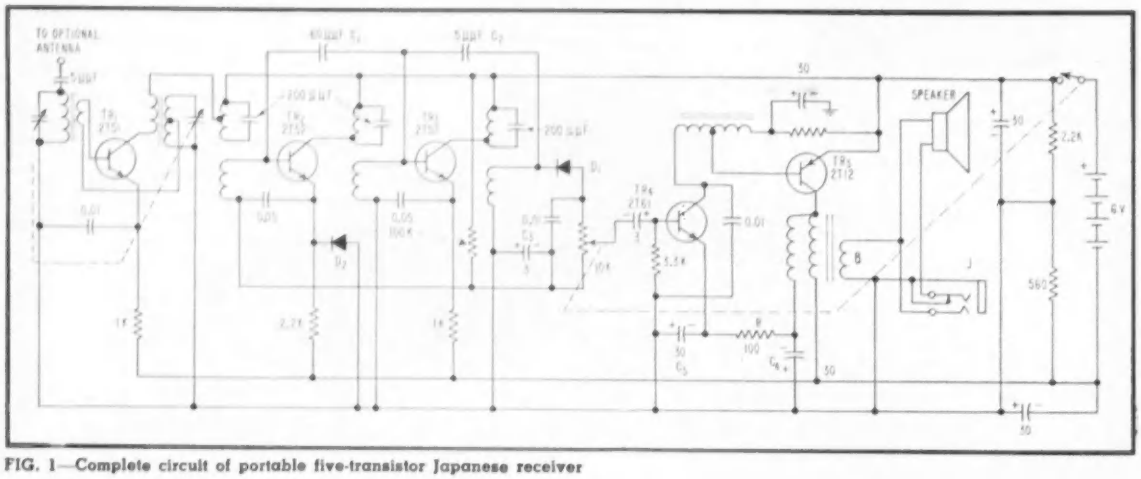

FIG. 1—Complete circuit of portable five-transistor Japanese receiver

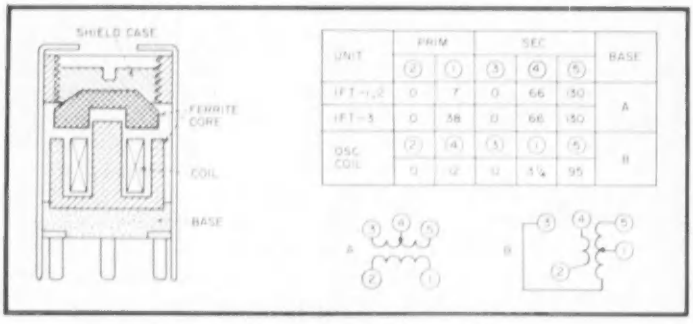

FIG. 2—Construction of i-f transformers and oscillator coil

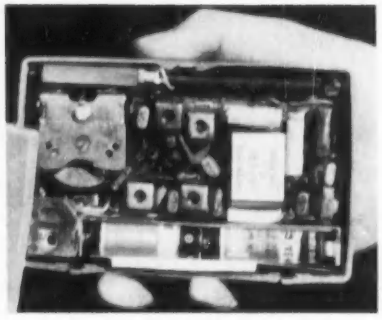

Rear view of Sony TR-55 portable

TRANSISTOR

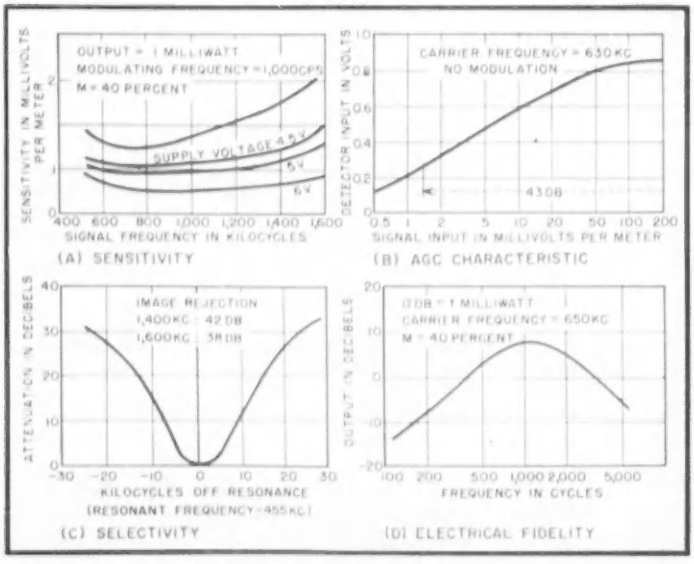

FIG. 3—Characteristics of the five-transistor receiver

ADVENT of transistorized radio receivers occurred at almost the same time in the United States and Japan. Engineering developments and techniques in both hemispheres have paralleled to an appreciable degree, but there are differences in details.

Last fall, ELECTRONICS editors were privileged to examine one of the first foreign broadcast receivers using transistors to enter this country. It was made in Japan by Tokyo Tsuchin Kogyo Ltd., a licensee of

Transistorized products include a table-model receiver, battery-operated tape recorder, superheterodyne pocket receiver, regenerative pocket receiver and hearing aid. The portable receiver on facing page is not shown above

CIRCUITRY in Japan

SUMMARY —— Characteristics of transistors, circuit designs of four different types of broadcast receivers using from two to seven transistors, a portable tape recorder and a hearing aid are disclosed

Western Electric. Some details of the receiver and circuit were published in October (p 12) and December (p 174) issues.

More details of the design of this portable receiver have now been made available by Kazuo Iwama, director of the transistor division of the company, and by J. Yasuda of the engineering staff.

Five junction transistor and two diodes are used in the "Sony" TR-55 portable. The r-f and i-f stages employ three *npn* junction transistors. The audio stages contain an *npn* alloy-type junction transistor and a conventional alloy-type *pnp* junction transistor.

The main tuning dial is a friction-type vernier. In production, all components are mounted on a printed-circuit board and all the connections are soldered in one dipping operation.

The complete circuit of the TR-55 is shown in Fig. 1. Transistor TR_1 serves as the converter and oscillator, while TR_2 and TR_3 are the first and second i-f stages respectively. Diodes, D_1 and D_2 are small germanium types. One is employed as the second detector and the other as the complement gate of the age circuit.

Transistor TR_4 and TR_5 comprise the audio stages. The characteristics of these transistors are shown in Table 1.

The intermediate frequency is 455 kc to obtain good image and i-f responses.

The tuned winding of the ferrite-

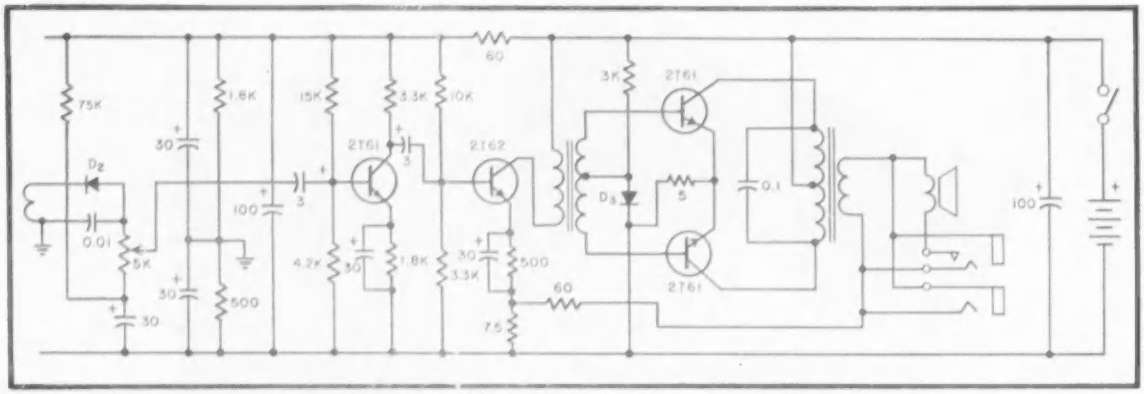

FIG. 4—Audio circuits of the seven-transistor receiver differ materially from those of the portable model

core antenna consists of approximately 80 turns of 0.08 Litz wire. The unloaded Q is about 150 at 1 mc.

The ferrite core is identified by the type number Ferrinver 503, the permeability of which is approximately 400 with its $\mu o/\tan\delta$ approximately $3x10^{-5}$ at 1 mc. The core is formed as a flat strip 12 cm long. It is 1.8 cm wide and 0.4 cm thick.

The five-turn secondary of the antenna coil matches the high impedance of the tuned primary to the low input impedance of the converter. This winding is adjacent to the primary and is dsc 0.2 mm wire.

The antenna is so located in the cabinet as to reduce feedback of i-f and harmonics from the i-f output stage and second-detector circuits. The two windings occupy less than half the length of the core.

Converter Circuit

The converter transistor performs the functions of both mixer and oscillator. The collector current is held at about 1 ma by the 1,000-ohm resistor in the emitter circuit which returns to the −1 volt battery line.

The turn ratio of the oscillator collector winding to the base tap winding has been determined experimentally to obtain near-optimum injection voltage over the band. This ratio is preferably tailored for each transistor. The optimum injection voltage is about 0.1 to 0.2 at the converter base.

I-F Stages

The i-f transformers are of the single-tuned type. These use a Ferrinver 403 ferrite pot core, the permeability of which is about 600 with its $\mu o/\tan\delta$ about $2.5x10^{-5}$ at 500 kc.

The coils are enclosed in a copper shield case whose dimensions are about 1.2 cm square by 1.65 cm high. The primary unloaded Q is about 100 and loaded Q about 30 at 455 kc. Construction of the transformers, and coil data, are given in Fig. 2.

Sensitivity of the receiver is shown in Fig. 3A.

The two i-f stages are connected in neutralized common-emitter circuits. Capacitors C_1 and C_2 are used for neutralizing.

The first i-f stage is controlled by agc. This voltage is derived from the output of the second detector, filtered by resistance of the volume control and electrolytic capacitor C_3, and then supplied to the base of transistor TR_2 through the secondary winding of the first i-f transformer.

The collector current of the first i-f stage is about 0.5 ma with no signal. It decreases with increasing signal and the gain of this stage is lowered as a result. The agc characteristic is given in Fig. 3B.

Diode D_1 complements the agc, so that the emitter potential of TR_2 may be grounded when the input signal level becomes large enough to make the potential of base lead

Table I—Transistor Characteristics

Type Description	2T51 NPN Grown Converter	2T52 Junction I-F Stage	2T61 NPN Alloy Junction Audio	2T12 PNP Alloy Junction Audio
Collector voltage	6	6	4.5	−4.5
Emitter current	−1	−1	−1	1
Cutoff freq (mc) $f\alpha$ Vc = 6 volts	4	2.5	.....	0.7
Collector C	5	5	40	40
Ext base res	150	100	.....	.....
Current ampl α	...	...	0.97	0.95
Collector cutoff current Vc = 10 volts	10	10	10	10
Noise figure in db	...	...	10	.....
Maximum rating (25C)				
Vc (v)	25	...	25	25
Ic (ma)	5	...	10	10
Pc (mw)	40	...	50	50

of TR_2 less than ground potential.

The output transformer matches the 600-ohm impedance of the output transistor to an 8-ohm voice coil impedance. The resistance of the primary winding is about 90 ohms, and this is employed as the stabilizing resistance of this stage.

Bypass capacitor C_4 should be about 200 μf, but physical size would be large. The small RC filter circuit, C_6, C_5 and R, is employed instead. This audio stage gain is about 60 db at 1,000 cycles.

The second detector output feeds a two-stage audio amplifier employing *npn* and *pnp* transistors in a cascade connection which operates class A, so that the source voltage may be effectively used. The stability factor is good and the undistorted maximum output is about 14 mw.

Four penlight cells in series provide 6 volts and the total current drain is about 14 milliamperes. The life of the battery is estimated at more than 100 hours.

Deluxe Model

The table model receiver shown in the photographs operates from three flashlight D cells. The battery operating cost is estimated to be less than 1/15 cent per hour.

This receiver contains seven transistors, two diodes and one varistor. The intermediate frequency is 455 kc.

Class B push-pull audio output is used. At maximum rated output, the total drain is approximately 30 ma. Idling current is 8 ma.

Two printed circuits boards are employed, one for the audio circuits and the other for the high-frequency circuits.

Sensitivity of the receiver is approximately 500 microvolts per meter. Adjacent-channel attenuation is about 12 db. Image-frequency interference at 1,400 kc is approximately 25 db and intermediate frequency interference at 600 kc is about 20 db.

Undistorted maximum output is 50 milliwatts. The loudspeaker is a 4 by 6-inch elliptical type.

The first three transistor stages contain *npn* triode grown-junction transistors for the mixer-oscillator and two i-f stages. The audio signal is handled by *pnp* alloy-type junc-

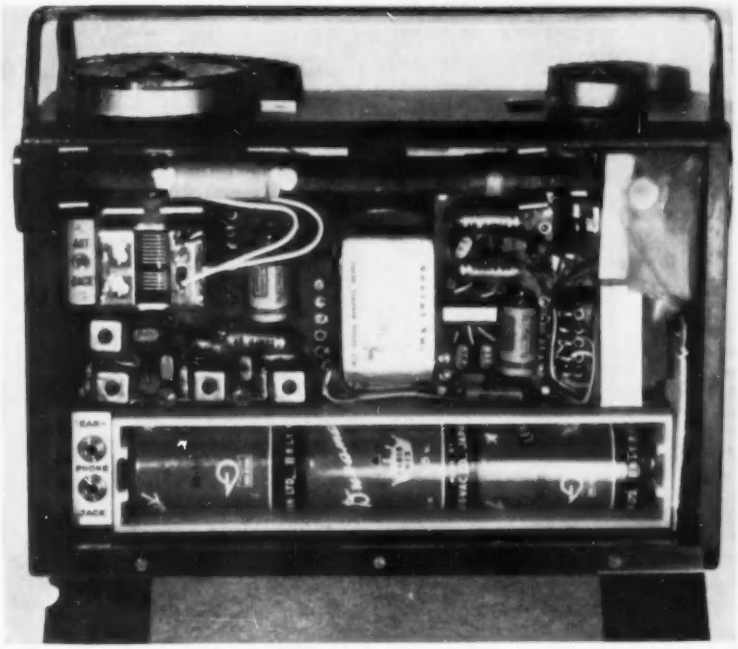

Components in table model receiver are mounted on two printed-circuit boards, one for audio and the other for r-f circuits

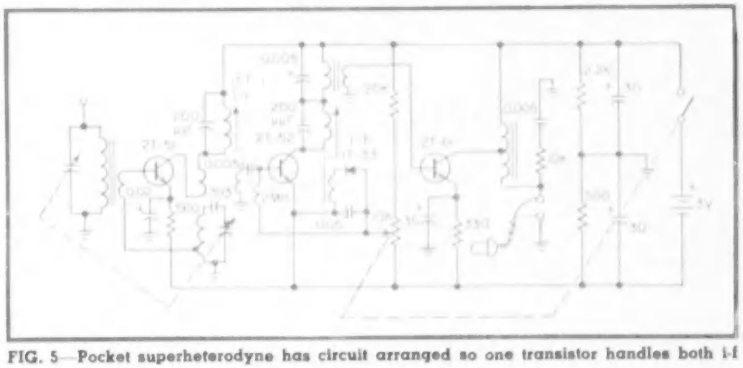

FIG. 5—Pocket superheterodyne has circuit arranged so one transistor handles both i-f and audio signals

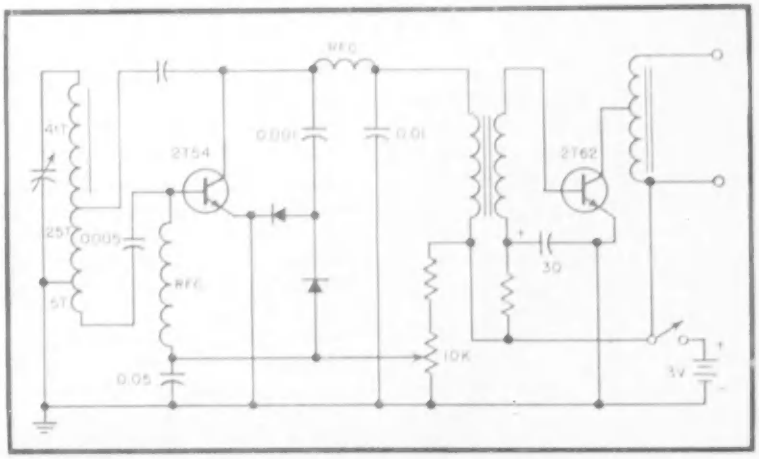

FIG. 6—Regenerative circuit used in two-transistor pocket receiver

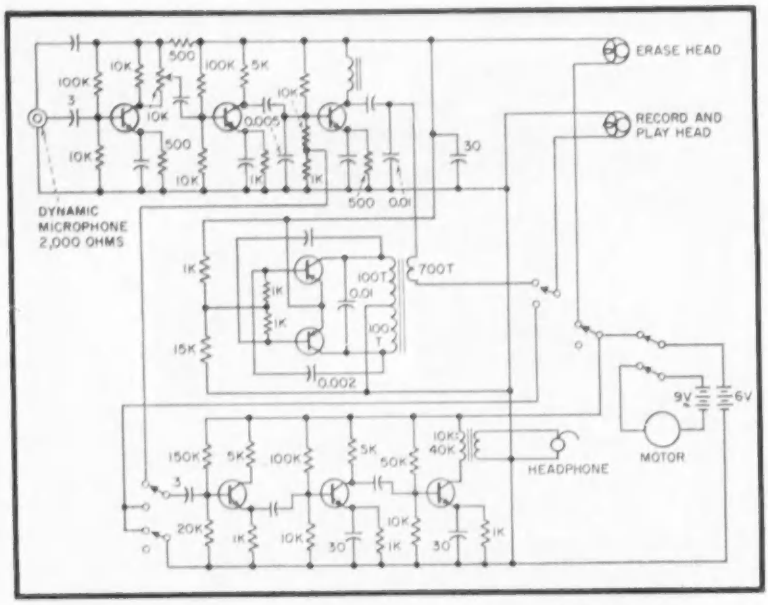

FIG. 7—Complete circuit of battery-operated tape recorder called "Babicorder"

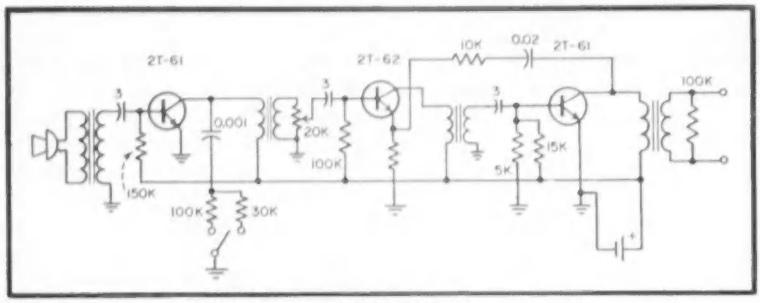

FIG. 8—Single penlight cell powers circuit of hearing aid

tion transistors. Two diodes are used for the second detector and complement of the age circuit. A varistor is used for improvement of the source voltage effect and thermal variation effect of the output circuit.

The antenna consists of a ferrite-cored loop made of two cemented ferrite rods 180 cm long 1 cm in diameter. The effective height of this antenna is greater than that of a core loop antenna. The winding ratio between the large antenna coil and the converter base input winding is approximately 10:1.

The circuits of converter and i-f stages are similar to those of the TR-55 portable radio. The additional circuitry from the second detector to the loudspeaker is shown in Fig. 4 for the TR-72 model.

Audio output of the detector is applied through a capacitor to the base of the first audio amplifier 2T61, then amplified and applied to an audio driver stage having a 2T62. This drives a class B push-pull output stage having two 2T61 transistors.

Pocket Receivers

Quite small in size, two Japanese receivers contain novel circuits that seem to be high in signal-handling efficiency. Both performed well without any external antennas in New York City.

One of these, a superheterodyne, contains only three transistors. Its sensitivity rating is about 1 or 2 millivolts per meter. Output to hearing-aid type earphone is 1 milliwatt.

Positive feedback in the i-f stage and reflexing seem to be the secrets of operation. The circuit is shown in Fig. 5. The i-f is 260 kc. The receiver sells for about $30 in Japan.

The second pocket receiver employs two transistors. One is a regenerative r-f stage and the other an audio amplifier. As shown in Fig. 6, two diodes handle demodulation.

Unlike many tube regenerative stages, hand capacitance effects were barely noticeable, an attribute of the inherent low-impedance circuits involved with transistors. Sensitivity is about 5 millivolts per meter. Output is about 1 mw.

Current drain at 3 volts is 2.5 ma. This set is selling for about $15 in kit form.

Midget Recorder

A transistorized tape recorder is designed for voice recording and uses standard ¼-inch tape in a special magazine. The circuit is shown in Fig. 7.

The motor provides two tape speeds, 1⅞ and 3¾. At the slower speed, one hour of operation is achieved. Nine volts of battery supply the motors and six volts feed the transistor amplifier. Six transistors are used in the amplifier.

The bias oscillator contains two transistors in push-pull. High frequency bias is 25 kc.

The overall signal to noise ratio of the amplifier is 45 db at 1,000 cycles. Input is from a small dynamic microphone and the output feeds a crystal earphone.

Hearing Aid

Three transistors are employed in a low-priced hearing aid. The stages are transformer coupled and negative feedback is used. Input is from a moving-coil microphone and the output feeds a crystal earphone. The complete circuit is given in Fig. 8.

The sound pressure gain is above 40 db and maximum undistorted acoustic power is 120 db. Output level of the microphone is 78 db, with 0 db = 1 volt per dyne per cm² at 1,000 cycles.

Operating power is obtained from one penlight cell whose life is estimated at 300 to 400 hours.—V.Z.

Speed of disk recorder used in tests was cut in half by using special pulley for belt

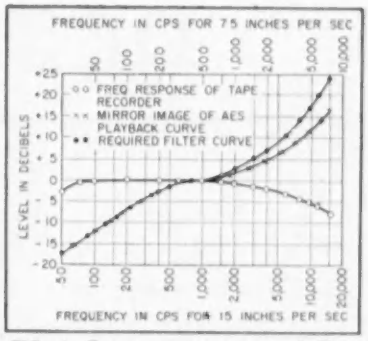

FIG. 1—Frequency response and filter compensation curves for combination tape-disk recording technique. Tape-recorder curve indicates frequency response obtained by recording at 15 inches per second (lower frequency scale) and playing back at 7½ inches per second (upper frequency scale). Use upper scale also for mirror-image of AES playback curve



FIG. 2—Filter circuit for solid-circle curve

TAPE Doubles Response of DISK RECORDERS

SUMMARY —— Signals recorded on magnetic tape at 15 inches per second are played back at half speed to ordinary cutting head of disk recorder modified to run at 16 2/3 rpm. Playback at 33 1/3 rpm then gives full fidelity

By W. E. GILSON

University of Wisconsin Medical School Madison, Wisconsin

THE ADVENT OF high-quality tape recording equipment makes it possible to bring the entire audible range of frequencies within the capabilities of the ordinary disk recorder cutting head. Assume that a signal having a 15,000-cps component is to be recorded on disk. This signal is recorded on a magnetic tape traveling at 15 inches per second. When this tape is played back at 7½ inches per second, all frequencies will have been cut in half. Thus the original 15,000-cps component will now be 7,500 cps. This may easily be recorded by an ordinary cutter. To transfer the signal to the disk at the proper frequency, it is necessary only to rotate the disk-recorder turntable at one-half the desired playback speed. When the disk is played back at its normal speed, all signal frequencies will again be as they were originally.

When a 15-inch-per-second tape recording is played back at half this speed there is a moderate loss of the higher frequencies, as shown in Fig. 1. The drop at 7,500 cps on the upper scale, which was 15,000 cps on the lower scale when recorded, is approximately 8 db with the Magnecord No. 90 and Minnesota Mining tape. The circuit in Fig. 2 compensates for this 8-db loss at 15,000 cps and also provides a mirror image of the AES playback curve for disk recordings. The approximation to this curve has a variation of less than 2 db.

It was found essential to use a tape recorder with a minimum of wow and flutter.

DESIGNING Storage-

SUMMARY — Special cathode-ray tubes for storing information are useful in frequency-bandwidth conversion, mti radar and data storage and analysis. High-voltage power supply, video amplifiers, sweep and blanking generator, focus-current regulator and staircase raster generator used with storage tube are described. Typical use is tv transmission over telephone lines

ABILITY of recording storage tubes to record pictures or other data with over 400-line resolution and full dynamic range has encouraged their use in many applications including frequency or bandwidth conversion, improved radar moving-target indication, data integration and analysis to determine energy distribution curves of atomic radiation, and rapid storage of changing pictures to stop motion and permit recorded information to be analyzed.

Tube Characteristics

The recording storage tube is a special cathode-ray tube available with either magnetic or electrostatic focus and deflection. Since the high voltage, normally 3,000 volts, is lower than for most tv picture tubes, the deflection sensitivity is somewhat greater and the susceptibility of the tube to inhomogeneities of the focus field and external magnetic fields is more of a problem than with most other cathode ray tubes.

The output when reading a stored pattern is an a-m current with a peak value up to 0.5 microampere. For circuit design this output is treated as a high-impedance source shunted by an effective capacitance of about 20 micromicrofarads.

To operate the tube through its write, read, erase and prime modes it is necessary to switch voltages to the storage element and control grid. The speed of mode switching is limited only by circuit considerations. Switching can be accomplished within a few milliseconds with electronic switches or fast-acting relay. A typical storage-tube circuit to write and read at different scan speeds is shown in Fig. 1.

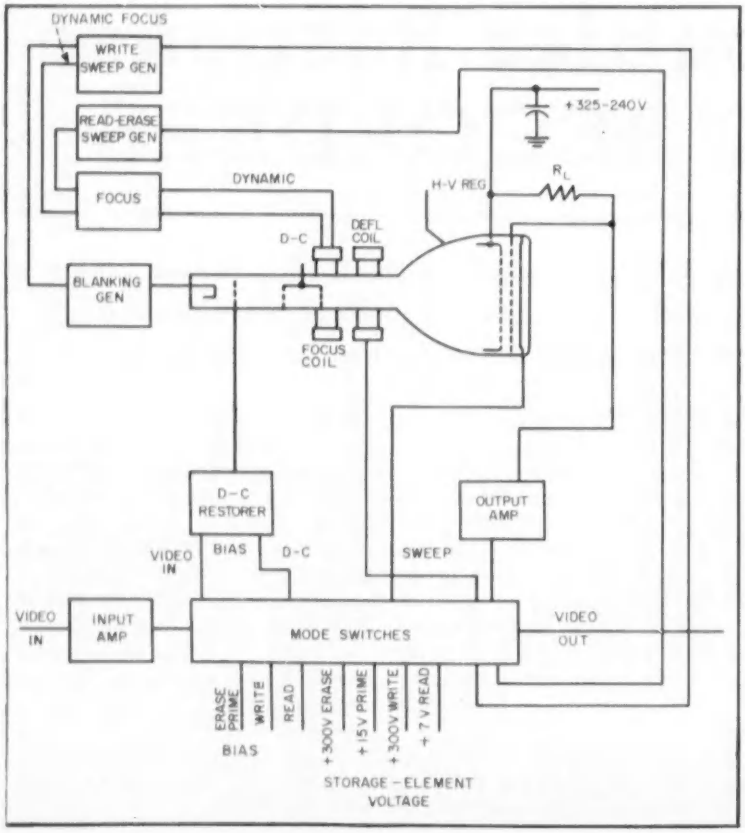

FIG. 1—Read, write and erase circuits used with recording storage tube

Voltage Supplies

The voltages for the tube elements, although interdependent, can often be based upon the amplifier B+ supply. The high-voltage supply should deliver approximately nine times the maximum voltage from the amplifier supply.

With a B+ supply of 325-v, the high-voltage supply should be 3,000 v. Since the optimum voltage for the decelerator and signal electrode will normally be between 8 and 10 percent of anode voltage, a bleeder output can be taken from the B+

Tube Equipment

By J. A. BUCKBEE and A. S. LUFTMAN
Chief Circuit Engineer *Senior Project Engineer*
Raytheon Manufacturing Company
Waltham, Massachusetts

Industrial television system with stored picture on monitor

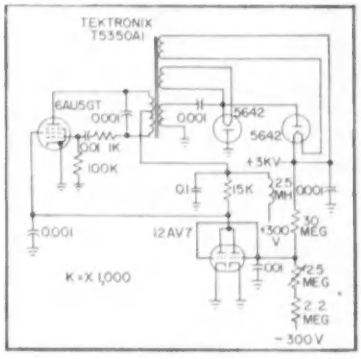

FIG. 2—Regulated high-voltage supply for storage-tube anode

supply which will be variable between 240 and 325 v.

The storage screen potential determines the operating mode of the tube at any instant. Typical voltages would be: for erase, decelerator screen potential; for prime, 15 volts; for read, between 6 and 10 volts; and for high scanning speed writes, the same voltage as for erase. Where slow scanning speeds will be used during write or where the tube will be used to integrate many write scans, the screen voltage for this mode should be decreased to as low as 80 volts.

Bias Level

The bias supply controls the storage-tube beam current and is a reference for the high-voltage supply. It should be well regulated and ripple-free. Besides the reference voltage to the r-f supply, normally −150 v or −300 v, three interdependent outputs with controllable ranges between 0 and −150 v are fed to the storage tube mode-switching unit.

For read, the bias level is such that the storage-tube cathode current will be approximately 3 to 5 microamperes. The write bias is adjusted for storage-tube beam current cutoff. The erase-prime bias is set for between 10 and 50 microamperes storage-tube cathode current depending upon the length of time the storage tube will be in these modes. If the storage tube will be in the erase and prime modes for a combined time greater than one minute, no more than 25 microamperes should be used.

The high-voltage supply must minimize ripple or hum and should provide good voltage stability with line-voltage fluctuations. Since the tube should never be operated with cathode current exceeding 1 milliampere, a low-current r-f supply may be used. Figure 2 illustrates a typical r-f voltage supply.

The method of control compares the high-voltage output with a reference voltage across a bleeder and uses an amplified error signal to control the screen voltage of an r-f oscillator. The oscillator output is rectified and filtered to provide the hum-free high-voltage output.

Table I—Time Allocation for Ten-to-One Band Compression

Mode	Time in Milliseconds	
	Tube 1	Tube 2
Write	0-1,000	1,000-2,000
Switch	1,000-1,050	2,000-2,050
Preread	1,050-1,150	2,050-2,150
Switch	1,150-1,200	2,150-2,200
Read	1,200-1,300	2,200-2,300
Switch	1,300-1,350	2,300-2,350
Erase	1,350-1,500	2,350-2,500
Switch	1,500-1,550	2,500-2,550
Prime	1,550-1,950	2,550-2,950
Switch	1,950-2,000	2,950-3,000
Write	2,000-3,000	3,000-4,000

Auxiliary Components

The deflection coil is dependent on the type of scanning and the frequencies. Where raster scan and sweep frequencies comparable to or less than television standards are used, good quality cosine television yokes are acceptable.

However, when it is necessary to track scan lines between write and read, the effective impedance of the yoke to the input deflection signal must be identical for the two sweep rates or compensated externally. Low-reactance deflection coils approximate the desired condition. High-quality radar ppi yokes and push-pull balanced deflection raster yokes are frequently used for special applications.

In low-electron-velocity cathode-ray tubes the beam is sensitive to inhomogeneities in the focus field. Therefore a focus coil with a homogeneous Swedish iron shell is normally used. Typical coils have two sets of windings. One is composed of approximately 17,500

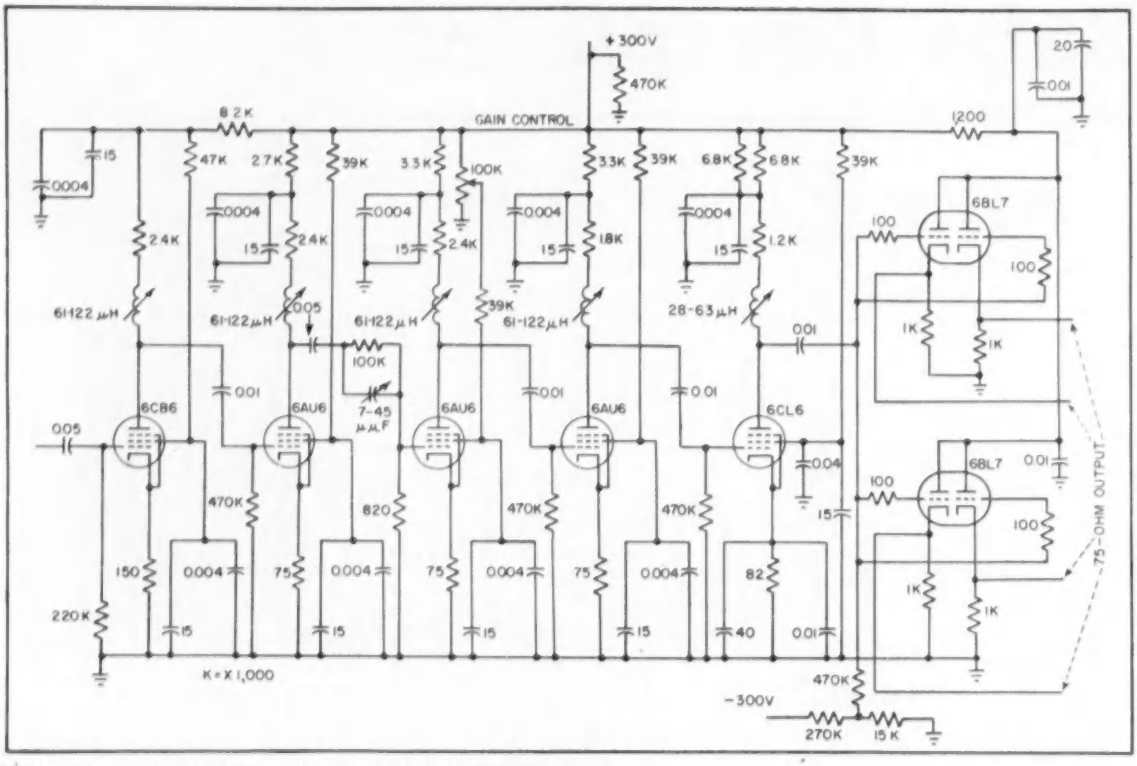

FIG. 3—Typical output amplifier with response flat from 600 cps to 3.5 mc

turns and used for d-c focusing of the beam in the region approximately half the distance from the tube center. The other is composed of less than 1,000 turns located in the air gap and can be used dynamically to focus the electron beam and thus maintain proper focus on the storage element regardless of deflection angle.

Storage-tube simulators (such as the QK-545) may often be used in place of the storage tube during setup for adjustment of sweep magnitudes and for viewing input video signals directly on a fluorescent surface to check the amplifier. These simulators have the same physical specifications and electron gun as the magnetic-deflection storage tube but in place of a storage assembly have a long-persistence fluorescent screen.

Video Amplifiers

The bandwidth of the video amplifiers must be adequate to pass the signal without phase or amplitude distortion and yet should not be excessively wide if good signal-to-noise ratio is to be maintained and if reasonable gain per stage is required. Where high-quality signals will be fed the storage equipment, the recording storage tube may be the limiting factor to overall equipment bandwidth. The resolution of a typical QK464/RK6835 provides 100 percent output at about 275 lines and 50 percent output at about 475 lines per diameter.

Where a standard 4 × 3 television raster with a 15,750-line scanning rate will be inscribed in the circular storage area, the frequency bandwidth of the tube will be flat from 60 cps to about 1.75 mc and down 6 db at 3 mc with approximately a 6-db roll-off per octave thereafter. An amplifier bandwidth greater than 4 mc is of little value in this instance.

Figure 3 shows a typical storage-tube output amplifier flat between 600 cps and 3.5 mc designed for equipment where four video outputs of 5-v peak were required for four remote indicators. Despite the 20-$\mu\mu$f capacitance from storage-tube signal electrode to ground, an equivalent load resistance of 100,000 ohms is used. The frequency drop-off is compensated for by the high-peaker circuit at the input of the third amplifier.

Bandwidth Adjustment

The amplifier was tuned for a 3.5-mc flat response with the peaker circuit replaced by a 470,000-ohm grid leak. The high-peaker was reinserted and, with a 220,000-ohm resistor feeding a 20-$\mu\mu$f capacitor across the input terminal to simulate a storage tube in the circuit, the 7 to 45-$\mu\mu$f capacitor was adjusted. This compensated for the shunting of high frequencies through the input capacitance so that the frequency response curve was again flat. Final adjustment is usually made after the storage tube is in operation.

Pulses with steep rise waveforms are fed through the tube and the amplifier while the amplifier peaking circuit is trimmed for minimum pulse distortion as viewed at the output. As with most video amplifiers, interstage wiring and component location has to be planned so that wires carrying video are as short as possible.

A final check of the video amplifier can be made with the storage tube used as an amplifier with a gain substantially less than one. This is accomplished by feeding a video signal, similar to that actually to be stored, through the storage tube and amplifier chain while the storage tube is in the write mode. The signal as viewed at the output of the final amplifier should not be substantially degraded over the original input.

Sweep and Blanking

The sweep generator and blanking circuit are frequently combined on a single chassis as shown in Fig. 4. A ppi sweep length can be changed by switching the R_1 and R_2 in the multivibrator section while simultaneously switching the 0.0025 and 0.005-μf capacitors of the saw-tooth generator feeding the deflection yoke.

Using the same principle to provide scan conversion, the switch can be a fast-acting dpdt relay, controlled by the master mode-switching circuit so that one sweep speed can be used for erase, prime and write, while the second sweep can be used for read.

The blanking generator is composed of ½ of a 5692 and its 3,300-ohm cathode resistor. The storage-tube cathode is connected to the cathode of the triode and the cathode resistor is common to both tubes. When the blanking generator is conducting, the voltage across the cathode resistor cuts off the storage tube, but when the blanking generator is cut off by the pulse from the sweep-generator multivibrator during a line scan, the storage-tube cathode is effectively grounded through the resistor and its bias is determined by the grid voltage setting.

Thus the storage tube is unblanked by the same pulse which generates the saw-tooth sweep and blanked during retrace.

Additional protection against sweep failure on the storage tube caused by loss of power to the sweep and blanking generator is obtained by the power-supply relay. It breaks the input to the storage-tube high-voltage supply when the relay coil is deenergized.

Sweep generation of scanning patterns such as television rasters, spirals, or staircase scans can be accomplished using circuitry similar to that used with a tv picture tube. However, the deflection power requirements of the storage tube will be less. The only exception to this can be caused by tracking requirements between read and write or scan linearity requirements.

Focus

Frequently there is a gradual drift of focus caused by the temperature rise in the focus coil during warmup, with a resultant increase in winding resistance and decrease in current through the windings if the coil is fed from a voltage source. Figure 5 illustrates a current-regulating circuit to prevent this drift.

Since the electron-collimating lens in the recording storage tube causes electrons deflected near the periphery of the storage area to traverse a much longer path than those striking the center, deflection defocusing is encountered. This can be compensated by a dynamic

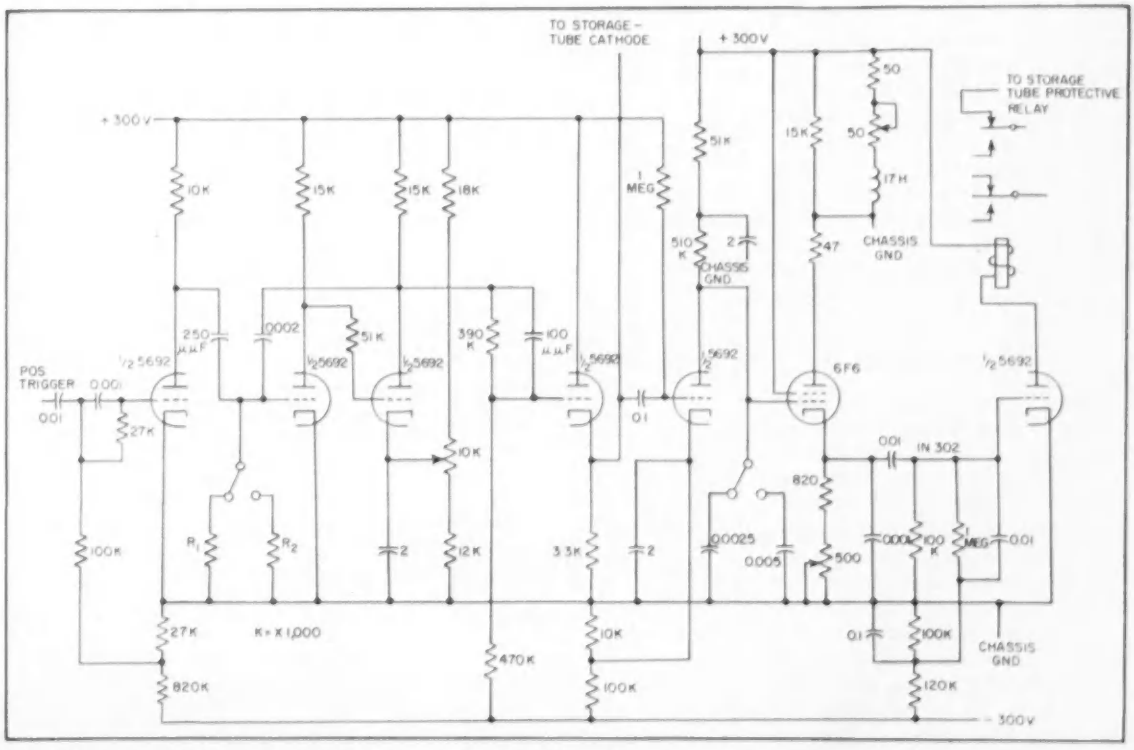

FIG. 4—Sweep and blanking generator. Relay deenergizes high-voltage if sweep circuit fails



FIG. 5—Focus-current regulator

focus field so generated that the focal length of the lens is increased as the beam is deflected toward the periphery of the storage area.

In a radial scan system a sawtooth in synchronism with the sweep may approximate the desired dynamic focusing although a parabolic curve would be more accurate. For raster scans the dynamic focus correction must include components due to displacement from both the X and Y axes. The circuitry for such dynamic focus is similar to that used in color television equipment.

Mode-Switching

The mode-switching circuits switch voltages at the storage tube and, in some instances, permit alternating between fast and slow scan deflection speeds. The switching can be controlled by an electronic timing circuit or by synchronizing pulses from a master timer which will control the time intervals to be allotted to the read, erase, prime and write modes. It may be manually operated when automatic timing is undesirable or unnecessary.

Tubes in Tandem

A four-mode storage cycle makes impossible a continual flow of input and output from a single storage tube. Where the time cycle for operation is proper, two or three recording tubes operating sequentially in the various modes can provide the desired continuity of intelligence.

For a 10-to-1 band compression where the complete cycle of operation is allotted 2 seconds and where a continuous flow of input information must be recorded, a planned time allocation cycle may be set up as illustrated in Table I.

One of the two storage tubes is always recording incoming information. This information is transmitted in a compressed form during the third 1,000-millisecond period after the start of each cycle, following which the tube is prepared for the next write mode.

A fifth mode, preread may be useful. Conditions are identical to read except that the output signal is not transmitted. Prereading is not necessary if the signal will be read out many times and used for a visual presentation, but may be desirable where a single read-out of high quality is required. The prereading permits overwritten stored signals to stabilize and also permits charge redistribution to reduce spurious noise peaks.

Design Problems

A typical application for storage tubes is to transmit television signals over telephone lines or over a microwave channel with a frequency bandwidth far less than the desired 4 to 4.5 mc. The tube is used for bandwidth compression at the transmitter and expansion at the receiver. The television signal normally transmitted in 1/60 second is slowed down so that the transmission time is 6 seconds and the frequency components in the signal are 1/360 of their initial value.

The circuitry for the compressor is in general identical with that described with the exception that the storage tube output amplifier must be capable of passing frequencies well below 1 cps. The sweep generator for the low-speed scan may cause design problems since the vertical sweep is equivalent to one cycle in 6 seconds.

Burst Transmission

The storage-tube application using tubes in tandem requires that in the transmitter a continuous flow of information be time-compressed into short bursts of higher-speed information. In the receiver these bursts are time-expanded to form a continuous flow of information. In both the transmitter and receiver, storage-tube units were developed to perform the band compression and/or expansion. Each storage unit contains two storage tubes alternately switched between fast and slow sweep speeds and between modes of storage-tube operation. In the transmitter, each tube is written for a fixed period, for example 1 second. During the alternate 1-second periods the signal is read out in a rapid burst and the tube is erased and primed so that it is again ready to write.

A staircase raster eliminates retrace gaps and simplifies circuitry. A 100-line raster is generated from sync pulses at the desired line frequency in a manner similar to that shown in Fig. 6.

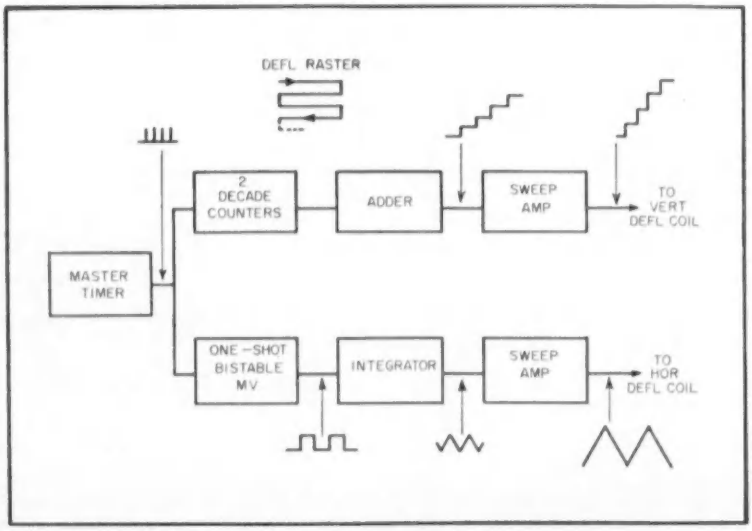

FIG. 6—Staircase raster generator for transmitting information in fast bursts

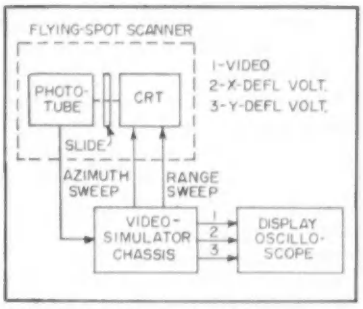

FIG. 1—Complete radar display system for three-dimensional presentation

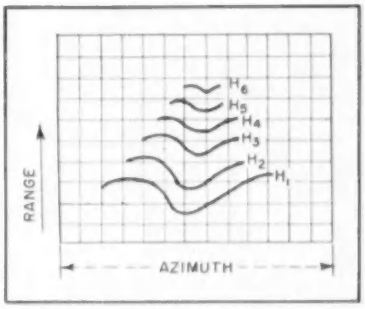

FIG. 2—Typical terrain-contour-line slide for flying-spot scanner

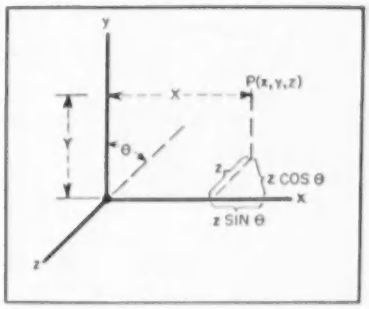

FIG. 3—Coordinate system for developing simulated-video signal

Three-Dimensional Radar VIDEO SIMULATOR

SUMMARY —— Terrain-clearance radar data is presented as three-dimensional oscilloscope display by using simulated-video generator and conventional flying-spot scanner. Equipment permits study of displays under realistic, but controllable, conditions

By PETER PIELICH

Senior Electronics Engineer
The Glenn L. Martin Company
Baltimore, Maryland

CONVENTIONAL RADAR DISPLAYS are restricted to a two-dimensional representation of a three-dimensional situation despite the general availability of range, azimuth and elevation data, which provide three-dimensional point coordinates.

An investigation to determine the feasibility of displaying terrain-clearance radar data in three-dimensional form established that mechanization of such a display is a relatively simple matter.

System

Picture video which provides a reasonable approximation of a three-dimensional radar display may be generated by the equipment shown in Fig. 1. A conventional television flying-spot scanner, modified to operate at radar scanning rates (1-cps azimuth scan rate and 3-kc range sweep rate), is used to scan a slide on which is represented the terrain to be reproduced, as in Fig. 2.

The terrain is described by six contour lines. Each contour line defines the range and azimuth of the terrain at a particular height level. The H_1 line describes the terrain at the lowest level. The H_6 line describes the terrain at the sixth or top level.

The video obtained by scanning the slide is converted to simulated radar video in the video-simulator chassis. This simulated radar video is then used to intensity-modulate a cathode-ray tube oscilloscope to obtain a projection of the scanned terrain. The X and Y oscilloscope deflection voltages are obtained by combining the x, y, and z sweep voltages generated in the video-simulator chassis.

Video-Simulation Theory

If electrical data representing the coordinates of the points of a solid are available, a two-dimensional pictorial projection of the solid can be generated on a cathode-ray oscilloscope screen.

The relation between the projection coordinates, X and Y, and the three-dimensional rectangular coordinates x, y and z of point P of Fig. 3 is given by

$$X = x + z \sin \theta,\ Y = y + z \cos \theta \qquad (1)$$

Since the viewing angle θ between the x and z axes of the plane projection is a constant,

$$X = x + K_1 z,\ Y = y + K_2 z \qquad (2)$$

The equations

$$E_X = E_x + K_1 E_z,\ E_Y = E_y + K_2 E_z \qquad (3)$$

therefore give the simple electrical relations between the projection voltages E_X, E_Y and the rectangular coordinate voltages E_x, E_y, E_z. If E_X and E_Y are applied as X and Y cathode-ray tube deflection voltages, point P will appear as shown in Fig. 3, in the correct relation to the X and Y projection axes.

If voltages E_x, E_y, E_z of Eq. 3 represent the instantaneous coordinates of a surface or solid, deflection voltages E_X and E_Y will trace the projection of the solid on the cathode-ray tube screen, generating

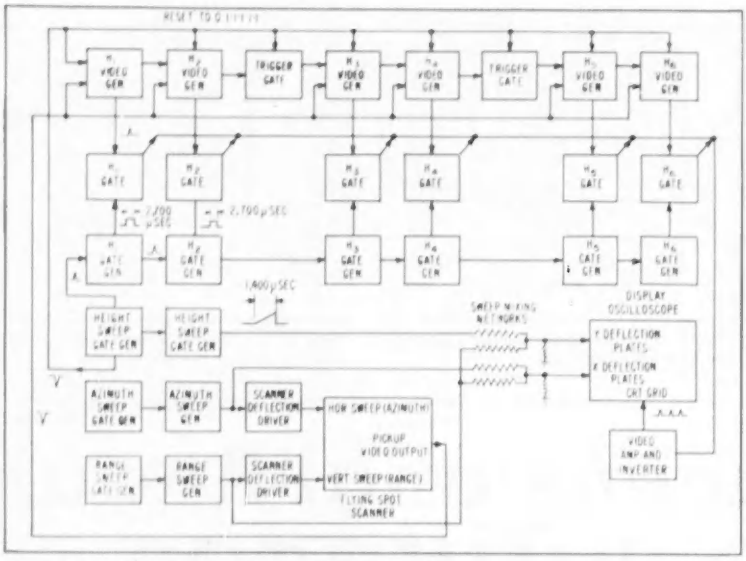

FIG. 4—Block diagram of radar-video simulator equipment

a three-dimensional picture.

The block diagram of the video simulator is shown in Fig. 4 and the circuit diagram in Fig. 5. Figure 6 is the circuit of the flying-spot-scanner range and azimuth sweep chassis.

Three astable multivibrator sweep gates generate three sawtooth sweeps. The azimuth sweep, in the sweep chassis, has a duration of one second and represents the radar-antenna azimuth sweep. The height sweep, in the simulator chassis, is 1/60 second in duration and corresponds to the vertical component of the antenna scan. The range sweep, in the sweep chassis, is approximately 100 microseconds in duration and provides a time base equivalent to 10 miles of radar range.

Video Generation

As the slide (Fig. 2) is scanned by the moving spot, a video output pulse is obtained whenever a line is intercepted. The pickup video output appears as shown in Fig. 7 if six lines are intercepted by the spot in one range interval.

The range (time) position of

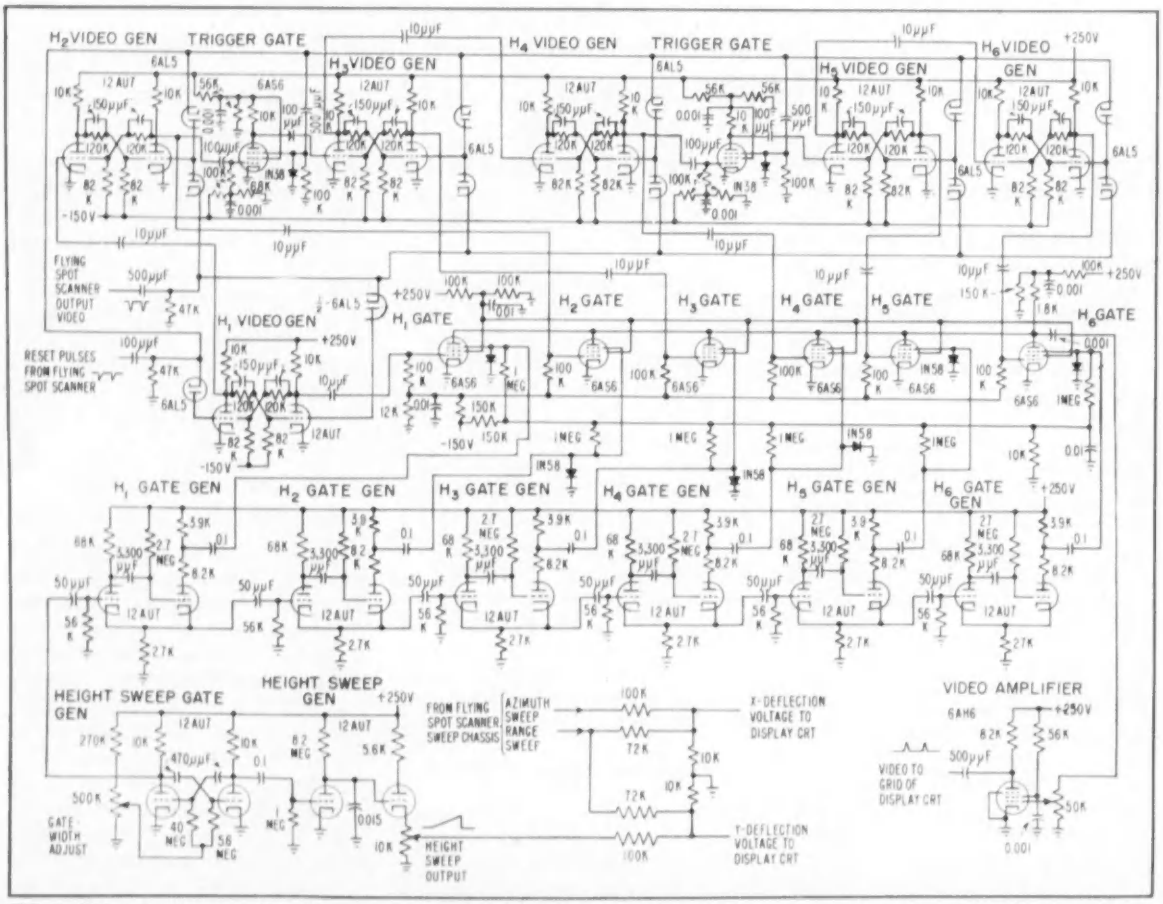

FIG. 5—Video simulator provides video signal for grid-modulation of crt and height-sweep-signal component of Y-deflection voltage

each pulse is determined by the position of the lines on the slide. As the azimuth sweep moves successive range sweeps across the slide, the range position of the video pulses will vary in accordance with the range positions of the corresponding lines.

The pickup video is applied as a parallel input to a series-coupled bistable multivibrator chain comprising video generators H_1 to H_6. Coupling within this chain is such that a multivibrator may be triggered only if it has been enabled by a trigger pulse from the preceding stage.

The H_1 multivibrator is enabled by the reset pulse so an output, a positive excursion of the output plate, is obtained in response to the first video input pulse (H_1 pulse). The corresponding negative output of the opposite plate of the H_1 multivibrator is used to enable the following stage, the H_2 multivibrator.

The second video input pulse triggers the H_2 multivibrator and enables the H_3 multivibrator, which then can be triggered by the third input pulse. The remaining multivibrators are successively enabled and triggered in this manner, each thereby responding to only one specific input pulse.

The action of the chain in response to a train (one range interval) of input pulses is diagrammed in Fig. 7. The trailing edges of the output plate wave forms are differentiated to form positive pulse inputs to pentode gating stages H_1 to H_6.

Height Gate Generation

The H_1 to H_6 height gate generators comprise a series-coupled chain of monostable multivibrators. The first is triggered in coincidence with the beginning of the height sweep.

Each of the following is triggered in succession by the end of the preceding gate waveform, so six 2,700-μsec-height gates are generated within each height sweep interval as shown in Fig. 8.

The H_1 to H_6 height gates thus generated enable gating stages H_1 to H_6 respectively. The pulse inputs to these gating stages are the respective H_1 to H_6 video pulses generated by the video-generator chain. The output at the common plate load of the gating stages is therefore a series of video pulses, which are gated in time sequence.

The H_1 video pulses appear only during the H_1 height gate interval, the H_2 (second) video pulses only during the H_2 height gate interval and so on. The video pulses appear distributed in height in accordance with their relative positions on the range sweep. As the height sweep moves the indicator cathode-ray tube spot upward, these video pulses appear as intensity modulations distributed along the y or height axis.

The trigger gates shown between pairs of bistable multivibrators are disabled by the reset pulse during the reset-pulse interval. If this buffer action is not provided, a multivibrator that may have been enabled but not triggered during one cycle will, when reset, enable the following stage, which will then be triggered by the first input pulse of the succeeding cycle. The trigger gates eliminate this possibility by isolating the critical stages during reset time.

The maximum number of height steps obtainable is limited only by the resolving time of the bistable multivibrators in the video-generator chain. This resolving time must be smaller than the separation in microseconds between contour lines on the slide.

The operation of this equipment permits the study of displays under realistic, yet controllable, objective and subjective conditions.

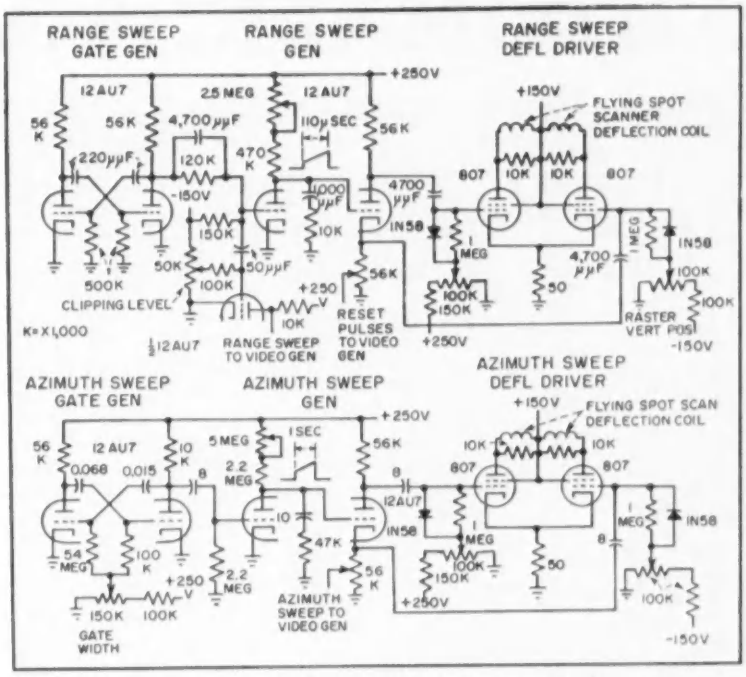

FIG. 6—Flying-spot-scanner sweep chassis generates range and azimuth sweeps



FIG. 7—Video generator chain output



FIG. 8—Height gate generator output

AUTOMATIC TUNING for

SUMMARY —— **Frequency-selecting dial operates servo system which tunes transmitter stages and adjusts loading of final stage. Combination of wide and narrow band discriminator circuits pulls servos into critical tuning position over wide frequency range**

TO MAINTAIN communications in the high-frequency spectrum, it is often necessary to have transmitting equipment capable of quick frequency change. In the transmitter shown in the photographs, a new frequency is selected by setting the desired frequency on a counter dial and pushing a button. Phase-operated servo systems and automatic controls direct the adjustment of the transmitter and within thirty seconds the equipment is ready for transmission on the new frequency.

The exact frequency, which has a stability of 1 part in 10^8 per day, is displayed on a counter dial. Output of the final amplifier is 4 kw peak envelope power for twin-sideband operation c-w, 5 kw a-m or c-w, in a frequency range from 1.5 to 30 mc.

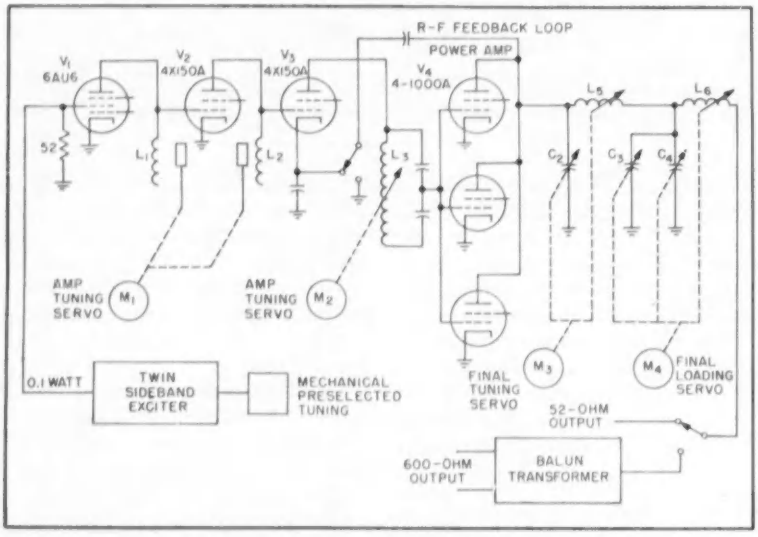

FIG. 1—Simplified diagram of r-f amplifier shows stages tuned by servo system

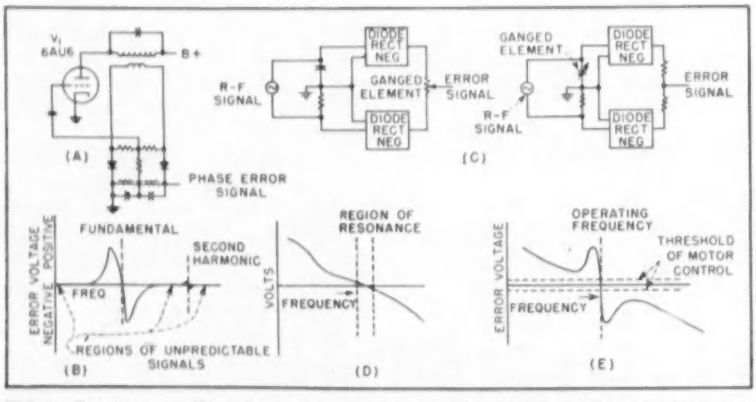

FIG. 2—Discriminator (A) with sharp response curve (B) is combined with R-C discriminator (C) with broad response (D) to obtain wide range with critical null (E)

Tuning Cycle

A tuning cycle begins when the operator either turns the exciter control dial to a new frequency or selects any one of ten previously dialed frequencies by setting a channel switch. Channel selection positions, by direct mechanical linkage, all the tuned circuits in the exciter including the stabilized master oscillator, mixer and variable-gain r-f amplifier circuits.

While the automatic tuner is in motion, a contact causes a tuning relay to energize. This relay reduces plate and screen voltage to protect the high-level amplifier tubes from over-dissipation. The tuning relay also operates the carrier reinsert circuit in the twin-sideband exciter to supply a signal on carrier frequency for the amplifier to tune. An additional contact on the relay ungrounds the grid of a differential amplifier allowing rectified d-c from the power-amplifier-tuning and loading-rate generators to be applied to the grid of a differential relay.

Upon reaching the new frequency, the automatic tuner shuts off and the reinserted carrier of proper frequency is applied to the amplifiers. A sample of this signal is rectified and compared with a rectified r-f sample of opposite polarity from the

High-Power Transmitter

By V. R. DeLONG

Collins Radio Co.
Cedar Rapids, Iowa

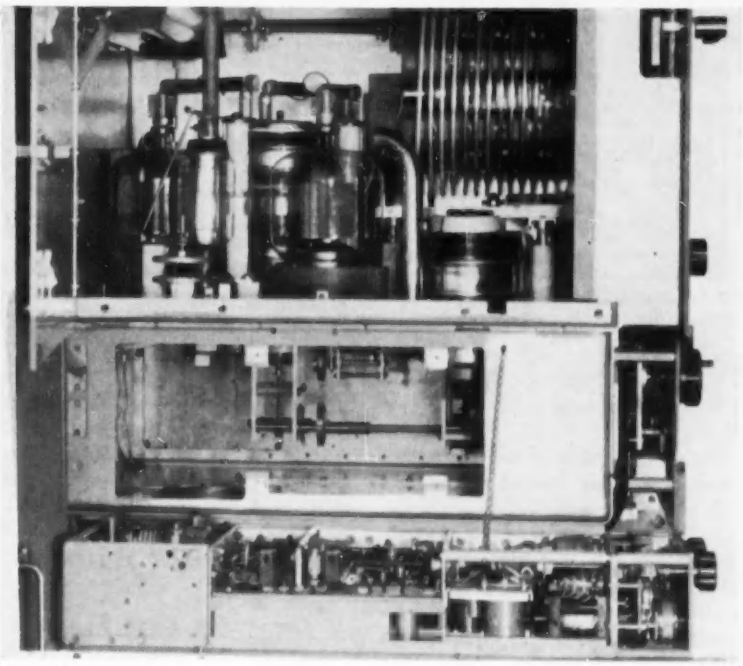

Twin-sideband transmitter is automatically tuned by setting exciter control to desired frequency

final amplifier. Since the amplifier is not tuned yet, no signal is available from the power amplifier. The resulting net signal from the comparing circuit is applied to the differential amplifier causing the differential relay to operate and lock the transmitter in tuning position until the tuning cycle is complete.

By coarse-positioning and discriminator circuits, the four tuning controls simultaneously proceed to seek the proper tuning positions for resonance. Once resonance is approached a rectified r-f signal is available from the power amplifier that allows the differential amplifier to deenergize the tuning relay and switch to full power before all the circuits are accurately tuned. To avoid this condition, the differential amplifier is fed with a rectified signal from the power-amplifier-tuning and loading-rate generators. Thus the transmitter remains in tune until the power amplifier tuning requirements are satisfied.

Once all tuning requirements have been satisfied the rectified rate signal applied to the differential amplifier decays to zero and the tuning relay is allowed to de-energize. This action turns off the carrier reinsert, makes the two audio channels ready for use and turns on a light on the front panel. Within thirty seconds the transmitter is on frequency with 5 kw available at the antenna.

Exciter Tuning

Due to the extremely low power levels involved, the twin-sideband exciter uses receiver-type construction. Tuning is continuous across the frequency range from 1.7 to 32 mc using a bandswitch and ganged permeability-tuned coils. Output from the exciter is fed into a terminated coaxial cable to drive the final string of linear amplifiers.

Figure 1 is a simplified schematic of the r-f circuits. The first stage, a miniature-receiver type pentode with a permability-tuned coil, drives a larger tetrode which also uses a permeability-tuned coil. These two stages comprise tuning control M_1. The second tetrode stage is resonated by a small roller coil actuated by control M_2. This stage has allowances to receive r-f feedback from the final amplifier in single-sideband operation to improve the linearity of the amplifiers. A motor-driven bandswitch changes tank-circuit capacitors in the first three tuned stages.

The final amplifier is resonated by control M_3 and loaded by control M_4. Tuning elements are continuously variable and consist of vacuum capacitors and large screw coils. These elements, partially visible in the photographs of the r-f chassis, are ganged to cover from 1.5 to 30 mc without switching.

Discriminator Circuits

In the vicinity of resonance, the information for positioning of controls M_1, M_2 and M_3 can be obtained from the Foster-Seeley type phase discriminator shown in Fig. 2A.[1] As the error curve of Fig. 2B indicates, this discriminator supplies adequate information for operating the servo system only when the tuning control is near resonance.

This phase discriminator also gives a response to second harmonic tuning. Were this the only information available, the transmitter might tune to a multiple of the desired frequency. It might even fail to tune at all, should the control stall in the region of unpredictable signal which is in general below the threshold to servo control. To overcome these difficulties, the coarse frequency discriminators shown in Fig. 2C are employed. These circuits are a simple series R-C network fed with a small amount of

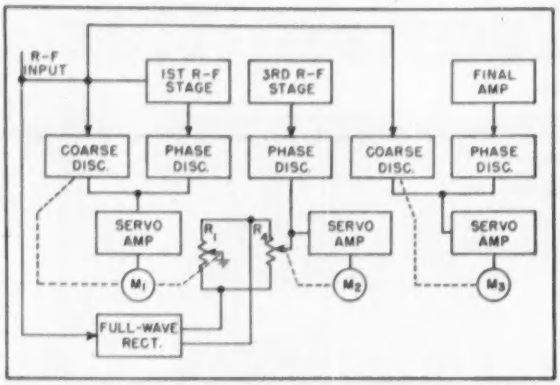

FIG. 3—Method of combining outputs of coarse and fine discriminators to obtain wide range servo drive signal

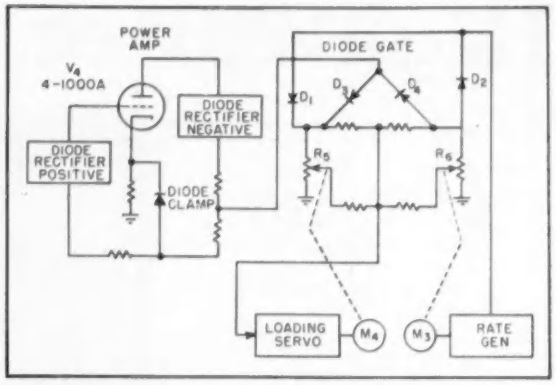

FIG. 4—Diode gate prevents loading-servo from operating until amplifier stages have been tuned

r-f voltage from the exciter and having a response curve as shown in Fig. 2D.

One discriminator uses a potentiometer output ganged to the control requiring positioning information. The servo system searches for a null from the potentiometer. Position of the null changes with frequency due to the change in capacitive reactance that switches the balance of the bridge circuit. The null function so generated may be matched to the mechanical tuning curve of the control shaft by nonlinear potentiometers, tailoring of R-C circuit constants or both. The potentiometer version of this discriminator was found to lend itself well to the band-switched amplifier circuits. Various values of capacitance were switched into the R-C circuit for each of five bands.

Use of a variable capacitor is shown in the second version of this circuit. The circuit with the capacitor as the variable element was found to be more easily tracked to the final tank circuit.

In combining the two discriminator outputs, use was made of the fact that the phase discriminator has a rather high gain in the vicinity of resonance, as indicated by the steep slope of the error curve, while the coarse discriminator has a constant gain throughout the entire shaft travel. Addition of the two curves in the proper gain relationship yields a curve similar to Fig. 2E.

The phase discriminator and coarse discriminator error signals are both a function of the r-f driving voltage. This allows the system to resonate on varying amplitude signals as will be obtained from the exciter in single-sideband service. It is also necessary that these servos do not drift in a no-signal condition. This requires that all noise in the servo circuits be held well below the threshold of motor control.

Combining Error Signals

Figure 3 is a simplified block diagram indicating how the coarse and fine information is combined. A coarse discriminator connected to the r-f input plus a phase discriminator connected around the first r-f stage yields information to position control M_1. Servo M_1 indicates its position to M_2 by setting potentiometer R_1. Coarse positioning for M_2 is obtained by a follow-up potentiometer system involving R_1 and R_2. Source voltage for this scheme is developed directly from the r-f input signal with a full-wave diode rectifier.

Since both the coarse and fine error signals are obtained from the r-f signal, the control of M_2 meets the requirement of proper position error signal whether the r-f be modulated or even reduced to zero potential for periods of time.

Final Tuning

As indicated in Fig. 3, the M_2 coarse discriminator obtains its information directly from the r-f exciting voltage. This allows the final tank circuits to do their rough positioning simultaneously with the driver circuits, hence, reducing the overall tuning time. Once again both types of servo control voltage, coarse and fine, are obtained from the r-f signal voltage resulting in proper position error voltages regardless of the type of modulation applied to the r-f signal.

Final Amplifier Loading

Loading the final amplifier for proper tube operation presents different problems than the tank-circuit tuning. Figure 4 is an outline of the basic circuits employed. For linear operation the ratio of the output from linear diode rectifiers connected by dividers to the plate and grid of the final amplifier will give an indication of the amount of plate loading. However, when the stage is driven into distortion or operated class C, the grid-diode

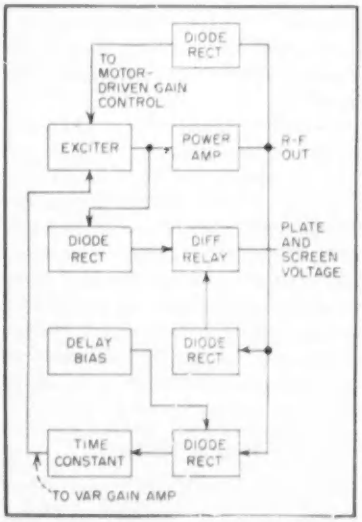

FIG. 5—Automatic load control and differential relay section of automatic tuner r-f section of automatically tuned high-power transmitter

voltage will increase faster than the plate-diode voltage. A diode clamp was added to prevent the rectified grid voltage from exceeding a value of voltage proportional to the plate current of the amplifier.

Proper adjustment of rectified plate voltage, rectified grid voltage and plate current sample, yields a loading-error voltage source that gives a null indication for the proper value of loading regardless of the operating conditions of the final tubes.

Unfortunately, the error signal from this composite detector-comparing circuit is correct only when control M_2 has the plate tank circuit tuned to resonance and a method is required to shut off the loading signal when it is in error. Since the loading signal would be incorrect whenever control M_2 is in motion, a gate circuit is operated from voltage obtained from the rate generator bus of control motor M_2. Diodes D_1 and D_2 rectify this 60-cps voltage creating equal negative and positive sources of voltage which bias-off diodes D_3 and D_4 blocking the incorrect error signal that originated in the loading comparator circuit. Nulling of control M_2 yields zero rate voltage allowing the gate to open and pass the now correct loading signal to the amplifier.

It is necessary to supply coarse position information to the loading servo. As the loading comparator does not give an S-shaped curve, it is not possible to directly add coarse information to obtain sufficient positioning accuracy. In addition, the loading-control position varies with different antenna impedances, a factor which makes tracking of a directly added coarse information circuit impossible. Hence, a coarse position system was devised whose signal decays to zero whenever good fine-position information is present.

The voltages developed by the M_2 rate generator and rectified by gate blocking diodes D_1 and D_2 are used to power a follow-up potentiometer system connecting the tuning and loading controls. Whenever the final tuning control operates, it causes the loading fine signal to be disabled and the loading coarse-position system to be actuated. In this condition, the loading control follows the tuning control. Once resonance has been reached, M_2 stops, disabling the follow-up potentiometer system, and control M_1 completes its task using the now correct fine-position signal.

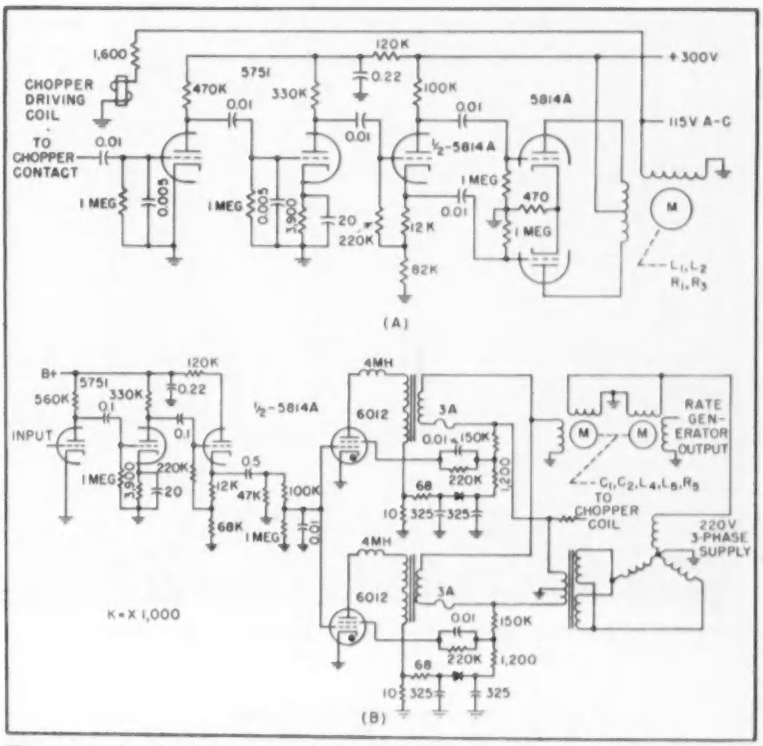

FIG. 6—Circuits of 1½-watt (A) and 25-watt (B) servo amplifier systems

Tube Protection

During periods of mistuning, protection must be given to the high-power tubes. When amplifier gain falls below a minimum level, a differential relay circuit comparing input and output r-f signals operates to reduce the plate voltage and screen voltage on the power tubes.

In single-sideband service, it is necessary to maintain overall circuit gain constant from the audio input to the antenna. Utilizing a motor as an infinite integrator, a constant gain is maintained from the antenna to a point in the low-level exciter (in this particular case to the 100-kc output of the balanced modulators) by comparing diode-rectified r-f signals from the low-level stages and the final amplifier, amplifying the result and using it for motor control.

It was found possible to maintain gain to about 1 db for various frequencies in the operating range. Following this degree of adjustment, a more dynamic control of the gain is effected with the automatic load-control circuit of Fig. 5.[2] This is a diode-rectifier circuit with delay voltage adjusted to hold conduction off until an r-f signal is encountered which would ordinarily drive the linear amplifier beyond its peak envelope power rating. These peaks cause the automatic-load-control diode to conduct and supply a negative signal on the alc bus. This control voltage feeds a variable-gain amplifier strip in the exciter, reducing the overall gain to a satisfactory level. This gain control is done ahead of the motor-driven gain adjuster in the exciter to prevent interaction and is tempered by a fast-attack, slow-delay time-constant circuit.

Figure 6 displays the circuits of the 1½ and 25-watt motor servo-amplifier systems.

Work done on the equipment described was in connection with Signal Corps Contract DA36-039-sc-36524.

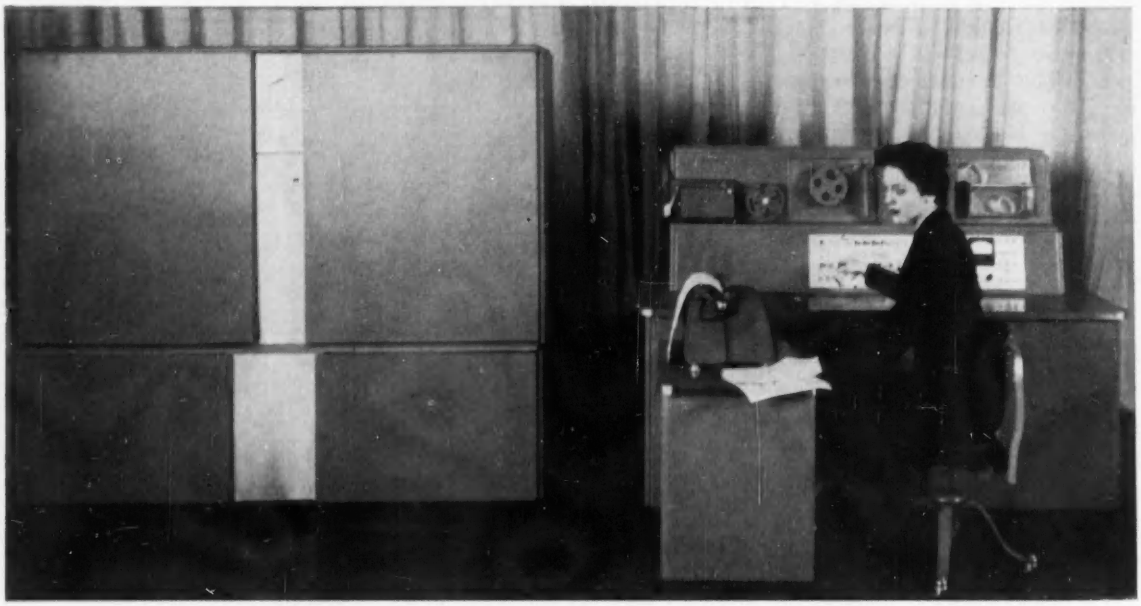

Installation comprises cabinet and desk-sized console. Input/output includes punched paper tape, typewriter and remote line

USAF Computer Uses

USE OF HIGH-SPEED pulse-type magnetic amplifiers provides an alternative to use of transistors as replacements for electron-tubes in digital computers.

A high-speed general-purpose engineering computer recently described by Remington Rand Univac engineers illustrates how magnetic amplifiers can be used in computing circuitry. The computer described was developed by Sperry Rand for the Air Force Cambridge Research Center.

The computer can add two 10-digit numbers in 90 microsec or multiply them in from 0.3 to 1.7 millisec. Its magnetic drum memory stores 2,000, 10-digit words plus sign. Average access time is 1.8 millisec.

About 1,500 magnetic core devices are used. The computer also contains about 9,000 germanium diodes, 15 electron tubes and several transistors.

Input and output for the computer can be from punched paper tape, typewriter or a remote line. A significant feature of the computer is that it is designed to operate in real time. This may indicate that it is to be used in connection with an aircraft warning system.

The computer occupies one 6 by 6 by 1.5-ft cabinet which is air cooled. Control is accomplished from a 4.5 by 6 by 3-ft desk-like console. The computer requires 5 kva of power. The entire computer installation is shown in a photograph.

Computing Circuitry

Basically the computer is a two-address, decimal-serial, binary-parallel machine. It operates at a master clock frequency of 660 kc. The clock utilizes electron-tube circuits and is of the two-phase type. Output is a square wave.

Diode logic is used throughout the computer. There is one basic diode configuration for both AND and OR circuits. How a circuit functions depends upon the master clock phase fed to it. The computer provides seven transfer functions, four arithmetic functions, seven logical functions and output instructions.

Computer operation is in three basic modes. The machine can run continuously. It can be made to stop before each instruction, display the instruction in lights and print it out if the operator desires. This mode of operation is useful for debugging problems. The computer can also be made to stop before each branching instruction to provide a type of manual operation.

Magnetic Amplifiers

Power gain is achieved by magnetic amplifiers. After each logical operation, the pulse is amplified. The arrangement is: amplifier—diodes—amplifier.

As illustrated in Fig. 1A, the amplifiers are of the serial type. The electron-tube master clock acts as the power source. Input pulses in the control winding saturate the core and allow the master clock pulse to pass to the load.

The amplifiers and other circuits are packaged in 600 plug-in units mounted on printed-wiring panels. Two photographs show several plug-in pacakages arranged in the

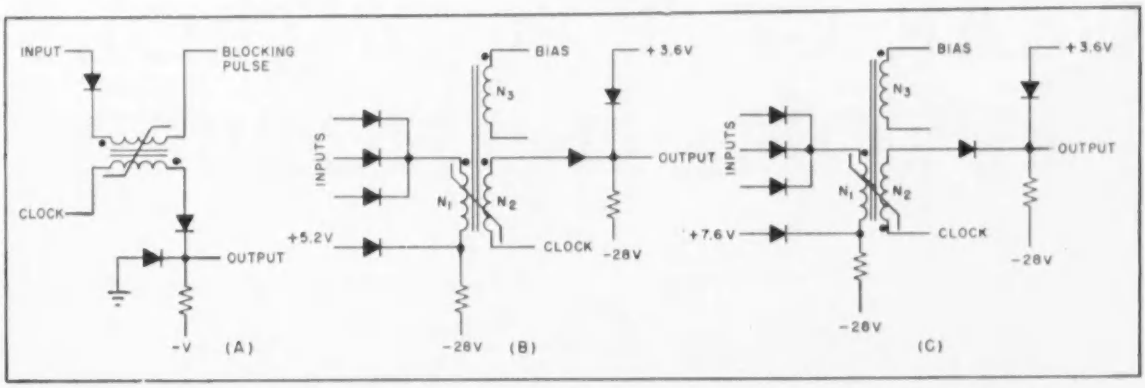

FIG. 1—Basic magnetic circuit is serial amplifier (A) which is used in complementing (B) and noncomplementing (C) amplifiers

SUMMARY —— Electron tubes work compatibly with transistors and magnetic amplifiers in high-speed computer which ties into remote line for real-time operation. Tape-wound cores on stainless-steel bobbins overcome frequency limitation of magnetic devices. Computer has 660-kc clock frequency

Magnetic Amplifiers

computer and one of the packages. Two magnetic amplifiers with cases open are shown at the bottom of this photograph. There are 17 basic circuit types used in the computer.

Both complementing, Fig. 1B, and noncomplementing, Fig. 1C, magnetic amplifiers are employed. The essential difference is in the polarity of the output winding.

Double-power amplifiers are used to some extent in the computer as are special amplifiers to drive the output buffer. Mechanical computer components are controlled by electromechanical relays which are controlled by magnetic amplifiers.

Three registers used in the arithmetic section of the computer—the A, L and X registers—consist of recirculating strings of magnetic amplifiers. There is also a 44-bit input buffer register and a 26-bit buffer shift register which feeds the output line when the computer is used in real-time operations.

The magnetic amplifiers utilize alloy tap cores wound on stainless-steel bobbins.

Magnetic amplifiers of the type used in this computer have functioned satisfactorily in pulse operations at information rates up to 2.5 mc.

The magnetic drum that provides the storage function in the computer is made from aluminum plated with nickel-chrome alloy. It is 5 in. in diameter and 3 in. long. It spins at 16,500 rpm. The drum is mounted in a gas-tight helium-filled housing to prevent corrosion.

Drum Memories

The drum has 200 word bands each with five tracks. Words are read serially. There is a timing band of five tracks and a single-track sprocket channel. The timing channel produces synchronizing pulses to control the master clock frequency.

A rapid-access memory of 400 words capacity is provided on the drum. Access time is 450 microseconds.

Rapid access is achieved by using four read-write heads for each track of the rapid-access portion of the drum. The heads are spaced 90 deg apart around the drum periphery.—J.M.C.



Rack of printed circuit modules typifies internal appearance of computer



Circuit cards hold magnetic elements in pill boxes at left and right

GEAR GAGE CONTROLS AUTOMATIC HOBBER

SUMMARY — Probes attached to cores of linear variable-differential transformers measure pitch diameter and root fillet of automobile transmission gears, to generate signals for logic and control memory circuits that automatically adjust depth setting of hobbing cutter or shift cutter laterally to replace dull cutting surface

THE ELECTRONICALLY-CONTROLLED hobbing machine installation at Plymouth's automobile transmission plant involves six-spindle gear-cutting machines, each of which has six essentially independent hobbing cutters mounted on a rotating platform. Each spindle discharges a completed gear as it passes a common discharge point. A single control unit measures and sorts the gears from all six spindles, controlling the spindles individually by means of six sets of control circuits.

Other installations of this electronic control have been made on single-spindle hobbers. For simplicity, the control equipment will be described in terms of a typical single-spindle installation.

Inspection Requirements

Each gear is automatically inspected as it comes from the hobber. This inspection includes measurement of pitch diameter and root fillet build-up, the latter being indicative of the extent of hob wear. Gears are sorted physically as being acceptable or unacceptable, and appropriate control signals are supplied to the hobbing machine. These control signals include demands for adjustments to correct pitch-diameter errors observed in the gears, shift the hobbing cutter laterally as a means of replacing dull cutting surfaces and shut down the hobbing machine when attempts to adjust it prove unsuccessful.

In the interests of good hobbing-machine control, measurements on the gears employ two sets of tolerances for each gear characteristic of interest. One set of tolerances, symmetrical about the nominal dimensions, is used principally as the basis for physical sorting of the gears. A narrower set of tolerances, also symmetrical, provides the basis for controlling the hobbing machine to limits that are somewhat smaller than the allowable manufacturing tolerances on the gears. By use of these two sets of tolerances, production of gears exceeding the manufacturing tolerances is kept to an absolute minimum.

Control Requirements

Control of the hobbing machine, as regards both pitch diameter adjustment and automatic hob shift, is in fixed increments. Consequently, the electronic control equipment is required only to operate the appropriate set of relay contacts in order to energize the adjustment mechanisms that are an integral part of the hobbing machine.



FIG. 1—How probes measure gear teeth

Although the control equipment is capable of detecting minute differences in gear dimensions, random variations in the hobbing machine output can result in individual gears that do not truly represent the need for hobbing machine adjustment. Consequently, the hobbing machine control signals are based on trends rather than on individual gears.

In the case of pitch diameter errors, three successive gears must fall outside the narrow tolerance limits before the control equipment calls for readjustment of the hobbing machine. In the case of apparent hob wear, a hob shift signal results each time two successive gears show root fillet build-up in excess of the narrow tolerance limits. If a single small

By RAYMOND C. MILES

Airborne Instruments Laboratory, Inc.
Mineola, New York

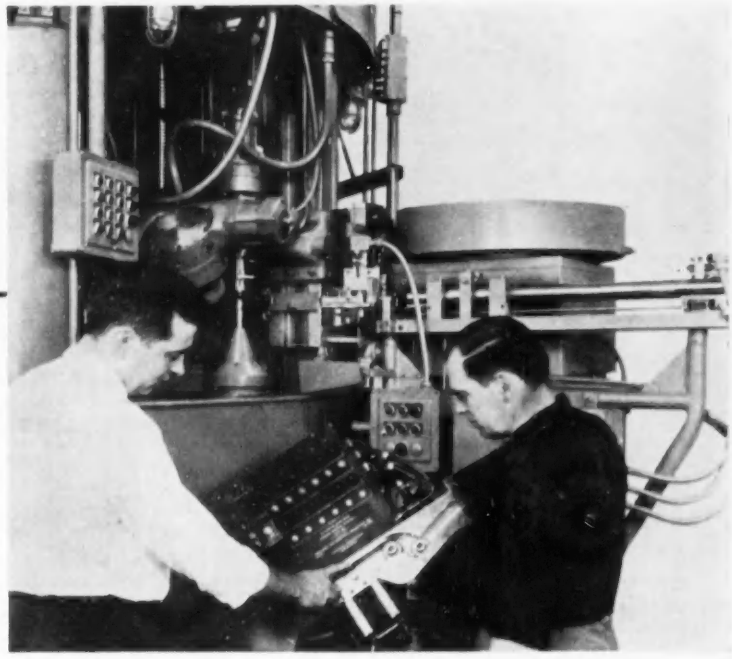

THE FRONT COVER—Method of mounting gear gage at output position of six-spindle Lees-Bradner rotary hobber for automotive transmission gears. Man at left points to position of one of gaging probes in chute down which gears slide

shift does not correct the root fillet build-up, additional shifts are made after each pair of gears with excessive build-up.

After calling for hobbing machine readjustment, the control equipment continues to count successive gears with the same type of error. If the count reaches ten, without at least one gear falling within the narrow tolerance limits, it is assumed that the hobbing machine requires human attention. The control equipment then opens a pair of contacts that removes operating power from the hobber.

Gears are automatically fed to two gaging stations at which pitch diameter and root fillet build-up are measured successively. After leaving the second gaging station, the gear exits through one of three sorting chutes, depending on actual gear dimensions as compared to the production tolerance limits.

Figure 1 shows enlarged cross-sections of gear tooth spaces, illustrating how the gaging probes make physical contact with the gear. The conical measuring probe contacts the gear at the pitch circle, which is a hypothetical circle approximately midway between the root and crown of the gear teeth; its diameter is the pitch diameter of the gear. Any variations from nominal pitch diameter are apparent as displacement of the measuring probe along the radius of the gear.

The method used to detect hob wear is also illustrated in Fig. 1. The solid lines show the shape of the gear tooth space and the position of the cylindrical measuring probe when the gear has been cut with a sharp hob. When the hob begins to wear, the effects are evident as growth of the root fillet of the gears. The broken lines illustrate such growth, and show the resulting displacement of the root-fillet measuring probe.

The mechanical portion of the control equipment includes a set of cam-operated switches that provide the necessary sequencing and timing signals for the electronic circuits.

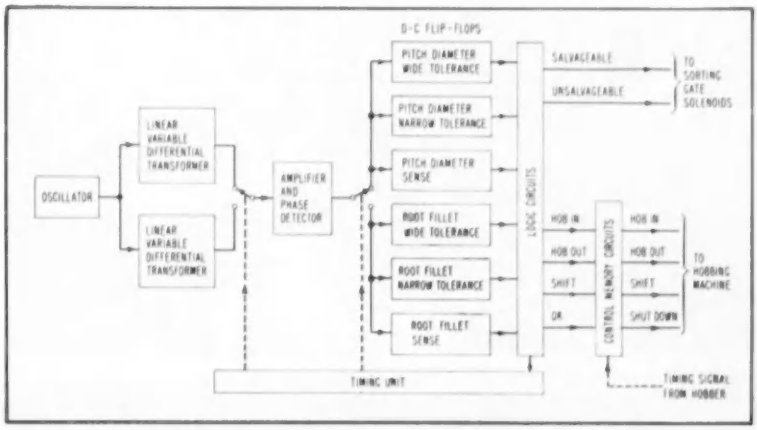

FIG. 2—Probes act on linear variable differential transformers of control system

Gaging Heads

The electronic measuring system is shown in Fig. 2. The gaging transducers are a pair of linear variable differential transformers, one each for the pitch diameter and root fillet measurements.

Each differential transformer

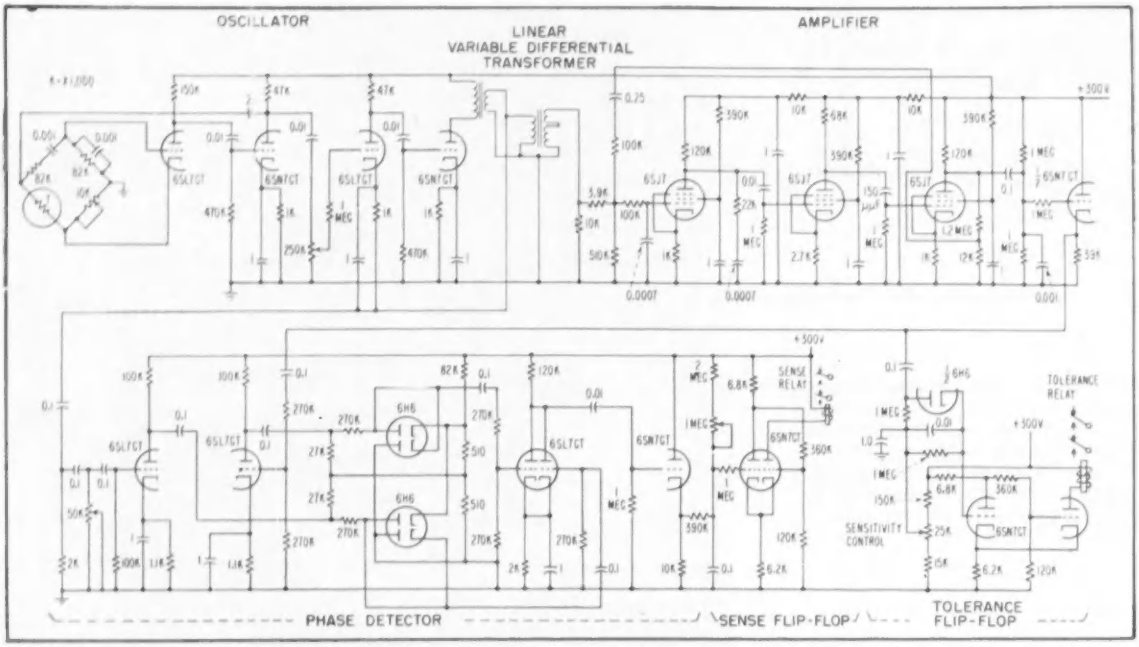

FIG. 3—Measuring circuit and two tolerance flip-flops. Other four tolerance flip-flops and other two sense flip-flops are identical

consists of a single primary winding and a pair of secondaries connected in opposition and symmetrically disposed about the primary. A movable magnetic core, mechanically connected to the gaging probe, varies the coupling between the primary and the two secondaries. Thus, when the primary is excited, the net output voltage from the two secondaries is proportional to the distance between the actual core position and its null position. The phase of the output voltage is a function of the direction of core movement from null. The result is a null-type measuring system with excellent linearity, good sensitivity and freedom from moving contacts with the resulting tendency to wear. Typical units have sensitivities of the order of a millivolt per 0.001 inch per volt excitation.

Measuring Circuits

The two differential transformers are driven by a common oscillator. Their outputs are applied, through relay contacts controlled by the timing unit, to a common amplifier and phase detector as shown in Fig. 3. Relay switching functions have been omitted from this schematic for simplicity.

The oscillator is a bridge-stabilized type, supplying 2,000-cps drive at about 3 volts to the differential transformer primaries. The amplifier and phase-detector circuits are conventional, including

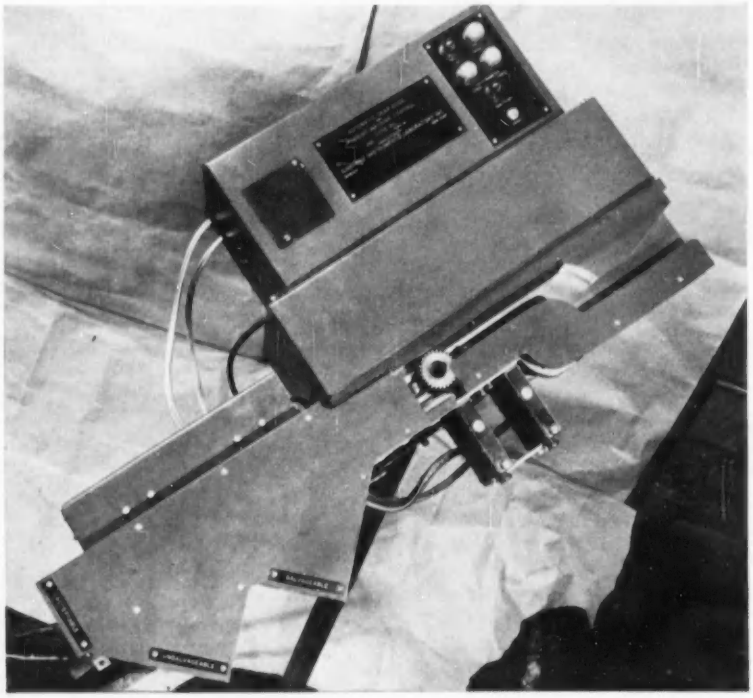

Sensing unit and sorting chutes of gear gage. Cables make interconnections with remotely located electronic control panel. Gear is in position for checking root fillet build-up. The three output chutes, for ACCEPTABLE, UNSALVAGEABLE and SALVAGEABLE gears, are at lower left

the use of negative feedback in the amplifier. The primary purpose of this feedback is to stabilize operation against such factors as power supply variations and tube characteristic changes.

Although gear-sorting and hobbing-machine control operations are both of an incremental nature, the measuring circuits operate on an analog basis. The reasons include the advantages obtained from use of the differential transformers, which are basically analog devices, and the ease with which adjustable tolerances can be obtained in an analog system as compared to a digital system.

The conversion from analog to digital measurement information takes place in a set of six direct-coupled flip-flops following the amplifier and phase detector. The four tolerance flip-flops are driven by the amplifier, while the two sense flip-flops are driven by the phase detector. In all cases, relay switching is employed to activate the particular flip-flops corresponding to the gear characteristic being measured.

In the schematic diagram of Fig. 3, one tolerance flip-flop and one sense flip-flop are shown. The four tolerance flip-flops are identical, as are the two sense flip-flops.

The four tolerance flip-flops each include a sensitivity control calibrated directly in thousandths of an inch tolerance. This facilitates adjustment of the equipment even by inexperienced operators.

Logic Circuits

Pitch diameter and root fillet measurements are made sequentially, but logical decisions as to gear sorting and hobber control must be based on both measurements. Consequently, the three logic relays associated with pitch diameter measurement include electrical locking circuits. Lock-up is automatic at the time pitch diameter is measured; unlocking is controlled by the timing unit and takes place at the end of the operating cycle of the control equipment.

With the aid of the wide tolerance and sense flip-flops, gears are physically rejected if they fall outside the manufacturing tolerance limits. Rejected gears are further segregated as either salvageable or unsalvageable. A salvageable gear is one that has been left with pitch diameter and/or root fillet above manufacturing tolerance limits. An unsalvageable gear is one that has been left with pitch diameter below manufacturing tolerance limit; there is no significance to a gear whose root fillet build-up is excessively small.

From the standpoint of hobbing-machine control, logic requirements are somewhat more complex. If the hobbing machine is taking a cut that is either too deep or too shallow, the gears will have incorrect pitch diameter and readjustment of the hob in-out mechanism is indicated. Unfortunately, such a condition also has the basic symptoms of excessive fillet build-up resulting from wear of the hob cutting surfaces.

Similarly, actual wear of the hob affects pitch diameter of the gears to some extent. Fortunately, incorrect adjustment of the hob in-out mechanism has effects of equal magnitude on both pitch diameter and root fillet build-up, while hob wear affects root fillet build-up by several times the effect on pitch diameter.

Classification of Gears

Consequently, the logic circuits classify each gear according to the magnitude and sense of its departure from nominal values of both pitch diameter and root fillet. This classification takes place in the manner indicated by the diagram of Fig. 4. The origin at the center of the classification diagram corresponds to nominal values of both pitch diameter and root fillet. Vertical departure from the origin represents an error in root fillet, while horizontal departure from the origin represents an error in pitch diameter.

Normally, all gears fall within the first or third quadrant of the diagram. Because the resulting pitch diameter and root fillet errors are of equal magnitude, an error in adjustment of the hobbing machine in-out mechanism places gears on a line at approximately 45 degrees to the axes of Fig. 4.

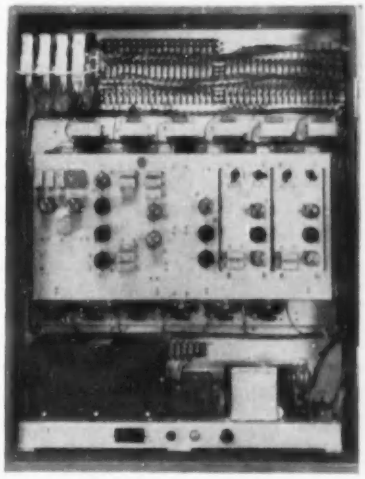

Electronic control cabinet. Hinged chassis at center drops forward to expose relays at rear. Main power supply is at bottom of cabinet

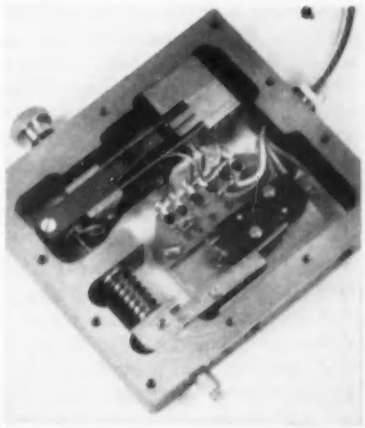

Interior of one of gaging heads. Probe is mounted on shaft projecting at bottom, which goes up to linear variable differential transformer mounted in plastic block supported by cantilever spring arrangement. Large knurled screw is zero adjustment for block

Distance along this 45-degree line depends on the magnitude of the error, while direction from the origin depends on the sense of the error.

In the case of hob wear, the root fillet is affected more than the pitch diameter, and gears will fall on a line that may be typically 30 degrees from the vertical axis. Deviation from the origin is always toward the first quadrant for hob wear, never toward the third quadrant.

The wide and narrow tolerances on both pitch diameter and root

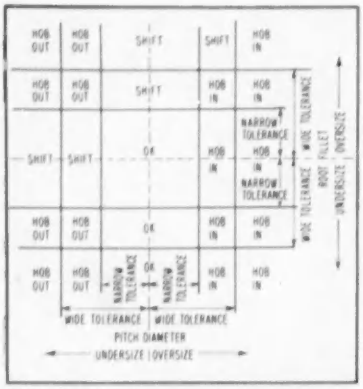

FIG. 4—Classification diagram showing method of classifying hobbing-machine errors according to observed defects

fillet are employed, in the logic circuits, to divide the complete area of the classification diagram into 25 subareas. With proper adjustments of the tolerance controls in the flip-flop circuits, each of these 25 areas corresponds to one of the following four conditions: (1) OK—gear within both sets of narrow tolerance limits so no hobbing machine adjustment is required; (2) HOB IN—pitch diameter (and perhaps root fillet) oversize, requiring hob-in adjustment; (3) HOB OUT—pitch diameter undersize, requiring hob-out adjustment; (4) SHIFT—root fillet oversize, requiring hob shift.

In certain areas of the diagram, the relation between the observed errors in the gears and the needed hobbing machine adjustment may not be immediately obvious. In some cases, the reason lies in the possibility of simultaneous errors in both in-out adjustment and hob wear; here the necessary adjustments will be made successively during the course of production and measurement of several gears. As the effect of each adjustment becomes apparent on the next gears hobbed, classification of gears will proceed from one area of the diagram to another, until finally gears are produced that fall within one of the OK areas.

The second and fourth quadrants of the classification diagram are of little or no practical importance. Consequently, some of the classifications in these quadrants are established as much from the standpoint of convenience and circuit simplicity as from the standpoint of control logic.

Control Memory Circuits

There are two reasons for using control memory circuits rather than controlling the hobbing machine directly from the logic circuits. First, the control memory circuits permit controlling the hobbing machine from observed trends in the gears, rather than supplying control signals based on measurement of a single gear. Second, some sort of control signal memory is required because the hobbing machine is capable of accepting adjustment signals only during a specific portion of its cycle. Thus, the logic information must be stored in some manner at least until the hobber is capable of responding to a demand for adjustment. The control memory circuits thus perform the dual function of determining trends and storing control signals until they can be transmitted to the hobber.

The control memory circuits involve principally a set of three stepping relays. Each of these relays has 10 positions in addition to a zero position, and each relay corresponds to one of the three possible hobbing machine adjustments, namely hob in, hob out and shift.

At the time each gear is being measured for root fillet build-up, the timing unit supplies a register pulse to the logic circuits. Depending on the positions of the six flip-flop relays, this register pulse then appears on one of four buses to the control memory circuits.

The HOB IN, HOB OUT, and SHIFT buses each operate one of the three stepping relays, causing the relay to advance one step each time a register signal appears on the associated bus. A signal on the OK bus, on the other hand, resets all three stepping relays to their zero positions. Further, each time one of the stepping relays steps forward, it automatically resets, to the zero position, either of the other two relays that may have previously advanced off zero. Consequently, each stepping relay counts only the successive gears showing the need of the related hobbing machine adjustment.

Each time the hobbing-machine cycle reaches a point such that it can accept an adjustment signal, an interrogating signal is supplied from the hobbing machine to the stepping-relay contacts. If either the HOB IN or HOB OUT stepping relay has counted three successive gears, or if the SHIFT relay has counted two successive gears, the interrogating signal passes through the stepping relay contacts to an associated power relay. Operation of the power relay then supplies the desired adjustment signal to the hobbing machine.

If one of the stepping relays counts ten successive gears, the interrogating pulse operates a shut-down relay. This relay removes operating power from the hobber and locks up until it is manually reset.

Other Features

The timing unit with its six cam-operated switches is a separate subassembly, chain-driven from the main camshaft of the mechanical handling apparatus. For ease in setting up the timing relationships, the six switch cams are on separate splined sections of the timing-unit camshaft.

Of the six switches, two accomplish the transfer of the amplifier-phase detector between pitch diameter and root fillet measuring functions, two provide register signals to actuate the sorting gate solenoids and the control memory relays through the logic circuits and two reset the locking circuits of the sorting solenoids and the logic relays.

In addition, there are two switches that operate in response to the actual presence of a gear in the mechanical handling portion of the equipment. These prevent false actuation of the control memory circuits during operating cycles in which no gear is actually being measured.

Indicator lights give the hobbing machine operator a visual indication of the classification of each gear as it is inspected.

BIBLIOGRAPHY

Robot Inspector Controls Hobber, *American Machinist*, p 123, June 6, 1955.
Electronically Controlled Hobbing Machine, *Product Engineering*, p 138, July 1955.



Hearing-aid battery powers encapsulated telemeter unit



Photoconductive devices. One at far left was selected



Hole in case admits light to photocell. Plastic section isolates nose-cap antenna

Transistors Telemeter Small Missiles

BY CECIL M. KORTMAN

Pacific Division
Bendix Aviation Corp.
North Hollywood, California

SUMMARY — Germanium photocell used with three-transistor f-m/f-m telemeter counts revolutions of two-inch diameter missile in flight. Other channels measure acceleration and pressure conventionally. Point-contact transistor furnishes vhf carrier

USE OF TRANSISTORS has made possible more complete instrumentation of small projectiles and rockets than heretofore. In the past practically the only information that could be obtained from a small missile was its rate of spin.

This was obtained by a spin sonde, a simple radio-frequency transmitter driving a loop antenna with the plane of the loop passing through the longitudinal axis of the missile. A receiving station located to one side of the flight path of the missile received a signal of varying intensity as the missile spun about its axis. Two maximums and two minimums occurred for each rotation.

In the system to be described, continuous monitoring of a pressure and an acceleration on two subcarrier channels made it necessary to maintain a relatively uniform radio-frequency field intensity. This required that the spin information be placed on a third subcarrier channel of an f-m/f-m system.

A 2-inch diameter test vehicle containing the complete system is shown in the photograph at the left above. The hearing-aid battery will operate the system satisfactorily for at least fifteen minutes and in some cases has run for more than two hours, with reduced power output. The plastic section isolates the nose-cap antenna.

Radio-Frequency Link

The radio-frequency link operates in the 44 to 50-mc region. The transmitter employs a 2N33 point-contact transistor with the parallel resonant circuit in the base lead, as shown in Fig. 1A. Variable capacitor C_1 permits a small frequency adjustment without appreciably affecting the output coupling. The composite subcarrier output is applied in the base circuit to frequency-modulate the carrier.

Instrumentation

Depending upon the individual transistors, output power of the order of 1 to 5 milliwatts can be obtained into a resistance load. Working into the nose-cap antenna, it is possible to transmit a usable signal for a distance of several hundred feet.

Most of the instrumentation consists of straightforward applications of telemetry and transistor practices. The pressure and acceleration pickups are standard variable reluctance types, of mini-

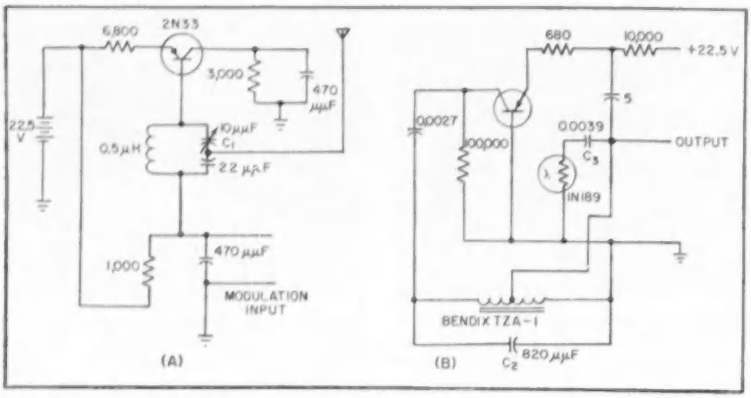

FIG. 1—Point-contact transistor r-f oscillator (A) and light-modulated subcarrier oscillator (B)

mum size and weight. The subcarrier oscillators are of the Hartley type, using junction transistors, with a variable reluctance pickup in the tuned circuit so that changes in the input stimulus are converted to changes in subcarrier frequency. Although the circuit shown in Fig. 1B is for the spin counter, it is essentially the same as those used for the other subcarrier channels.

For the pressure and acceleration measurements, the 1N189 photocell and C_3, the series capacitor, are removed from the circuit. The variable reluctance pickups are substituted for the TZA-1 coil shown in Fig. 1B. Capacitor C_2 is adjusted to give the desired frequency of oscillation.

Spin Counter

The spin-counting device presented an especially interesting problem. The requirements were for a device capable of sensing spin rates of hundreds of revolutions per second, of modulating an audio-frequency oscillator in accordance with f-m telemetry practices, ±7.5-percent bandwidth, and a device compatible with the weight, space and power-supply limitations of the small missile. These limitations eliminated mechanical devices such as angular accelerometers.

However, some of the larger missles, employing electron-tube circuits for instrumentation, have used a standard photocell to sense the variation in light intensity as it faced a light source, such as the sun, or was shielded from the light by the body of the missile. These variations occur with each rotation of the missile and may be used to determine the spin rate. Because of the size and weight limitations of the small projectile, this appeared to be the most feasible approach for the all-transistor system.

Photo Devices

The center photograph shows some of the photosensitive devices investigated. The one finally selected is at the far left and consists of a bar of germanium having leads attached to each end and encapsulated in transparent plastic. Essentially, this is a variable resistor with the instantaneous resistance dependent upon incident light intensity and temperature.

In the spin-counting application the temperature will be, at most, a uniformly varying quantity, so any cyclic variations will be entirely due to changes in light intensity. Being a resistance element, the device operates as effectively in a-c circuits as in d-c, and introduces no distortion such as might be caused by clipping in a photodiode or phototransistor.

In Fig. 1B the photocell is placed in series with a capacitor across the coil tap of the Hartley oscillator. The variation in resistance causes a frequency change in the oscillator. The series capacitor is chosen so that the difference between total darkness and bright sunlight will deviate the oscillator from the upper band limit to the lower band limit, based upon ±7.5-percent bandwidth. This method of modulation produces considerable a-m as well as f-m, but this is not objectionable in this application.

Table I—Test Data for Small-Missile Telemeter

Lighting Conditions	Subcarrier Frequency (in cps)
Dark	11,153
Deep shade	11,030
Missile shadow	10,214
Bright sun	9,800

10.5-kc band ±7.5 percent; upper band limit = 11,288 cps; lower band limit = 9,712 cps

Performance

The radio-frequency transmitter, although operating out of the regularly assigned telemetering bands, performed much like the standard transmitters except for the reduced power output. Deviations of ±30 to ±50 kc per subcarrier channel were easily obtained. With suitable receiving equipment, line-of-sight transmission was possible for distance approaching one mile. However, any obstructions in the transmission path will reduce the operating distance.

The pressure and acceleration measuring channels were completely analogous to the electron-tube circuits. In fact, the pickups were first calibrated using a standard electron-tube test fixture. Then the calibrations were checked using the transistor oscillators. Agreement was within the accuracy of measurement over the complete range of input stimulus.

Although absolute light intensity was of no concern in this application, Fig. 2A shows the sensitivity that can be obtained under one set of conditions.

Sensitivity

It is possible to adjust the sensitivity over a wide range by changing the capacitance in series with the photocell. Figure 2B shows the variations that can be obtained. To check the oscillator linearity and to provide a means of determining the effective a-c resistance of the photocell, a decade resistor was substituted for the 1N189 shown in Fig. 1B. Figure 2C is a plot of frequency against decade resistance value for three different values of

series capacitance, C_s.

As the capacitance increases the frequency variation increases, as does the nonlinearity. A capacitance of 0.0051 μf appears to be a reasonable compromise between sensitivity and linearity. Returning to Fig. 2B, it is found that 0.0051 μf in series with the photoconductor gives a frequency shift from 10,250 to 9,360 cps for a change in light intensity from zero to 100 foot-candles.

From Fig. 2C, this change in frequency is found to correspond to a change in resistance from 3,300 to 2,000 ohms. In the circuit shown in Fig. 1B, it was necessary to reduce the sensitivity by reducing the series capacitance to 0.0039 μf which also made the frequency variations more linear with resistance change, as is shown by Fig. 2C.

Frequency Response

To check the frequency response of the photocell, a squirrel-cage blower wheel was used as a light chopper with a 100-watt lamp as a source. The subcarrier output frequency was fed directly to a telemetering discriminator which converted frequency changes into changes in d-c level. The output of the discriminator was monitored on a d-c oscilloscope. The chopper frequency was found to be nearly 850 cps, and the peak-to-peak output of the discriminator was roughly half the change obtained between steady conditions of light off and light on. This proved that the device was capable of responding at rates far in excess of the requirements.

To determine the effects of temperature, the photocell circuit was placed in an oven with a 100-watt lamp. The lamp power was supplied through a variable transformer so that intermediate light levels could be obtained. Figure 2D shows the variations of frequency for temperature between −10 and 52 C for three light intensities.

For the curves labeled dark and medium, the frequency remains nearly constant to around room temperature, where it begins to decrease rapidly. This may be attributed to intrinsic conduction as the thermal energy becomes sufficient to create more hole-electron pairs and thus decrease the effective resistance. However, the curve labeled bright does not exhibit this trend.

This indicates that the light energy effectively saturates the germanium so that the relatively small increase in thermal energy has little effect. For the spin-counter application, the results shown in Fig. 2D are acceptable since the frequency shift with light intensity remains large over the complete temperature range.

The trend of the curves is such that, if the circuit is adjusted to keep the frequency within band limits at room temperature, it will remain within limits over the complete range even though there is a decrease in sensitivity at the higher temperatures.

Operating Data

Following these tests the circuit was packaged in the 2-inch diameter test vehicle. The photocell is mounted in the small window near the center of the cylindrical metal portion of the missile shown in the third photograph. Actual firing performance data is not available on the test vehicle.

However, Table I shows the frequency variations obtained under possible operating conditions. Both the dark and bright sun frequencies lie within the ±7.5-percent bandwidth of the 10.5-kc channel. The full bandwidth was utilized since drift or distortion of the peaks at either end would not effect the count.

The important information is that the frequency shift obtained by rotating the missile 180 degrees from having the bright sun shining directly onto the photocell is nearly 400 cps, or roughly 25 percent of bandwidth. This is more than enough information to give a clear record of each rotation of the missile in flight.

Acknowledgement is due to R. E. Colander for his contribution to the development of the entire system and to W. J. McMaster for his assistance in developing the spin counter and in building the test vehicle.

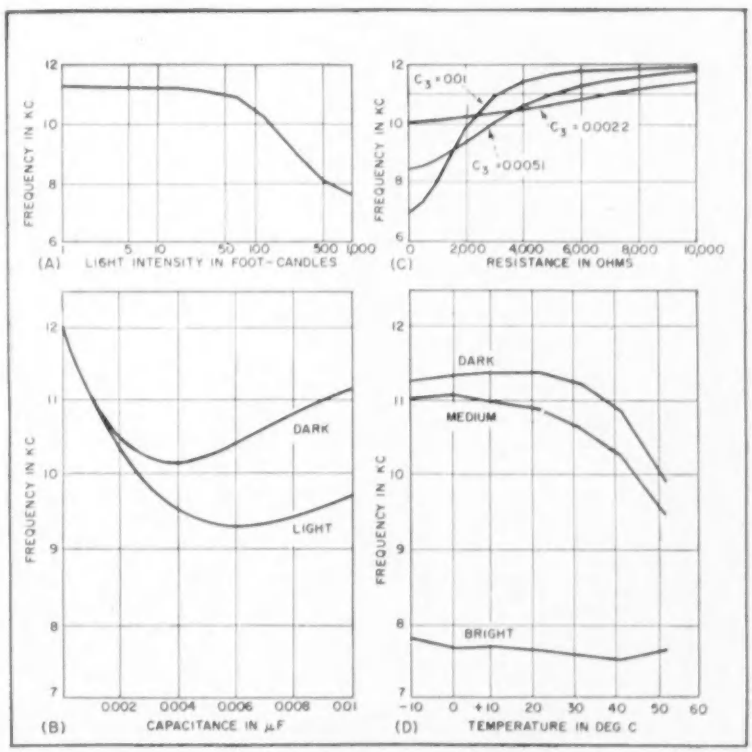

FIG. 2—Performance of subcarrier oscillator with frequency plotted against light intensity (A), capacitance in series with photocell (B), resistance of photocell (C) and temperature (D)

REDUCING NOISE in Part V

SUMMARY —— Transmitting information through noise can be accomplished by exchanging excess bandwidth for improved signal-to-noise ratio. Pulse-code modulation does this efficiently and permits regenerating pulses that have become distorted. Error detecting and correcting codes offer additional advantages

By W. R. BENNETT
Bell Telephone Laboratories, Inc.
Murray Hill, New Jersey

PRACTICAL communications systems must prevent noise from disturbing the essential information to be transmitted. There may be considerable variation as to what is essential depending on the type of message and the needs of the user.

At one extreme, there is a luxury zone in which cost is no deterrent. At the other, there are situations in which it is difficult to provide even meager message service.

An example of the first case is the high-fidelity music system. Since the objective is personal satisfaction, not measurable in dollars and cents, low-noise components should be used and signal power should be high enough to make negligible the effect of any noise other than that inherently present in the source. To cheapen the system by allowing even a small noise defect would make the hobby frustrating rather than rewarding.

An example of the other extreme involves providing communications when the only available medium is so noisy and interference-ridden that great skill and luck are needed to get information through. Here it is imperative to strip the message to its barest essentials.

Overriding noise by high-level signal power is the straightforward luxury approach to communication over a noisy channel. If the noise level is unduly high, the cost may be prohibitive. If part of the noise is interference from other channels, the method may fail because interchannel interference is a mutual problem for all channels.

If one transmitter is operated at higher power to overcome interference, more interference is produced in the other channels. This calls for more transmitted power in the other channels and more interference in the first.

A similar argument applies in a noise situation caused by fluctuations in signal level in beyond-the-horizon transmission and by mode-transfer echoes in waveguide. Noise is proportional to signal and increase in signal power increases noise power in the same ratio.

Frequency-Modulation

A more subtle approach uses excess bandwidth to augment the signal-to-noise ratio when extra bandwidth is available. The first success of this method was with frequency modulation.[1]

OTHER ARTICLES IN THIS SERIES

Characteristics and Origins of Noise ..... p 154, March 1956
Equipment for Generating Noise ..... p 134, April 1956
Techniques for Measuring Noise ..... p 162, May 1956
Designing Low-Noise Equipment ..... p 154, June 1956



FIG. 1—Exchange of excess bandwidth for improved signal-to-noise ratio with frequency modulation

The signal magnitudes are converted at the transmitter into proportional variations in carrier frequency at constant amplitude. If these variations in frequency are large, the frequency perturbations of the carrier caused by noise become negligibly small provided the ratio of mean carrier power to mean total power in the r-f band is above a modest threshold value.

To make room for the wide frequency swing, the recommended spacing of mean carrier frequencies is 200 kc instead of the 10 kc allotted in a-m broadcasting. The ratio of rms signal to rms noise in the detected f-m output varies directly with the rms frequency swing imparted by the signal up to a point where the mean total noise power in the widened r-f band becomes comparable with the mean carrier power.

Figure 1 shows how f-m systems

exchange bandwidth for signal-to-noise ratio. The r-f bandwidth is the double sideband width plus the peak-to-peak frequency swing. The carrier power is constant and above improvement threshold for all bandwidths. Noise power is uniformly distributed throughout the r-f band. The test signal is the same throughout and the reference condition that in which frequency deviation equals baseband width.

Pulse-Code Modulation

Frequency modulation is not the most efficient way of exchanging bandwidth for signal-to-noise ratio. The ultimate bargain is reached by pulse-code modulation. Instead of direct proportionality of rms signal-to-noise ratio with bandwidth, pcm gives an exponentially increasing improvement with bandwidth.

The signal is sampled at a rate at least twice the highest frequency in the signal and the samples are quantized to the nearest of a set of discrete magnitudes. The quantized samples are transmitted by code sequences. Greatest noise tolerance is obtained with a binary code.

In transmitting binary pcm, two conditions are used which may be *plus* and *minus* or *off* and *on*. The stepped magnitudes are assigned binary numbers. If 128 steps give a sufficiently accurate representation of the signal, the levels may be represented by the 128 possible seven-digit binary numbers

0 = 0000000
1 = 0000001
2 = 0000010
3 = 0000011
4 = 0000100
. . . . . .
127 = 1111111

The code groups can be transmitted by c-w using carrier off to represent 0 and carrier on to represent 1. Sufficient bandwidth must be provided to transmit pulses at a rate equal to seven times the sampling rate. The bandwidth is proportional to the pulse rate.

Figure 2 illustrates the exchange of bandwidth for signal-to-noise ratio in binary pulse-code modulation. The signal-to-noise ratio is the ratio of mean power in a full-load test tone to mean quantizing noise power in the signal band. Carrier power is large enough to make transmission errors negligible.

Sampling rate is 2.5 times signal bandwidth which increases the signal-to-noise ratio 1 db over the minimum sampling rate. The reference bandwidth for one pulse a sample depends on the tolerable margins against intersymbol interference. Ideally it can be made equal to signal bandwidth but is usually more to ease transmission requirements.

In pcm, the pulses are correctly received if the carrier peaks and noise peaks can be distinguished. Ideally, the system is error-free if the carrier peaks slightly exceed twice the noise peaks. In gaussian r-f noise, the noise peaks cannot be precisely defined but an upper limit of about four times the rms value is exceeded so rarely as to make consideration of higher peaks unnecessary.

By operating the pcm system at a sufficient carrier power level above noise to make errors in recognition rare, the pulses can be decoded to represent exactly the original quantized signal levels. The only noise present is quantizing noise caused by differences between the sampled magnitudes and the discrete representations.

Pulse Regeneration

Pulse-code modulation has the advantage that the pulses can be regenerated in both magnitude and time. A pulse train which has been distorted by noise and interference can be examined at equally spaced intervals and a determination made as to whether or not a pulse is present. If the answer is *yes*, a clean properly timed pulse can be sent on to the next repeater; if the answer is *no*, a clean blank can be sent.



FIG. 2—Pulse-code modulation provides exponential signal-to-noise improvement with bandwidth

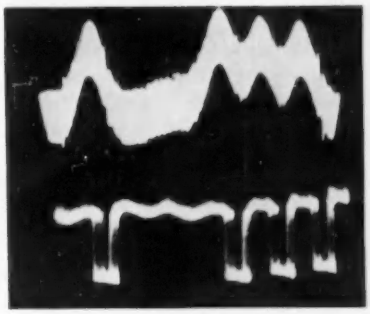

FIG. 3—Pulse-code modulation sequence before (above) and after (below) regeneration

Figure 3 shows input and output of a regenerative pulse repeater. The code sequence is 100111. The input is accompanied by interference and distortion. Nonsynchronous interference produces the blurred trace. There is a phase reversal between input and output while the small ripple visible in the output is a result of the timing wave.

Because of pulse regeneration there can be no accumulation of error in a chain of repeaters provided the effects of noise, distortion and interference in any one link are sufficiently small to prevent a pulse

from being mistaken for a space. An important feature is that this exploitation of bandwidth for noise suppression does not imply high-fidelity low-noise bandwidth, but only bandwidth of moderate quality to enable on-off pulses to be recognized accurately.

Repeater Circuit

The transistorized regenerative repeater depicted in Fig. 4 has been used to obtain the results shown in Fig. 3.[3] The second stage is a blocking oscillator that delivers an output pulse when the sum of the input signal and timing waves exceeds threshold.

The timing wave is derived by shock exciting a parallel resonant circuit with the output pulse train. A clamping diode establishes the positive peak of the timing wave. A small part of the pulse output is fed back to the input to cancel stretching of input pulses caused by inadequate low-frequency response of the transformers.

With the noncritical input equalizing network shown, this repeater operated successfully at 672 kc over 2.3 miles of No. 19 Awg paper-insulated cable pair.

Frequency-modulation, pcm and related schemes such as pulse-position modulation, pulse-duration modulation and pulse-frequency modulation are of the improvement-threshold type. A minimum ratio of signal power to noise power is required in the transmission medium to obtain noise suppression. The improvement threshold reaches its most lenient value in binary pcm where the theoretical requirement is only a factor of two between carrier and noise peaks.

If instead of c-w, a video pulse transmission system is used, the binary values can be sent as positive and negative pulses, the detector becomes a polarity indicator and the threshold is reduced to equal signal and noise peaks. In practice, an additional margin should be allowed for variation.

In improvement-threshold systems, when the noise breaks through the threshold barrier the system favors the strongest component and is indifferent to whether it is signal or noise. If the strongest component is noise, the suppression works in reverse and pure noise is registered in the output.

Table I—Code for Single-Error Correcting and Double-Error Detecting

Decimal Number	Position in Sequence 1	2	3	4	5	6	7	8
0	0	0	0	0	0	0	0	0
1	1	1	0	1	0	0	1	0
2	0	1	0	1	0	1	0	1
3	1	0	0	0	0	1	1	1
4	1	0	0	1	1	0	0	1
5	0	1	0	0	1	0	1	1
6	1	1	0	0	1	1	0	0
7	0	0	0	1	1	1	1	0
8	1	1	1	0	0	0	0	1
9	0	0	1	1	0	0	1	1
10	1	0	1	1	0	1	0	0
11	0	1	1	0	0	1	1	0
12	0	1	1	1	1	0	0	0
13	1	0	1	0	1	0	1	0
14	0	0	1	0	1	1	0	1
15	1	1	1	1	1	1	1	1

Filtering and Repetition

There exist systems for reliable transmission at small ratios of signal-to-noise power. The key to success is a decrease in the signaling rate to give time to make decisions which discriminate between signal and noise.

An example applicable to noise uniformly distributed over the frequency range is the use of narrow-band filters. This cuts down the amount of noise power accepted by the receiver. The signal power is concentrated in the narrow band to obtain a margin over noise.

Since the narrow-band system can not follow rapid changes in waveform, the signaling rate must be reduced. Practical limitations are: the cost of highly selective filters, the stability requirements imposed on carrier oscillators and the transmission delay.

Radar operation with a low signal-to-noise ratio is related to the narrow-band filter technique. The repeated pulse pattern reflected from an object stands out through the nonrecurrent grass produced by noise. Repetition is a form of integration and integration is a form of low-pass filtering.[5] The poorer the signal-to-noise ratio, the more repetitions are required.

Controlled Redundancy

A systematic approach based on controlled redundancy is offered by error-detecting and error-correcting codes. As an example, consider the 2-out-of-5 code in which the code groups are sequences of five intervals in which only two pulses are sent.

The ten allowed sequences are 11000, 10100, 10010, 10001, 01100, 01010, 01001, 00110, 00101, 00011. If choice were not restricted there would be 32 sequences available. Also, it would be possible to obtain 16 sequences from four intervals. This cuts the signaling rate to less than $\frac{1}{2}$.

If more or less than two pulses are received in a five-interval frame, it is known that there must have been at least one error. Occurrence of two errors in a frame may not be detected, for if one pulse is changed to a space and one space to a pulse, the 2-out-of-5 condition remains. Single error detection is most effective when the probability of error in one pulse is small. The probability of two errors in a frame becomes approximately the square of a small quantity and may be negligible.

To correct single errors in a frame it is necessary to restrict the meaningful sequences to a set differing individually in at least three places. If the minimum number of differences is increased to four, double-error detection as well as single-error correction is possible. The total number of meaningful sequences out of a given number of pulse intervals shrinks rapidly as higher numbers of errors are detected and corrected.

It is not possible to detect a number of errors up to and including the number of pulse intervals, for this would yield only one allowed sequence.

Parity Checks

Table I illustrates a coding plan in which 16 meaningful sequences are obtained from the 256 possible sequences in eight intervals.[4] If the correcting and detecting features were not used, the same information could be sent in four intervals, so the penalty is halving the transmission rate.

Columns 3, 5, 6 and 7 give the message pulse values and represent, in binary notation, the numbers 0,

1, 2, . . . 15. Columns 1, 2 and 4 are check-pulse values for single-error correction. Column eight gives check-pulse values for double-error detection. The checking is done on a parity basis in selected subgroups.

The parity of a set of 1's and 0's is determined by counting the 1's. If the number of 1's is even or zero, the parity is even. Each check value is chosen to make the parity of its subgroup even.

At the receiver, four parity checks are made: pulses 1, 3, 5 and 7; pulses 2, 3, 6 and 7; pulses 4, 5, 6 and 7; pulses 1, 2, 3, 4, 5, 6, 7 and 8. If a parity check gives an even number or zero, the result is 0. If an odd number is obtained, the result is 1. If no errors are made, all four checks give 0.

If a single error is made, the fourth parity check gives 1 and the results of the first three checks in the order 3, 2, 1 form a binary number indicating which position is in error. If this number is 000, the error is in position 8. The offending value may then be corrected by changing 1 into 0 or 0 into 1.

If two errors are made, the result of check 4 is 0 and at least one of the other checks gives 1. The location of the errors cannot be found.

Information Theory

Error correction and detection reduce the probability of error from noise but cannot guarantee freedom from error. Operations which take account of statistical differences between the possible message sequences and the noise can under ideal conditions assure errorless transmission through noise up to a maximum signaling rate which is a property of the system.

The fundamental theorem is[5]

$$C = W \log [1 + (S/N)]$$

where C is the maximum number of units of information a second which can be received without error, W is the bandwidth of the system in cps, S is the average signal power and N is the average noise power. The number of units of information is the logarithm of the number of choices between possible messages. If the base of the logarithm is two, the unit is called the bit. When the logarithm is taken to the base 10, the unit is called the hartley.[6] When natural logarithms are used, the unit has been called the nit.

Bandwidth W is that of an ideal filter—a linear filter with no loss in a band of width W, infinite loss at all other frequencies and constant delay in the transmission band. The noise is assumed to be white and gaussian.

White gaussian noise has maximum interfering effect for a given mean noise power. Hence, if the noise is nongaussian, the maximum possible rate of errorless transmission of information is at least as great as given by the formula and is in general greater.

The information rate is the product of $2W$ and $\log [1 + (S/N)]^{\frac{1}{2}}$. This means that $2W$ independent samples a second can be unambiguously recognized in the output of an ideal filter of width W and the number of recognizable distinct magnitudes a sample is

$$[1 + (S/N)]^{\frac{1}{2}}$$

Application of the theorem postulates an equivalent ideal filter obtained by equalization of the amplitude-frequency curve to flat response over the band utilized and high loss outside. Also equalization of the phase-frequency curve to a straight line with effectively zero intercept. Many transmission systems do not need to meet these requirements and the theorem indicates only what their channel capacities could approach if extensive modifications were made.

A typical voice channel is designed for transmission of human speech and performs this function well when the amplitude-frequency curve is flat from 300 to 3,300 cps. The phase-frequency curve is not critical.

Ideal Transmission

Given a channel consisting of an ideal filter perturbed by white gaussian noise, the theorem assures that errorless transmission at the rate C is possible and errorless transmission at any rate greater than C is not possible. The proof does not show how the ideal rate can be obtained, but indicates a direction in which to go.

The maximum rate is approached by using long messages and applying statistical treatment to the complete response of the system. Identifications of individual elements are postponed until the complete message has been received.

This implies a long delay since no part of the message can be obtained until it has all been decoded. As the ideal rate is approached the delay becomes indefinitely large. The ideal condition is approached analogously by drawing sets of code values for long messages at random from a gaussian distribution of numbers.[7]

One decoding plan is to compare the actual response of the system to the long message plus noise with the individual noise-free responses which would be obtained from each message code separately. Identification of the actual message sent is made on the basis of the best match in accordance with some criterion such as the least integrated squared difference. Since the number of possible messages increases exponentially with the message length, the complexity of the decoding apparatus does likewise.

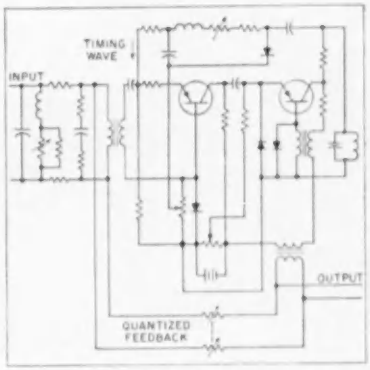

FIG. 4—Transistorized regenerative repeater produces results shown in Fig. 3

REFERENCES

(1) H. S. Black, "Modulation Theory," D. Van Nostrand & Co., New York, 1953.

(2) L. R. Wrathall, U. S. Patent No. 2,719,189, Sept. 1955.

(3) J. L. Lawson and G. E. Uhlenbeck, "Threshold Signals," McGraw-Hill Book Co., New York, 1950.

(4) R. W. Hamming, Error Detecting and Error Correcting Codes, *BSTJ*, **29**, p 147, April 1950. Also Bell System Monograph 1,757.

(5) C. E. Shannon, Mathematical Theory of Communication, *BSTJ*, **27**, p 379, July 1948; p 623, Oct. 1948. Also Bell System Monograph 1,598.

(6) R. V. L. Hartley, Transmission of Information *BSTJ*, **7**, p 438, July 1928. Also Bell System Technical Reprint B-343.

(7) S. O. Rice, Communication in the Presence of Noise, *BSTJ*, **29**, p 60, Jan. 1950. Also Bell System Monograph 1,741.

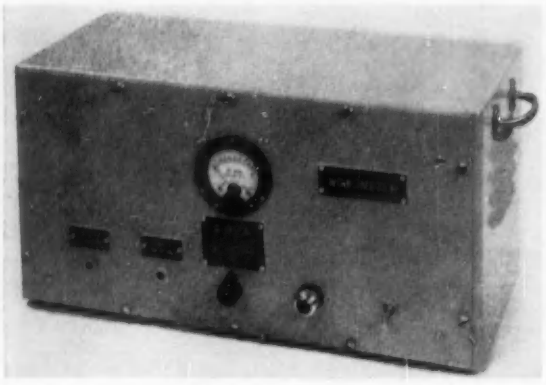

Meter indicates flutter and wow using 3,000-cps signal

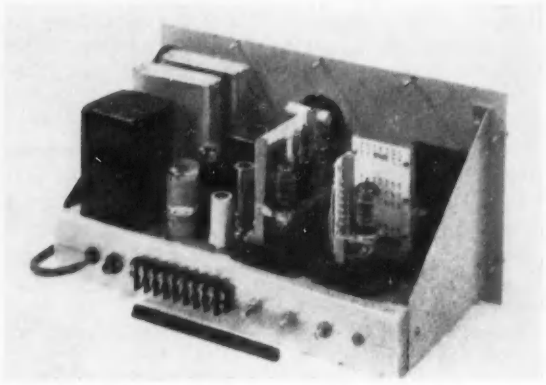

Construction of wow meter makes use of plug-in units

SUMMARY — Test instrument for tape recorder transport mechanisms measures speed variations from 0.01 to 5.0 percent at rates from 1 to 450 cps. Simple system uses f-m discriminator to detect change in recorded signal

WIDE RANGE METER

By H. J. WIRTH

Electronics Scientist
U. S. Navy Electronics Laboratory
San Diego, California

SINCE the basic function of a tape transport mechanism is to drive the magnetic tape over the head at a constant speed, it is often necessary to determine how well this basic requirement is being met.

Defective parts can be found by comparing the rhythmic pattern of the flutter or wow with the rotational speeds of the various components in the transport mechanism.

Basic System

Two basic systems are used to measure flutter and wow. Both systems utilize a sinusoidal signal which has been recorded on magnetic tape. In one system, the recorded signal is squared and differentiated to convert the sine waves into pips. These pips are used to intensity modulate an oscilloscope. Another set of pips from a precision oscillator supplies timing reference markers to the horizontal plates of the oscilloscope. The instantaneous time difference betwen the reproduced and the reference pips is proportional to flutter and wow. The scope face is photographed to provide a permanent record. This system is complex and expensive, but provides measurements over a wide range of flutter rates.

Another system is based on the fact that the instantaneous frequency of the reproduced signal is proportional to the instantaneous tape speed. The reproduced signal from the tape is applied to a f-m discriminator which provides an output voltage proportional to the flutter and wow. This output drives a meter which directly indicates the percent flutter and wow. In addition the output from the discriminator can be sent to a pen recorder for a permanent record.

This sytem is simple and inexpensive, but small flutter amplitudes usually can not be measured over a wide range of flutter rates; it is satisfactory where extreme precision is not required. This article describes a simple instrument which utilizes the second system. The instrument is capable of detecting flutter and wow from 0.01 to 5.0 percent at rates from 1 to 450 cps.

Circuit

Figure 1 shows an overall schematic of the flutter and wow meter.

The 3-kc band-pass filter prevents the meter from responding to harmonics of the recorded signal and tape noise. This filter is of the constant-k type with 1-kc and 6-kc signals being attenuated more than 55 db.

A limiter prevents erroneous meter readings caused by amplitude variations in the recorded signals. These variations are mainly caused by defects in the magnetic tape rather than in the transport mechanism. The limiter allows only a 1-db change in output amplitude for a 35-db change in input amplitude. Waveform remains symmetrical over this range.

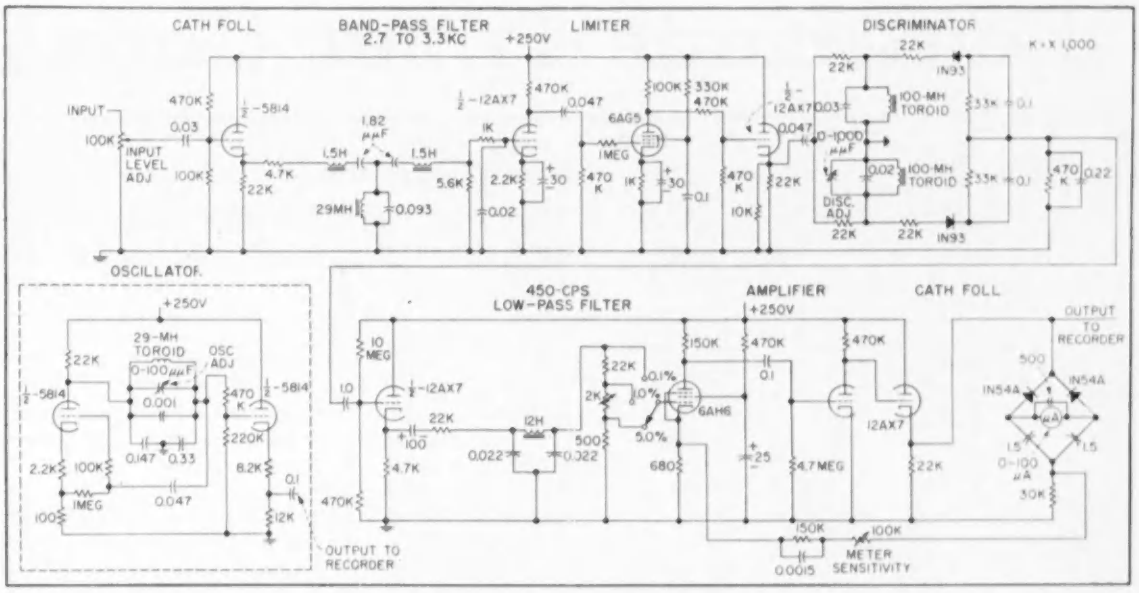

FIG. 1—Flutter and wow meter uses dual-tank discriminator with tanks tuned 300-cps on either side of 3,000-cps center frequency

Measures Flutter and Wow

The discriminator used detects flutter and wow over a 500-to-1 range from 0.01 percent to 5.0 percent. The circuit is essentially a dual tank in which each tank is tuned approximately 300 cps off the center frequency of 3,000 cps. The components were arranged so that heat would not cause the discriminator to drift. The output characteristic, shown in Fig. 2, can be observed directly on an oscilloscope, a pen recorder or used to activate a direct-current meter.

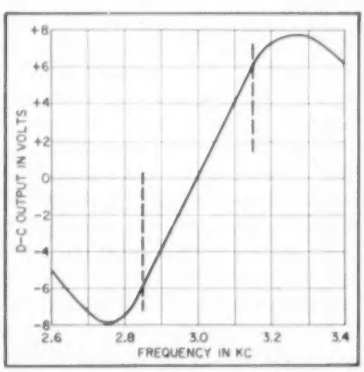

FIG. 2—Characteristic of dual-tank discriminator

A low-pass filter between the discriminator and meter amplifier prevents erroneous meter readings by the residual 3-kc signal and noise produced by the discriminator diodes. This filter is a single-section low-pass filter of the constant-k type with high-frequency cutoff at 450 cps. The 3-kc signal is attenuated over 50 db. If desired, the low-pass filter can be replaced with narrow band-pass filters to obtain a spectrum analysis of the flutter and wow.

Meter Circuit

Scale switching is accomplished by a calibrated voltage divider in the grid circuit of the meter amplifier. The high-gain meter amplifier is direct-coupled to a cathode follower which drives the meter.

Diodes in the meter circuit should have a linear voltage-current characteristic in the vicinity of the origin so that the meter deflection will be linear over a wide dynamic range. Three types of diodes, 1N54A, 1N137 and 1N-138 proved satisfactory in this circuit. Overall feedback is used to insure linearity. Feedback is increased in the high-frequency region to reduce the effects of pickup of the 3-kc oscillator signal in the meter circuit.

Test Oscillator

The test signal to the recorder is supplied by a 3,000-cps oscillator. An ordinary variable R-C oscillator does not have sufficient stability, especially if it is supplied from an unregulated power source. Any variation of the test oscillator frequency at a rate between 1 and 450 cps is sufficient to cause false meter readings.

The oscillator is a Colpitts type operated class A. Long-term stability of the signal is about 0.3 cps and warm-up time is less than five minutes.

A regulated power supply is used as the power source. This adds to the stability of the oscillator circuit and the meter amplifier gain.

Four-Place Timer Codes

SUMMARY —— Timing generator creates pattern that indicates time on oscillograph record in increments of 0.001 from 0 to 9.999 seconds before repeating itself. Coding produces tenth, hundredth and thousandth-second markers on single trace



FIG. 1—Principle units of timing system

TIMING INFORMATION can be introduced into an oscillograph record by one or more timing traces containing pips or markers onto which the timing information is coded. However, if the timing display utilizes too many traces, or if assessment of the data contained in the timing traces is made difficult by tedious measurements or lengthy counting of markers, the value of the data is reduced.

The two timing traces derived from the timing generator described in this article create a pattern which indicates time directly down to 0.001 second. With the simple method of calibration recommended, the pattern reads from zero to 9.999 seconds before repeating itself, with a maximum of ten markers to be counted for each data point.

The complete system is portrayed in Fig. 1. The timing generator drives two type 7-216 galvanometers in a Consolidated oscillograph. A monitoring neon lamp, which flashes at a rate of one flash per second, provides remote indication that the system is on and in operation.

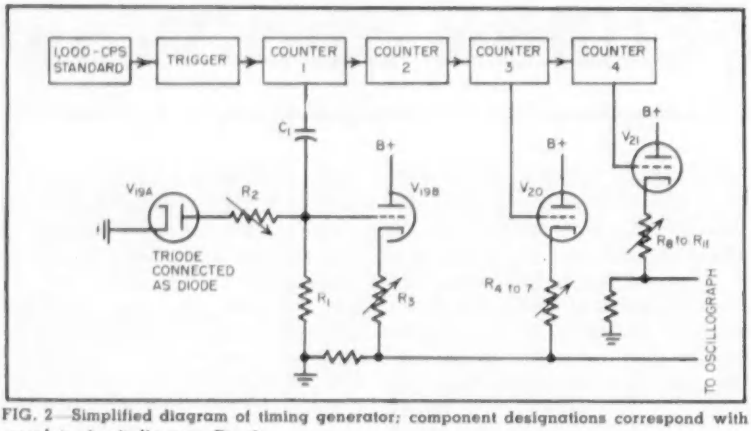

FIG. 2—Simplified diagram of timing generator; component designations correspond with complete circuit diagram, Fig. 3

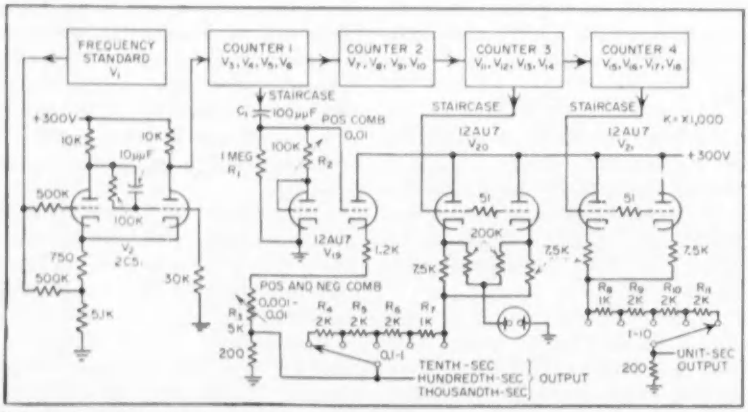

FIG. 3—Complete circuit of timing generator. Frequency standard and decade counters, represented by blocks, are commercially available plug-in units

Timing Generator Unit

A block diagram of the timing generator is given in Fig. 2 and the complete schematic in Fig. 3. The design is centered around commercially available plug-in type units.

The 1,000-cps frequency standard feeds through a trigger circuit into a chain of four decade counter units, which have staircase outputs in addition to their normal output circuits. These staircase outputs are differentiated and limited as required, fed through cathode followers, attenuated, combined and fed into the oscillograph to form the time pattern.

The frequency standard, an American Time Products type 2007W, is a dual-triode, inductively coupled, temperature-compensated tuning-fork oscillator which de-

Oscillograph Recordings

By SAMUEL E. DORSEY

Electronic Engineer
U. S. Naval Ordnance Test Station
China Lake, California

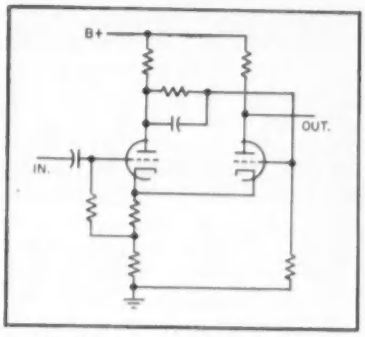

FIG. 4—Schmitt-type trigger used in timing generator

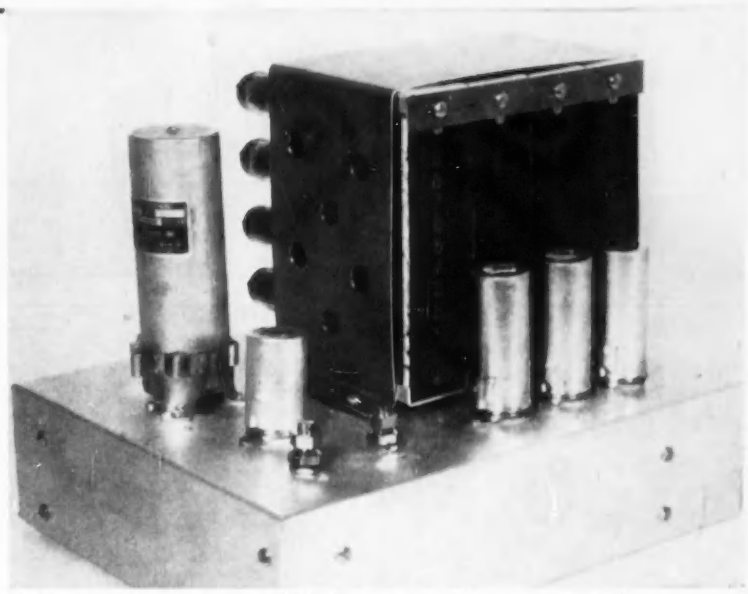

Timing generator uses commercial plug-in counters and frequency standard

livers approximately five volts at 1,000 cps into a 200,000-ohm load. The unit has an accuracy of 0.001 percent. It is furnished as a complete entity with an octal plug for making the necessary connections of power input and signal output.

The trigger, or signal shaper, diagrammed in Fig. 4, is very similar to a Schmitt trigger except that bias for both grids is obtained from conduction through the cathode resistors. It generates rectangular waves with steep, negative-going trailing edges, the type of signal best suited to drive the decade counter, a Hewlett-Packard type AC-4A.

Staircase Waveform

This counter has the advantage of a staircase output. The circuit is represented symbolically in Fig. 5A; neon lamps and their resistor matrix are omitted from this diagram. The staircase-forming resistors, R_A, R_B, R_C and R_D, are connected to points A, B, C and D, each of which is a plate of its flip-flop not being used to drive the succeeding flip-flop.

Figure 5B shows idealized wave forms of the voltages at A, B, C and D of Fig. 5A. These voltages are summed through resistors R_A, R_B, R_C and R_D, which are proportioned to produce the staircase output shown in Fig. 5C. The staircase signal can be differentiated into the comb-like timing signal shown in Fig. 5D.

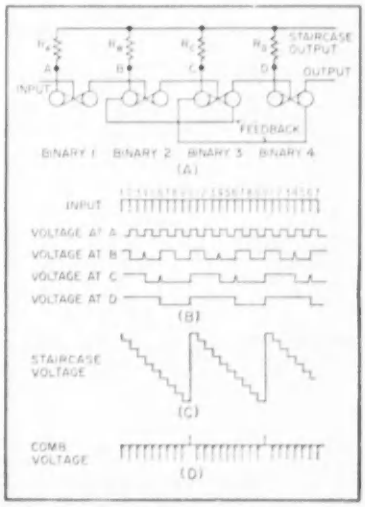

FIG. 5—Basic configuration of counter decade with staircase output (A) and waveforms (B, C and D)

Comb Signal

Referring to Fig. 2, the staircase output of the first counter is differentiated by capacitor C_1 and resistor R_1 to form the comb signal of Fig. 5D. The positive pulses of Fig. 5D are limited by potentiometer R_2 and V_{10-1}. The diode conducts through R_2 only on the positive portions of the differentiated signal. Cathode follower V_{10B} serves as driving amplifier for the comb signal.

In the comb, the negative pulses are the 1,000-cps indications and the positive pulses are the 100-cps indications. Potentiometer R_4 serves as amplitude control of the comb signal.

The staircase output of the second counter is not used. The staircase-voltage output of the third counter is amplified by cathode follower V_{20}, controlled in amplitude by switched resistors $R_{4\,to\,7}$, and mixed with the comb signal to provide indications of tenth-seconds, hundredth-seconds and thousandth-

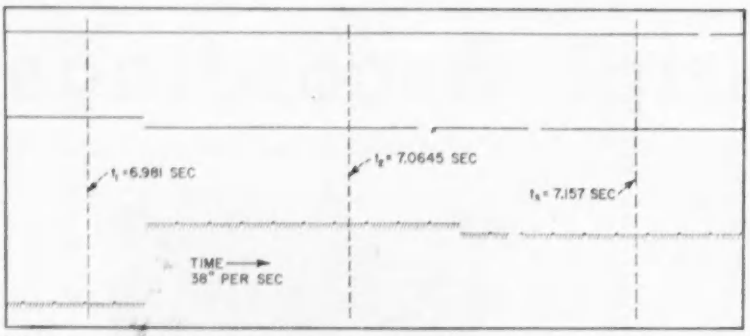

FIG. 6—Section of oscillograph record taken during test

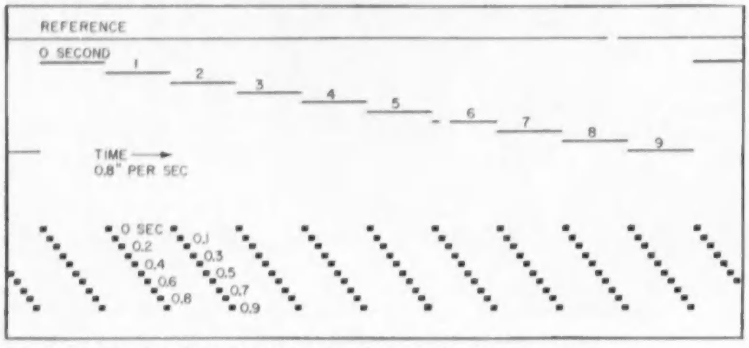

FIG. 7—Section of oscillogaph record taken during calibration run of test

seconds, all recorded on the same trace of the oscillograph. The staircase output of the fourth counter is amplified by cathode follower V_{21}, controlled by switched resistors $R_{8\ to\ 17}$ and fed into another galvonometer element on the oscillograph, giving indications of unit-seconds in ten-second groups.

Oscillograph Record

Prints of sections of the oscillograph record, taken during a test run of the timing system, are shown in Fig. 6 and 7. All identifying markers have been deleted from the record except for a single reference trace and the occasional blanks which serve as trace identifiers. The speed of the film in Fig. 6 is approximately 38 ips, which is close to the expected operating speed of the oscillograph. In Fig. 7, the speed has been reduced to about 0.8 ips. This is too slow to be of practical value in recording of data, but serves to illustrate the maximum timing pattern of the system of 10 seconds and is valuable for calibration purposes.

In Fig. 6, the thousandth-second indications are the negative pips appearing in groups of nine, each in comb-like fashion. The hundredth-second indications are the positive pips interspersed among the thousandth - second combs. Tenths of seconds are represented by the steps in the staircase upon which the pips are superimposed. Unit-seconds are represented by the steps in the staircase of the other trace. Portions of three tenth-second and two unit-second steps are shown.

The time scale is so reduced in Fig. 7 that the thousandth-second and hundredth-second pips are run together and are therefore unreadable. However, this view is well adapted to the calibration procedures because complete staircases of tenth-second and unit-second steps are available.

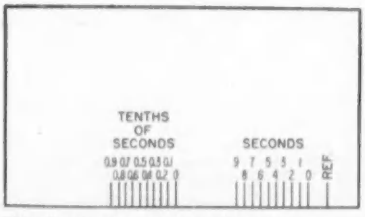

FIG. 8—Card used for calibration

For calibration in any test and subsequent reading of time it is desirable to run at least 20 seconds of film in the oscillograph with the timing generator on and with very slow film speed, as was done for Fig. 7. This makes certain that, when an assessment is started, there will be at least one full staircase of unit-second steps.

Calibration

To calibrate, a 3 by 5 inch card is held so that one of its long edges bridges the two timing traces and the reference line on the slow oscillograph record. The point on the edge where reference line crosses is marked. The card is then slid along the film, keeping the reference mark of the card on the reference trace; the points of crossing of the zero-second step, the one-second step, the two-second step and so on through the nine-second step are marked. The same is done with the tenth-second steps, marking the card as shown in Fig. 8. It is not necessary to number individual steps on the film. This was done in Fig. 7 for clarity.

Example

To illustrate the use of the calibrating card, three arbitrary times are marked on Fig. 6. These times are indicated by the dash lines and the letters t_1, t_2 and t_3. In determining t_2, for example, the marked edge of the calibrating card was held on the dash line of t_2 so the reference mark on the card coincided with the reference trace at the crossing of the dash line. The units trace indicated 7 and the tenths trace indicated 0. Hundredth-second pips were counted and indicated 6 from the last step of the tenth-second staircase. Thousandth-second pips were counted in the comb with an indication of 4 pips and half a space. This made the number 7.0645, as shown in Fig. 6. Times t_1 and t_3 were found in similar fashion.

These time numbers are relative. There is no absolute zero time in this timing system. What is determined is time difference obtained by subtraction of two indicated values. Where time differences cross from one unit-second staircase into the next, 10 seconds must be added to the second reading.

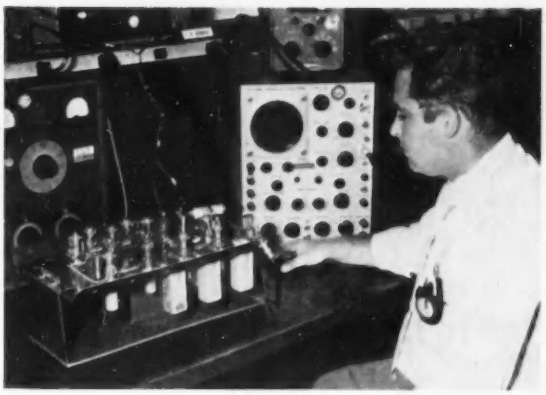

Experimental frequency shifter and demodulator undergoing test

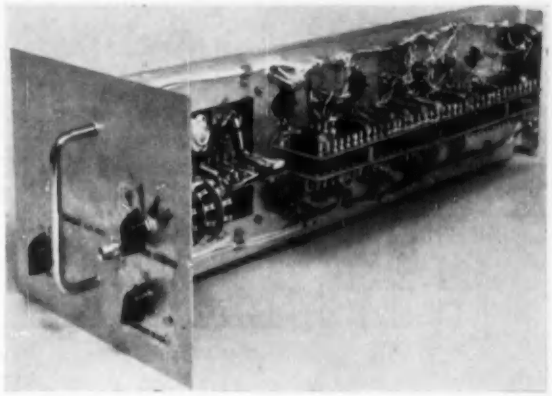

Final design for rack mounting uses terminal board construction

Telemetering Demodulator for Wide-Band F-M Data

SUMMARY —— Translating wide-band f-m subcarrier to lower frequency permits recording modulating signal at lower tape speed. Demodulator converts f-m to pfm for pulse averaging recovery of signal

By T. D. WARZECHA
Electronics Engineer
Convair Division
General Dynamics Corp.
San Diego, Calif.

IN THE DESIGN of a telemetry system, demodulation of 12 video range (1.0-4.0 mc) f-m subcarrier oscillators characterized by 60-kc deviation at 20 cps to 20 kc intelligence rates was required. In addition, magnetic-tape recording of the f-m signal before demodulation was desirable to minimize amplitude errors encountered in direct amplitude magnetic recording. Further study indicated that to keep the recorder tape speed and response requirements from becoming excessive, frequency translation of the subcarrier would be necessary.

The video subcarriers are translated, by selection of the proper beat-frequency oscillator, to 150 kc with ±60 kc deviation, at rates up to 20 kc.

The problem of demodulating the wide-band f-m wave of 150 kc ±60 kc deviation is successfully solved by converting the f-m to pulse-frequency modulation in which a narrow pulse, compared to the period, is generated for every cycle of the translated subcarrier wave. This signal is then demodulated by pulse-averaging techniques. Figure 1 is a block diagram of the system and the circuit is shown in Fig. 2.

Frequency Translator

The experimental circuit was designed to process a typical subcarrier channel of 1.0-mc center frequency. The modulated subcarrier is fed to the control grid of the 6AS6 mixer V_1. The output of the 1,150-kc beat-frequency oscillator V_2 is fed to the mixer suppressor grid. When F_c is 1.0 mc and F_{BFO} is 1,150 kc, the translated frequency F_T is 150 kc.

The minimum value of F_T is determined by the number of lower sidebands generated in the modulation process. The equation for

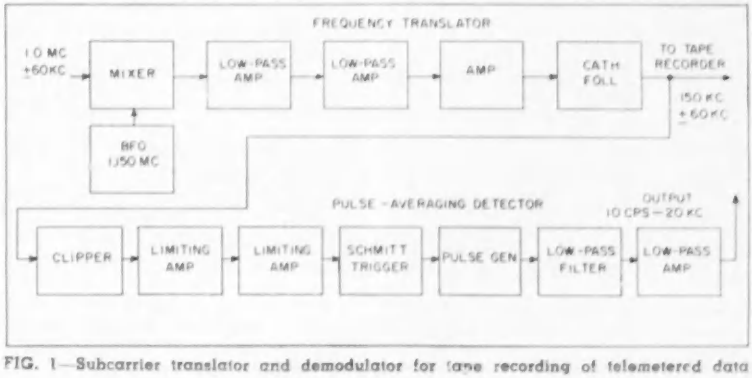

FIG. 1—Subcarrier translator and demodulator for tape recording of telemetered data

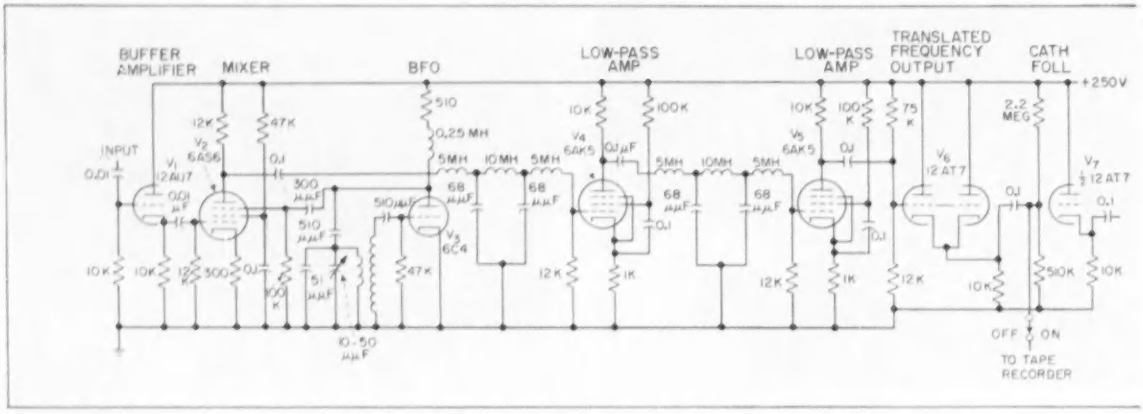

FIG. 2—Frequency-shifter provides undistorted modulation signal on lower frequency carrier for tape recording. Pulse averaging

an f-m wave is

$$e = A \sin (\omega T + M_F \sin \omega_S t) \quad (1)$$

where:

A = carrier-wave amplitude
ω = carrier angular velocity
F_{dev} = frequency deviation
F_{mod} = modulation frequency
$M_F = F_{dev}/F_{mod}$
T = time
$\omega_S = 2\pi F_{mod}$

A trigometric expansion of the right hand side of Eq. 1 will yield an expression which contains the sideband frequency components and amplitude relations in terms of the Bessel functions. The significant sideband components for a given modulation index may be found from a table of Bessel functions.

An approximate relation of the minimum value of F_T determined by experimental data is

$$F_{T\min} = (F_{dev} + 2F_{mod}) \quad (2)$$

for $F_{dev} = 60$ kc and $F_{mod} = 20$ kc, $F_{T\min}$ will be 100 kc.

The instantaneous value of F_T is

$$F_T = F_T \pm (F_{dev} + 2F_{mod}) \quad (3)$$

If the value of $F_{T\min}$ is not maintained according to Eq. 2 severe distortion will result because the lower sidebands will not be transmitted with phase and amplitude fidelity.

Tubes V_4 and V_5 are low-pass selective amplifier stages designed to pass only the different frequency components of the F_c and bfo signals. The response limits of the filter may approximately be determined by Eq. 3. For example when:

F_T = 150 kc
F_{dev} = ± 60 kc
F_{mod} = 20 kc
F_T lower = 150 − [60 + 2(20)] = 50 kc
F_T upper = 150 + [60 + 2(20)] = 250 kc.

Figure 3 is a response curve of the selective amplifier stages. This curve includes the amplifier and the low-pass filter characteristics. Figure 4 is an oscillogram taken at various stages of the translation process. The output of cathode follower V_6 is 15v peak-to-peak.

Pulse Frequency Demodulator

The extremely wide-band f-m output of the frequency translator presents demodulation problems. Tuned-circuit discriminator techniques were not considered feasible due to difficulties in obtaining linear operation over the wide deviation percentages employed. The percent deviation is

$$\text{Percent dev} = \frac{F_{dev}}{F_T}(100) = \frac{60 \text{ kc}}{150 \text{ kc}}$$

$$(100) = \pm 40 \text{ percent} \quad (4)$$

The demodulation is accomplished by converting the translated f-m wave to pulse frequency modulation. This process is indicated by the oscillograms in Fig. 5.

A 1.0-microsecond pulse of fixed duration and amplitude is generated for every cycle of the translated f-m wave. Hence, the intelligence information is contained in the instantaneous pulse frequency.

In the circuit diagram, Fig. 2,



FIG. 3—Response of selective amplifier stage with low-pass filter

the translated f-m wave F_T is directed to the cathode-follower driver tube V_6. Each cycle of the wave is symmetrically clipped by the resistor and biased diode networks. The input to the amplifier stages is a symmetrically clipped wave of 3v peak-to-peak amplitude. The rise time of this signal is related to the frequency and amplitude of F_T.

These rise-time variations are a source of standard-pulse jitter and therefore must be minimized by additional limiting which is provided by V_8 and V_9. Each of these stages symmetrically amplify and limit the clipped signal so that the output of V_9 is a square wave of 100 v peak-to-peak amplitude and 0.2 microsecond rise time. This signal is used to drive V_{10} which is a Schmitt-trigger type square-wave generator circuit.

The output of the Schmitt trigger is differentiated by C_1 and R_1. The negative spike of the differentiated wave is shunted to ground by the 1N38 diode.

The remaining signal is a +10 v spike of 0.02-microsecond rise time which is sufficient to trigger the standard-pulse generator.

The standard pulse is generated by a cathode-coupled one-shot multivibrator, V_{11}. The output of this stage is a 1.0-microsecond pulse of fixed duration and constant amplitude of +40 volts. The 10-to-90 percent rise time of this pulse is less than 0.10 microsecond. Due to the large deviations employed, the standard-pulse duration t_0 must be less than half the period of the highest frequency encountered to

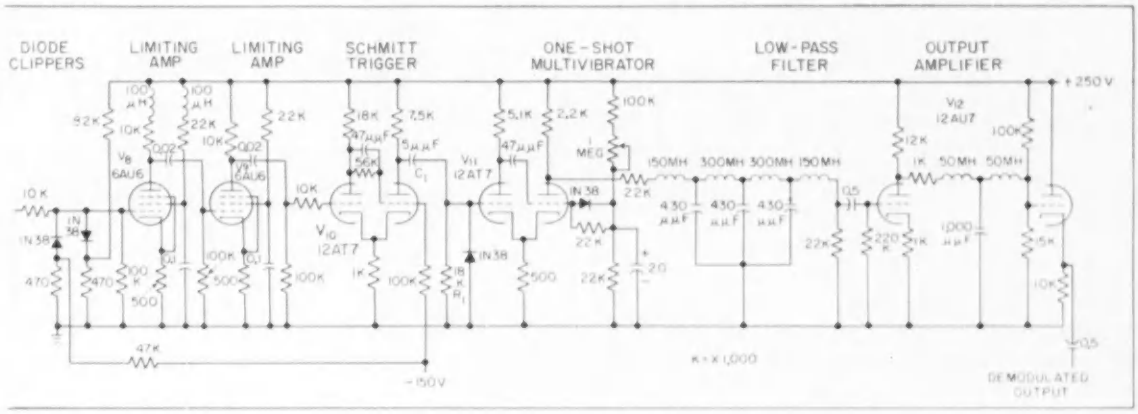

method is used in demodulator to give output signal from 10 cps to 20 kc for frequency-modulated tape recording

allow sufficient recovery time. Hence,

$$T_{max} = \tfrac{1}{2} F_t$$

$$T_{max} = \frac{1}{2(250\times10^3)} = 2.0\times10^{-6}\ \text{sec} \quad (5)$$

Experimental data indicated that a 1.0-microsecond pulse duration was suitable for operation of the standard-pulse generator.

Energy of Wave

The energy of the wave is proportional to the duty cycle; this relation is Energy $= t_0/_T(K)$.

Where t_0 is the pulse duration, T is the period and K is a constant. Since changes in T contain the intelligence, and $T = \frac{1}{F_t}$

$$e_{out} = \frac{t_0}{\frac{1}{F_t} \pm \frac{(\ 1\ )}{(F_{dev})}}(K) \quad (6)$$

The value of K is dependent upon the pulse amplitude and the integrator characteristic.

For a given value of K the integrated voltage output is directly proportional to the value of the instantaneous pulse frequency. To demodulate the pfm wave to the original modulating signal it is necessary to integrate the pulses by means of a low-pass filter network.

Either L-C or R-C low-pass filters may be successfully employed. An L-C T-section filter as shown in Fig. 2 was used to demodulate the pfm waveform. The ripple component appearing on the demodulated signal is less than 0.5 percent. Since d-c response was not required, a-c coupled amplifier and cathode-follower stages V_{12} were added. This provided a more suitable output signal level. The overall deviation sensitivity was increased to 0.1 volt per kc.

The frequency deviation against demodulator output voltage plot is linear to better than 1-percent of the deviation bandwidth. Dynamic tests indicate the overall distortion due to processing to be less than 1 percent.

Fig. 6 is an oscillogram of the demodulator response to a 500-cps square wave and a 20-kc sine wave.

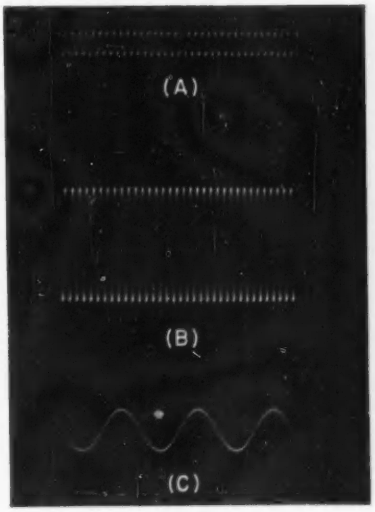

FIG. 4—Unmodulated subcarrier (A) is combined with bfo output (B) to give translator output (C) for frequency-modulation magnetic-tape recording

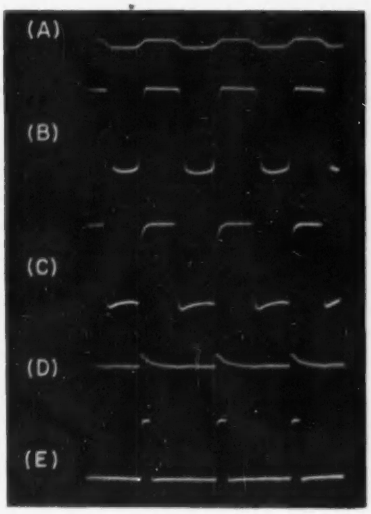

FIG. 5—Circuit waveforms at output of clipper (A), limiting amplifier (B) and trigger circuit (C). Pulse generator trigger (D) provides standard-pulse output (E)

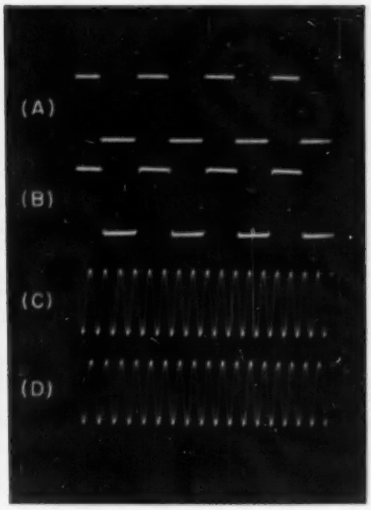

FIG. 6—Waveform of 500 cps signal before (A) and after (B) demodulation. Waveforms of 20-kc sine wave before (C) and after (D) demodulation

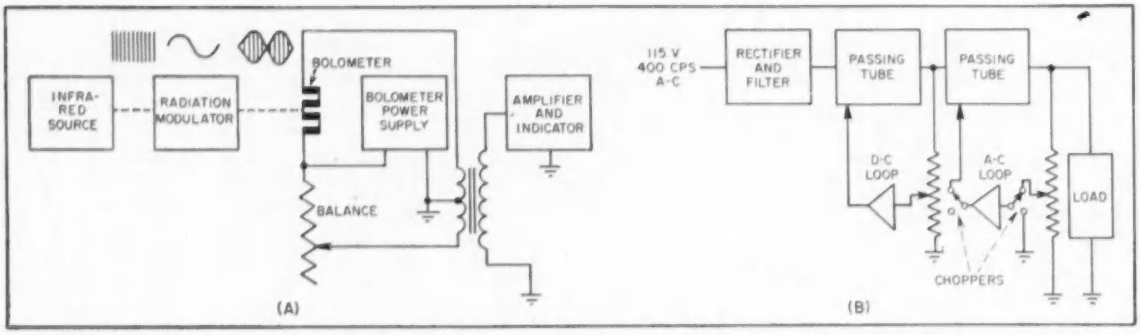

FIG. 1—Block diagram of test setup for infrared detector (A) and elements of the double-regulation power supply for bolometer (B)

Regulator Stabilizes

BOLOMETERS used for detection of infrared radiation require the application of d-c voltages that are devoid of noise and fluctuations. The power source used must also be capable of supplying high current at low voltage. These requirements generally indicate the use of a battery. For an aircraft installation where batteries are not permissible as equipment power supplies, there was developed a supply adequate for bolometer requirements.

Detector Construction

In this application, the bolometer comprises a group of blackened nickel strips, one micron in thickness with a surface area of half a square centimeter each. The strips absorb the infrared radiation, from a flame or other source, on their surfaces. The strips, connected in series, heat up, consequently change their resistance slightly and thus produce a small output voltage across a load. Since the strips are thin, their mass is small and the time required for the strips to heat is short.

Thermal lag in the bolometer heating process is small. Therefore, if the radiation varies in intensity at a rate corresponding to frequencies in the subaudio or low audio range up to 25 cycles, a usable output voltage of the same frequencies is produced. Thus the bolometer gives an electrical analog of the variation in the intensity of radiation with time. The output amplitude is in the microvolt region. The theory of infrared bolometer performance[1, 2] is given in mathematical form in the literature.

A test set-up used to examine bolometer performance without use of an actual flame is shown in Fig. 1A. A source of steady infrared radiation, such as a light bulb, is placed in front of a modulator. The latter consists of a motor-driven metallic disk with notches in its periphery. When the disk rotates, infrared radiation is interrupted at a frequency dependent on the rate of motor rotation and the number of notches.

The bolometer, power supply, transformer and balancing potentiometer are connected in a bridge circuit. The voltage appearing at the secondary winding of the transformer is a replica of the intensity variation. It is amplified by a low-frequency a-c amplifier and observed on an oscilloscope.

Because of the extremely small amplitudes of the signals, a high-gain amplifier is used. Variations at subaudio and audio frequencies in the voltage source used to supply the bolometer bridge circuit are likewise amplified, especially if the bridge does not entirely cancel them. Fluctuations comparable to the desired signal may be falsely detected as such. Hum reduction and long-term voltage stability are of secondary importance. The former has little effect since the lowest hum component, the second harmonic of the supply frequency, is 800 cycles and outside the passband of the detector amplifier. Long-term voltage changes affect the sensitivity of the system only slightly. The sensitivity need not be accurately controlled for this application, since qualitative rather than quantitative results are observed.

Double Regulation

After a number of more conventional approaches failed to yield a voltage output sufficiently free from low-frequency variations, the design of Fig. 1B was evolved. As shown in Fig. 2 this uses an a-c loop as well as a d-c loop. The reference voltage of −5 volts is derived, by a stage of gas-tube regulation consisting of an 0A3 and associated components, from an ordinary −180-volt regulated power supply.

In the a-c loop, the 5,000-ohm potentiometer is connected between the output terminal and the reference voltage and it is adjusted to vary the output voltage. A type A-300 miniature 400-cycle mechanical chopper driven from 6.3 volts has its moving contact on the potentiometer arm during part of a cycle and on ground during the other part. This gives a 400-cycle carrier modulated by variations in the output voltage.

Since the chopper gives sup-

SUMMARY —— Bolometer-type infrared detectors used on aircraft give ambiguous indication at intensity variation rates up to 25 cycles unless power supply is well regulated. Chopper-derived a-c loop supplements more conventional d-c regulation in cutting variations to less than a millivolt

By HENRY B. WEISBECKER
Project Engineer
Simmonds Aerocessories, Inc.
Tarrytown, N. Y.

INFRARED DETECTOR

pressed-carrier modulation, only the sidebands are present. The modulated signal is amplified by one section of the 12AX7 and then synchronously rectified by a second chopper. It is finally filtered, to give a grid voltage for one of the 6AS7 passing tubes, which has its two sections connected in parallel. Use of choppers for similar purposes[3,4,5] is discussed in the references.

If the extremes of the frequencies of the variations in the output voltage are denoted by F_1 and F_2, where both F_1 and F_2 are considerably below 400 cycles, the chopper converts the band F_1 to F_2 to the bands 400 − F_2 to 400 − F_1 and 400 + F_1 to 400 + F_2. The 12AX7 stage was found to generate considerable noise at the lower frequencies, F_1 to F_2.

A-C Amplifier

The amplifier in the a-c loop is designed to pass only frequencies in the neighborhood of 400 cycles and attenuate greatly any low-frequency components. The low-frequency disturbances are not amplified. Tube noises near 400 cycles are small and can cause disturbances only to the extent that they appear as sidebands by modulating the carrier. This effect is slight. Improvement in regulation of the output voltage is thus obtained in the a-c loop that could not be obtained in a d-c loop.

To supply the a-c regulating loop with a reasonably clean voltage so excessive gain is not required of it, a second loop is employed. This is a d-c loop, since here only coarse regulation is needed. A 25,000-ohm potentiometer is connected in a voltage divider used between the 6AS7 plate voltage and the −180-volt reference power supply. From the arm of the 25,000-ohm potentiometer, voltage variations are fed to a section of the 12AX7, amplified and applied to a second 6AS7 passing tube.

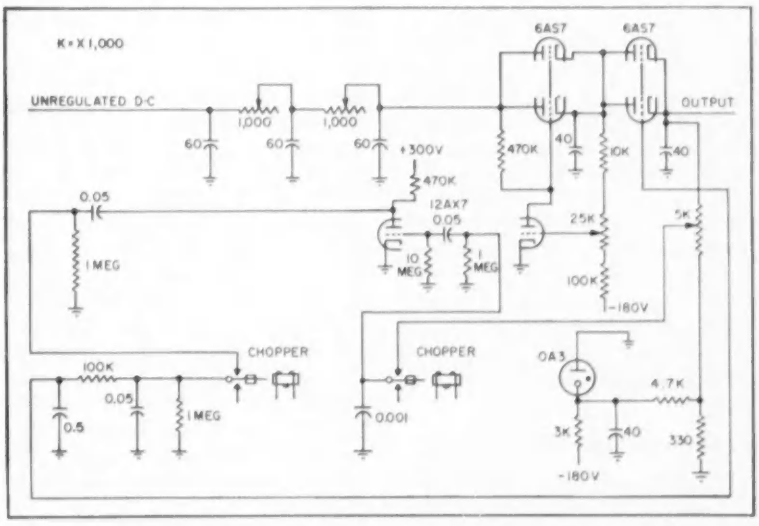

FIG. 2—Circuit diagram shows choppers used to generate and rectify a-c signal that compensates low-frequency variation

Loop Supply

The d-c loop is, in turn, supplied by a standard circuit utilizing a transformer, a 5U4 full-wave rectifier and a filter composed of two resistors and three electrolytic capacitors.

The output voltage is 3 to 6 volts with current capacity of 250 ma. Hum at 800 cps is under one millivolt rms and low-frequency variations are less than a millivolt.

References

(1) R. Clark Jones, The General Theory of Bolometer Performance, *Journ Opt Soc Am*, p 1, Jan. 1953.
(2) Marcel J. E. Golay, Theoretical Consideration in Heat and Infra-Red Detection, *Rev Sci Instr*, p 347, May 1947.
(3) "The Contact Modulator", Bulletin 103, Airpax Products Co., Middle River, Baltimore, Md.
(4) William P. Ernst, Stable Power Supplies for Microwave Standards, ELECTRONICS, p 168, Jan. 1954.
(5) F. R. Bradley and R. P. McCoy, Driftless D-C Amplifiers, ELECTRONICS, p 144, Apr. 1952.

By MARTIN S. RAPHAEL

and

ARTHUR S. ROBINSON

Department of Electrical Engineering
Electronics Research Laboratories
Columbia University
New York, New York

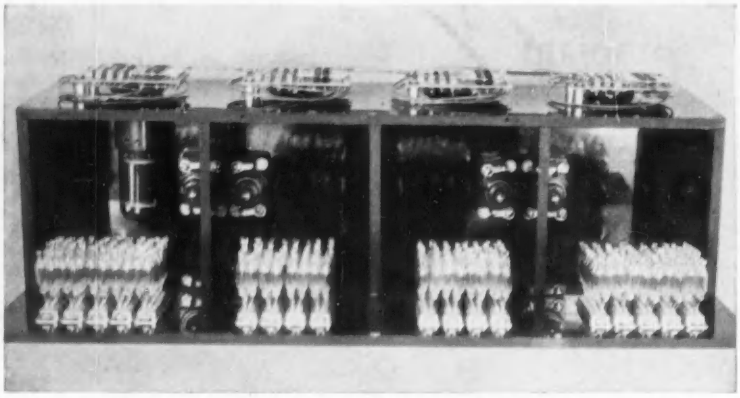

Memory matrix with light-tight cover open. Only one multiplier phototube is shown

DIGITAL STORAGE

SUMMARY —— Inexpensive storage for digital data is provided by neon-tube matrix. Less power is required than with coincident-current memories such as a core matrix. Memory uses multiplier-phototube read out. Flasher lamp prevents complete deionization of neon tubes

NEON STORAGE unit uses the presence or absence of a small neon tube as the memory element. The memory consists of rows and columns of wires with neon tubes connected to appropriate intersections.

The neon tube detects a coincident voltage at the intersection and its light output is converted to voltage by a phototube. Since the phototube will pick up the light of any of the neons, it also acts as the logical OR gate which is necessary in memories.

Operation of Matrix

Figure 1 shows a corner of a neon matrix and operating waveforms. The selection of the corners of the matrix is accomplished by a coincident voltage. Once the correct voltage is present, the neon tube will fire and draw a small amount of current (about 0.2 milliamp). This current, however, can normally be supplied by any circuit having a reasonable output impedance without seriously affecting the output voltage level.

The sets of vertical and horizontal wires have the property that at all times only one wire from each set has the selecting voltage on it. The magnitude of this selecting voltage is about one-half the firing voltage of the neon tubes.

On the voltage waveforms at time t_1, wire 3 is selected but none of the hundred series wires is selected (one in another part of the matrix is chosen). Even though there are neons at corners *c* and *d*, the voltage applied to them is lower than their firing point and they remain off.

Extinguishing Neon Tubes

The neon tubes are NE-2's. These are small tubes with wires extending from the glass seal. In manufacture, no measures have been taken to hold the gas pressure and the spacing of the electrodes uniform between tubes.

The firing voltages of new tubes can be from 65 to 90 v, and the maintaining voltages from 55 to 65 v. As the tubes age, these voltages will increase.

The amplitude of the half-selecting voltages is about plus or minus 55 from ground. This will insure the firing of any tube when coincidence occurs. A resistor in series with one line will drop the voltage applied to the neon to the maintaining value after the tube fires.

However, when one selecting voltage is removed, there will still be 55 v available which may prevent the neon from extinguishing. This can be overcome by adding an R-C network in series with the vertical or horizontal wires as shown in Fig. 2.

As the neon fires and starts to draw current, capacitor *C* charges

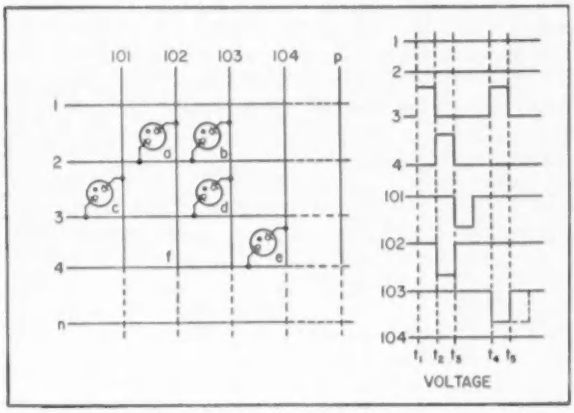

FIG. 1—Section of neon-tube matrix and firing waveforms

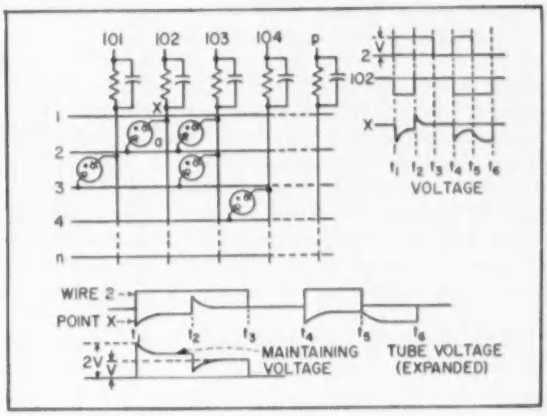

FIG. 2—Section of matrix and extinguishing waveforms

Using Neon Tubes

and the voltage across the tube drops to the maintaining voltage level. When one selecting voltage is removed, the voltage across the neon drops to about 10 volts for the short time before *C* discharges. It is long enough, however, to extinguish the neon.

When the neon tubes are in an area which has normal illumination, 110 v or so across the neon tube when there is a coincident voltage would be enough to fire the tube reliably. The light in the area would prevent the neon gas from deionizing completely, thus making it easier fully to ionize or fire the tube.

The neons of the matrix, however, must be installed in a light-tight enclosure to allow the phototube to pickup the on-off condition. In a dark area, there is practically complete deionization about 30 millisec after the maintaining voltage is removed. Since each neon bulb in the matrix must be addressed as often or as infrequently as desired, no restriction based on the 30-millisec interval can be tolerated.

In a dark area, the neons may not fire for periods greater than 20 millisec after a voltage much in excess of their normal firing voltage is applied. This is in contrast to a neon in a lighted area which will fire within a few microseconds. Since the neons can be held from deionizing by light, a flash of light, at intervals in the normally dark area would ionize the tubes partially. In particular, if a neon lamp were flashed, the emitted light would cause the most activity in the neon lamps of the storage matrix.

The flasher neon is normally flashed at the time a new corner in the matrix is chosen. A new neon which must fire is thus given the activation when the coincident voltage is applied. Since the flasher neon is fired each time a new location is pulsed, it normally fires many times a second and there is no possibility of this tube becoming fully deionized.



FIG. 3—Output circuit and timing cycle

Matrix Output

Both the light from the signal neons and the flasher neon will be picked up by the multiplier phototube. Whether a signal neon is on or not, an output indication could result at the time the flasher neon is on. It is therefore necessary to look for the output after the flasher is turned off.

This can be accomplished by the circuit shown in Fig. 3. The output of the multiplier phototube passes through an amplifier to increase the voltage swing available and change the d-c output level. The output of the amplifier and the timing pulse are gated to produce the output. Immediately after this output, another location is chosen for the next output.

The delay between the turning off of the flasher and the output is necessary to allow the light output of the flasher neon to decay to a low level. The multiplier phototube and amplifier are designed to have no greater bandwidth than is necessary to follow this decay.

Where the memory is to be used

to generate a certain function it will always be read in the same order. A simple way of reading which would cover all corners of the memory would be to select one horizontal wire and then sequentially select all the vertical wires. The next horizontal wire would then be selected and all the vertical wires would be selected again. This process then would be repeated until all the horizontal wires were selected.

With this method of selection, it is always known which corner will be the next one selected. Therefore the circuit can remain one step ahead of the input and also have an instantaneous output instead of waiting for the flasher neon and slow decay. A circuit which will perform in this manner is illustrated in Fig. 4.

To scan the matrix in a sequential order, two four-stage counters and decoding circuits are included. The four-stage binary counter has 2^4 or 16 possible configurations. Each configuration can be recognized by the decoding circuit as being distinct.

It will therefore energize one of its 16 output lines according to the four inputs it receives from the counter. These output lines form one set of wires to go to the neon tubes.

The second counter and decoder form the second set of wires to the neon matrix. Since the second counter is fed by the overflow of the first, all 16 lines of the first will be selected while the second set remains fixed. The overflow will then cause another line in the second set to be chosen and the first set will sweep through again.

It is necessary that one of the two sets of outputs from the decoders have a positive selecting voltage and the other be negative. Since it is generally desirable to make all counter stages the same, this difference in circuitry is in the cathode followers and the decoding circuits.

Pulse Input

The positions of the neon tubes are set up initially so that the corner of the matrix which is energized when the counters are reset contains the information to be read out at the time of the first pulse. When the first pulse comes in, it is regenerated by the blocking oscillator and fed to the AND gate. The other input to this gate before the pulse came was the information from the matrix at the reset position.

Since this input is designed to have a long time constant, it will only start to change at the time of the pulse and the previous in-

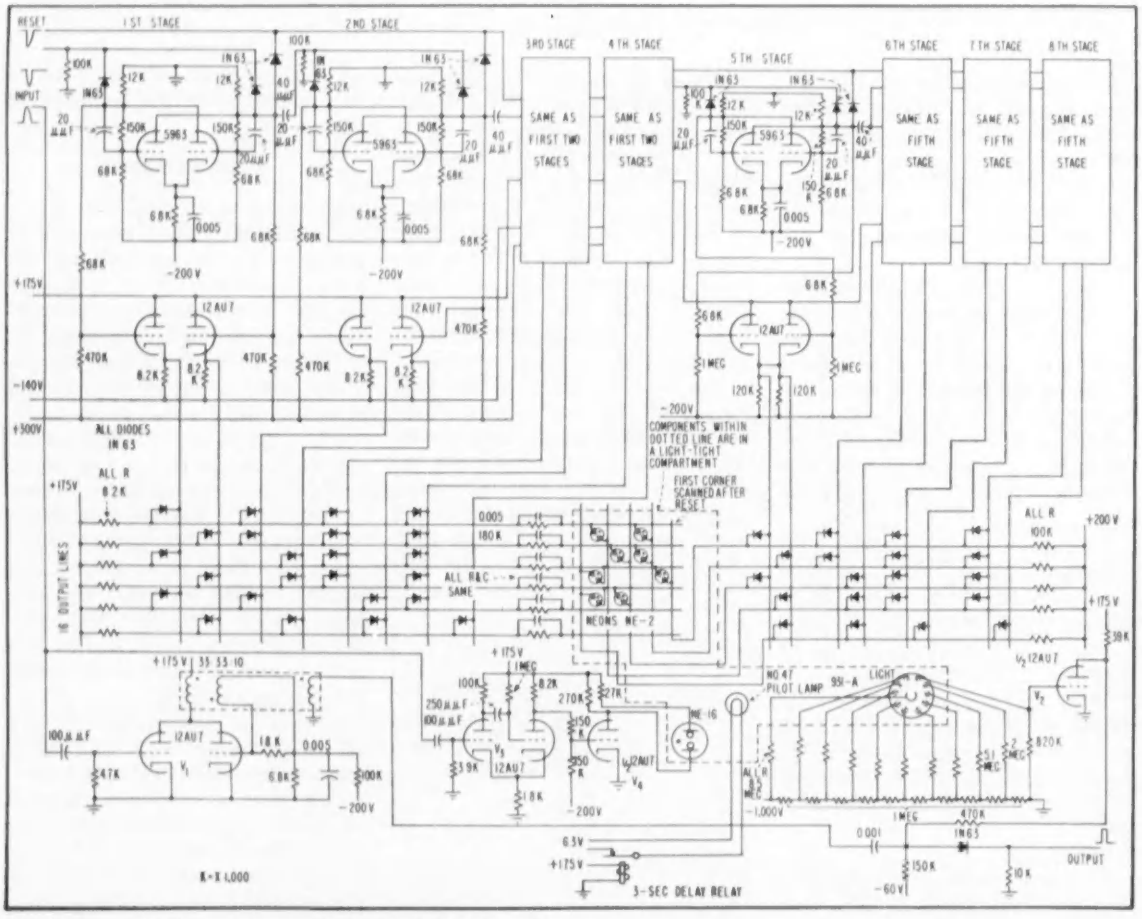

FIG. 4—Schematic diagram of neon-memory function generator

formation will be the control on the gate. The output is therefore directly available.

The input pulse also steps the counter and triggers the monostable multivibrator which in turn fires the flasher neon. This sets the matrix at the next corner and the neon at that corner, if any, will light. The multiplier phototube picks up the light and slowly changes the input to the AND gate. When the next input pulse arrives, the second output is immediate and the matrix is set for the third position.

Circuit Operation

The decoded output to the neon matrix from the first four stages is a positive gate from the zero-reference level. The d-c output level of the counter flip-flops is raised by the dividers to the grids of the cathode followers and the polarity of the diodes in the decoding matrix provides for the positive output gate. The d-c level of the fifth to eighth counter flip-flops is lowered by the dividers to their cathode followers to obtain a negative gate from the zero reference level. The outputs of these flip-flops are reversed to obtain correct sequencing of the negative output gates.

The positive input pulse is brought to blocking oscillator V_1 for reshaping and amplification. The positive output of V_1 is gated with the d-c level from multiplier-phototube amplifier V_2. Since the amplifier and gate have a slow response to the d-c level change, the output information is based on the past output of the neon matrix.

The flasher neon is ignited immediately after the input pulse by monostable multivibrator V_3 and amplifier V_4. To be certain that the flasher neon is partially ionized when the equipment is put into operation, a pilot lamp is included in the light-tight compartment. This lamp is turned off by the thermal relay about three seconds after B+ is applied. This delay allows the equipment to start its operation and insures initial firing of the flasher neon.

The circuit shown was designed for equipment requiring a maximum read-out rate of 200 cps and no attempt was made to attain maximum speed from the memory unit. The unit as constructed has a maximum read-out rate of about 2 kc. This is due to some portions of the circuitry and the mechanical layout of the decoding and neon matrixes. To work at higher speeds, the capacitance between all matrix wires must be reduced to improve rise times and reduce crosstalk.

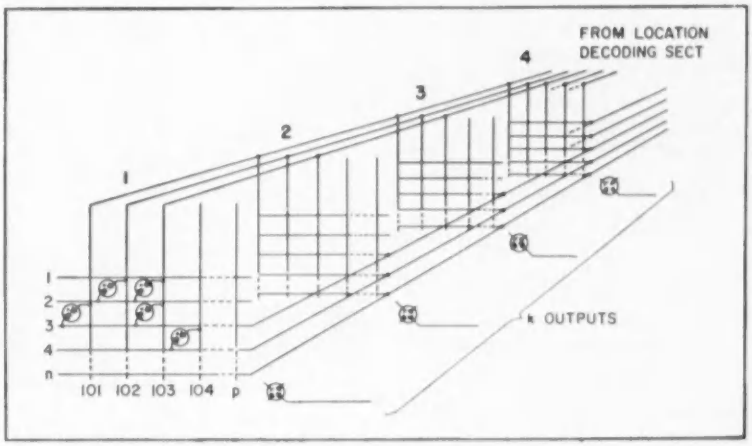

FIG. 5—Neon-tube matrix memory with four-bit output

Multidigit Output

The circuit provides one bit of output information at the time of each input. Many applications, however, require more bits per input pulse. Each bit will require a separate neon matrix but most of the equipment can be common. The layout of the matrixes for a four-bit output word is shown in Fig. 5.

Corresponding wires of each matrix are connected together and driven from the same source. The counters, cathode followers, decoding circuitry, monostable multivibrator and blocking oscillator need not be repeated. All that is necessary for each additional bit is a matrix, multiplier phototube and amplifier, AND gate and flasher.

The additional power required is negligible. For memories which require a different number of locations than 16 by 16 or 256 positions, a different counter configuration can be used or the counters can be reset before they reach full capacity.

The life of the components is normally no problem. The counters, cathode followers and decoding circuitry need not be high-speed units. Therefore they can operate with relatively low current and reasonable rise times. This speed also allows the crystal diodes in the decoding circuits to operate in circuits which are relatively insensitive to variations between diodes. The NE-2's have a rated life of about 25,000 hours. Since the tubes are on only a fraction of the time and are operating at about $\frac{1}{3}$ rated current due to the large gain available from the multiplier phototube, the neon life is no problem.

Construction

The physical layout of a typical memory matrix is shown in the photograph. The cover holding the neons is tipped up. This unit has four output bits per input pulse therefore four light-tight compartments, each with the memory neons, flasher neon and multiplier phototube. The neon memory tubes, rather than being physically located at the intersections of cross wires, are bunched in a group to illuminate the multiplier phototube uniformly.

The access time for the neon memory is about 100 microsec and the consecutive read-out time is the same. About 25 tubes and 128 diodes are needed for the 4-bit 256-word consecutive read-out memory. Sixteen tubes are counters and cathode followers.

This work was supported by USAF Cambridge Research Center under contract AF 30(635)-2815.

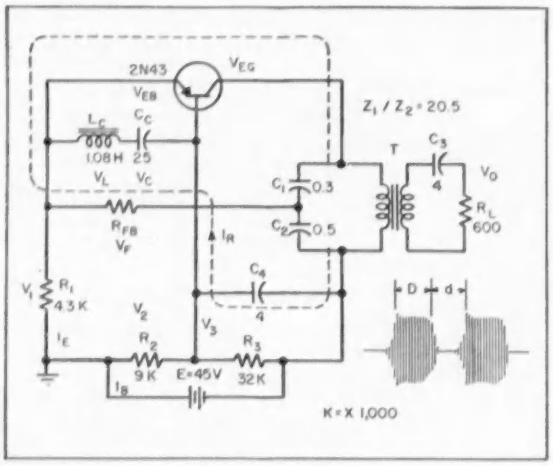

FIG. 1—Self-quenching superregenerative oscillator circuit uses junction transistor. Point contact may also be used

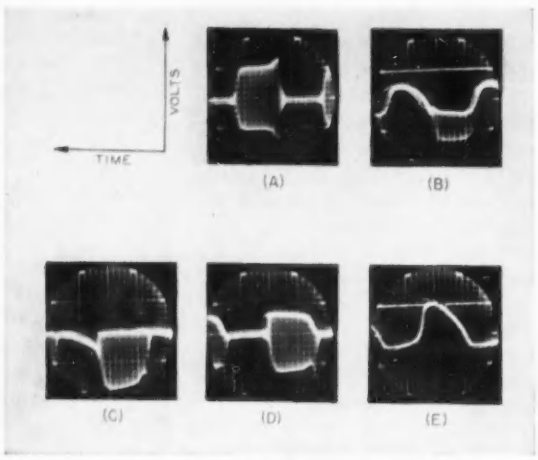

FIG. 2—Waveforms show circuit voltages V_o (A), V_1 (B), V_{eb} (C), V_1 (D) and V_c (E) corresponding to circuit diagram

SUPERREGENERATIVE

By R. J. KIRCHER* and I. P. KAMINOW

Hughes Aircraft Co.
Culver City, Calif.

Bell Telephone Laboratories
New York, N. Y.

SUMMARY — Equal on-off intervals of 500-cps audio frequency are obtained at a rate of 7 cps using junction transistor in basic self-quenching oscillator circuit. Effects of circuit parameter variation on oscillator performance are given. Operation is possible at higher frequencies

PULSES OF AUDIO-FREQUENCY tone produced at a slow rate from 5 to 10 cps are useful in providing alarm controls and in performing identification and supervisory functions in signaling systems.

This article describes a simple transistor circuit that produces equal on-off intervals of 500-cps tone at a rate of 7 cps. The circuit requires one junction transistor and provides 23 milliwatts of pulse power to a 600-ohm load. Operation at higher frequencies and the use of point-contact transistors in this circuit is possible.[1, 2]

The circuit diagram of the self-quenched oscillator is shown in Fig. 1.

Figure 2A is the output signal, Fig. 2B is the voltage across the resistor R_1 in the emitter circuit, Fig. 2C is the emitter-to-base voltage and Fig. 2D and 2E are the voltages across L_c and C_c respectively.

*Formerly with Bell Telephone Laboratories

Operation

To obtain some insight into the circuit operation, assume that self-quenched oscillation takes place. Suppose that the off period has just been completed and the on period is about to begin. Thus the emitter-to-base voltage will be slightly positive (for a *pnp* unit), the current through the *LC* combination will be small, the emitter-to-base resistance will be low and C_c will be charged positively.

Capacitor C_c will discharge rapidly through L_c and the emitter-to-base resistance. The voltage across L_c will increase, opposing the change in current, and the voltage across the *LC* combination will adjust itself to maintain a small positive voltage across emitter and base. Oscillations will build up rapidly toward some limiting value. Owing to transistor nonlinearity these oscillations produce a rectified current I_B, with a fundamental frequency of 7 cps, that flows through the inductance-capacitance combination along the assumed path shown in Fig. 1.

This current reduces the voltage across C_c until V_{eb} becomes so small that oscillation ceases. The emitter-to-base resistance is now high and C_c begins to charge through L_c, R_1 and the bias network R_2, R_3, C_4 and E. The resultant rapid change in the direction of current through L_c causes the voltage across the coil to decrease rapidly and drive the emitter diode further below cutoff.

The emitter-to-base voltage now increases toward the bias voltage V_2 as C_c charges. When V_{eb} becomes slightly positive, the emitter diode again becomes a low resist-

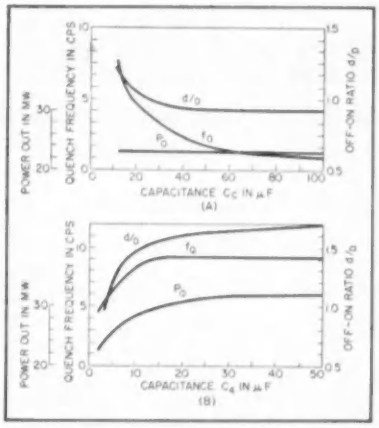

FIG. 3—Circuit performance with variation in quench capacitor C_c (A) and bypass capacitor C_A (B)

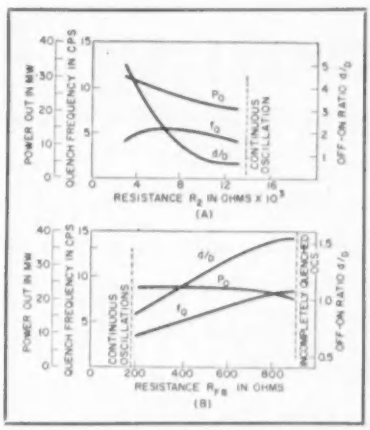

FIG. 4—Effect of changes in bias (A) and feedback (B) on circuit performance. Sum of R_2 and R_3 held constant in (A)

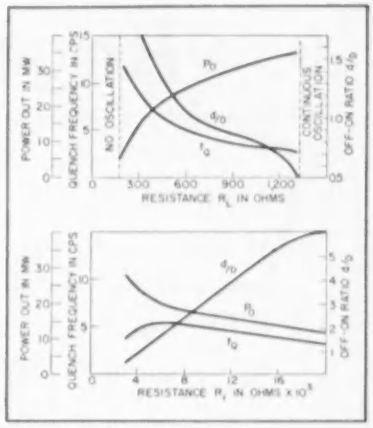

FIG. 5—Effect of changes of load resistance (A) and emitter resistance (B) on circuit performance

Transistor Oscillator

ance across the LC combination and the cycle repeats itself.

Choke L_c also serves to prevent a short circuit across the emitter and base at the fundamental oscillator frequency.

Experimental Results

Circuit performance was measured with a fundamental oscillator frequency of 500 cps, a quench frequency of 7 cps and a off to on ratio, d/D, of unity.

Only one significant element at a time was varied. The pulse power dissipated in R_L and P_s is taken as $A^2/2R_L$.

Performance as a function of the quench circuit capacitance C_c is shown in Fig. 3A. The power output and the off-on ratio d/D, do not vary appreciably for values of $C/_c$ above 25 μf. Quench frequency f_q varies hyperbolically with C_c. An empirical relation for f_q is $(8.8 \times 10^{-3}C_c)^{-1}$.

This variation suggests that quenching is controlled by a time constant rather than by a resonance phenomenon since the resonant frequency for the L_cC_c circuit is 33 cps. Since C_c chiefly affects f_q, it can be used as the primary control for the quench frequency.

Effects of varying bypass capacitor C_A values are shown in Fig. 3B. Above a value of 15 μf, d/D, f_q and P_s change slightly indicating that R_3 is effectively bypassed at the quench frequency.

Figure 4A shows the effects of changing the bias by varying R_2 while keeping the sum of R_2 and R_3 constant at 41,000 ohms. As R_2 is increased beyond 14,000 ohms quenching of the 500-cps signal stops owing to reduced collector voltage. As R_2 is decreased toward zero d/D increases rapidly because of reduced quiescent emitter current. Values of P_s and f_q are less critically related to the value of resistance than d/D; thus R_2 and R_3 can be used as a fine control for d/D.

The effect of the feedback resistance, R_{FB}, is shown in Fig. 4B. Within the operating region both d/D and f_q vary moderately so that R_{FB} can be used as a fine control for the 7-cps quench signal as well as a control over the basic 500-cps frequency.

Figure 5A shows that variation in R_L has a marked effect on the circuit performance. Improvement may be obtained by using a more suitable output transformer, a pad in the secondary to reduce the load variation seen by the circuit or a buffer amplifier in the output circuit.

Effects of variation in R_1 are shown in Fig. 5B. The important property here is that d/D can be controlled by R_1, with only small changes in f_s and f_q, in the range of 4,000 to 16,000 ohms.

Although the sum of $R_2 + R_3$ was not varied, it was found that for a value of 10,000 ohms instead of 41,000 ohms, the quench frequency increased about 40 percent with some increase in d/D. This change increased the battery drain from 4 ma to 8 ma.

A resistor placed in series with L_c and C_c decreased d/D as the resistance was increased, and quenching stopped when the sum of the value of this resistor and the resistance of L_c reached approximately 200 ohms. An increase in the value of L_c lowered the quench frequency.

References

(1) W. F. Chow, Transistor Superregenerative Detection Conference on Transistor Circuits, Philadelphia, 1955.

(2) R. U. Endries and R. P. Moore, Jr., Transistor Oscillators, RCA Lab. Report LB-865, p 9, May 23, 1952.

Regulating Amplifier

SUMMARY —— Servocontrol automatically adjusts gain to accommodate changes in attenuation in long open-wire telephone lines. Slope, or unequal attenuation as a function of frequency, in 12-channel carrier systems is likewise compensated. Pilot-tone pairs of 40 and 80 kc with 99 and 150 kc are employed to control gain

By W. S. CHASKIN and H. R. KIMBALL

Lenkurt Electric Co., Inc.
San Carlos, Calif.

MULTICHANNEL CARRIER telephone systems require compensation for variations in line attenuation caused by weather changes.

The device described is used in a new 12-channel carrier telephone system to correct automatically not only for changes in attenuation but also slope—the change of attenuation over a range of frequencies—that occur in open-wire telephone lines.

The telephone system uses frequencies from 40 to 88 kc in one direction of transmission and 99 to 150 kc in the other direction. Over these frequency ranges, differing weather conditions cause large changes in the attenuation characteristics of a line.

Figure 1 shows the attenuation characteristics of a typical 33-mile long telephone line. Under dry weather conditions, the average attenuation of the line is about 8 db and the change in attenuation from 99 to 150 kc is only 2 db. During a sleet storm, however, the attenuation at 99 kc may increase to 38 db and the attenuation at 150 kc may increase to 60 db.

The difference between these two values of attenuation (22 db) is the slope across the transmitted band of frequencies. Under different weather conditions, attenuation and slope may be anywhere between the dry-weather and sleet-storm extremes.

The regulator compensates for any attenuation in the range covered in Fig. 1. This includes lines so short that instead of providing variable amounts of gain, the regulator must provide varying amounts of loss. For long lines, the regulator will provide up to 48 db gain at 99 kc or 72 db gain at 150 kc. The regulation error under most conditions does not exceed ± 1 db.

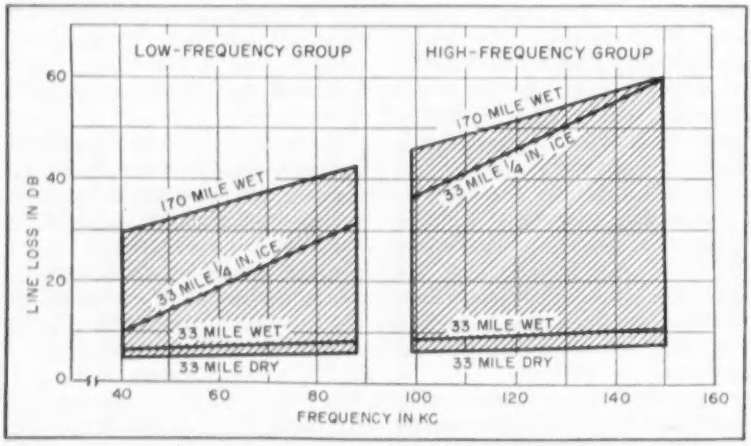

FIG. 1—Attenuation characteristics of open-wire line. Shaded portions show range of regulation of the equipment described in text

Design Considerations

Two general approaches, either electromechanical or electronic, can be taken in the design of regulators for open-wire carrier systems.

Electromechanical regulators are possible because attenuation changes occur slowly enough to be adequately compensated by a mechanical device. In fact, slow regulator response is necessary to prevent wide swings in system gain resulting from momentary line shorts or induced transients.

One type of electromechanical regulator now used in carrier system is a servomechanism consisting of motor-driven attenuators and slope-correcting networks. The motors of these devices are driven by a system of amplifiers, relays and filters to insert the necessary characteristics in the line. Such regulators, although they perform satisfactorily, are large physically and include expensive components.

Another design approach makes use of electronic circuits to take advantage of miniature components now available. An electronic regulator is smaller, more efficient and can be inexpensively manufactured.

To correct for wide range line-

Corrects Slope and Level

loss and slope conditions, precise attenuation and slope information must be conveyed to each regulator in the system. This information is obtained by sending two pilot frequencies in each direction of transmission. Pilots of 150 kc for slope control and 99 kc for flat-gain control are transmitted in the high-frequency direction. Tones of 80 kc for flat-gain control and 40 kc for slope control are transmitted in the low-frequency direction.

The regulator can be considered a closed-loop electronic servo system. The characteristics of this system are controlled by the level of the pilot tones at each end of the transmitted band.

A block diagram of the regulator circuit is shown in Fig. 2. In operation, the regulator attempts to maintain both pilot tones at a constant preset level at point *B*. This level is determined by the amplifier gains existing within the feedback loop, indicated by β.

The received band of frequencies, including the message and the pilot tones, is transmitted from input *A* to output *B* of the regulator. The pilot tones present in the output are then separated from the message frequencies and returned through a feedback loop to control the flat-gain and the slope-compensating amplifiers.

The line-equalizer section of the *A-B* path contains a low-pass roof filter to suppress out-of-band crosstalk and noise and a fixed equalizer to provide a moderate amount of preliminary equalization.

The flat-gain section maintains the overall gain of the regulator constant. This section consists of a pi-network in which attenuation depends upon the resistance of thermistors in its shunt arms and an amplifier with gain controllable by a thermistor in parallel with the load resistor. The overall gain or loss of the flat-gain section is determined by a direct current flowing through the thermistors.

Slope correction follows the flat-gain correction and is provided by two cascaded amplifiers with slope-equalizing networks in their feedback circuits. The frequency response of these amplifiers is controlled by varying the characteristics of the equalizer networks. As in the flat-gain regulator, this is accomplished by thermistors whose resistance is varied by d-c control. The output of the second slope amplifier is also the output of the regulator.

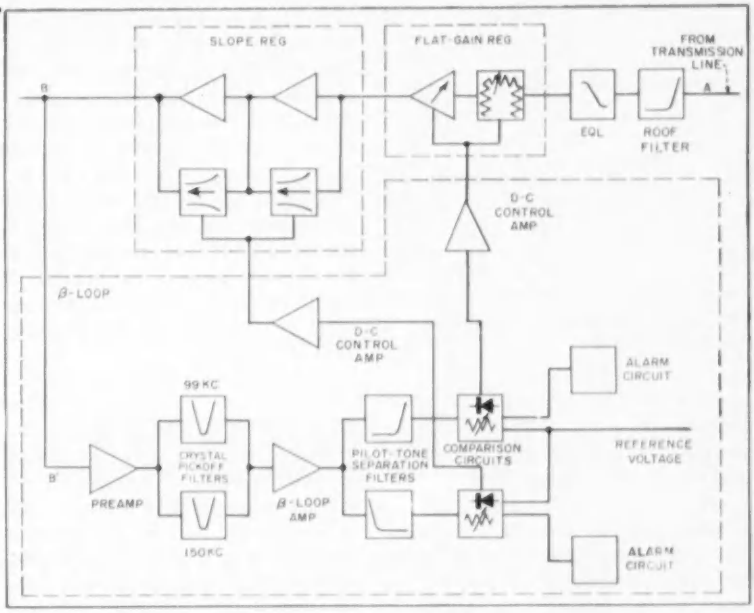

FIG. 2—Block diagram shows signal and pilot-tone paths

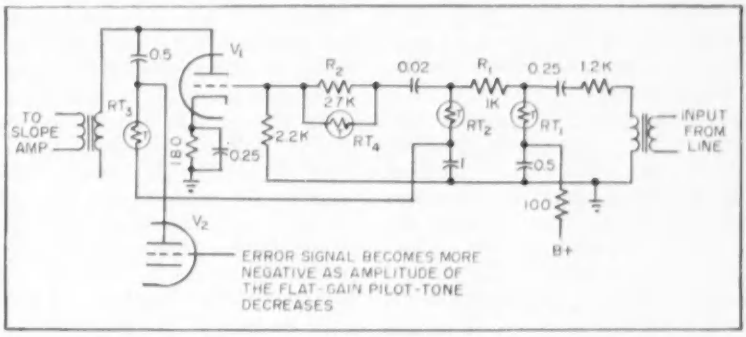

FIG. 3—Flat-gain regulator uses four thermistors

Feedback Loop

A portion of the regulator output is applied to the β-loop to control the gain characteristics of the flat-gain and slope-correcting amplifiers. In this loop, a pair of very sharp crystal band-pass filters separate the two pilot tones from the message frequencies. After further amplification, the pilot tones are separated from each other by a low-pass and high-pass filter combination, individually rectified and compared with d-c reference voltages.

The two error voltages obtained by the comparison depend upon the level of the pilot tones at the regulator output and are used to determine the output of the d-c control tubes. These tubes supply current to the flat-gain and slope-correcting

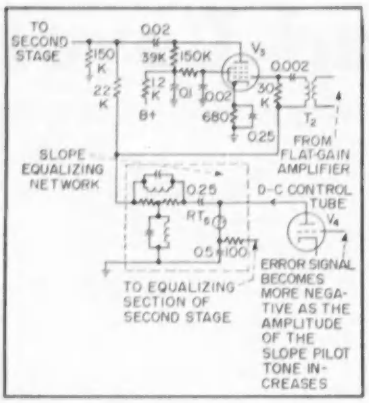

FIG. 4—Two slope-correcting amplifiers are used in cascade

networks. An output pilot level change of ± 1.0 db swings these control currents through their complete operating range.

Any change in the amplitude of a pilot tone at point *B* will cause the characteristic of the flat-gain or slope-correcting networks to vary in a direction that creates a compensating change in gain or slope.

To prevent the regulator from responding to transient phenomena such as swinging shorts on the telephone line or momentary interruptions from maintenance procedures, the time constants of the d-c control circuits are made long. If signals are completely lost, alarm circuits that monitor the error signals will be operated after about five seconds delay. The loss of either or both of the pilot tones will cause audible or visual indication.

A simplified schematic of the flat-gain regulating circuit is shown in Fig. 3. The input transformer provides an impedance step-up necessary to obtain optimum performance from a pi-section attenuator. Resistance R_1 and the two thermistors, RT_1 and RT_2 form the attenuator. The thermistors have a resistance characteristic that decreases as the current through them increases.

By varying the current through the thermistors, the attenuation of the pi-network can be changed to the desired value. The current is controlled by an error voltage applied to the grid of d-c amplifier tube V_3.

The plate-current path of the control tube contains a third thermistor RT_3, which is in series with RT_1 and RT_2 as far as the d-c control current is concerned. To the incoming signals, however, RT_3 is part of the load on the flat-gain amplifier tube V_1.

Therefore, any changes in control-tube plate current will also cause the resistance of the thermistor to modify the amplifier load impedance. This alters the gain of the amplifier in the same direction as the pi-network and provides additional attenuation compensation.

Thermistor RT_4 and resistor R_3 provide temperature compensation. They form a voltage divider that controls the input to the flat-gain amplifier as a function of ambient temperature. Temperature compensation is necessary because the thermistors that control the flat-gain or loss of the regulator are sensitive to changes in the ambient temperature as well as to changes in control current.

Since thermistor RT_4 is not in the d-c path of the other thermistors and does not carry appreciable current, its resistance is dependent only on ambient temperature. Its effect on the gain of the regulator is opposite to the effects of temperature change on thermistors RT_1, RT_2 and RT_3.

Slope Control

A simplified diagram of one of the two slope-correcting amplifiers is shown in Fig. 4. Signals from the flat-gain regulating stage are stepped up in voltage and impedance by the interstage transformer and applied to the grid of a pentode amplifier connected in a conventional *RC* arrangement with voltage feedback.

The feedback voltage of this amplifier is developed across a two-terminal *RLC* network in which impedance to ground varies linearly with frequency. By changing the resistance of RT_5 in the *RLC* network the impedance variation with frequency can be made to increase or decrease.

By passing plate current from d-c control tube V_4 through this thermistor, a means is provided for varying the slope of amplifier V_2 as a function of the error voltage applied to V_4. To keep the reactive elements in the slope-correcting networks within practical limits, two slope-correcting amplifiers are cascaded. Overall performance characteristics of the regulator are shown in Fig. 5.

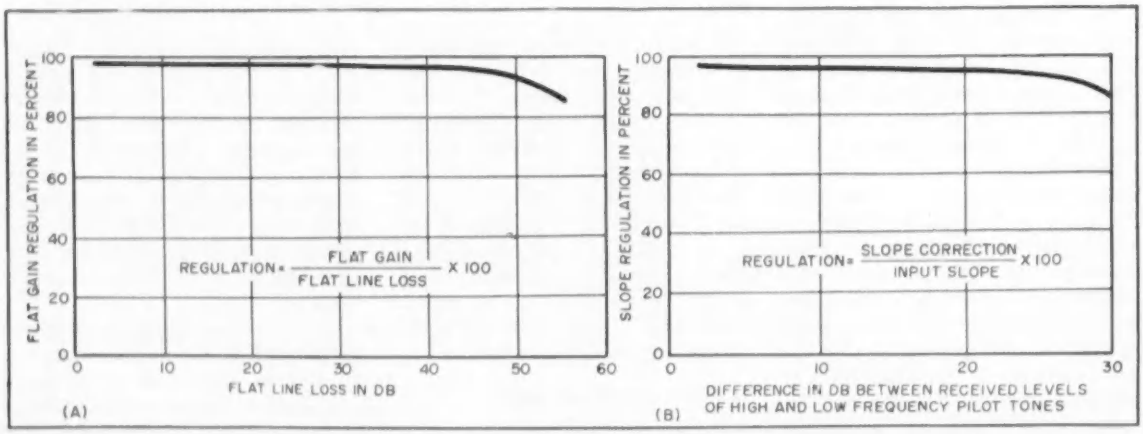

FIG. 5—Flat-gain regulation (A) and slope regulation (B) characteristics. Complete plug-in regulator comprises main chassis and four plug in units

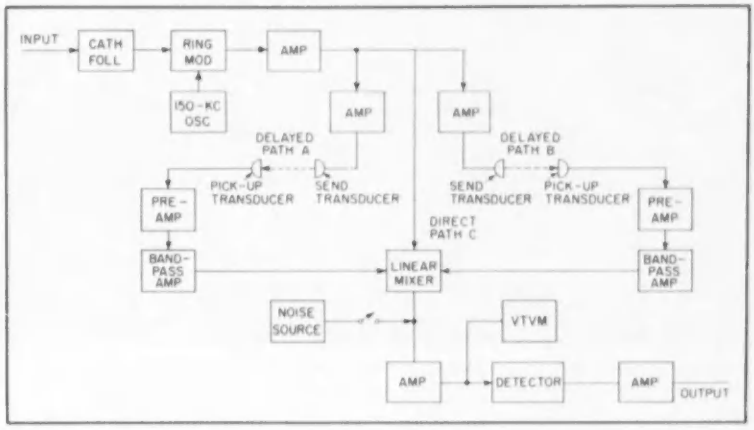

FIG. 1—Two ultrasonic paths through artificial ionosphere are compared with direct line signal in linear mixer

Multipath Simulator Tests Communications

By ALBERT F. DEUTH,* HUGH C. RESSLER, JOHN W. SMITH and GEORGE M. STAMPS

Project Engineer *Chief Engineer* *Asst. Chief Engineer*

Hogan Laboratories, Inc.
New York, N. Y.

SUMMARY —— Ultrasonic artificial ionosphere uses crystal transducers at 150 kc operating in air. Heat and fans simulate fading in two air-path signals which are compared with direct wire path

DEVELOPMENT of long-range communications equipment requires an ionosphere simulator capable of duplicating in the laboratory radio-signal test conditions corresponding to actual field conditions.

The multipath simulator described here is a discrete path type employing three paths, two of which are atmospheric. These paths provide for adjustable differential delays up to about 5 milliseconds. It differs from previous simulators in that the path delay takes place after modulation and that both amplitude and phase of the delayed signals can be varied dynamically and simultaneously. Fading is random and frequency selective.

The path delay point is important for double-sideband amplitude modulation for, if the signals were delayed in advance of carrier modulation, the system would not be realistic. The frequency selective nature of the fading simulates the actual nature of radio fading and distorts the two sidebands in different fashion.

To account for the fading patterns observed, both the phase and amplitude of the delayed signals must vary. Fading due to multipath is random in nature and follows the Rayleigh distribution law.

Transducers

The simulator employs acoustic transducers operating in air at a frequency of 150 kc. The high frequency is necessary since the signals are delayed after modulation. The transducers are made up of 14 ADP crystals. Since the ratio of the diameter of the transducer diaphragm to the wavelength of the 150-kc signal in air is large, the transducers have a sharp beam pattern. This makes it possible to operate them in an ordinary room without taking special precautions against spurious reflections. The transmitting and receiving transducers are identical. They are mounted on stands and are aligned by swivel joints. The arrangement is shown in a photograph.

The distance between transducers determines the delay, and the distance for each path can be independently adjusted. Since the velocity of sound in air is 1,119 feet per

* Formerly with Hogan Laboratories.

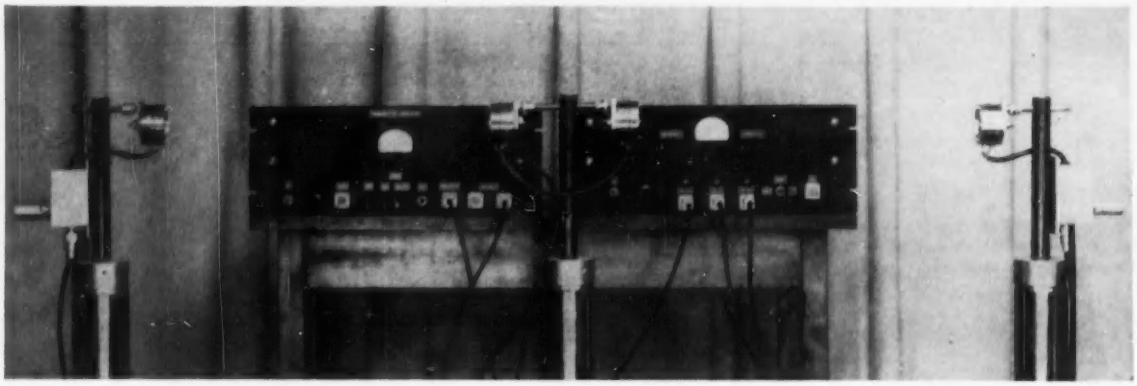

Multipath simulator with transducers spaced for delay of about two milliseconds. Transmitting transducers are on stand at center and the receiving transducers are on stands at left and right

second at 20 C, the delay is 0.9 millisecond per foot. The third or reference path is a direct wire transmitted signal traveling from the transmitter simulator to the receiver simulator.

A block diagram of the system is shown in Fig. 1. The transmitter consists essentially of a cathode-follower current amplifier which amplifies the modulation signals and supplies the current to a ring modulator. The 150-kc oscillator signal is amplitude modulated and amplified to drive the transmitting transducers. A small part of the amplified signal is taken as the direct signal.

The receiver portion of the simulator consists of the receiving transducers which furnish the input signals for preamplifiers mounted on the transducer stands. These preamplifiers feed band-pass amplifiers terminated by level controls. The signals are monitored by a vtvm and are combined, amplified, detected and further amplified for recording. Considerable amplification and careful shielding are required because the signal level out of the receiving transducers is on the order of a fraction of a millivolt. The low output of the transducers is due to the necessity of providing damping to increase bandwidth.

Although the system as described provides for only double-sideband a-m transmission, provision is made to incorporate single-sideband transmission. Provision is also made for adding a noise signal.

Transmitter

Figure 2 is a schematic of the transmitting unit of the multipath simulator. The carrier frequency of 150 kc is generated by one-half of a 12AT7 in a series tuned *L-C* oscillator circuit. The other half of the 12AT7 is operated as a cathode-follower buffer amplifier which drives the diode-ring modulator. Carrier amplitude is adjusted so that the modulated carrier output is linear with the modulating signal well past 100-percent modulation.

With perfectly matched diodes, the diode ring is balanced for both the carrier and the modulating signal so neither appears in the output unless the other is present. Therefore, no component of the modulating signal will appear in the output except as a modulation of the carrier. This is desirable when the highest modulating frequency is close to the carrier frequency.

The output voltage is proportional to the current flowing in the center-tap circuit with matched diodes and with a sine-wave carrier input that is sufficiently high in level to be clamped to essentially a square wave by the forward conductance of the diodes.

The ring in the transmitter simulator is operated with a steady-state direct current in the modulator to obtain the quiescent carrier. The voltage differential between the cathode of V_4, the modulator tube, and the tap from the 150-v plate supply causes this residual direct current flow through the modulator. Operation of V_4 against a positive direct voltage source instead of against ground is necessary for linearity when the modulation approaches 100 percent.

Output of the modulator appears at the grid of V_5 and is amplified by the 12AT7 two-stage *R-C* coupled amplifier. This amplified modu-

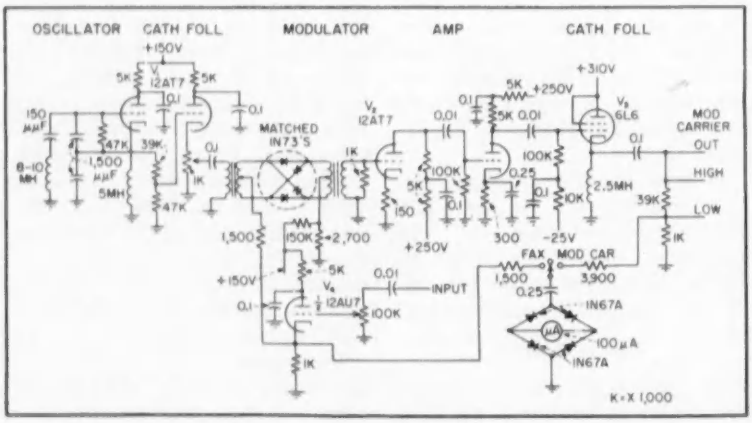

FIG. 2—Transmitter simulator provides modulated carrier output to drive sending transducer

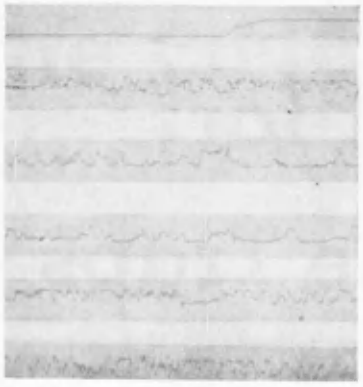

Combined carrier signal through simulator with paths perturbed by electric fan

lated 150-kc carrier drives the cathode-follower connected 6L6 output tube. Back bias is used so that impedance coupling may be employed to obtain a reasonable power output. This output is capacitively coupled to the transducers.

The bridge-type a-c meter indicates the amplitude of the modulating signal or the amplitude of the modulated output carrier. In the modulated carrier position this meter may be employed as a simple overmodulation indicator. With the balanced modulator used in this system, overmodulation will be indicated by a pronounced upward carrier shift.

The modulating signal may lie anywhere within the audio-frequency band from approximately 200 to 6,000 cps.

Figure 3 is a schematic of the preamplifier and band-pass amplifier for the receiving transducers. Two such systems are employed, one for each of the delayed path received signals. The preamplifiers are mounted in the small boxes on the transducer stand. The preamplifier has a double-tuned band-pass filter input with a bandwidth of approximately 14 kc. Overall voltage gain of the preamplifier is 25.

A two-stage band-pass amplifier using 6AH6 pentodes raises the level of the signal from the preamplifier to a peak value of approximately 1 volt. A separate amplifier is employed for each of the delayed signal inputs. Since the direct signal is obtained by a wire connection, no band-pass amplifier is required for this third circuit.

In the linear mixer, shown in Fig. 4, the composite output signal from the two delayed channels and the direct signal channel is developed across the resistor in the grid circuits of the 6AK6 amplifier.

A 6H6 is used for full-wave detection of the composite amplitude-modulated carrier. A simple *L-C* filter section removes the carrier components from the output of this detector. Parallel resonance in the filter effectively suppresses the carrier fundamental frequency.

A 6C4 cathode follower provides a low-impedance output stage for transmission of the recovered information signals to the recorder.

A separate vtvm circuit using a cascade-connected 12AT7 is provided for setting the relative amplitudes of the various input channels. Inverse feedback is employed in this amplifier to stabilize gain.

In the equipment shown the bandwidth, and hence the highest permissible modulation frequency, is determined by the band-pass circuits employed. The transducers themselves have an essentially flat bandwidth of 20 kc and so are not the limiting elements in the system.

Fading Effects

The velocity of sound in air changes with temperature about 2 feet per sec per degree C. At a frequency of 150 kc a small temperature differential will change the velocity sufficiently to produce a considerable change in phase. A change of about 0.9 deg C over a 2.24 foot beam path would change the phase π radians. This effect is made use of in obtaining random change of phase. A small heat source is placed between the transducers and under the beam. Random convection currents intercept the beam over a part of its travel and cause two effects, the phase is changed in a random manner due to the change in velocity and the amplitude is changed in a random manner due to refraction.

Fading rates can be somewhat controlled by increasing heat intensity.

Oscillograph records were made of the instantaneous value of combined carrier signals through the simulator. The delayed path was perturbed by an electric fan, causing rapid fading of the resultant carrier corresponding to rates on the order of 25 to approximately 500 per minute. The records are strikingly similar to oscillograms of actual radio transmissions.

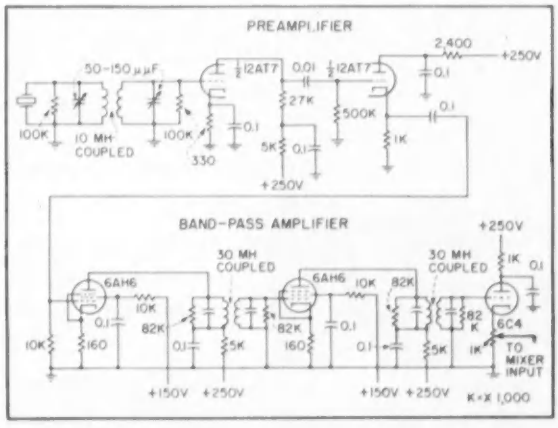

FIG. 3—Preamplifier-bandpass amplifier circuit for each delayed path boosts signal to 1-volt for mixing

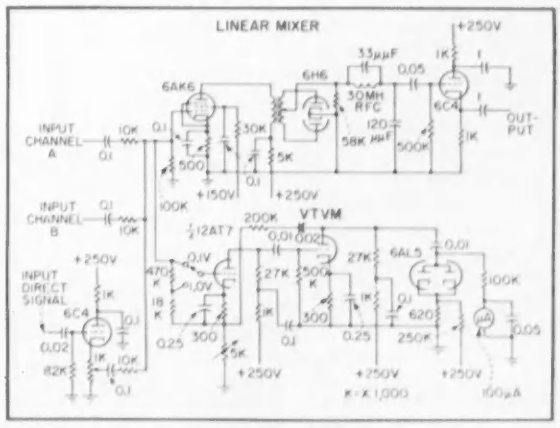

FIG. 4—Inputs from two delayed paths and direct path are combined and demodulated to drive recorder

Design Chart for Selective Cathode Traps

By K. HILLMAN
Sylvania Electric Products Inc.
Bayside, N. Y.

SUMMARY —— Equations for determining attenuation introduced at trap frequency and at other desired frequency used with chart speed determination of values for R, L and C for cathode trap. Graph can also be used to determine bandwidth of trap

IN DESIGNING cathode traps of the type shown in Fig. 1, attenuation must be introduced at a trap frequency, f_0, without greatly affecting the gain at some other frequency, f.

It is useful, therefore, to consider how the gain at f relative to the gain at f_0 varies with trap Q, normalized frequency spacing δ, and the increased loss at f due to the presence of the trap. A cathode resistor R_k has been included in the circuit, but may be set to zero or bypassed, if desired.

Chart Construction

In obtaining the expression from which the chart is plotted, the following assumptions are made: grid-cathode and cathode-ground capacitances are negligible, the tube is a constant-current generator ($i_p = g_m e_{gk}$) and the trap may be represented by a parallel combination of R, L and C.

An actual coil has, of course, series resistance. A parallel representation is exact, however, if the Q of the coil as a function of frequency is constant.

Let $|r_1| \equiv$
gain reduction factor at f with trap / gain reduction factor at f or f_0 without trap

$$= \left| \frac{1 + g_m \left[R_k + \dfrac{R}{1 + jQ\delta \dfrac{(2+\delta)}{(1+\delta)}} \right]}{1 + g_m R_k} \right|$$

and $r_2 \equiv$
gain reduction factor at f_0 with trap / gain reduction factor at f_0 or f without trap

$$= \frac{1 + g_m (R + R_k)}{1 + g_m R_k}$$

It can then be shown that

$$\frac{r_2}{|r_1|} = \left[\left(Q\delta \frac{(2+\delta)}{(1+\delta)} \right)^2 \left(\frac{|r_1|^2 - 1}{|r_1|^2} \right) + 1 \right]^{1/2}$$

The ratio

$$\frac{r_2}{|r_1|} =$$
gain reduction factor at f_0 with trap / gain reduction factor at f without trap



FIG. 1—Basic cathode trap circuit with design equations

has been plotted against $Q|\delta(2+\delta)/(1+\delta)|$ for various values of $|r_1|$. In addition, contour lines indicating levels where the value of r_2 remain constant are shown on the chart.

Example

An example of a typical design problem will show how the chart can be used to obtain component values and aid in gaging the trap bandwidth.

It is desired to reduce the gain at 10 mc by a factor of 20 relative to the gain at 7 mc.

The gain at 7 mc is to be decreased by no more than five percent. The circuit constants are $R_k = 0$, $g_m = 5{,}000$ μmhos. Find R, L and C.

The intersection of $r_2/|r_1| = 20$ and the curve corresponding to a value of $|r_1| = 1.05$ occurs for an abscissia corresponding to

$$Q\left|\delta\frac{(2+\delta)}{(1+\delta)}\right| = 66$$

since

$$\left|\delta\frac{(2+\delta)}{(1+\delta)}\right| = (0.3)\frac{1.7}{0.7} = 0.73,$$

$$Q = \frac{66}{0.73} \leq 90$$

(Continued on page 176)

The CINCH-JAN Shield Insert

—FOR INCREASED COOLING EFFICIENCY

. . . aids in maintaining lower operating tube temperatures . . . equipments have fewer failures, greater reliability, less maintenance and tube replacement costs.



Six sizes of the corrugated inserts are necessary to fit the six sizes of miniature tubes. The seven-pin tubes require a certain corrugation height and three widths: for the small, medium, and large sizes. The nine-pin tubes require a different corrugation and three different widths: for small, medium and large tubes.

CINCH corrugated inserts are made from 0.003 inch cadmium-plated brass shim stock with black matte finish; bent into a circular shape, the ends fitted together, and then inserted into the proper shield. The insert makes contact with the glass bulb on one side and the shield on the other, distributing the hot-spot on the tube and conducting the heat to the shield with a greater radiating surface.

Part No.	Shield	B	A	D	E	For Shield Number
20K22591	7 pin Small	$2\frac{13}{32}$	.750	.049	$\frac{3}{32}$	TS 102U01
20K22592	Medium	$2\frac{13}{32}$	1.000	.049	$\frac{3}{32}$	TS 102U02
20K22593	Large	$2\frac{13}{32}$	1.500	.049	$\frac{3}{32}$	TS 102U03
20K22594	9 pin Small	$2\frac{15}{16}$	.860	.068	$\frac{1}{32}$	TS 103U01
20K22595	Medium	$2\frac{15}{16}$	1.200	.068	$\frac{1}{32}$	TS 103U02
20K22596	Large	$2\frac{15}{16}$	1.500	.068	$\frac{1}{32}$	TS 103U03

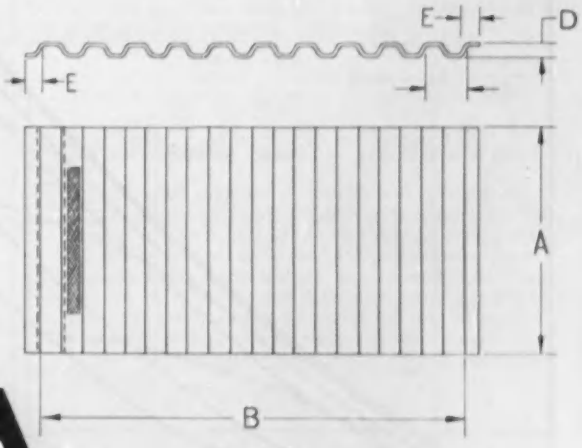

These inserts may be adapted to operating equipments presently in use with no chassis modification or additional space requirements.

Centrally located plants at Chicago, Shelbyville, Pasadena and St. Louis.

CONSULT CINCH

CINCH MANUFACTURING CORPORATION

1026 South Homan Ave., Chicago 24, Illinois

Subsidiary of United-Carr Fastener Corporation, Cambridge, Mass.

Design Chart

(Continued from page 174)

Also, $r_2 = 1.05\ (20) = 21 = 1 + g_m R = 1 + 0.005R$ so that

$$R = 4{,}000 \text{ ohms}$$

$$X_{10\ mc} = \frac{R}{Q} = \frac{4{,}000}{90} = 44 \text{ ohms}$$

from which

$$L \cong 0.7\ \mu h$$

$$C \cong 360\ \mu\mu f$$

Suppose a 0.7-μh coil is now made and found to have a Q>90. Let the measured value be Q = 130. The chart shows that the intersection of $r_2 = 1 + 20\ 130/90 = 30$ and $Q|\delta(2 + \delta)/(1 + \delta)| = 94$ occurs for value of $r_2/|r_1| \cong 28.5$ and for $|r_1| = 1.05$.

If desired, the inductance may be reduced, assuming the coil Q is held constant, so that $r_2/|r_1| = 20$ is again obtained but at a value of $|r_1| < 1.05$.

Trap Bandwidth

Sometimes a band of frequencies rather than a single frequency is to be attenuated. The chart may be used to gage the trap bandwidth. In the preceding example, the range of frequencies where the gain relative to 7 mc is decreased by a factor of ten or more can be found.

Since $r_2 = 21$, for $|r_1| \geq 10$ $(1.05 = 10.5$, then $r_2/|r_1| \leq 2$. The intersection of $r_2/|\bar{r}_1| = 2$ with the curve $r_1 >> 1$ occurs at about $Q|\delta(2 + \delta)/(1 + \delta)| \cong 2\ Q|\delta| \cong 1.7$, so that $2|\delta| \cong 1.7/90 \cong 0.019$. Hence the trapping bandwidth (as defined) is 0.019 (10) or 0.19 mc.

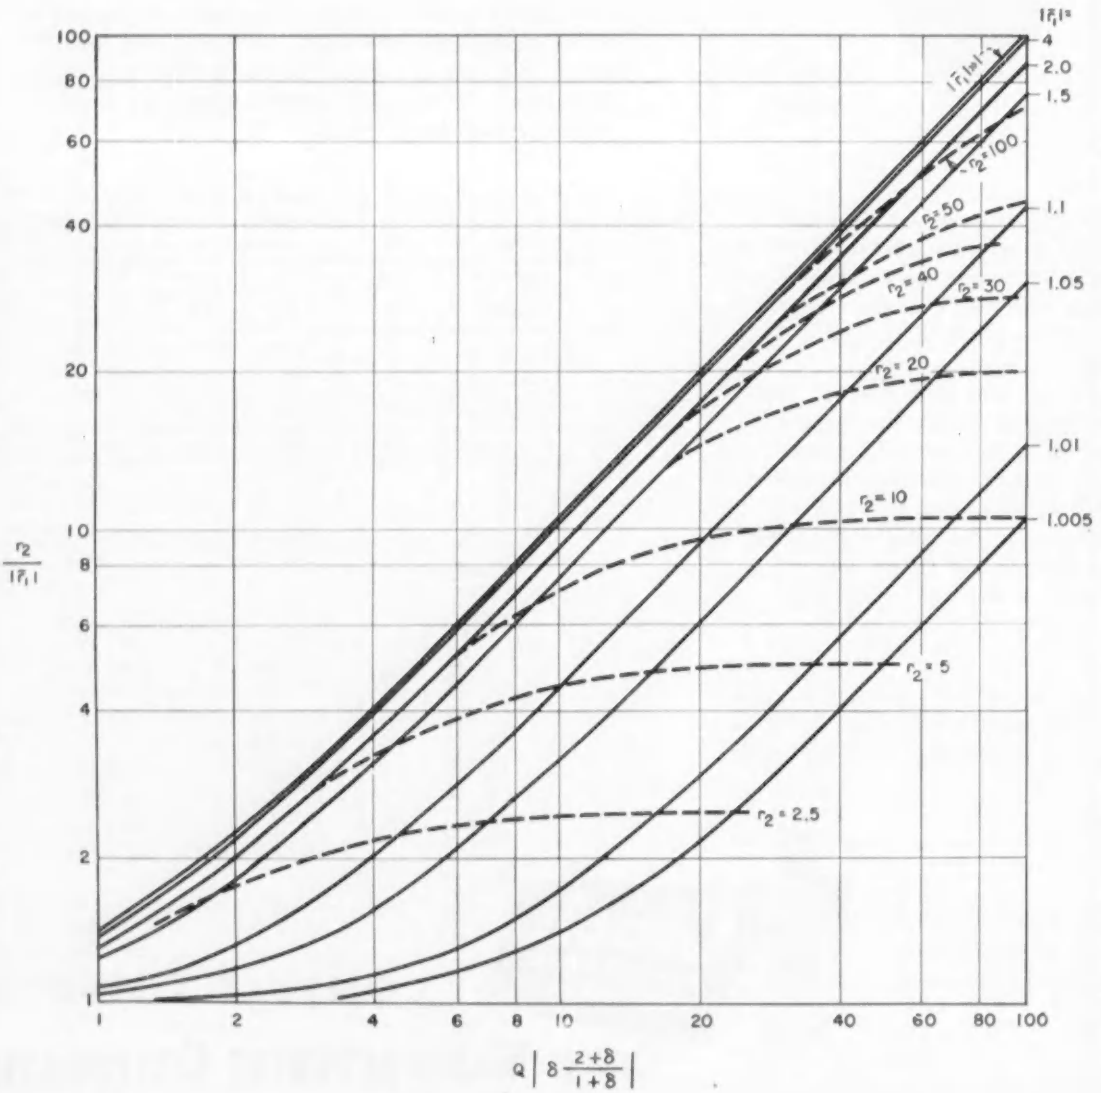

MALLORY

For Extra Capacitor Life and Reliability— Mallory Telephone and Computer Grades

Certain types of electronic equipment demand the ultimate in reliability and long life in all components . . . either because replacement would be highly expensive or because complex circuits require extreme stability. For applications of this sort, beyond the range of standard commercial products, Mallory manufactures electrolytic capacitors known as telephone and computer grade. These capacitors have premium characteristics obtained by special techniques in processing.

To assure highest quality, extra precautions are observed in the selection of materials, and in manufacturing . . . even beyond the extreme care normally practiced in making Mallory commercial grade capacitors. Special electrical processing operations produce exceptionally low leakage current and series resistance. Rigid pretesting assures as much as twenty years' life on a statistically high percentage of capacitors of this grade.

This extra measure of performance is available in three different series of Mallory capacitors:

- Units manufactured to conform in appearance and construction with current telephone standards.
- Capacitors of telephone grade performance, but with physical design other than that called for in telephone applications.
- Units similar to telephone grade but with recommended voltage ratings lower in relation to anode forming voltages: particularly useful for high stability and low leakage in computer circuits.

Mallory capacitor specialists will be glad to consult with you on the selection and application of special grades for your special circuit requirements.

For all capacitor needs . . . see Mallory first!

For the great majority of civilian and military electronic circuits, Mallory supplies a complete line of commercial and JAN grade electrolytic capacitors. All can be counted on to render superior performance at economical cost. Mallory also manufactures the famous FP—the pioneer fabricated plate capacitor rated for continuous duty at 85° C.; also miniature and subminiature electrolytics, tantalum capacitors, motor starting capacitors. Write or call for complete data.

Serving Industry with These Products:

Electromechanical—Resistors • Switches • Tuning Devices • Vibrators
Electrochemical—Capacitors • Rectifiers • Mercury Batteries
Metallurgical—Contacts • Special Metals • Welding Materials

Parts distributors in all major cities stock Mallory standard components for your convenience.

Expect more...get more from

P. R. MALLORY & CO. Inc.
MALLORY

P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA

Electrons At Work

Edited by ALEXANDER A. McKENZIE

New Carrier Communications and Radar

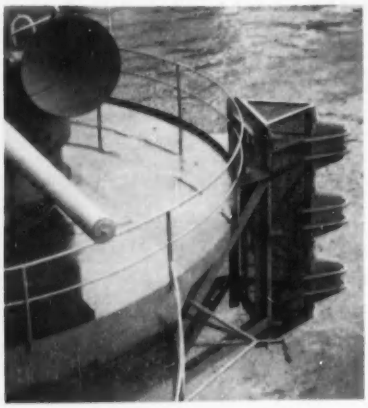

Newly commissioned *U. S. S. Saratoga* uses the latest electronic devices to improve detection and fire control besides furnishing navigational signals and communications to aircraft. Barrel-shaped structure at top of mast (left) is enclosed Tacan navigation-aid antenna, used with system developed by Federal Telecommunication Labs. Antennas for uhf communications are visible at the corners of the flight deck. Detail of similar antenna mounted on gun tub is shown at right. Eight antennas provide 360-degree cover

Shock-Velocity Measurement

AN ACCELEROMETER that conveniently produces shock-damage data previously unavailable may eventually lead to design changes and improvements in the shock-load performance of aircraft and shipboard equipment. It was developed by T. A. Perls and C. W. Kissinger at the National Bureau of Standards.

Conventional velocity meters comprise a heavy mass, spring-mounted to a rigid frame attached to the test structure. When the test structure and frame are accelerated, the mass remains fixed in space for a small fraction of the natural period of the spring-mass system. For this short time, displacement of the mass relative to the frame is equal and opposite to the absolute motion of the frame.

This relative motion causes a pick-up coil to cut lines of force of a constant magnetic field, generating a voltage. Such voltage is proportional to the relative velocity between the mass and the frame and, for a short time, it is proportional to the absolute velocity of the frame.

These conventional velocity meters have an undesirable low-frequency resonance between 3 and 5

Construction Of DEW Line In Far North



Temporary Air Force communications tower is erected at early-warning location



Module-type housing being erected near air strip for radar-communications use

Mobile unit transports Western Electric personnel in vicinity of radar stations

kepco

VOLTAGE REGULATED POWER SUPPLIES

for powering electronic equipment

KR SERIES

with ***NEW-IMPROVED FEATURES***

★ ***FAST*** **RECOVERY TIME**

★ ***GOOD*** **STABILITY**

★ ***LOW*** **OUTPUT IMPEDANCE**

KR Voltage Regulated Power Supplies are conservatively rated and are designed for continuous duty at 50°C ambient.

REGULATION: Less than 0.2 volts for line fluctuation from 105-125 volts and less than 0.2 volts for load variation from 0 to maximum current.

RIPPLE: Less than 3 mv. rms.

STABILITY: The output voltage variation is less than the regulation specification for a period of 8 hours.

RECOVERY TIME: Less than 50 microseconds. The excursion in the output voltage during the recovery period is less than the regulation specification.

OUTPUT IMPEDANCE: Less than 0.1 ohms from 20 cycles to 100KC. Less than 0.5 ohms from DC to 20 cycles. Many units have very much lower output impedance.

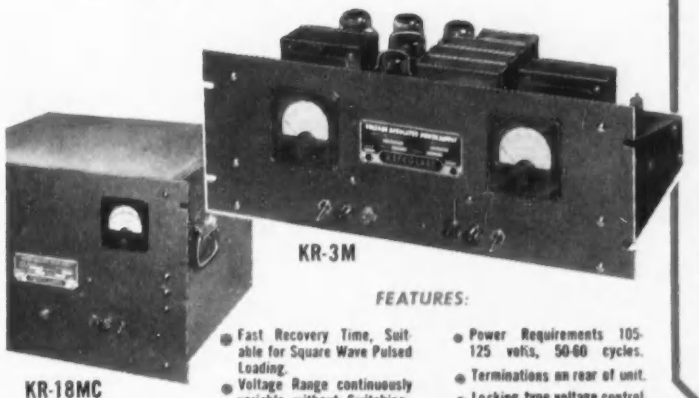

KR-3M

KR-18MC

FEATURES:

- Fast Recovery Time, Suitable for Square Wave Pulsed Loading.
- Voltage Range continuously variable without Switching.
- Either Positive or Negative may be Grounded.
- Oil Filled Condensers.
- Wire Harness and Resistor Board Construction.
- Power Requirements 105-125 volts, 50-60 cycles.
- Terminations on rear of unit.
- Locking type voltage control AC, DC Switches, Fuses, and Pilot Lights.
- Color Grey Hammertone.
- Guarantee One Year.

All models available for 400 cycle operation on special order.

1.5 Amp. KR SERIES

Model	Volts	6.3V AC	Rack Mount W	H	D	Price
KR16	0-150	Each supply	19"	12¼"	17"	$625
KR17	100-200	has two	19"	12¼"	17"	$625
KR18	195-325	15 Amp.	19"	12¼"	17"	$695
KR19	295-450	outputs	19"	12¼"	17"	$695

600 ma. KR SERIES

Model	Volts	6.3V AC	Rack Mount W	H	D	Price
KR 8	0-150	Each supply	19"	10½"	13"	$330
KR 5	100-200	has two	19"	10½"	13"	$240
KR 6	195-325	10 Amp.	19"	10½"	13"	$240
KR 7	295-450	outputs	19"	10½"	13"	$250

300 ma. KR SERIES

Model	Volts	6.3V AC	Rack Mount W	H	D	Price
KR 12	0-150	Each supply	19"	7"	11"	$270
KR 3	100-200	has two	19"	7"	11"	$180
KR 4	195-325	5 Amp.	19"	7"	11"	$180
KR 10	295-450	outputs	19"	7"	11"	$190

125 ma. KR SERIES

Model	Volts	6.3V AC	Rack Mount W	H	D	Price
KR 11	0-150	Each supply	19"	7"	11"	$180
KR 1	100-200	has one	19"	7"	7½"	$ 90
KR 2	195-325	3 Amp.	19"	7"	7½"	$ 90
KR 9	295-450	output	19"	7"	7½"	$ 97

To include 3" Current and Voltage Meters, Add M to Model number (e.g. KR 16 M) and Add $30.00 to the Price.
To include Dust Cover and Handles for Table Mounting, Add C to Model number (e.g. KR16-C) and Add $10.00 to the Price.
To include Meters, Dust Cover and Handles, Add MC to Model number (e.g. KR-16 MC) and Add $40.00 to the Price.

PRICES F.O.B. Flushing.

A LINE OF 50 MODELS
Available from Stock - Catalog on Request

RESEARCH • MANUFACTURING
KEPCO Laboratories

KEPCO LABORATORIES

131-38 SANFORD AVENUE • FLUSHING 55, N.Y. • INDEPENDENCE 1-7000

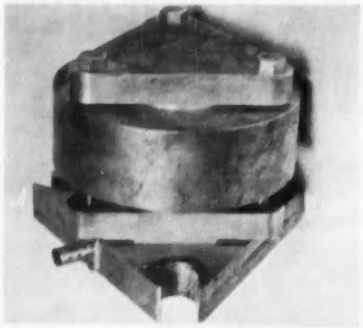

Large barium titanate velocity meter is bolted to structure being shock tested. It acts as a transducer to convert shock into an electrical signal

cps and are impossible to adjust more than approximately under conditions of movement, such as a rolling ship. Large errors may be introduced if the instrument is used with its sensitive axis other than vertical.

The new device is a barium titanate velocity meter operating on a different principle. It is essentially an integrating accelerometer. The sensing element is a group of four piezoelectric transducers, each 3 inches in diameter and ½-inch thick. Sensitivity of the device is such that an applied acceleration of one gravity unit will produce electrical output of approximately 200 millivolts. Linear range is better than ±300 g.

Acceleration output from the barium titanate element must be integrated to obtain a velocity signal, which can be done using a simple R-C integrator. A velocity sensitivity of 4 millivolts per foot per second might be available at the amplifier recorder.

With commercially flat crystals, the resonant frequency of the meter is 6,900 cps. Optically ground crystals increase resonant frequency to 10,200 cps. To achieve highest possible resonant frequency, the velocimeter base, the barium titanate disks and the loading mass must be in contact over their entire mating surfaces. The assembly then acts as a compression spring.

The force exerted by the bolts that hold the assembly together must be so applied that the surfaces bearing against the piezoelectric disks are not distorted. Contact in the present instrument is established by machining three ears on the loading mass and on the base and providing an undercut. The force exerted by the three assembly bolts is applied relatively uniformly around a circle of smaller diameter than that of the barium titanate disks.



Cross-section drawing shows the four barium-titanate wafers that are the heart of the electromechanical transducer that was recently developed at NBS

With the device mounted on a heavy object, theoretical resonant frequency should be 0.7 times the unmounted resonant frequency, assuming perfect coupling. Such coupling can be obtained using a ⅛-inch lead mounting shim that has proved not to flow appreciably during six days.

Tesla Centenary Honors High-Frequency Pioneer

Nikola Tesla, in 1922, experiments with high frequencies in his laboratory

ACCORDING to the best available information, Nikola Tesla was born in what is now Jugoslavia on July 10, 1856. He died in New York City on January 7, 1943. He was about 28 years old when he came to America, but the young man brought with him the idea of a new alternating-current power distribution system based upon the polyphase induction motor. Current electrical power practice bears witness to the importance of his ideas.

Despite his latter-day flamboyant pronouncements in the press, Tesla did not ever achieve a like measure of success in high-frequency radio communications or—a pet project—wireless transmission of power.

Writing about Tesla's contribution to high frequency, L. P. Wheeler in 1943 pointed out that a perusal of pertinent patent specifications indicated Tesla's superior grasp of three ideas. While they were not effectively exploited for communications purposes, his ideas appear to have been clearer than those of his contemporaries.

He understood the idea of inductive coupling between driving and working circuits; he saw the importance of tuning both circuits (the idea of an oscillation transformer); and he had the idea of a capacitance-loaded open-secondary

surprise

Another product *from Helipot!*

Critics Captivated!

Discriminating engineers, the world's toughest critics, applaud the brilliant performance of Helipot's brand new trio - - series 5400, 5600 and 5700 single-turn precision potentiometers.

According to the program notes, these three virtuosi come in a choice of five mounting-and-bearing combinations. A one-piece, dimensionally-stable plastic housing eliminates a separate rear lid. There are tighter tolerances on linearity and mechanical run-out.

A new rotor design reduces mass . . . permits lower contact pressure . . . results in decreased coil wear, more reliable operation, greater life expectancy. Incidentally, torque is lower.

They're a quiet trio, too. Maximum noise, at 100 rpm, with 1 milliamp of slider current, is 100 millivolts.

Sweet music to any electronic designer's ear!

For complete information and specifications on these three new HELIPOT* precision potentiometers, write for data file 701.

Helipot®

first in precision potentiometers
Helipot Corporation, South Pasadena, California
Engineering representatives in principal cities
a division of Beckman Instruments, Inc.

706 *REG. U. S. PAT. OFF.

circuit. All this was presented in lectures or patent disclosures prior to 1894.

Tesla's great body of unworkable or unworked ideas was not so limited, however. For example, the late E. H. Armstrong wrote, a few months before his own death, ". . . in my 'Appreciation' of the work of Tesla which came during wartime (1943), there was much research under way toward reducing the Tesla concept of the guided weapon in various laboratories—I considered it inadvisable to draw attention to the subject by reference to Tesla's early concept of the matter. So far as I know, the credit for the concept rests entirely with him."

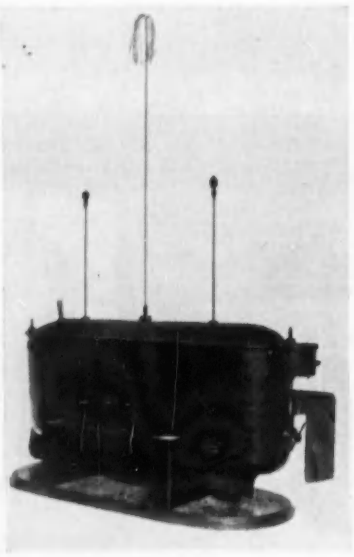

Wireless-controlled boat (1897)

New Wind Tunnel Depends On Television

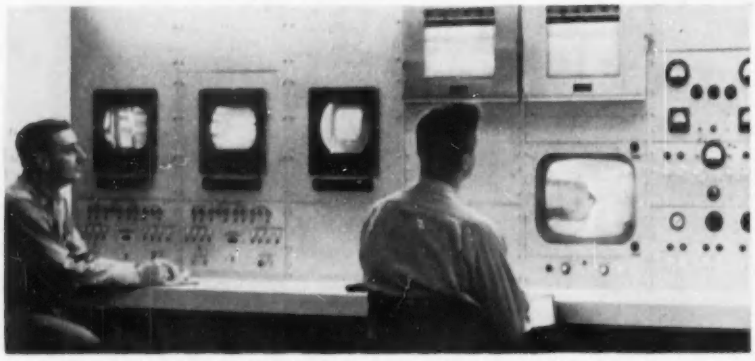

Three strategically placed RCA television cameras in the new 10-by-10 foot supersonic wind tunnel located at Lewis Flight Propulsion Laboratory, Cleveland, permit safe observation of tests. Monitors shown are installed at the tunnel control room

Man-Made Industrial Diamonds

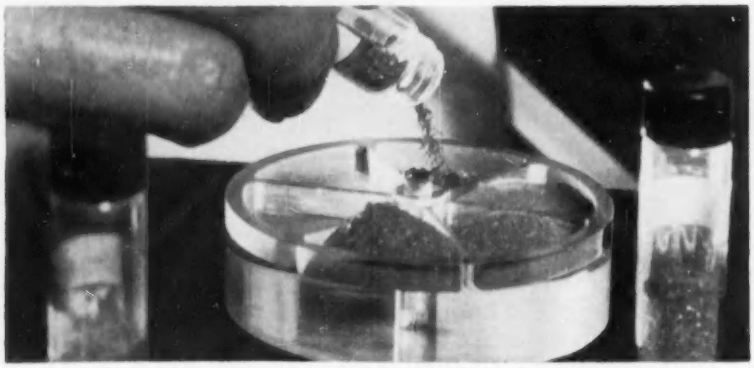

Production of man-made diamonds in 1954 by scientists of the General Electric Co. is commemorated in an exhibit of 100 carats of small industrial crystals at the Smithsonian Institution. The stones were made since 1954 using pressures of 2.7 million pounds a square inch at temperatures above 5,000 F. They are not commercially available

Radio Paging Eliminates Public Address

DISADVANTAGES of public-address paging or sound-signaling systems can be overcome by radio systems provided equipment is not too complex or expensive for all those required to use the service. Various systems have been suggested or used varying from the Hollywood closed-loop cueing system to selective signaling devices that can be operated many miles from the central transmitter.

In Great Britain, according to *McGraw-Hill World News*, British Communications Corp. of Wembley, England, is producing a Radiopage equipment that uses transistors in a receiver that picks up energy from a closed wire loop encircling the building in which communication is desired.

The frequency band includes 75

to 87 kc and each receiver is allocated a frequency 250 cps from its neighbor, allowing a total of 50 channels. Signals picked up by a ferrite rod antenna go through a stage of r-f amplification and are rectified by a germanium diode. Selectivity is obtained with a crystal filter tuned to one of the 50 different carrier frequencies of which the transmitter is capable.

A gating transistor controls application of high voltage to the audio stages so that only when a signal of correct frequency arrives does the gate open and the a-f stage operate. Audio power to the loudspeaker is about 5 milliwatts. When the receiver (illustrated) is not carried in the pocket but laid

A COMPLETE LINE OF DEPENDABLE ENCAPSULATED RESISTORS

PERMASEAL®

PRECISION WIREWOUND RESISTORS FOR 85C AND 125C AMBIENTS

For applications requiring accurate resistance values at 85C and 125C operating temperatures—in units of truly small physical size—select the precise resistor you want from one of the 46 standard Permaseal designs in tab or axial lead styles.

Winding forms, resistance wire and embedding material are matched and integrated, resulting in long term stability at rated wattage over the operating temperature range. The embedding material is a special plastic that extends protection well beyond the severe humidity resistance specifications of MIL-R-93A and Proposed MIL-R-9444 (USAF).

These high-accuracy units are available in close resistance tolerances down to ± 0.1%. They are carefully and properly aged by a special Sprague process so that they maintain their accuracy within the limits set by the most stringent military specifications.

SPRAGUE

FOR COMPLETE DATA WRITE FOR COPY OF SPRAGUE ENGINEERING BULLETIN NO. 122A

SPRAGUE ELECTRIC COMPANY • 35 MARSHALL ST. • NORTH ADAMS, MASS.

TRANSCO
AIRBORNE
ANTENNAS

–designed for production, to save time and money

TRANSCO offers fully integrated antenna facilities . . . a single responsibility for design, development, testing and manufacturing. You can count on TRANSCO to take your job from problem through production in fastest possible time, and at minimum overall cost.

Should you have antenna problems involving development, manufacture or test, we invite your inquiries.

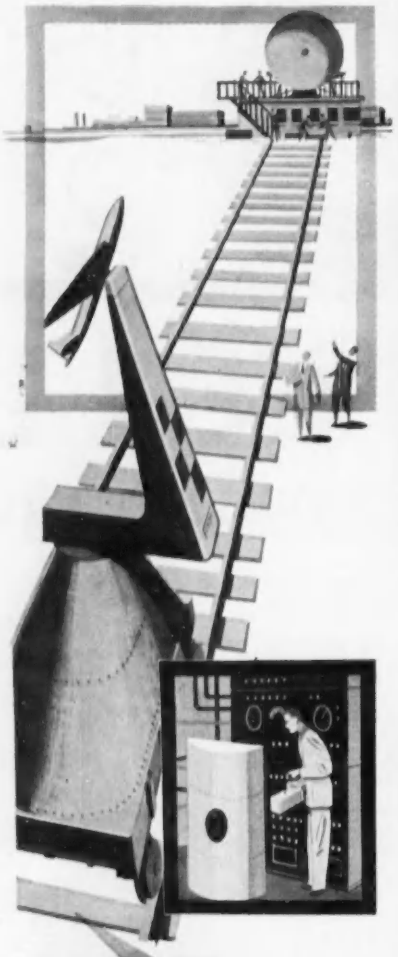

TRANSCO
PRODUCTS, INC.
Always the Finest in Avionics
12210 NEBRASKA AVE.,
LOS ANGELES 25, CALIF.
REPRESENTATIVES IN MAJOR AREAS

Want more information? Use post card on last page.

flat on a table, a mercury switch turns off the unit.

►**Transmitter Unit**—With a power output of 25 watts, the transmitter is considered adequate to cover an area of some 30 acres. A control unit contains 50 crystals. Signals from the control unit pass through a limiter and are then amplified sufficiently to drive a push-pull output stage. Amplitude modulation is used on both plate and screen. Output impedance can be adjusted between 50 and 300 ohms.

A loop Q up to 10 can be expected and as the frequency of the transmitter is varied with the selector switch, tuning capacitors are switched in each time transmitter frequency is changed by an increment of 2.5 kc. It is necessary to tune the transmitting loop by the addition of series capacitors so that a resistive load is presented to the transmitter.

Siting Communications Stations

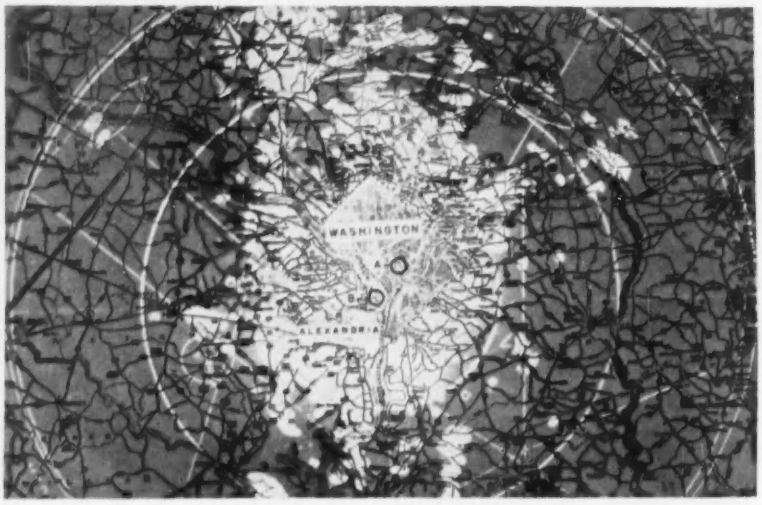

Ground clutter, the generally unwanted signal return from hills, trees and other low objects, has been put to use by the Signal Corps. Propagation maps, showing possible uhf signal paths, can be prepared by superimposing radar reflections upon terrain maps. The light areas shown above indicate good communications paths from a 147-foot tower at Washington National Airport

Army Meteorologists Study Duct Effects

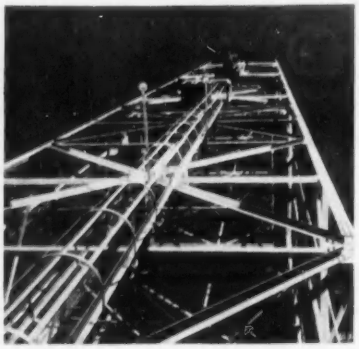

Instruments mounted on the 200-foot tower measure changing meteorological conditions during correlation tests on propagation ducts

ATMOSPHERIC conditions that cause ducting, or propagation of ultra-high frequency radio signals far beyond the optical horizon are recognized but quantitative data are lacking. The phenomenon is important to the military since transmissions thought to be private have sometimes been heard at distances great as compared with the location of the desired receiver.

Special Studies Branch, Plans and Programs Division, Aviation and Meteorological Dept., Army Electronic Proving Ground, Fort Huachuca, Arizona, is currently using airborne electronic equipment

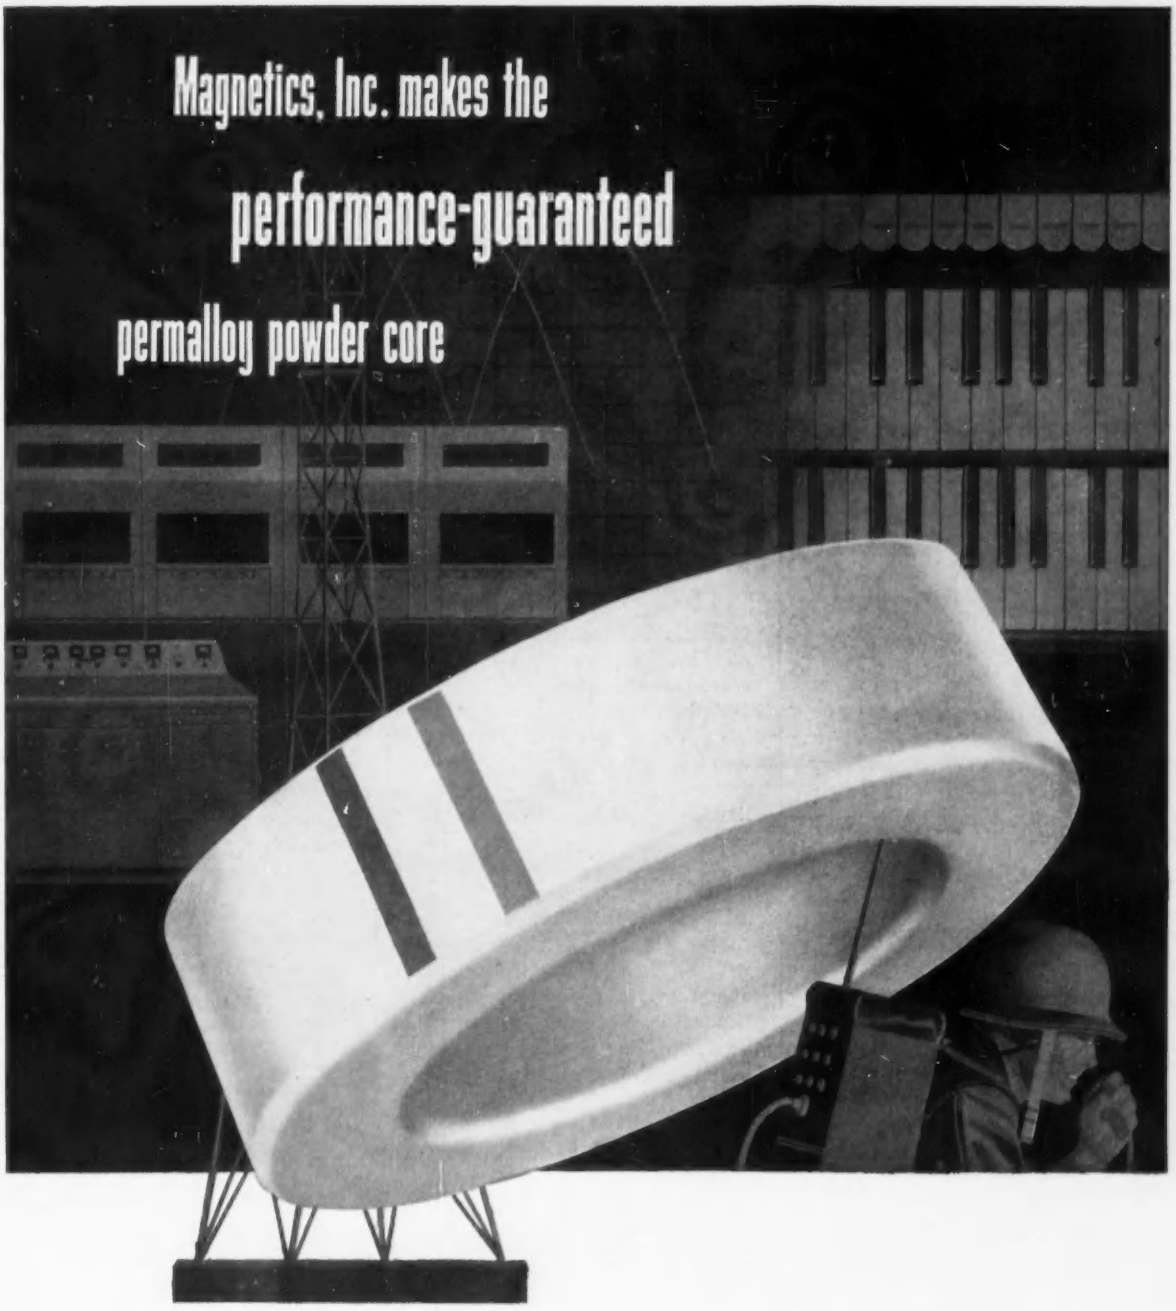

We have taken the guesswork out of using molybdenum permalloy*powder cores, for Magnetics, Inc. Powder Cores are Performance-Guaranteed. What's more you can specify as an extra, Magnetics' exclusive feature . . . color-coding. Color-coding *tells* your assemblers, *without special testing*, how many turns to put on these cores, for they are graded and coded according to inductance before they reach you.

Bulletin PC-103 gives you detailed information, and the Powder Core Color-Coding Card guides your assemblers and others with production responsibility. Why not write for your copies today? Magnetics, Inc., Dept. E-30, Butler, Pennsylvania. *Manufactured under a license with Western Electric Co.

MAGNETICS inc.

CABLE: Magnetics

New . . . LOW COST PRECIOUS METALS PLATING PROCESSES!

Sel-Rex

BRIGHT PRECIOUS METALS PLATING PROCESSES

From coast to coast, electronic and electrical manufacturers are installing Sel-Rex Bright Gold, Rhodium and Silver Processes as best suited to their exacting requirements.

Sel-Rex PROCESSES used extensively in following products

Printed Circuits

Connectors

Tubes

Wave Guides

Switches

Reflectors

Sel-Rex BRIGHT PRECIOUS METAL PROCESSES have unique features which make them particularly suited for the electronic and electrical industries. Sel-Rex Bright Gold, for example, gives a mirror-bright finish directly from the bath — regardless of thickness requirements . . . economical, too — one gram does the job of 2 grams of conventional 24 K. gold.

Among the many advantages of Sel-Rex Bright Rhodium is that it actually plates bright longer (heavier deposits) than other rhodium processes.

***EXTRA — Sel-Rex offers A.S.C. — Automatic Stress Compensation — a special technique which counteracts the high stress characteristics inherent in conventional precious metals plating.**

Sel-Rex Precious Metals, Inc.
229 Main Street • Belleville 9, N. J.

Manufacturers of
Sel-Rex BRIGHT GOLD • RHODIUM • SILVER

Mail the coupon today for latest literature and case histories

Sel-Rex Precious Metals, Inc. Dept. EL-7
229 Main St., Belleville 9, N. J.
Please rush descriptive literature and technical data on Sel-Rex PRECIOUS METALS PROCESSES.

Name_____
Company_____
_____
Address_____
City_____ Zone____ State_____

Want more information? Use post card on last page.

Officer checks wind direction, velocity and humidity at base of 200-foot tower. Recorder at left is connected to wind vane, the center recorder indicates velocity of an anemometer. Motor operated psychrometer and recorder are at right

to analyze effects of temperature and humidity changes on microwave transmissions.

A duct is a layer of atmosphere, based either at the earth's surface or aloft. Ducts may be anywhere from 10 to 100 feet high. Some have been measured from 100 to 500 feet.

With a normal lapse rate in the atmosphere, temperature and humidity decrease with altitude. When the temperature, instead, increases with height and humidity decreases at a rate faster than normal, conditions are ideal for the formation of ducts. The greater the vertical dimension of a surface base duct, the greater the range of frequencies affected.

When a duct is aloft, its base above the transmitting and receiving stations, only those transmitted beams forming an angle of less than a degree with the base of the duct are deflected back and extend beyond the line of sight.

Helium-filled Kytoon is a nylon covered balloon with a stabilizing tail section. A Wiresonde picks up meteorological information and sends it back down the wire to the ground in tests being conducted at Gila Bend, Ariz.

Transhorizon Utilization

IN NOTICE of proposed rule making, FCC says, "There is no question but that the technique (of over-the-horizon transmission) may prove to be economical and feasible with respect to short-haul international fixed circuits and there appears to be a great number of applications where the techniques might possibly be useful for the domestic fixed service perhaps, in some instances, replacing or supplementing conventional systems".

▶ **Information Needed**—Desired by July 1 is specific information as to whether tropospheric transhorizon fixed circuits can share with conventional circuits the bands above 940 mc. Also wanted is data showing anticipated use of tropospheric circuits, state of the art in techniques and equipment and evalua-

TEXAS INSTRUMENTS PROGRESS REPORT ON HIGH FREQUENCY

VHF transistors NOW!

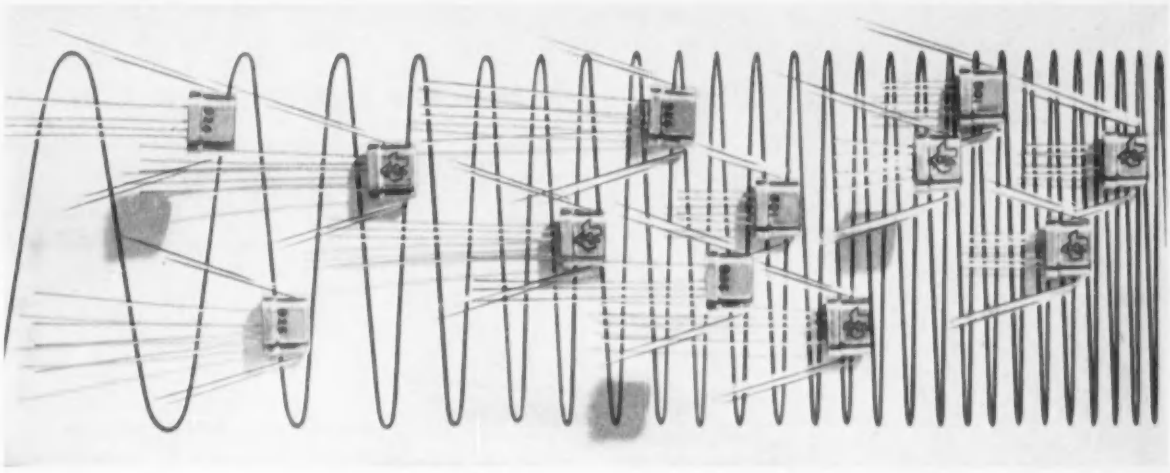

NEW 'GROWN-DIFFUSED' TYPES COMMERCIALLY AVAILABLE IN PRODUCTION QUANTITIES

HIGH GAIN VHF TRANSISTORS with usable power levels and band widths are now immediately available from Texas Instruments . . . another first for the leading producer of silicon and germanium transistors. Your design horizons are now extended to include all-transistor TV, FM, and VHF receivers . . . and transistorized amplifier, oscillator, or switching applications in communications, telemetering, or radar.

NEW VHF GERMANIUM TRANSISTOR

OSCILLATING FREQUENCY IS ABOVE 250 MEGACYCLES . . . alpha cutoff frequency is 200 mc. Typical gain is 12 db at 100 mc (unregenerative). This performance in a production transistor was unheard of prior to perfection of the "grown-diffused" method – an exclusive Texas Instruments technique.

NEW HF SILICON TRANSISTORS

FREQUENCIES TO 30 MEGACYCLES, rated 30 volts and 125° C, make these "grown-diffused" units ideal for high temperature military and commercial applications. They increase to 10 the types of silicon transistors now available from Texas Instruments, and represent the continual improvement in frequency, gain, and power made by the pioneer producer of silicon transistors.



OTHER NEW SEMICONDUCTOR DEVICES FROM TI

NEW HIGH POWER TRANSISTORS – 12-watt dissipation germanium power transistor and 8.75-watt dissipation silicon power transistor. NEW HIGH VOLTAGE RECTIFIERS – full wave and single junction half wave 1500-volt silicon units stable to 150° C. NEW HIGH CONDUCTANCE DIODES – 4 types of axial-lead silicon junction diodes with 100 ma forward currents and 0.1 μa back currents.

All these devices in production and available immediately. Write today!

LOOK TO TI FOR: GERMANIUM VHF, POWER, RADIO, & GENERAL PURPOSE TRANSISTORS ● SILICON HF, POWER, & SMALL SIGNAL TRANSISTORS ● SILICON RECTIFIERS AND DIODES

TEXAS INSTRUMENTS
INCORPORATED
6000 LEMMON AVENUE DALLAS 9, TEXAS

PRECISION ATTENUATION to 3000 mc!

SINGLE *"in-the-line"* ATTENUATOR PADS *and* 50 ohm COAXIAL TERMINATIONS

PROTECTED UNDER STODDART PATENTS

This new group of pads and terminations features the popular Types C and N connectors, and permits any conceivable combination of the two styles.



PROTECTED UNDER STODDART PATENTS

six-position TURRET ATTENUATOR

- **Frequency Range:** dc to 3000 mc.
- **Characteristic Impedance:** 50 ohms.
- **Available Attenuation:** Any value from 1 db to 60 db.
- **Accuracy:** ±0.5 db.
- **Power Rating:** One watt sine wave power dissipation.

STODDART
Aircraft Radio Co., Inc.
6644-A SANTA MONICA BLVD.
HOLLYWOOD 38, CALIF. • HO 4-9294

Want more information? Use post card on last page.

tion of relative spectrum utilization efficiency as compared with conventional line-of-sight systems.

The questions concern only tropospheric propagation, having a present practical range of about 200 miles using frequencies generally above 100 mc. Unmentioned is the technique of ionospheric forward scatter, which customarily operates in the frequency region of 30 to 50 mc over distances between about 500 and 1,500 miles. Circuits are experimental or military now.

Photoelectric Sampler Detects Nerve Gas

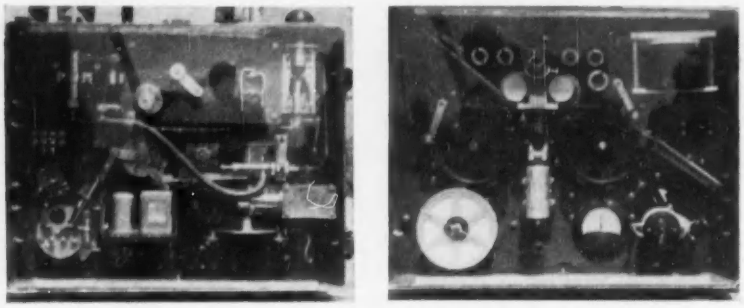

Back (left) and front (right) of a nerve gas detector built by RCA for Army Chemical Corps. In principle, a chemically treated paper tape is drawn past a photocell. Then it is wetted and exposed to ambient air pumped through the unit. Hazardous industrial or commercial gases react with the impregnated paper to change its color, which is sensed by a second photocell. If the before and after colors do not balance, an alarm is sounded

Toll Highways Check Vehicle Scales

Accuracy of the electronic weighing mechanism used to determine load of trucks on turnpikes is tested with a hydraulic jack and load cell similar to that employed under scale platform. A series of weight readings obtained with the Baldwin-Lima-Hamilton SR-4 load cell is checked with those recorded in the toll booth

Research Publication

MILLIONS of dollars are being spent in tax-supported institutions for research that should benefit industry. To make the results of its scientific contribution available, Naval Research Laboratory has adopted the expedient of publishing regular monthly reports, beginning January 1956.

Priced at $1.25 each, these reports are available from Office of Technical Services, U. S. Depart-

ALSiMAG®

DATA FOR DESIGNERS

Abrasion Resistant
Sand Blast Nozzles. Spray Nozzles. Hard, homogeneous, long-lived. Suited to the most exacting uses.



Precision Tolerances
Minute, yet strong tubing of AlSiMa Alumina. Parts in inset magnified thre times (smaller one .013" OD); othe approximate actual size.



Non-Inductive
Alignment Tool Blades. Non-metallic, for sensitive machine and instrument settings—other demanding applications.

NEW!

AlSiMag Alumina Ceramics open new fields for designers . . . permit designing to higher temperatures, higher frequencies, greater strengths.

Designers are generally familiar with the plus values of AlSiMag technical ceramics for standard industry applications. However, recent developments—particularly in new, high-strength, high-temperature AlSiMag Aluminas—have greatly enlarged their range of usefulness.

Do you need a material with such versatile characteristics as shown on this page? AlSimag technical ceramics have helped many designers solve problems . . . may help solve yours. Send blueprint with complete operating details for our recommendations.

PLANTWIDE VACATION—First Two Weeks of July

AMERICAN LAVA
CORPORATION
CHATTANOOGA 5, TENN.
55TH YEAR OF CERAMIC LEADERSHIP

A subsidiary of Minnesota Mining and Manufacturing Company

Branch offices in these cities (see your local telephone directory): Cambridge, Mass. • Chicago, Ill. • Cleveland, Ohio • Dallas-Houston, Texas Indianapolis, Ind • Los Angeles, Calif. • Newark, N. J. • Philadelphia, Pa. St. Louis, Mo. • South San Francisco, Calif. • Syracuse, N. Y. • Tulsa, Okla. **Canada:** Minnesota Mining & Manufacturing of Canada, Ltd., P. O. Box 757, London, Ontario. **All other export:** Minnesota Mining & Manufacturing Company, International Division, 99 Park Ave., New York, N. Y.



Hard
AlSiMag Tool Tips for cutting an machining strongest alloy steels.



Thin . . . Strong
Electron Tube Spacers as thin as .009" have remarkable strength. Similar parts might solve other application problems where superior insulation is needed.



Durable
Rollers for flattening inductance wire a new application for AlSiMag.



Precision Finishes
Smooth, easily coated AlSiMag Cores for Ink, Metal Film and Carbon Deposited Resistors.

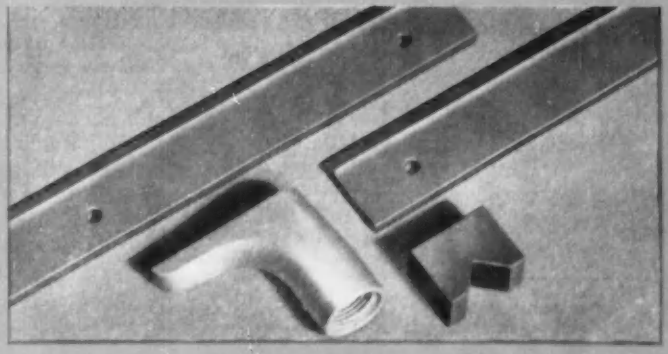

Heat Resistant
Support Rings for Heat Treating Fixtures. Welding Jigs. Hold-down Jigs for heat applications.

Acid Resistant
Rotary Seals and Plungers. Extraord nary wearing qualities. Surface finish to most exacting specifications.

Visit Booth 127
Western Electronic Show
August 21-24

PROJECT:
QUALITY CONTROL

TARGET:
EVEN BETTER PERFORMANCE!

RESISTANCE ALLOYS

Wilbur B. Driver Precision RESISTANCE ALLOYS

Experimental Vacuum Melting Furnace

Chemical Laboratory

Better Performance – on every electrical and electronic application because . . . from ingot to final inspection, every test known to science safeguards the quality of Wilbur B. Driver Precision Alloys. These tests assure performance as specified! Why not consult a Wilbur B. Driver sales engineer for recommendations on precision alloys for your applications.

Wilbur B. Driver Co.
NEWARK 4, NEW JERSEY

Specialists in PRECISION ALLOYS

For Over Thirty-five Years Manufacturers of Dependable Electrical, Electronic, Chemical and Mechanical Alloys

ment of Commerce, Washington 25, D. C. Each bulletin contains 50 to 60 pages and carries articles by members of the NRL staff.

There is a list of problems accepted and a number of problem notes in electricity, optics, radio, sound and other fields allied to that of electronics.

A list of published reports (available from OTS) and papers appearing in scientific journals and patents issued is also given.

Higher Pentode Gain

By LESTER LEVY
Engineering Consultant
Brooklyn, N. Y.

WHEN EMPLOYING triodes in amplifying circuits, little difficulty is encountered in realizing amplifications approaching the μ of the tube. This is because it is relatively simple to load the plate circuit with impedances that are five or more times the internal plate impedance of the tube.

For pentodes, the internal plate impedance is in the order of a megohm. To realize amplifications approaching the μ of the tube, a load of several megohms is needed. Even with resonant circuits it is not usual to realize amplifications much in excess of 200.

For broadband characteristics at audio frequencies, it is customary to use resistive, inductive or transformer loading. Unfortunately, inductances and transformers are expensive, weighty and bulky. In obtaining high amplification through the use of higher primary impedances, the expense, weight and bulk are also increased.

While the resistor has the advantages of being small, light and inexpensive, it has the serious drawback of limiting the available electrode voltages and currents. The μ or the g_m decreases with decreasing plate current so that resistance coupling limits the available amplification, with reasonable power supplies, to about 200.

One means of increasing the gain of a pentode is to use another pentode as the load impedance on the amplifying pentode. This is illustrated in Fig. 1A. Inductances

MEMO

TO *Engineering Dept.*

SUBJECT

MINIATURE SENSITIVE RELAY (TYPE MS)

(IDEAL FOR PRINTED CIRCUITS)

Note desired RBM features will cut Our Assembly Costs

Mgt.

Self locking Terminals position Relay before Soldering

X-Bar Contacts insure ultimate in Circuit Switching Reliability

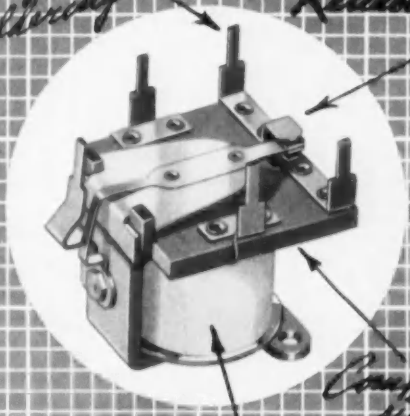

Compact size

Coil Construction meets unusual climatic conditions

Construction—Printed circuit terminals are designed with snap-in feature which holds relay in printed circuit board without lugging prior to solder dip.

Other versions of MS relay available with standard solder type terminals and insulating base, where required. Also with 4 N.O. isolated circuits having common make.

While not yet in production, extra-sensitive version has been developed. Maximum coil resistance 18,000 ohms, nominal sensitivity .030 watt, maximum sensitivity .020 watt, overall height 1-9/16". All other details same as standard MS relay.

Application—Type MS is an ideal relay for any application requiring a compact, highly reliable single pole D. C. device, where a low cost solution is required because of volume usage and competitive problems.

The fact that industry has already used over a million units of this design is your assurance that the R-B-M Type MS relay will meet your most exacting requirements.

Contacts used in Type MS are of the cross bar type, which offer the ultimate in reliability throughout the life of the relay. Molded bobbin design has eliminated coil failure on sensitive applications under severe climatic conditions.

OTHER VERSIONS

SOLDER TERMINALS
4 isolated circuits with common make contact.



INSULATED BASE
Solder terminals mounted on insulating base.

EXTRA SENSITIVE VERSION

ENGINEERING DATA	
Specifications	Miniature Sensitive Relay Type MS
Contact Form	S. P. D. T.
Contact Rating	1 amp. 32 V.D.C. non-inductive
Coil Resistance	Up to 10,000 ohms
Nominal Sensitivity (Coil Input)	.060 Watt
Maximum Sensitivity	.040 Watt
Approx. Dimensions	1⅛ x 1⅛ x 1½"

CORD SETS
WIRE HARNESSES
MAGNET WIRE
OTHER PRODUCTS

Send for Descriptive Bulletin MS-1

RBM DIVISION

ESSEX WIRE CORPORATION, *Logansport, Indiana*

BALLANTINE Sensitive, Wide Band Electronic Voltmeter

measures 1 millivolt to 1000 volts
from 15 cycles to 6 megacycles

Accuracy 3% to 3 mc; 5% above
Input impedance 7.5 mmfds shunted by 11 megs

When used without probe, sensitivity is increased to 100 MICROVOLTS but impedance is reduced to 25 mmfds and 1 megohm

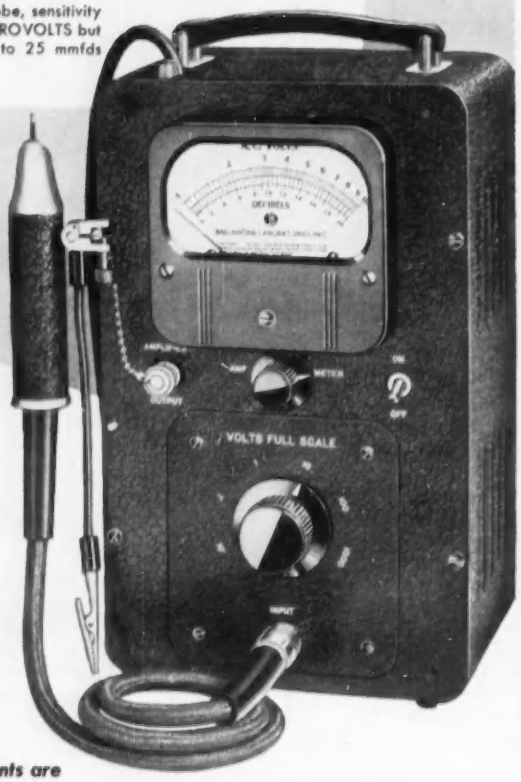

MODEL 314
Price $285

All Ballantine instruments are

SENSITIVE – ACCURATE – DEPENDABLE

- Same accuracy at *ALL* points on a logarithmic voltage scale and a uniform DB scale.
- Only *ONE* voltage scale to read with decade range switching.
- No "turnover" discrepancy on unsymmetrical waves.
- Easy-to-use probe with self-holding connector tip and unique supporting clamp.
- Low impedance ground return provided by supporting clamp.
- Stabilized by generous use of negative feedback.
- Can be used as 60 DB high fidelity video pre-amplifier.

Write for catalog for more information about this and other BALLANTINE voltmeters, amplifiers, and accessories.

BALLANTINE LABORATORIES, INC.

100 FANNY ROAD, BOONTON, NEW JERSEY

and transformers have the advantage of relatively low d-c voltage drops, owing to relatively low d-c resistance, while maintaining high impedances. The small d-c voltage drops permit the amplifier tube to operate at high current and high g_m with the consequent high gain. In the case of the pentode used as a load on the amplifier pentode, the fact that the internal plate impedance is much higher than the d-c resistance of the tube is used. In such a circuit it should be possible to realize about half the μ of the tube if identical tubes are used.

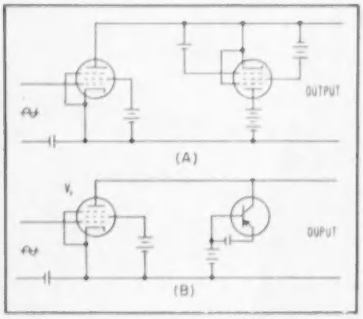

FIG. 1—Pentode gain increased (A) by using another as load impedance. Pentode load is replaced by transistor (B)

Use of a pentode as a load on another presents a few difficulties. The load-tube cathode is several hundred volts above ground and its filament winding must be floating. Tube cost is much higher than that of a resistor. The tube requires additional capacitors and resistors, in addition to a floating screen supply.

Transistors have collector internal impedances of the same order of magnitude as those found in pentodes. The collector impedance is a function of both collector current and emitter external circuit impedance, among other factors.

A simple theoretical circuit, using a *pnp* transistor, is shown in Fig. 1B. The circuit between collector and emitter serves both as the d-c path for the plate current of V_1 and as the high impedance load on V_1. Since the d-c voltage drop is small, being of the order of 20 volts or less, there is no problem with regard to uneconomical power supplies.

A practical circuit is shown in Fig. 2. Tube V_2 is not essential to the circuit. This tube was added as

...Use SIZE 8 Synchros

with No Sacrifice in Accuracy or Reliability

Why use 1945 Synchros in 1956 designs?

In equipment which must be flown, you want the least possible bulk and weight.

Clifton Precision's new Size 8 series of Synchros is in production and providing the highest accuracy and reliability in the industry. Samples from stock. Write or phone MAdison 6-2101 (Suburban Philadelphia)

ILLUSTRATIONS ACTUAL SIZE

STANDARD UNITS

SYNCHRO FUNCTION	CPPC TYPE	ROTOR Input V400cy	Input Amps	Input Watts	Ohms (DC)	Output Rotor	Sensitivity (MV/deg.)	STATOR Output Volts	Sensitivity (MV/deg.)	Input Volts	Input Amps	Input Watts	Ohms (DC)	IMPEDANCE Zro	Zso	Zrss	Phase R-S	Shift S-R	Nulls (MV)	Possible Error	Possible Spd.	Length in inches
Torque Transmitter	CGC-8-A-7	26.0	.100	.5	37	—	—	11.8	200	—	—	—	12	54+j260	12+j45	76.4+j19.6	8°	←	30	7′	14′	1.240
Control Transformer	CTC-8-A-1	26.0	.050	.25	143	24	410	11.8	200	11.8	.090	.23	25	220+j740	28+j110	246+j60		8.5°	30	7′	14′	1.240
Control Transformer	CTC-8-A-4	—	—	—	381	24	410	—	—	11.8	.037	.09	60	508+j1680	67+j270	640+j190	—	9.2°	30	7′	14′	1.240
Control Differential	CDC-8-A-1	—	—	—	36	11.8	200	—	—	11.8	.085	.21	25	38+j122	27+j120	48.6+j13.8	—	9°	30	7′	14′	1.240
Electrical Resolver	CSC-8-A-1	26.0	.039	.43	230	23.2	400	10.6	180	11.8	.084	.27	27	280+j600	38+j136	70+j136	20°	11°	30	7′	14′	1.240
Torque Receiver	CRC-8-A-1	26.0	.100	.50	37	—	—	11.8	200	—	—	—	12	54+j260	12+j45	85.1+j20.4	8°	—	30	30′	30′	1.240
Vector Resolver	CVC-8-A-1	1-26	.057	.34	78	—	—			11.8	.294		27	103+j444	28.8+j27.9		10.2°	—	1MV·V			1.240

TYPICAL SYSTEM MEASUREMENTS

SYSTEM	Input V400cy	Input Amps	Input Watts	Output Volts	Sensitivity (MV/deg.)	CPPC TYPES	Input Z	Output Z	Phase Shift	Nulls (MV)	REMARKS
Transmitter ➤C.T.	26	.110	.74	23.6	408	CGC-8-A-7 ➤CTC-8-A-4	58+j226	626+j233	19°+	50	Hi Z Load on CT
Transmitter ➤C.T.	26	.111	.75	23.3	407	CGC-8-A-7 ➤CTC-8-A-4	58+j226		19°	50	50K Load on CT
Transmitter ➤C.T.	26	.111	.83	20.8	363	CGC-8-A-7 ➤CTC-8-A-4	64+j221		17°	50	5K Load on CT
Transmitter ➤4 Parallel CT's	26	.145		21.8	381	CGC-8-A-7 ➤4 ea CTC-8-A-4			28°	40	CT Interaction ½° Max.
Transmitter ➤Differential ➤C.T.	26	.134	1.78	19.5	340	CGC-8-A-7 ➤CDC-8-A-1 ➤CTC-8-A-4		748+j364	40°	40	CT Output to Hi Z
Series Vector ➤Electrical Resolver	1 ➤26	103	67	4.9	85	CVC-8-A-1 ➤CSC-8-A-1	55+j230	32+j68	32°	40	$E_o = .19\ E_i \sin\theta_i \sin\theta_r$
Series Vector Resolvers	1 ➤26	110	55	5.2	91	CVC-8-A-1 ➤CVC-8-A-1			20.2°	40	$E_o = .2\ E_i \sin\theta_i \sin\theta_r$
Transmitter ➤Receiver	26	.200	1.0	—	—	CGC-8-A-7 ➤CBC-8-A-1			—	—	Torque 2400 mg-mm/deg.

LOOK TO CPPC FOR cppc *SYNCHRO PROGRESS*

CLIFTON PRECISION PRODUCTS COMPANY, INC.

CLIFTON HEIGHTS PENNSYLVANIA

improved facilities

to serve you better . . .

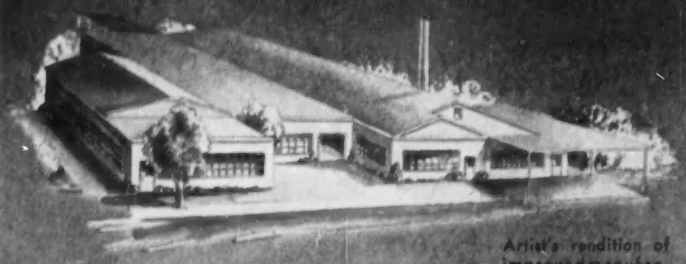

Artist's rendition of improved manufacturing facilities of Nothelfer Winding Laboratories, Inc.

specialists in transformers for any custom requirement

NWL

Nothelfer

WINDING LABORATORIES, Inc.

P. O. Box 455, Dept. 106, Trenton, New Jersey

a cathode follower that permits relatively heavy loading by the measuring instrument while giving a good measure of the a-c voltage being delivered by the transistor-loaded pentode. Resistor R_1, the external emitter circuit resistance, is chosen high enough to have negligible effect upon the collector impedance. Resistor R_2 controls the base current, helping to determine the operating point of the transistor. The plate current of V_1 passes through



FIG. 2—Practical amplifier circuit uses transistor load stage followed by cathode follower

power supply, R_1 and the collector.

For a particular collector current and emitter external circuit resistance, there is a discrete base current that yields the maximum gain. Inasmuch as V_1 will have its greatest g_m with the greatest plate current, it is necessary to adjust its plate current and base current of the transistor until maximum amplification is obtained. Since the collector impedance seems to drop with rising collector current it is necessary to strike the optimum combination depending upon the particular tube and transistor used. Resistor R_2 permits adjustment of plate current by adjustment of the screen voltage.

With the particular tubes and transistors used, the maximum amplification was obtained with collector current in the range of 4 to 6 milliamperes. In general, transistors with high alpha gave highest amplification. For V_1, a type 6AG5 tube was used, although there is no reason to believe that other tubes giving reasonable g_m at lower plate currents might not give better results. This may be expected since maximum collector impedance rises with decreasing collector current.

A value of 10,000 ohms has al-

CAN *Ampli*FILM DO THIS?

Many times we have been asked if Ampli-Film Dielectric can be *curved*. We had anticipated applications in which Ampli-Film would be made in shapes other than flat . . .

Yes, *Ampli*FILM can be formed in unusual shapes

The size and shape of some electronic gear require that components be manufactured in unusual shapes. Dielectrics must, in turn, be formed to fit. Ampli-Film meets the requirement. The curved Capitron® Wafer Capacitor pictured is an example. A truly remarkable versatility in a dielectric.

Ampli*FILM** ***the all-purpose dielectric, is insoluble, incompressible and inert . . . undergoes no distortion from heat or pressure . . . can be bonded by adhesives . . . is free from pinholes and flaws . . . is easy to handle and fabricate.

AIRCRAFT-MARINE PRODUCTS, INC.
Chemicals and Dielectrics Division • 155 Park Street, Elizabethtown, Pa.

A-MP of Canada, Ltd., Toronto, Canada • Aircraft-Marine Products (G.B.) Ltd., London, England
A-MP—Holland N.V., 's-Hertogenbosch, Holland • Societe A-MP de France, Courbevoie, Seine, France

Want more information? Use post card on last page.

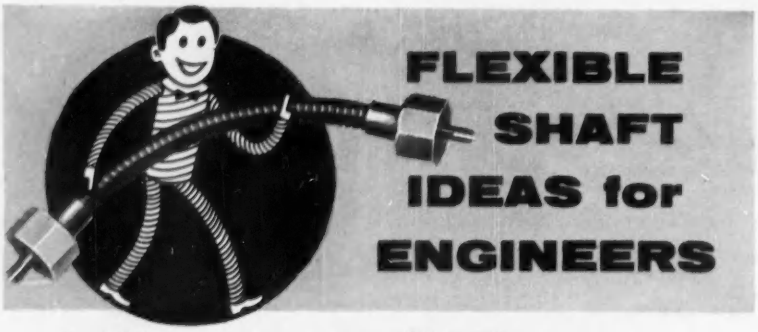

4 Ways to profit from a flexible shaft's adaptability

Ideas that may help you design better drives and controls for electronic equipment

S.S.White flexible shafts easily solve these design problems

Control of inaccessible parts is easily accomplished by running a single remote control flexible shaft between the controlled element and its control knob.



Mounting controls in convenient operating positions is easier when a flexible shaft is used as the coupling. The shaft allows the control to be mounted wherever desired.



Alignment problems are never a factor when you use flexible shafts to couple two parts. Its flexible construction automatically compensates for misalignment.

1. Eliminating Alignment Problems
Where misalignment exists, or where accurate alignment of drive and control elements is likely to be costly and time-consuming, an S.S.White flexible shaft is a "must." The flexible shaft automatically compensates for misalignment, thereby simplifying assembly and eliminating possible operating troubles.

2. Providing Adjustable Drives
Where there is relative movement between driving and driven parts, or where the driven part must be moved or adjusted in operation, an S.S.White power drive flexible shaft is an economical, dependable way to transmit power between the two. The shaft readily adapts itself to any operating position and is capable of giving long trouble-free service.

3. Gaining Extra Design Freedom
Consider the use of S.S.White flexible shafts if you want to gain greater freedom in positioning drive and control elements in their most desirable locations. It will simplify the job of meeting specific operating and service requirements.

4. Satisfying Space Limitations
Flexible shafts are more adaptable, less complicated, less expensive and considerably more compact than systems of bevel gears, straight shafts, belts, pulleys, etc. Their use allows you to develop more efficient, more compact equipment.

FLEXIBLE SHAFT INFORMATION

Bulletin 5601, a helpful informative guide on flexible shaft construction, selection and application, will be sent on request. Write for your copy.

FG-6A

S.S.White FIRST NAME IN FLEXIBLE SHAFTS

S. S. WHITE INDUSTRIAL DIVISION, DEPT. E, 10 EAST 40th ST., NEW YORK 16, N.Y.
Western Office: 1839 West Pico Blvd., Los Angeles 6, Calif.

ready been tried successfully for R_1. Probably even less can be used. This would result in lower voltage requirement in the power supply, since R_1 produces an appreciable voltage drop.

With transistors having high alpha values R_2 became ineffective at higher resistance values. This might indicate that the static operating point of the transistor was being controlled by either or both of the two components of I_{co}. These two components are the normal saturation current and surface leakage currents. Transistors with improved characteristics along these lines should give still higher amplification.

Frequency response, noise and distribution characteristics have not been evaluated.

Magnetic Storm Alarm

ACCORDING to *McGraw-Hill World News*, Askania-Werke in East Germany has produced an instrument called the H-Magnetograph for giving automatic warning of magnetic storms. It consists of an H-unit with torsion fiber and magnetic system, photocell attachment, switching box and line recorder with contact operating at a prearranged amplitude.

By this means, any kind of visual or audible alarm can be actuated, indicating the outbreak of a magnetic storm. Detailed ionospheric observations can then be carried out immediately upon such warning.

This instrument has been developed following the recommendation of a special committee for the International Geophysical Year, that equipment for giving automatic warning of great geophysical events such as magnetic storms, should be developed.

Cadmium Oxide Cover Electrodes

COVER ELECTRODES for photocells should be as transparent as possible. The greatest amount of light energy must reach the active cadmium

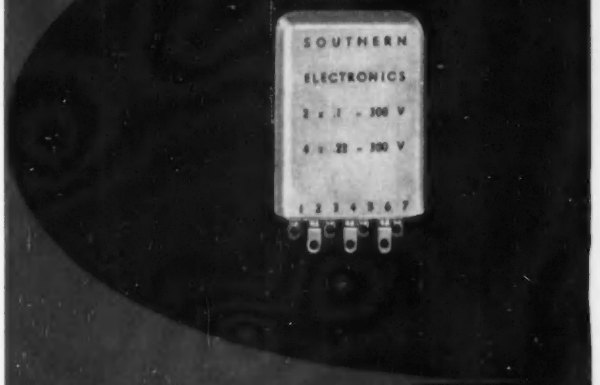

CONDENSE AND SAVE!

Plastic condenser block capacitors save you space, labor, money!

Multiple capacitors in one block! Now you can install one capacitor case and use 125% less space than before — at a saving in labor costs of up to 300%.

Let us solve your condenser block problems. Send us your requirements. Many case sizes and configurations are available with polystyrene or MYLAR* dielectric to tolerances as close as 1%.

now after years of intense research and development of military requirements

offers you **RC NETWORKS**

PITCH FILTERS
INTEGRATOR NETWORKS

RC NETWORK as low as ½% capacitors and ½% resistors for reliable RC value of 1%.

- Hermetically sealed and potted
- Meets exacting military specifications
- SAVES SPACE & LABOR

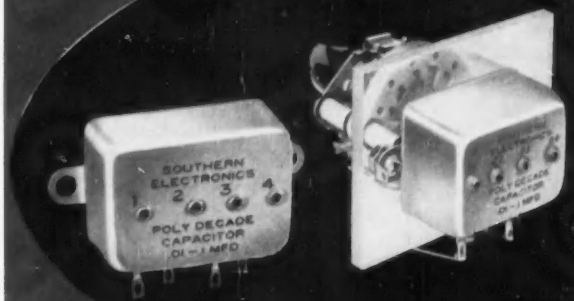

PRECISION DECADE CAPACITORS with attached rotary switch or completely boxed!

Now on special order! Decade capacitors with higher voltage ratings, closer tolerances and capacitance from .001 to 10 M.F.D. with polystyrene or MYLAR* dielectric to tolerances as low as 1%.

CHECK THESE OUTSTANDING FEATURES:

- Standard voltage rating . . . 200 V.D.C.
- Very high insulation resistance
- Low dissipation factor
- Low dielectric absorption
- Small sizes

*DuPont T.M.

SOUTHERN ELECTRONICS *Corporation*

POLYCON S·E·C MYCON

For your most exacting requirements—

always specify S.E.C.

Wire, write or phone for a complete catalog today!

239 West Orange Grove Ave., Burbank, California

all kinds of "specials"



are "standards"! with

MANDEX
ELECTRONIC COMPONENTS

CHECK THIS LIST

☐ Anode Connectors ☐ Tube Sockets

☐ Test Point Receptacles ☐ Lugs . . . Brackets . . . Contacts

☐ Terminal Strips ☐ Printed Circuit Wiring

. . . also Custom Moldings and Laminating . . . Stampings

The complete line of MANDEX Electronic Components is so big and broad . . . chances are you can get what you want with no delay for tool and die work. Costs to you are a lot lower this way . . . an important consideration when you're next in the market for products such as these.

Affiliate, P. R. Mallory & Co., Inc., Indianapolis

SEND TODAY for your free copy of the new 60-page MANDEX Illustrated Catalog . . . a real "gold mine" of valuable data and information!

CLIP COUPON AND MAIL!

MANDEX MANUFACTURING COMPANY, INC.
2612 West 16th Street • Chicago 8, Illinois

Gentlemen: Please send me my free copy of your new Catalog.

NAME _____

FIRM _____

ADDRESS _____

CITY _____ ZONE _____ STATE _____

selenide layer of a selenium photocell to have maximum effectiveness. Such a cover electrode should likewise have minimum electrical resistance. *McGraw-Hill World News* reports that Wilfred Berger of Electrocell GmbH, Berlin-Steglitz has recently developed a selenium photocell using cadmium oxide as a cover. Whereas cadmium of 60 percent transparency has a resistance of 1,000 ohms, the cadmium oxide layer under the same conditions has a resistance of 10 ohms.

Video Tape Recorder

TECHNICAL details of the new Ampex video tape recorder show its differences from conventional sound recorder-reproducers. Designed for broadcast service, the new unit has two input connections, one for video and the other for audio. The output signal is said to meet RETMA standards for video to transmitter.

Relative timing of any two scanning lines in any group of 20 adjacent lines is reproduced on any machine to an accuracy of 1 part in 600. Horizontal instability is not detectable on a studio monitor of RCA 630TS synchronizing circuitry. Field-to-field stability is held to a degree equivalent to no more than 10-percent error of interlace on the reproduced picture.

Much of the operational stability of the machine results from a refined version of a power-line lock-in drive described in 1950. A control track is continuously recorded on the tape at a frequency that corresponds to that of the power line.

Small variations are thus recorded for future reference. During playback, an electronic servo compares power-line frequency recorded with that being supplied and issues a correction signal to the tape-drive mechanism.

► **Response Levels** — Video level changes between record input and playback output, owing to differences in output among the four revolving heads, are more than 40

Here's THE basic V-R "COUNTER-PACKAGE" for INDUSTRY...

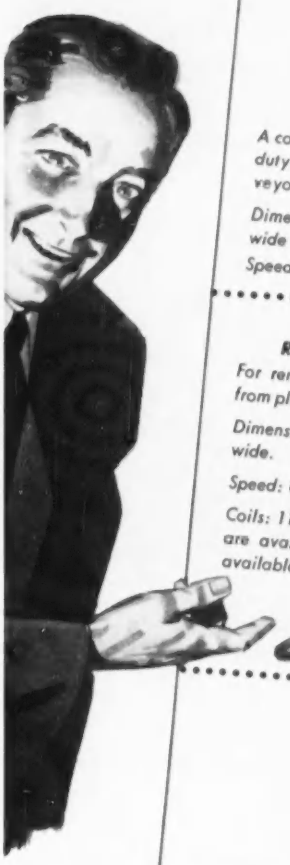



SMALL RESET COUNTER

A compact, rugged reset counter for moderate duty in parts inspection, quality control, conveyors, machine tools, light presses, etc.

Dimensions: 1¾" long, 1 15/64" high, 1 1/16" wide

Speed: Up to 1000 counts per minute.



BOX-TYPE RESET COUNTER

For punch press installations, conveyors, metal-working equipment, die casting, plastic-molding, rivet, spring and wire machining, or any installation requiring a heavy duty counter.

Dimensions: 4¼" long, 2 9/32" high, 3⅜" wide.

Speed: 500 counts per minute.

RESET MAGNETIC COUNTER

For remote indication of machine operation from plant to office.

Dimensions: 3 15/16" long, 2½" high, 1⅝" wide.

Speed: Up to 1000 counts per minute.

Coils: 110V-AC are standard. Other voltages are available. Panel mounting feature also available.

HAND TALLY

For quick spot-checks of production or performance.

Dimensions: 1 17/64" long (to end of reset knob), 1¾" deep, 2" high.

Counts one for each depression of the thumb lever, and resets to zero by a turn of the knob.



CLUTCH SPEED COUNTER

For checking to make sure that the machine is operating at the required R.P.M.

Dimensions: 3¼" long, ⅞" max. diameter. Non-Reset.

Internal clutch operates counter only when rubber tip is pressed against the shaft.

Here are 5 of the most widely used Veeder-Root Counters in industry . . . and they're immediately available from stock at leading Industrial Supply Distributors. There are Veeder-Root mechanical, electrical and manual counters for use in production recording and control, wage payment, time study work, quality control. In fact, you can profitably apply Veeder-Root Counters to every machine, operation, process or system in your plant. Ask your own Industrial Supply Distributor. Or write Veeder-Root Inc., Hartford 2, Conn.

Everyone can count on

VEEDER-ROOT

"The Name that Counts"

Insist on Standard

VEEDER-ROOT COUNTERS

from your

Industrial Supply Distributor

or write us on special problems

SILVER-MAG-NICKEL

This new silver-magnesium-nickel alloy is particularly useful in the electrical and electronic industries because of the unique combination of properties it offers.

One of its outstanding characteristics is that it can be *irreversibly hardened* by simply heating in an oxidizing atmosphere.

In the annealed condition in which Silver-Mag-Nickel is supplied, it is readily workable by stamping, drawing, bending, spinning etc. After hardening, the alloy is remarkably resistant to softening and for all practical purposes does not anneal.

In addition to permanent hardness, Silver-Mag-Nickel's high thermal and electrical conductivity and resistance to corrosion make possible performances that cannot be obtained with any other material.

GET DETAILS IN TECHNICAL BULLETIN A-3

This bulletin gives the physical and working properties of Silver-Mag-Nickel and the forms in which it is available. It tells also how to harden and braze the alloy. Write for a copy.

HANDY & HARMAN

General Offices: 82 Fulton St., New York 38, N. Y.

OFFICES and PLANTS
BRIDGEPORT, CONN.
PROVIDENCE, R. I.
CHICAGO, ILL.
CLEVELAND, OHIO
DETROIT, MICH.
LOS ANGELES, CALIF.
TORONTO, CANADA
MONTREAL, CANADA

db below the peak-to-peak video level. The playback level of 15.75 kc pulses will not vary more than 1 db in any half-hour, or more than 0.1 db in periods of 1/60 of a second to 5 seconds.

Level changes of video tape during storage are not substantially different from those of audio tape.

Horizontal resolution is 320 lines and video bandwidth is 4 mc. Peak-to-peak signal-to-noise ratio is better than 30 db.

► **Audio** — In addition to the audio sound track, which has a frequency response greater than 10 kc and a signal-to-noise ratio of more than 50 db, there is an audio cue track with 50 to 3,000 cps response.

The size of the machine may be reduced by using one-mil-base tape; 64 minutes of program can be put on a 12-inch reel rather than the 14-inch reels announced earlier.

Head life is presently greater than 100 hours. Oxides used in the video tape differ slightly from those used in audio tape. Video tape is available from at least four manufacturers.

FCC Spectrum Changes

EFFECTIVE May 31, the Federal Communications Commission rearranged allocation of frequencies from 9,800 to 13,225 mc. The principal adjustment is exchange of the 9,800-9,900-mc nongovernment fixed band for more useful space immediately adjacent to existing nongovernment space just above 10,000 mc.

Space is thus provided for c-w emission radiolocation transmissions and a larger block of space for nongovernment microwave services. As a result, government and nongovernment bands in the range will not be interspersed, government and nongovernment services will share the c-w portion without ism interference and operation of speed meters and similar apparatus will be facilitated.

Present allocations show 9,800-10,000 mc, government; 10,000-10,500 mc, amateur; 10,500-10,550 mc, government and nongovernment radiolocation; 10,550-10,700 mc,

Jeno Paulucci, President of Chun King Sales, Inc., says

"You're looking at a million-dollar menu!"

"Only two years ago, we started freezing our Chinese food and selling it around Minnesota.

"Now, we've sold millions of dollars' worth throughout the U.S.A. – captured half of a $25,000,000 market – all with food prepared in our one plant in Duluth!

"Food brokers and buyers receive our Chow Mein, Egg Rolls or whole Cantonese dinners anywhere in the 48 states – within a few hours!

"How do we do it? We pack these new delicacies in dry ice and rush them Air Express! With Air Express, they travel fast and sure, taking hours instead of days for delivery.

"Air Express never fails us. In fact, it's opening up the whole country as our regular market.

"And yet, most of our shipments cost less than any other air service. 15 lbs., for instance, Duluth to St. Louis, is $4.67. It's the lowest-priced complete air service by $2.98!"

Air Express

GETS THERE FIRST *via U.S. Scheduled Airlines*

CALL AIR EXPRESS . . . *division of* RAILWAY EXPRESS AGENCY

PIONEERING is our business

Volume cleaning in seconds with Bendix ULTRASONICS

Typical parts and assemblies cleaned by Bendix Ultrasonics. (*Parts for these assemblies are cleaned prior to assembly.)

Clean more parts and assemblies! Accommodate standard baskets and racks! Reduce costs!

Rectangular cleaners make Bendix Ultrasonic Cleaning even more efficient, even more useful than before. Models are now available in a choice of sizes: 18″ x 25″ x 18″ . . . 9″ x 14″ x 13″ . . . 6″ x 18″ x 13″ . . . or 7″ x 9″ x 11″.

The large, rectangular units offer *increased cleaning capacity. Cleaning is exceptionally thorough* . . . because the entire bottom of the cleaner develops cleaning cavitation. The rectangular cleaners *accommodate baskets and racks already used in production cleaning.*

Besides those advantages, Bendix Ultrasonics clean faster and 99.5 percent to 100 percent effectively . . . eliminate costly, hazardous solvents . . . clean even most delicate parts safely . . . greatly reduce cleaning costs. Get full details. Write PIONEER-CENTRAL DIVISION, BENDIX AVIATION CORPORATION, DAVENPORT, IOWA.

West Coast Office: 117 E. Providencia, Burbank, Calif.
Southwest Distributor:
Southwestern Eng. & Equip. Co., 3906 Lemmon Avenue, Dallas, Texas
Export Sales and Service:
Bendix International Division, 205 E. 42nd Street, New York 17, New York
Canadian Distributor:
Williams & Wilson, Ltd., 11 Front Street, East, Toronto, Canada

Pioneer-Central DIVISION | **Bendix AVIATION CORPORATION**

nongovernment fixed and mobile (as further defined in Part 2 of the Rules).

Frequencies between 13,200-13,225 mc are nongovernment fixed and mobile; and 13,225-16,000 is assigned to government use.

Camera Exposure Adjusts Automatically

LIGHT striking a photocell is measured by a meter to which is affixed a moving contact arm. A pair of fixed contacts shown in the drawing is mounted on a gear ring and so connected that the motor tends to center these contacts on the moving contact. The camera iris is



Circuit diagram of the photocell-actuated iris



Bottom view shows motor and mercury-cell battery

Transistors Under Test



Electrical performance tests on Philco M-1 transistors that operate in the audio-frequency range. Hermetically sealed units can withstand acceleration rates up to 20,000 g

BUILT-IN
PROTECTION

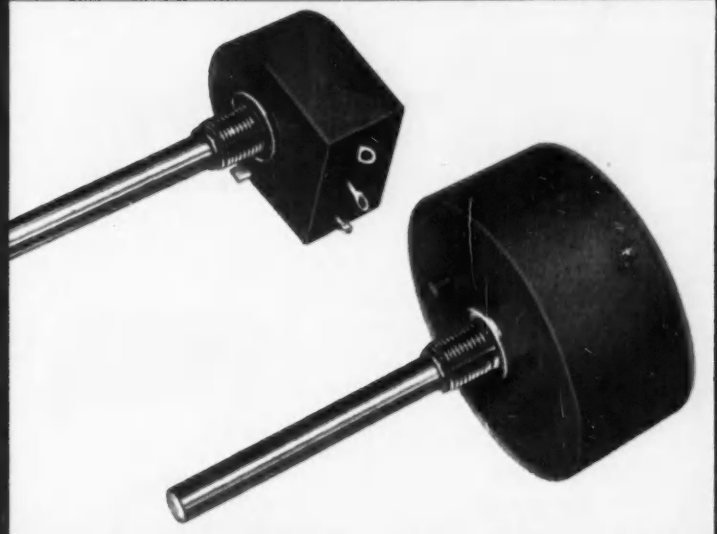

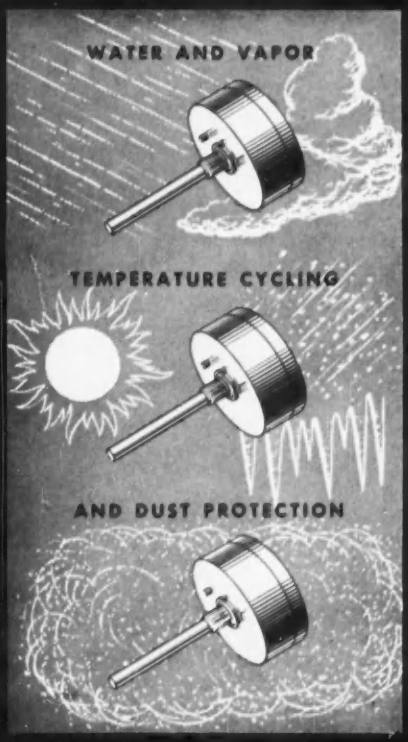

POTPOT
Potentiometers

Another **Clarostat** "first," meeting the latest requirements for ultra-dependable components.

"POTPOT" means potted or encapsulated potentiometers. Either in wire-wound or carbon types, including **Clarostat** Series 48M, 49M, 43, 37, 51, 58, and 10 controls. New encapsulating material means water- and vapor-tight molded enclosures imbedding entire unit with exception of external shaft assembly and terminal tips. Special water-tight assembly for shaft bushing.

Designed specifically to meet MIL-STD-202 Test Specification. Incorporating necessary salt-spray, humidity and temperature cycling requirements of MIL-E-5272 climatic standards. Excellent shelf life. Electrical specifications are those of given **Clarostat** control type.

CLAROSTAT®

WRITE FOR COMPLETE DETAILS . . .

CLAROSTAT MFG. CO., INC.
DOVER, NEW HAMPSHIRE

In Canada: CANADIAN MARCONI CO., LTD., Toronto 17, Ont.
Manufactured under license in Great Britain by A. B. Metal Products Ltd., 17 Stratton St., London W. 1, Concessionaires for British Commonwealth except Canada.

Kearfott Servo Motor-Generators are characterized by low rotor inertia, low time constants and high stall torque. Motor-Generator combinations provide ½ to 3.1 volts per 1000 R.P.M. with an extremely linear output over a speed range of 0—3600 R.P.M. and useful output up to 10,000 R.P.M.

**New Size 11 low cost, Servo Motor-Damping Generator Type R 809.*

CHARACTERISTICS

TYPE	MOTOR		GENERATOR	
DAMPING	STALL TORQUE	NO LOAD SPEED	OUTPUT FUND. NULL	LINEARITY
SIZE 10	.35 OZ. IN.	6000	21/1	.5%
SIZE 10	.70 OZ. IN.	8500	23/1	.5%
NEW R 809	.63 OZ. IN.	5900	25/1	.5%
SIZE 15	1.5 OZ. IN.	5000	25/1	.5%
SIZE 18	2.4 OZ. IN.	5000	25/1	.5%
SIZE 18	3.0 OZ. IN.	9600	23/1	.5%
RATE				
SIZE 15	.45 OZ. IN.	10,500	170/1	.5%
SIZE 15	1.5 OZ. IN.	4700	350/1	.2%
SIZE 18	2.4 OZ. IN.	4700	350/1	.2%
SIZE 18	3.0 OZ. IN.	8400	350/1	.2%
*INTEGRATOR				
SIZE 15	.70 OZ. IN.	6300	400/1	.1%
SIZE 15	1.25 OZ. IN.	4500	400/1	.1%
SIZE 18	1.35 OZ. IN.	7200	400/1	.1%
SIZE 18	2.4 OZ. IN.	5200	333/1	.06%
SIZE 18	3.0 OZ. IN.	8000	333/1	.06%

*Integrator Tachometers are temperature stabilized

Kearfott components satisfy all requirements for high accuracy, light weight and small size.

KEARFOTT COMPONENTS INCLUDE:

Gyros, Servo Motors, Servo and Magnetic Amplifiers, Tachometer Generators, Hermetic Rotary Seals, Aircraft Navigational Systems, and other high accuracy mechanical, electrical and electronic components.

Send for bulletin giving data of Counters and other components of interest to you.

Kearfott

A SUBSIDIARY OF GPE

KEARFOTT COMPANY, INC., LITTLE FALLS, N. J.

Sales and Engineering Offices: 1378 Main Avenue, Clifton, N. J.
Midwest Office: 188 W. Randolph Street, Chicago, Ill. South Central Office: 6115 Denton Drive, Dallas, Texas
West Coast Office: 253 N. Vinedo Avenue, Pasadena, Calif.

likewise geared into the system with the result that strong ambient light tends to close the iris, while weak light opens it.

▶ **Home Movies** — Application of this system has been made in a Bell & Howell camera designed for amateur use. Six mercury cells are used to drive the actuating motor.

Phase Detector for Synchro Alignment

By G. S. Copper
Supervisor
Test Equipment Design Section
Bell Aircraft Corp.
Tonawanda, N. Y.

THE PHASE DETECTOR described here is the result for the need of a simple and inexpensive in-line production tool to be utilized during the assembly of synchros into servo systems.

The construction of the angle-indicating synchro is shown in Fig. 1A. A single winding is rotated so that it couples in varying amounts with three fixed stator windings.

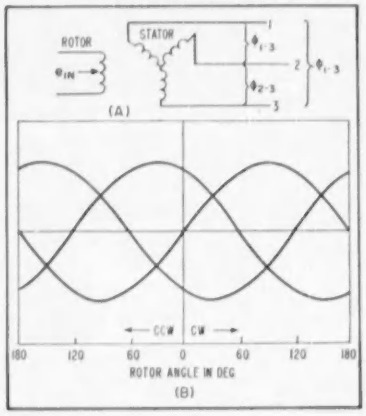

FIG. 1—Winding arrangement of synchro motor (A) provides 3-phase output (B) when sinusoidal signal is applied

The stator windings are oriented 120 degrees apart in space. Signals induced in these stator windings are essentially in time phase but are 120 degrees apart in space phase.

If a sinusoidal voltage is applied to the rotor windings of the synchro, the induced output voltages between phase 1 and 2, phase



L-C FILTERS

L-C filters utilizing high Q toroidal inductors and high quality capacitors are the heart of these frequency selective components. Recent developments of magnetic materials and highly stable capacitors have extended the useful frequency and temperature range of electrical wave filters. Use of impedance transformations, near unity coupling, and other applications of advanced network theory result in high performance units in small volume packages.

Low pass, high pass, band pass and band stop filters can be designed covering sub audio to over 500kc range. Line, interstage or other impedances can be specified. Filters can be designed for direct paralleling where required. High permeability cases and the closed toroidal form assure low hum pickup. Temperature stabilization on the order of 0.1% frequency can be attained through use of negative TC compensation to offset slightly positive coil and capacitor characteristics.

Depicted response curve is for an integrally packaged low pass—band pass filter employing the latest design and production procedures. This unit uses less chassis area and is an excellent example of subminiature coil usage, impedance transformations, and printed circuitry. Hermetically sealed to meet the military specifications.

C-A-C®

LC AND MECHANICAL FILTERS

Engineering...

As a result of CAC's engineering developments, more end equipment manufacturers now specify CAC toroids and filters than any other supplier. You are invited to present your network problems to our engineering staff.

COMMUNICATION ACCESSORIES CO.

World's Largest Exclusive Producer of Toroidal Windings

HICKMAN MILLS, MISSOURI • PHONE KANSAS CITY, SOUTH 1-5528

A Subsidiary of Collins Radio Company





MECHANICAL FILTERS *(Developed and mfd. by Collins Radio Co.)*

The Mechanical Filter provides far better bandpass selectivity in one small sealed unit than a series of bulky conventional IF transformers. Excellent characteristics allow closer spacing of information channels, lower adjacent-channel interference and improved signal to noise ratios. These Filters have been proven in thousands of military and commercial receivers, transmitters and microwave multiplex systems.

Units are designed for center frequencies of 60 to 600kc and various 6db bandwidths from 300cps to 16kc. In general, bandwidth is limited to 10% of the center frequency. In many types, the 60db bandwidth is only twice the 6db bandwidth. Filters have a frequency shift with temperature of ± 10ppm/°C. Normal insertion loss for the filters is 6 to 8db. Most types comply with Mil-E-5400 on shock and vibration.

In receiver IF amplifier design the Mechanical Filter replaces one of the usual IF transformers and is fixed tuned. Preceding or following stages may be coupled with subminiature toroidal transformers using fixed tuning. Variable selectivity is obtained by using two or more Filters and switching connections.

Catalogs on Individual Components are Available on Request.

TECHNICRAFT

for complex WAVEGUIDE assemblies like this

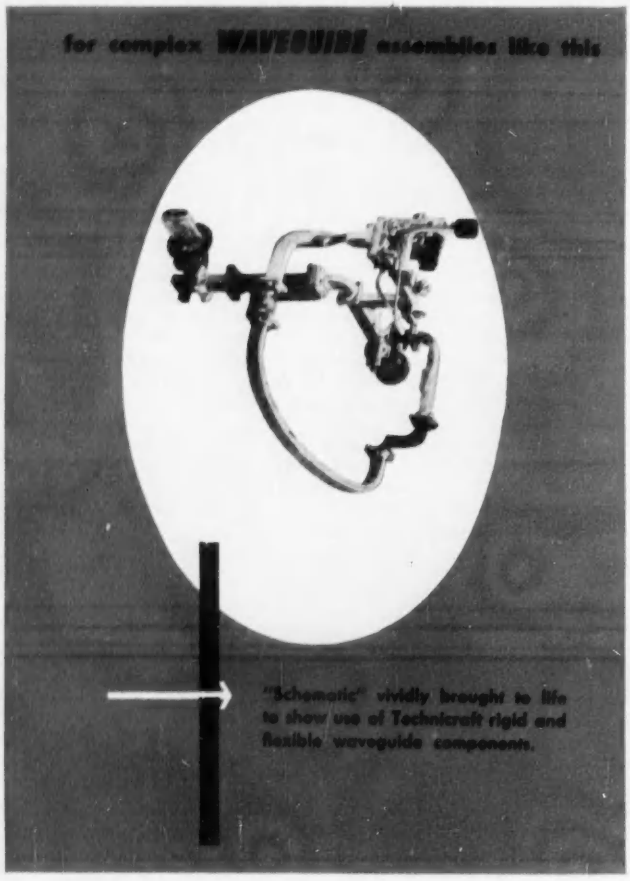

"Schematic" vividly brought to life to show use of Technicraft rigid and flexible waveguide components.

MAKE

TECHNICRAFT

YOUR PRIMARY SOURCE

Designed with Precision

Built with Precision

Tested with Precision

One of our representatives is near you. Sales engineering offices in: Dallas • Dayton • Los Angeles Chicago • Seattle • St. Louis • Toronto (Canada).

SERVING RADAR AND COMMUNICATIONS WITH THE BEST IN MICROWAVE TRANSMISSION DEVICES

TECHNICRAFT LABORATORIES

INCORPORATED

1550 THOMASTON RD. • THOMASTON, CONNECTICUT

Designers and Manufacturers of Rigid and Flexible Waveguide Assemblies, Microwave Test Plumbing and Components, Waveguide Systems.

2 and 3, and phase 1 and 3 are amplitude-modulated signals, as shown in Fig. 1B, proportional to the angular displacement of the rotor. Negative values of induced output voltages indicate a 180-deg phase reversal with respect to the rotor input voltage.

Two null points exist as the rotor is turned through 360 degrees and phase reversal is in opposite directions. For example, if the rotor is adjusted to null at zero degrees and the rotor is turned through 180 degrees in a counterclockwise direction, the phase of the output stator voltage (phase 1 and 3) will be 180 degrees out-of-phase with respect to the rotor input voltage.

If the rotor is then turned to its other null position (180 mechanical degrees), clockwise rotation from its new null position will produce an output voltage whose phase is 180 degrees with respect to the rotor input voltage. Counterclockwise rotation through null will produce an output voltage which is in phase with the rotor input voltage.

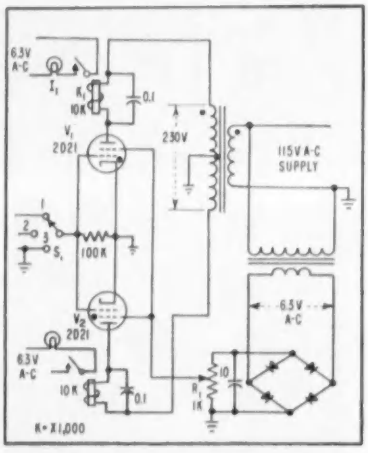

FIG. 2—Phase detector for determining independent null points in synchro alignment

The circuit shown in Fig. 2 may be used to select, as a go no-go detector, the two independent null points in order properly to align the synchro in an angle-error detection system. A feedback signal resulting from a false null position of the synchro would add to rather

Notable Achievements at JPL

REALISM IN VIBRATION... Recognizing that it was necessary to provide a simulated missile-flight vibration environment far more realistic than heretofore available the Laboratory developed high power, wide-band, complex waveshape vibration testing equipment.

This has made possible the development of components and packages of greatly improved reliability.

New Techniques for Component Reliability

JPL JOB OPPORTUNITIES ARE WAITING FOR YOU TODAY
in these fields

RADIO GUIDANCE
·
MICROWAVES
·
SYSTEMS ANALYSIS
·
GUIDANCE ANALYSIS
·
APPLIED PHYSICS
·
ELECTRO MECHANICAL
·
INSTRUMENTATION
·
INERTIAL GUIDANCE
·
TELEMETERING
·
PACKAGING
·
MECHANICAL ENGINEERING
·

Wide-band, complex waveshape vibration testing using electromagnetic shakers driven by large audio amplifiers, is a valuable new tool for evaluating guided missile components. Input information can be in-flight vibration data which has been obtained via telemetering or it can be artificial vibration records sythensized from noise, pulses, sine waves, etc., to suit specialized needs.

Design and test for survival in adverse environment is fundamental in producing guided missile components with reliability adequate for modern weapons system requirements. At JPL, a constant search is being conducted for better design and packaging techniques, and for more significant laboratory test methods. Development of the "complex wave" vibration test philosophy, and of apparatus to exploit it, are but two results of this program. In the area of component design, new packaging techniques have been developed, involving control of local internal resonances and nonlinearities, which permit electronic circuits to withstand many times the vibration level which would destroy a conventional package.

Engineers and scientists are working at JPL in nearly all of the physical sciences. Here they are supported not only by outstanding laboratory facilities, but by a continuing series of experimental rocket firings which provide an invaluable tool for research and development.

The combination of a broad base of fundamental research, active development effort, and strong test and flight program has made the Lab a place of achievement. Perhaps you would like to participate in the many new, exciting programs now under way here. Your inquiry is invited.

CALTECH jpl **JET PROPULSION LABORATORY**

A DIVISION OF CALIFORNIA INSTITUTE OF TECHNOLOGY

PASADENA, CALIFORNIA

Want more information? Use post card on last page.

LOW NOISE PLUS INTERCHANGEABILITY

Recent advances in germanium mixer diodes have appeared most promising, providing they are used in conjunction with special biasing circuits, low impedance IF inputs and RF microwave mixers specially designed for the purpose. Actual systems experience with germanium mixer diodes is still limited, and hence, it is not well known how their field reliability in such matters as high temperature operation, pulse burnout, etc. compares with the time-tested silicon diode.

To allow our customers to achieve super low noise figure performance without the inconvenience of modifying their IF and RF circuits, we now offer the 1N415E (double ended) and 1N23E (single ended) silicon diodes which are comparable in performance to the 1N263, but are interchangeable with the 1N23 series.

These diodes are produced to the same upper overall noise limit of 7.5 db (with IF noise figure of 1.5 db) as that specified for the 1N263 germanium diode. Hence, existing systems, designed for 1N23 series design centers can invariably be improved by the simple expedient of direct substitution. The RF and low IF impedance of the 1N263 does not lend itself to such direct interchangeability. Try these new silicon types. We are sure that your enthusiasm will match those of users now reporting systems noise figures including duplexer loss as low as 6.45 db.

The information above has been taken directly from our new 8-page technical brochure on silicon diodes.

SEND FOR YOUR COPY.

MICROWAVE ASSOCIATES INC.

22 CUMMINGTON STREET, BOSTON 15, MASSACHUSETTS

than reduce the angular error.

Essentially, the circuit consists of two thyratrons whose plate voltages are 180-degrees out of phase with respect to each other, a bias supply and two indicating lamps, each connected across the contacts of the plate-load relays, of the thyratrons. A calibrating a-c input voltage, approximately ten times the rms value of the synchro null voltage is applied simultaneously to the control grids of V_1 and V_2.

Bias potentiometer, R_1 is adjusted until indicator lamps I_1 and I_2 are extinguished. If the phase 1 and 3 stator winding of the synchro is connected to switch 1 and the rotor displaced from null in a clockwise direction to induce a stator voltage equal to or greater than the calibrating voltage, V_1 or V_2 will conduct, lighting I_1 and I_2 respectively. For example, if synchro stator phase 1 and 3 is in phase with the supply voltage, then V_1 will conduct each half cycle and I_1 will light. Tube V_2 will be in a nonconducting state since the control grid and plate voltages are 180 degrees out of phase.

Conversely, if phase 1 and 3 is 180 degrees out of phase (counterclockwise rotation) with the supply voltage, then V_2 will conduct, I_2 will light and I_1 will be extinguished.

If the synchro rotor be mechanically rotated 180 degrees to its other null position, a clockwise displacement of the rotor would produce an out-of-phase voltage, lighting I_2. Conversely, a counterclockwise displacement would produce an in-phase voltage, lighting I_1.

This circuit lends itself easily to production line go no-go alignment of correct null points for synchros. After the lighting sequence has been established, refinement of null adjustment may be made with a vacuum-tube voltmeter.

Dish Antennas To Scan Chromosphere

MICROWAVE spectroheliograph comprising 32 parabolic antennas will soon be erected in the form of a

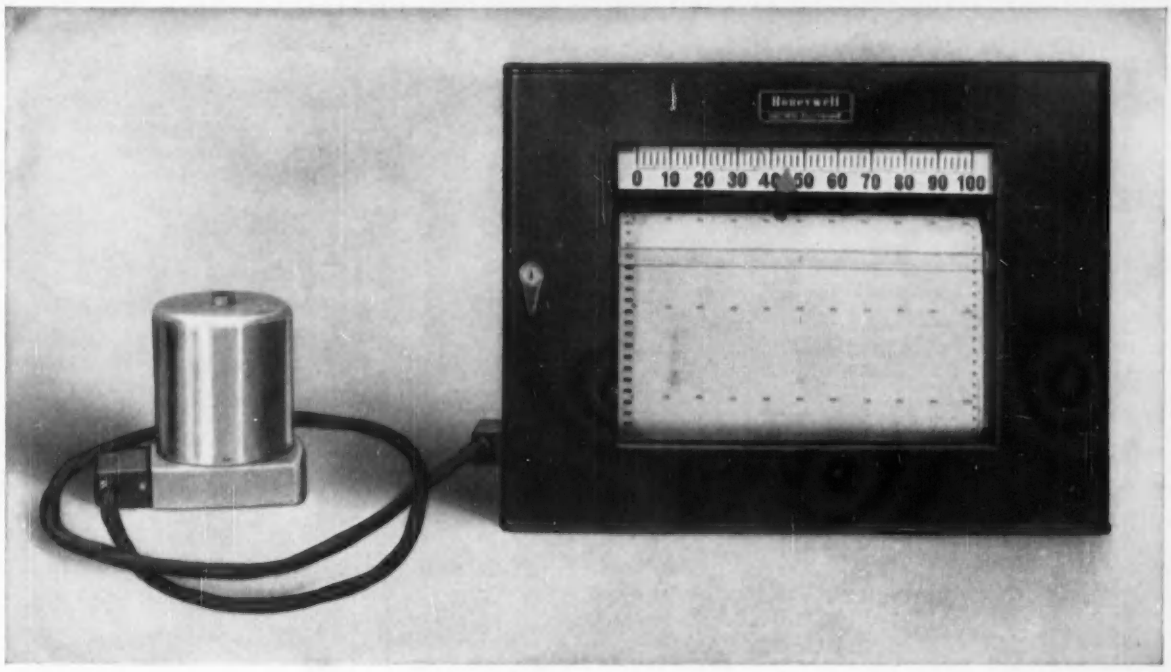

Record radiation data in lab or plant

...with the BROWN ELECTROMETER

Valuable aid in chemical nucleonics, this instrument records currents as small as 10^{-15} ampere . . . useful in isotope tracer studies, nuclear fuel reprocessing, and similar atomic investigations.

THE exceptionally high sensitivity of the Brown Electrometer makes it ideal for a wide range of atomic radiation measurements. Use it with beta gages, ion chambers, photoelectric scintillation counters or other detecting elements which produce minute currents. It is excellent, too, for use in mass spectrometers . . . in spectroscopic analysis using vacuum phototubes.

The Electrometer consists of a preamplifier head connected to a special *ElectroniK* recorder. In addition to current measurements, it can be supplied as a high-impedance millivoltmeter. Full scale range is 10^{-13} amperes for maximum sensitivity model . . . can be changed by 10 or 100 to 1 by means of a range switch. System accuracy is approximately 1% of scale. Zero drift should not exceed 0.3 millivolt per day. Input resistor is 10^{11} ohms for highest current sensitivity . . . also supplied in values down to 10^{5} ohms.

High stability and low system noise assure dependable measurements. Switches can be provided in the instrument to actuate external alarms at preset limits of radiation level.

The Brown Electrometer, proved by years of use in leading atomic installations, is a valuable asset in any lab doing nuclear studies. Call your local Honeywell field engineer for a discussion of your application . . . he's as near as your phone.

MINNEAPOLIS-HONEYWELL REGULATOR CO., *Industrial Division*, Wayne and Windrim Avenues, Philadelphia 44, Pa.—in Canada, Toronto 17, Ontario.

● **REFERENCE DATA:**
Write for Data Sheet No. 10.0-4b, "Minute Current Measurement."

MINNEAPOLIS **Honeywell**
BROWN INSTRUMENTS
First in Controls

Want more information? Use post card on last page.

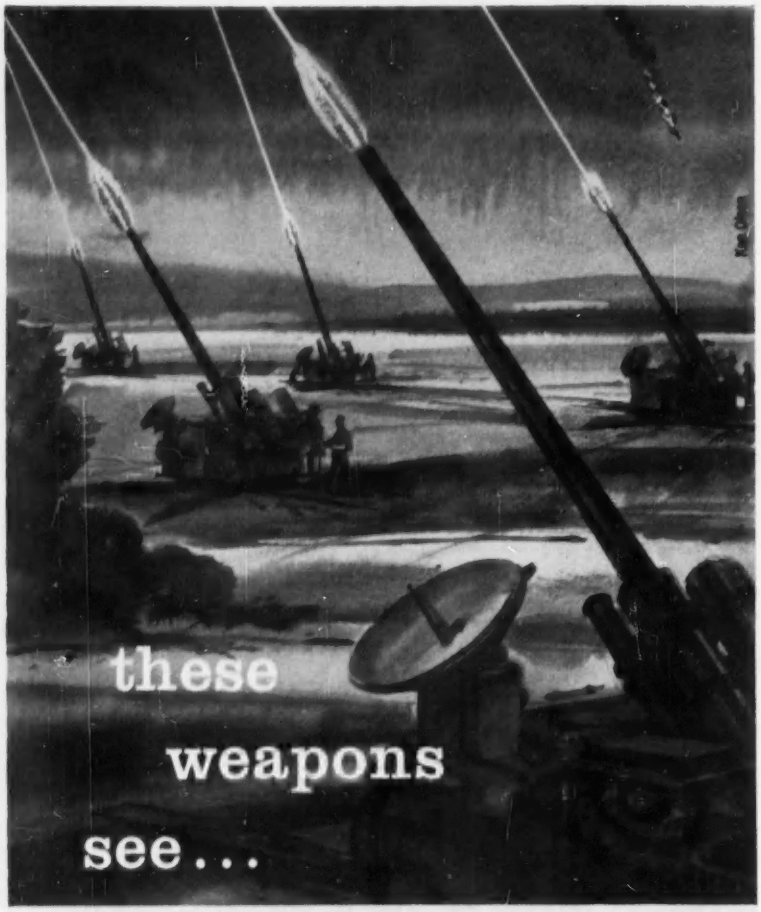

but only when components are reliable

Modern fire control and gun direction equipment must depend completely on the reliability of hundreds of components. The products of G-V Controls Inc. have been adopted by the major manufacturers of this vital equipment and have proven themselves by a long record of dependable performance.

G-V Hot Wire Time Delay Relays
1/10 to 5 seconds with fast recovery

G-V Thermal Time Delay Relays
Adjustable delays of 2 to 300 seconds

G-V Voltage & Current Sensing Relays
For circuit protection

G-V Electrical Thermostats
Hermetically sealed, still adjustable

A well-qualified G-V Representative is ready to serve you. Write for data.

G-V CONTROLS INC.
24 Hollywood Plaza, East Orange, N. J.

G-V

cross occupying a level, two-acre meadow on Stanford University campus. Financed by Air Research and Development Command, the device will pick up solar microwave radiation in the 3-kmc region.

▶ **Radio Picture**—One phenomenon to be recorded will be the chromosphere, a billowing layer of incandescence that rises to heights 6,000 miles above the sun's surface. A primary accomplishment will be scanning the solar regions as small as three-thousandths of one square degree, a definition finer than thus far achieved in radio astronomy or radar.

Bistable Circuits Using Triode-Pentodes

by H. L. ARMSTRONG
Pacific Semiconductors, Inc
Culver City, California

TRIODE-PENTODE tubes make possible several interesting multivibrator-type circuits that use only one tube envelope. Oscillators working

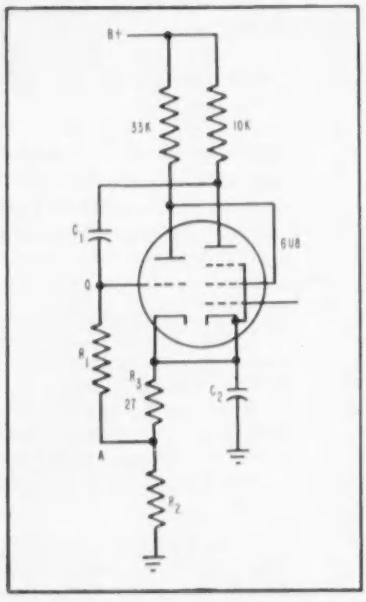

FIG. 1—Basic multivibrator-type circuit. Component values for free-running, one-shot and Schmitt trigger circuits are given in text

on the same principle are also possible.

Figure 1 shows a basic circuit; it is like a conventional multivi-

Microwave Frequency Meters

by

FREQUENCY STANDARDS

In offering these frequency meters we have endeavored to bring to the electronics industry instruments for frequency measurement which are fairly priced yet without sacrificing a high degree of accuracy resulting from precision manufacture. The frequency determining element of these instruments is a cylindrical resonator with a tuneable choke plunger that provides a smooth and accurate interpolation of frequency. Four models are offered, each model covering a wide frequency range and employing standard waveguide and flanges. Three types, described below, are offered in each frequency range. All models have been designed to use the standard FS Model M-1000 Micrometer Head which has been widely accepted by the electronics industry. Construction is of Invar and accuracy is .01% under laboratory conditions.

Three Types Available

WAVEGUIDE ABSORPTION TYPE I cavity is mounted on the broad face of waveguide. The transmission indication is secured by a crystal loop monitor located opposite the iris input coupling hole. (Type illustrated)

WAVEGUIDE FEED TYPE II cavity is mounted as the termination of a short section of waveguide. The cavity body and output coupling loop are the same as Type I.

WAVEGUIDE TRANSMISSION TYPE III cavity is the same as Types I and II but waveguide is used for input and output coupling.

DESCRIPTIVE LITERATURE AVAILABLE ON REQUEST

TYPE	FREQUENCY RANGE	WAVEGUIDE
Models 8211– 3	8200 to 11500 MC	RG-52/U
Models 7010– 3	7000 to 10000 MC	RG-51/U
Models 5882–1, 2, 3	5800 to 8200 MC	RG-50/U
Models 4458–1, 2, 3	4400 to 5800 MC	RG-49/U

Frequency Standards

General Offices: ASBURY PARK, NEW JERSEY

Address inquiries to
BOX 504

QUAKER CITY GEAR..

• For complete gear assemblies . . Hardened and Ground Gears..Master Gears and Involute Spline Gauges . . Thread Ground Worms . . Coniflex and Spiral Bevel Gears . . . .

We invite your inquiry

QUAKER CITY GEAR WORKS INCORPORATED

RED LION AND PHILMONT ROADS

BETHAYRES, PA., CHAPEL HILL 0800



brator except that one feedback path is from the triode plate to the pentode screen by having the two directly connected.

A free-running circuit uses the following numerical values: B+ = 150 volts, $C_1 = 300\ \mu\mu f$, $R_1 = 100{,}000$ ohms, $C_2 = 50\ \mu f$, $R_2 = 0$ (point A was grounded directly) and the grid of the pentode section went to ground through a 10,000-ohm resistor. Figure 2 shows the waveforms at the pentode plate, triode plate and triode grid.

On the upper two waveforms, the scales are 20 volts per cm and 1 μsec per cm. (the squares are one cm); on the bottom one they are 10 volts per cm and 10 μsec per cm. Thus the frequency of this circuit was about 12 kc, and the length of the main pulse about 4.5 μsec.

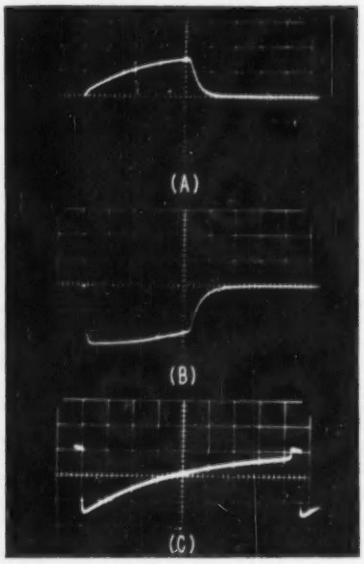

FIG. 2—Waveforms present at pentode plate (A), triode plate (B) and triode grid (C) in free-running circuit

A one-shot circuit was also tried, using values of B+ = 300 volts, $C_1 = 0.0015\ \mu f$, $R_1 = 100{,}000$ ohms, $R_2 = 2{,}200$ ohms, $C_2 = 100\ \mu f$. The pentode grid was again returned to ground through a 10,000-ohm resistor and the triggering pulses, which were derived from a neon bulb relaxation oscillator, were applied to it.

Figure 3 shows the resulting waveform at the triode plate. Here the scale is 40 volts per cm and 10

CORES

Name it . . . if it's a Ferrite, a Magnetic Iron Core, a Molded Coil Form (Iron and phenolic) or an E. E. Core, MOLDITE makes it and MOLDITE is your one consistently dependable source.

MOLDITE continues to pioneer with new methods and techniques closely related to automation in manufacturing stud and studless powdered iron cores. This will enable MOLDITE to produce faster, better and cheaper.

In addition, color TV is finding MOLDITE in the forefront with highly specialized equipment built and designed by MOLDITE engineers for both quality and quantity production.

Truly MOLDITE means Cores Unlimited for unlimited electronic applications today . . . tomorrow!

Send for our Catalog 120

NATIONAL MOLDITE COMPANY

1410 CHESTNUT AVE., HILLSIDE 3, N. J.

IRON CORES • FERRITES • MOLDED COIL FORMS • E E CORES

Robert T. Murray Co.
604 Central Avenue
East Orange, N. J.

William A. Franklin
3 Holly Road
North Syracuse, N. Y.

Jerry Golten Co.
2750 W. North Ave.
Chicago 22, Ill.

Engineering Services Co.
4550 Main St.
Kansas City, Mo.

Perlmuth Electronics Assoc.
2419 South Grand Ave.
Los Angeles, Cal.

John S. Plewes Co.
52 Humbercrest Blvd.
Toronto 9, Ontario

Jose Luis Ponte
Cardoba 1472
Buenos Aires

Want more information? Use post card on last page.

μsec per cm, and the operating frequency about 800 cps.

A Schmitt-type circuit, which switches from one stable state to the other when the input voltage exceeds a certain level,[1, 2] was also built. For this circuit, B+ = 300 volts, R_1 = 1 megohm, and C_1 was replaced by a 1.8-megohm resistor. Point A was connected to ground

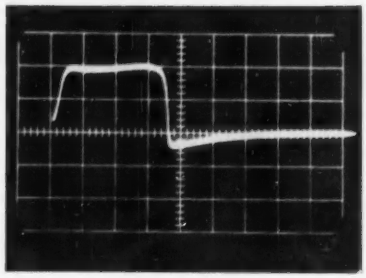

FIG. 3—Triode plate waveform for one-shot multivibrator-type circuit

but C_2 and R_2 were omitted and the cathodes connected directly to +80 volts.

When the voltage applied to the pentode grid exceeds about 80 volts, the circuit changes from state 1 (triode conducting, pentode nonconducting) to the other state. This causes a rise of about 50 volts at the triode plate, which is the output.

For this use, the present circuit has some advantage over the cath-

Forms Burster

Office forms of varying length can be quickly processed using a forms burster that separates sections along a perforated line. Twenty-three different lengths from 3 to 22 inches can be selected by electronic timing in a machine recently developed by Standard Register

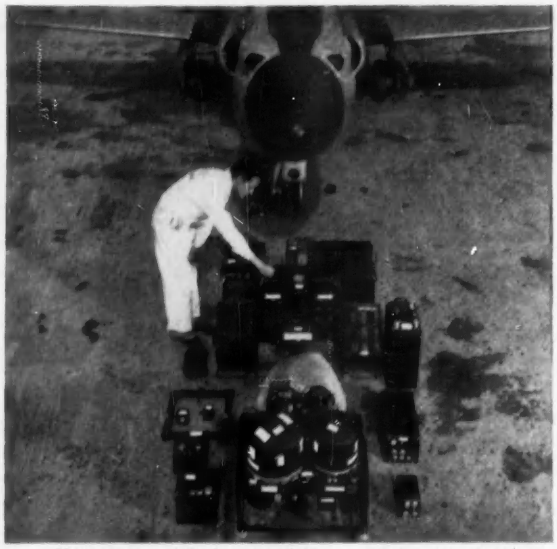

Photo courtesy of Hughes Aircraft Company, Culver City, California.

Billions of operations here with Bristol Syncroverter® high-speed relays

How do you build reliability into a fire control system for interceptor planes—a system containing as many components as 200 TV sets; but occupying only 29 cubic feet?

The obvious solution is to use reliable components, so the design engineers at the Hughes Aircraft Company selected Bristol Syncroverter high-speed relays for the high-speed relay requirements of the Hughes Fire Control System.

Their operation is unaffected *during shock* up to 30G's, and vibration (10-55 cps) of 10G. This high-speed relay, which meets military specifications, is completely reliable in *dry-circuit applications* as well as in *low-power applications.*



Bristol Syncroverter high-speed relay. Covered by patents.

Versatile relays meet a wide variety of requirements

Your applications of high-speed relays in such equipment as air-to-ground telemetering, analog and digital computers, aircraft or missile control, carrier current switching and the like may call for different specifications from those below. You'll find the high-speed relays you need—including miniature (70 gram) relays—in Bristol's broad Syncroverter line. Write us. The Bristol Company, 152 Bristol Road, Waterbury 20, Conn.

TYPICAL PERFORMANCE CHARACTERISTICS

Temperature range: —55°C to 100°C.
Operating shock: 30G; 11 milliseconds duration.
Vibration: (10-55 cps): 10G
Contact ratings: up to 28v, 200 ma.
Stray contact capacitance: less than 15 mmfd.
Pull-in time (including bounce): as low as 200 microseconds.
Drop-out time: 300 microseconds.
Life: At least 1000 hours at 400 operations per second.
Mounting: Octal tube socket.

6.15

BRISTOL *Points the Way in Human-Engineered Instrumentation*

AUTOMATIC CONTROLLING, RECORDING AND TELEMETERING INSTRUMENTS

RUGGEDIZED

TO SOAK UP SHOCK!

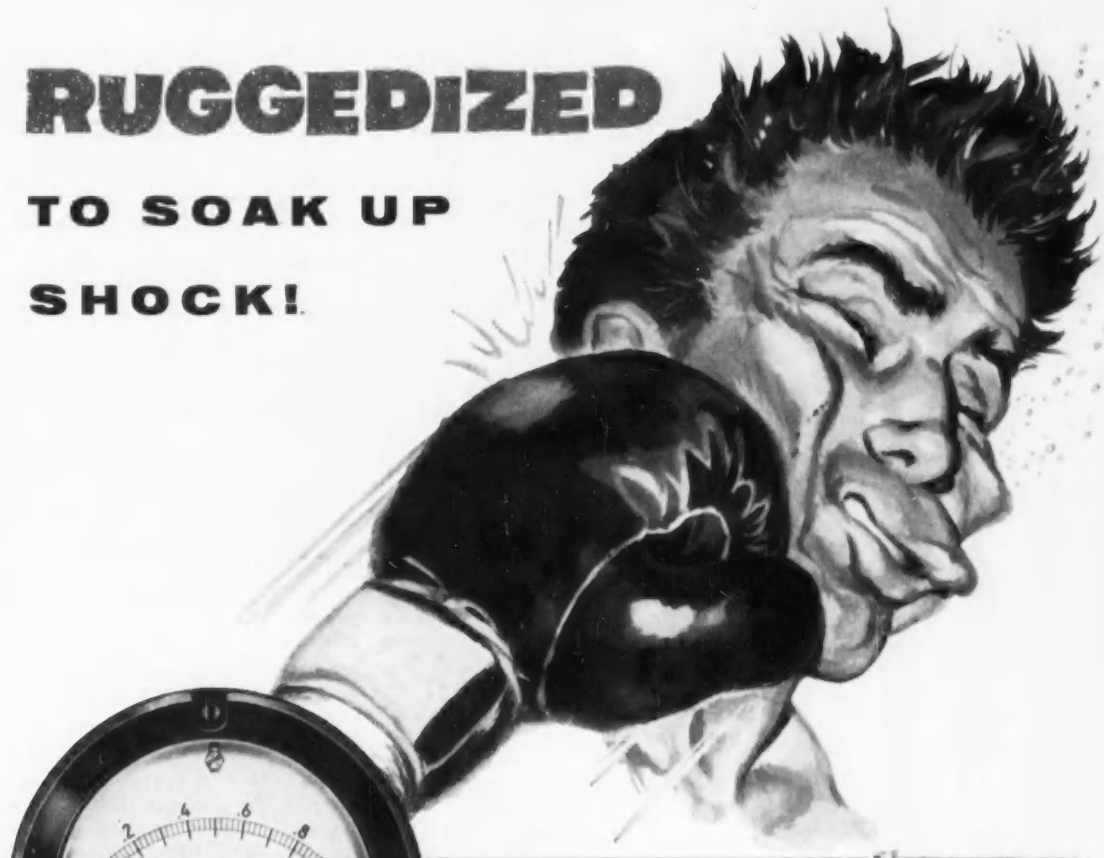

Cutaway view of instrument case showing how the ruggedized WESTON movement is cradled on a shock mount of specially formulated rubber. Case is completely lined for high dielectric strength.

Tiny springs in back of each jewel bearing in WESTON ruggedized instruments *soak up shock* — thus eliminate damage and help insure dependable operation in severest service.

Where specifications read "ruggedized", it means instruments that can really *take* punishment, *and come through!* That's why WESTON is industry's *major* supply source, and the *exclusive* source for ruggedized panel instruments in *all* sizes in A-C, D-C, RF, and THERMO types. For the complete story on WESTON ruggedized meters, as well as on the full line of conventional and core-magnet type panel meters, consult the Weston representative near you, or write WESTON Electrical Instrument Corporation, 614 Frelinghuysen Avenue, Newark 5, N. J. A subsidiary of Daystrom, Incorporated.

WESTON

RUGGEDIZED

PANEL INSTRUMENTS

ode-coupled multivibrator in freedom from feed-through effects for rapidly rising inputs. It shares this advantage with other circuits[3, 4] recently described, but is simpler.

A bistable circuit would also be possible, but it would seem to have no advantage over the conventional flip-flop.

This basic circuit has also been applied to sine-wave oscillators. One type makes C_1 fairly large and replaces R_1 by a parallel-resonant tank circuit. Another makes a resistance-capacitance oscillator in replacing C_1 by a resistor and capacitor in series and R_1 by the same value of resistor and capacitor in parallel. Thus the latter is similar to some other oscillators[5] recently described.

The R-C oscillator gave good results with B+ voltages as low as 25 volts. With these, as with other oscillators, the amplitude must be limited for a good waveform.

These examples show how plate-to-screen feedback can be applied to produce several interesting circuits that require only one tube envelope and leave one grid free for triggering, gating or modulation.

References

(1) B. Chance, V. Hughes, E. F. MacNichol, D. Sayres and F. C. Williams, "Waveforms", M.I.T. Rad Lab Series, 19, McGraw-Hill Book Co., New York, 1949.

(2) W. C. Elmore and M. Sands, "Electronics", McGraw-Hill Book Co., New York, 1949.

(3) W. M. Grimm and A. B. Van Rennes, *Rev Sci Inst*, 23, p 563, 1952.

(4) H. L. Armstrong, *Rev Sci Inst*, 24, p 551, 1953.

(5) H. L. Armstrong, ELECTRONICS, p 234, July, 1953.

Lapp

ANTENNA STRAIN INSULATORS

• The largest of the porcelain rod insulators shown in the illustration develops 12,000 lb. strength. It is available, if specified, with rain shield and/or corona rings. All hardware is silicon aluminum alloy. Smaller units, in porcelain or steatite, are suited to lighter duty for strain or spreader use. Engineering and production facilities are also available for design and manufacture of units to almost any performance specification. Write for Bulletin 301, with complete description and specification data. Lapp Insulator Co., Inc., Radio Specialties Division, 902 Sumner St., Le Roy, N. Y.

Lapp

Color Tape Head

Magnetic tape recorder head used by RCA to record and reproduce, monochrome, color and sound. It is claimed that the unit can handle ten times more information per inch of tape than is possible with conventional techniques. The five-element assembly can record more than 20,000 cycles an inch at rates up to 4 mc on half-inch tape

FOR ADVANCED-ENGINEERED

VR tubes

IT'S CBS

Have you an exacting requirement for stable voltage? Try the reliabilized CBS 6626 and 6627. There are no better VR tubes made. They represent the most advanced engineering concepts in gaseous voltage-regulator tubes. They eliminate sudden discrete voltage shifts in voltage-reference circuits.

It's only natural that CBS VR tubes should be the finest. CBS-Hytron specializes in VR tubes . . . has made over 20 millions of them. CBS-Hytron has originated many VR types; for example, the OB2, USN-OA2WA, USN-OB2WA, 6830, 6831 . . . as well as the 6626 and 6627. CBS-Hytron offers the widest line of 105-volt and 150-volt VR tubes; commercial and military . . . miniature and GT . . . for voltage regulation and voltage reference. And inquiries are solicited for production quantities of specialized VR types, like the flying-lead 6830 and 6831.

It makes good sense to think of CBS when you think of VR tubes. Be sure of up-to-the-minute design and tightly controlled quality. Follow the leaders, specify the leader. For stable, reliable, advanced-engineered VR tubes . . . always make it CBS.

Seen the new CBS VR Tube Manual? A complete, informative, easy-to-read eight pages. Includes data, theory, and application on voltage regulation and voltage reference. Write for free Bulletin E-267 today.

CBS-HYTRON, Danvers, Massachusetts
A Division of
Columbia Broadcasting System, Inc.

Production Techniques

Edited by JOHN MARKUS

Wire Brush on Drill Cleans Metal for Good Grounding

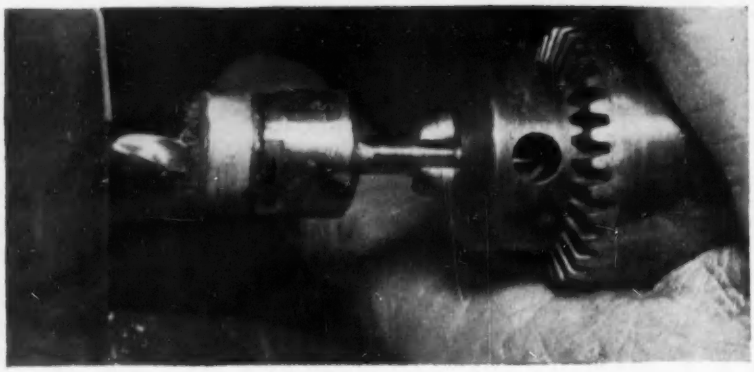

A COMBINATION drill and wire brush developed by Martin serves to drill holes and remove aluminum cladding from duralumin in one operation. This insures positive electrical connections when grounding airborne electronic equipment to aircraft structures, without need for an extra cleaning operation. The drill is mounted in the center of a standard wire brush.

Method of using tool for drilling duralumin held in vise

Lamps Indicate Errors During Wiring of Harness Boards

UP TO 7,000 man-hours per year are saved by using automatic checkout on wiring harness boards for airborne electronic equipment in the Los Angeles plant of Packard-Bell Co. The holding clips for wires on the board are connected underneath to indicating lamps in such a way that a lamp lights to indicate satisfactory installation of a group of up to ten wires.

Combining of inspection with production actually saves still more time through elimination of the human error factor in inspecting harnesses after conventional assembly. Errors that get past inspectors involve costly and time-consuming corrections once wired into actual equipment.

▶ **Construction**—Ordinary cotter pins are used as combination terminals and anchors for the wires. The pins are installed with the split ends up and slightly spread apart, so stripped ends of wires can easily be inserted. The eyes of the cotter pins project under the board. The pins are driven into under-sized holes so they cannot rotate out of position once the ends are spread apart above the board.

Connecting leads are soldered to the eyes under the board to achieve the self-inspecting feature. These interconnections serve to place an average of seven wires in series with an indicating lamp across the low-voltage secondary of a small power transformer. The lamps can then light only when all of the wires are correctly positioned to complete the series circuit.

The wiring board serves as the upper surface of a box about 6

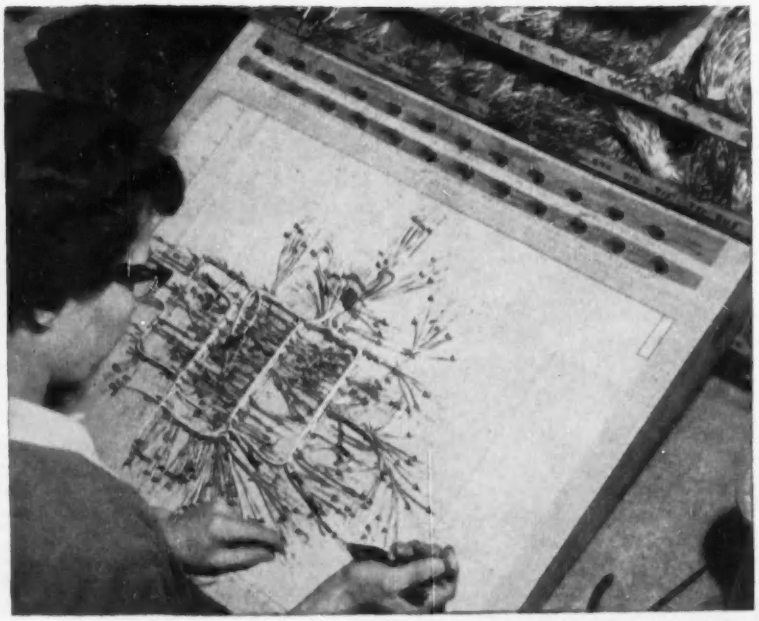

Installing wire lead on self-checking harness board. Each of 24 lamps across top of board indicates correct installation of an average of seven wires, installed in a prescribed sequence

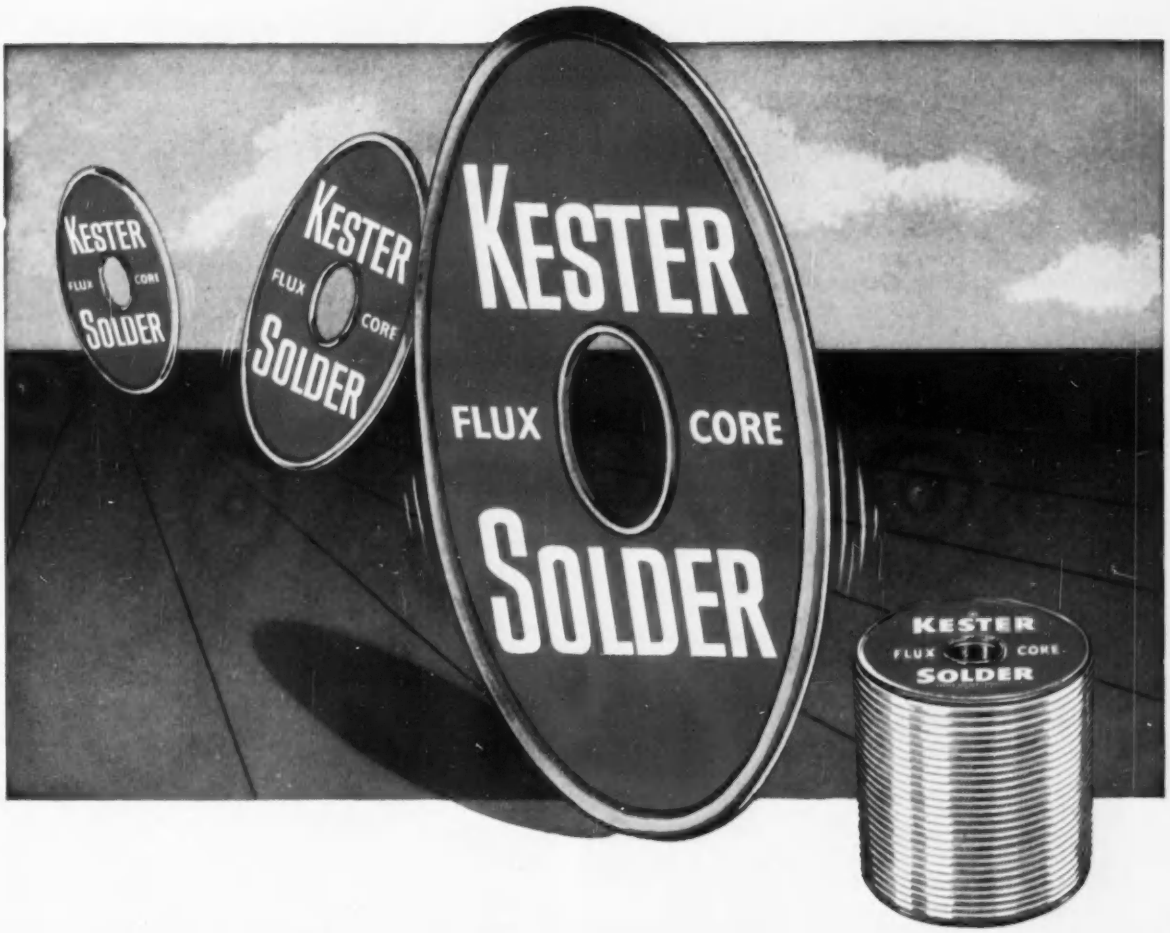

KEEPS 'EM ROLLING!

KESTER "44" Resin, Plastic Rosin and "Resin-Five" Flux-Core Solders keep the production lines moving by providing the exactly right solder for every application. Only virgin metals are used in Kester . . . further assurance of the constant solder alloy control combined with consistent flux formulae . . . all part of Kester Flux-Core Solder quality that'll "keep 'em rolling" for you!

• • •

BE SURE YOU GET KESTER'S new 78-page informative textbook "SOLDER . . . Its Fundamentals and Usage."

KESTER SOLDER

COMPANY **4204 Wrightwood Avenue, Chicago 39, Illinois; Newark 5, N. J.; Brantford, Canada**

inches high, to give protection for the terminals underneath.

▶ **Identification**—For each job, the worker is given an instruction sheet that specifies the size and type of wire to be used at each position, the color code, length and installation directions. Positions are specified by a combination of letters and numbers much as on maps, with corresponding letters running vertically down the side of the board and corresponding numbers running from left to right across the bottom of the board. The approximate position of a starting cotter pin can thus be determined quickly. Each pin also has a code number on the instructions and on the board, corresponding to the name of a city on a map.

▶ **Circuit**—The low voltage used for this automatic checkout system eliminates the possibility of shock to the operator. A fuse in the primary of the power transformer provides further protection, even though the lamps are all in one leg of the secondary so it is impossible to produce a direct short.

A typical wiring harness, such as that used as the main cable of the integrated communication system for Douglas and Chance-Vought fighter aircraft, involves installation of 152 wires, and takes approximately 3½ hours to complete. Initial planning and wiring of such a harness board circuit takes just about a full week of a technician's time.



Twelve circuits identical to this are installed on board. Use of only two lamps per transformer permits use of small and inexpensive transformers under board

Anchoring Leads in Terminal Strip with Nylon Rods

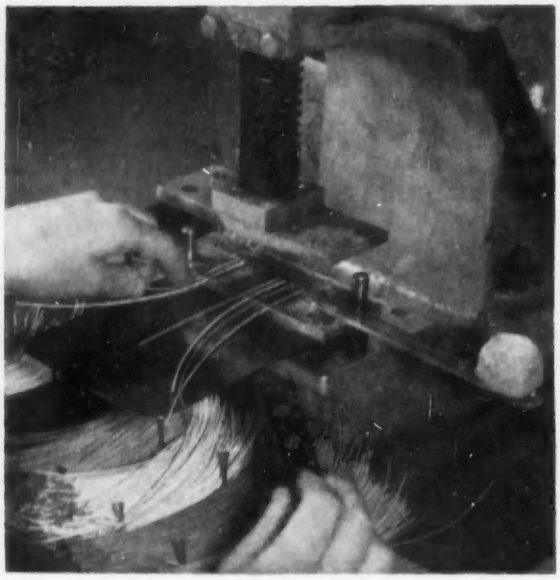

Loading wires into press. Stripped ends of wires go into holes at rear of slots in floating bed of press. Padded handle at right moves pointed steel rod used for spreading loops

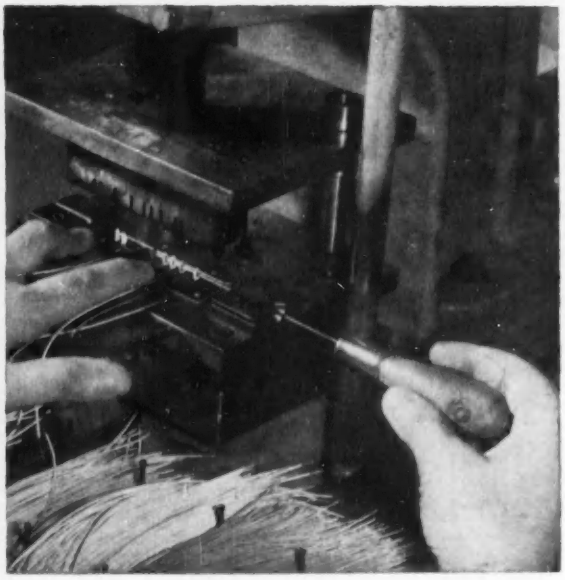

Spreading loops with pointed steel rod on handle. The seven different colors of insulated wire leads used are kept separated by long finishing nails driven into the bench

TWO DIFFERENT TYPES of work setups are used at Radio Condenser Co., Camden, N. J., to push seven loops of insulated wire through punched slots in a Bakelite strip simultaneously and thread a length of nylon rod through the loops for anchoring all leads at once without using eyelets.

In one setup, the operator loads the leads one by one into machine grooves in the bed of a Dake arbor press, places a strip over the leads, then operates the lever to bring down the head of the press. This has a contoured rubber block with slots at each lead position. Downward pressure of the rubber block pushes the strip and the spring-supported false bed of the press down over seven upward-projecting metal studs that push a loop of wire up into each punched hole of the strip.

Next, the operator retracts the press and holds the strip in position with her left hand while she pushes a metal rod through each of the seven loops that now project up through the strip. This rod is guided by a clamp bolted to one side of the false bed, and has a pointed end so that it can easily enter and spread apart each loop. The rod is pulled entirely out from the press and a solid nylon rod of

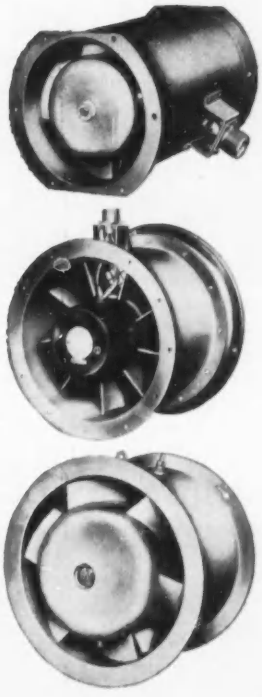

In Electronic Fan Design

Only JOY AXIVANE® FANS Offer All These Advantages

PRECISION CONSTRUCTION

Precision construction insures performance that gives you great power in so compact a unit.

COMPACT DESIGN

Joy's axivane design permits installation of Axivane fans as part of the duct . . . requires no extra space.

LIGHT WEIGHT

Axivane fans are light in weight as well as compact because they are built from precision aluminum or magnesium castings produced in our own foundry under JOY engineering supervision.

AERODYNAMIC ENGINEERING

The airfoil blades and stationary vanes of JOY fans are made with power-saving, efficient airfoil cross-section. AXIVANE design provides equal pressure and velocity distribution across the fan outlet . . . eliminates turbulence . . . and produces the greatest cooling effect with the least expenditure of power.

MAXIMUM STRENGTH

Joy AXIVANE fans are durable because the outer casing, stationary vanes, and inner casing are precision-cast as a single unit, giving extra strength and maximum resistance to shock.

UNMATCHED EXPERIENCE

Joy's unmatched experience as the world's largest manufacturer of Vaneaxial fans and blowers is a bonus that costs you nothing extra . . . JOY'S leadership is due solely to the multitude of customers who are now enjoying the benefits of outstanding engineering. Why not join the number of satisfied JOY customers . . . you'll be in the best company.

COMPLETE LINE

Joy offers a large selection of fans in the standard line . . . as well as custom-designed types that are available to your specifications. The Joy line includes fans for all purposes ranging from 1/500 HP to 3000 HP. You'll find a fan to suit your needs in the JOY line. Let us work with you. ***Joy Manufacturing Company, Oliver Building, Pittsburgh 22, Pa.*** In Canada: *Joy Manufacturing Company (Canada) Limited, Galt, Ontario.*

Write for FREE Bulletin 15-39

WAD 1 5627-15

Consult a Joy Engineer

For VANEAXIAL FANS • COMPRESSORS • VACUUM PUMPS and BOOSTERS
OXYGEN GENERATORS • HYDRAULIC FITTINGS • ELECTRICAL CONNECTORS

JOY

WORLD'S LARGEST MANUFACTURER OF VANEAXIAL-TYPE FANS

EXPAND YOUR TAPE RECORDER SALES!!

with ATR INVERTERS

for changing your storage battery current to A.C. Household ELECTRICITY Anywhere ... in your own car!

Make your car, boat or plane a "ROLLING OFFICE"

mounted out of sight under dash or in trunk compartment!

EASY TO INSTALL
EASY TO OPERATE

ATR INVERTERS especially designed for operating standard 110 volt A. C. . . .

- TAPE RECORDERS
- WIRE RECORDERS
- DICTATING MACHINES
- ELECTRIC RAZORS

for

- EXECUTIVES
- SALESMEN
- PUBLIC OFFICIALS
- POLICEMEN
- FIREMEN
- OUTDOOR MEN
- REPORTERS
- FIELD INSPECTORS
- DOCTORS
- LAWYERS, ETC.

See your jobber or write factory

√NEW MODELS "A" Battery Eliminators, √NEW DESIGNS DC-AC Inverters, √NEW LITERATURE Auto Radio Vibrators

ATR AMERICAN TELEVISION & RADIO CO.
Quality Products Since 1931
SAINT PAUL 1, MINNESOTA, U. S. A.

Want more information? Use post card on last page.

slightly smaller diameter is pushed through the loops. Cement is then applied to several of the loops to anchor the rod.

▶**Variation**—A slightly modified version of this press setup employs a captive needle to spread open the loops. This slides in a metal outrigger projecting to the right from the floating bed of the press. After the holes have been spread, the piece is lifted out and held in the left hand while the nylon rod is pushed through the loops with the right hand. Production rate is about the same as on the other press.



Removing finished strip from press

Motorized Solder Wheel for Capacitor Leads

Swaging and soldering leads to paper-wound bathtub capacitors. Knurled, tin-plated steel wheels turning vertically in asbestos-enclosed electric solder pots bring hot aluminum solder to the slots in the tops of the asbestos boxes. Soldered units go down slide onto conveyor belt

A MOTORIZED SOLDER WHEEL that simplifies the assembly of certain paper-wound bathtub capacitors is used in the capacitor department of Lenkurt Electric Co.

The capacitors are swaged at each end and the leads are soldered in place simultaneously. Previously, these operations were accomplished by placing a number of capacitors in a jig and swaging and assembling each with an ordinary soldering iron. The new system obviates use of a soldering iron and is more nearly like dip soldering, except that a tin-plated wheel carries hot aluminum solder from the pot to the capacitors.

▶**Construction**—Two of the knurled wheels are mounted vertically on a horizontal shaft powered by a small electric motor (Lee Engineering Co., Milwaukee; maximum current 3.5 amp; speed range 1,000 to 10,000 rpm). The bottom portion of each wheel is immersed in an electric solder pot (DEE

DU PONT

Better Things for Better Living
. . . through Chemistry

ELECTRONIC DESIGN NEWS

PROPERTY AND APPLICATION DATA
ON THESE VERSATILE ENGINEERING MATERIALS:
"ZYTEL," "ALATHON," "TEFLON," "LUCITE."

Mechanical properties and high dielectric strength of TEFLON® unaffected by extremes of temperature

Electrical properties of TEFLON® constant over tested range of 60 cycles to 10^8 cycles

The unique combination of properties of TEFLON offer many advantages to the electronics industry, permitting improved design and providing unexcelled performance. TEFLON is capable of continuous service at 260° C., exceeding the requirements of Class H materials.

The power factor of TEFLON is less than 0.0003 over the measured spectrum (60 cycles to 10^8 cycles), and its dielectric constant is 2.0 over the same range. Following prolonged soaking in water, the volume resistivity of TEFLON is greater than 10^{15} ohm-cm., and water absorption (ASTM D570-42) is only 0.005%. TEFLON has good arc resistance and its short-time dielectric strengths are high, ranging from 1,000 to 2,000 volts per mil depending upon thickness.

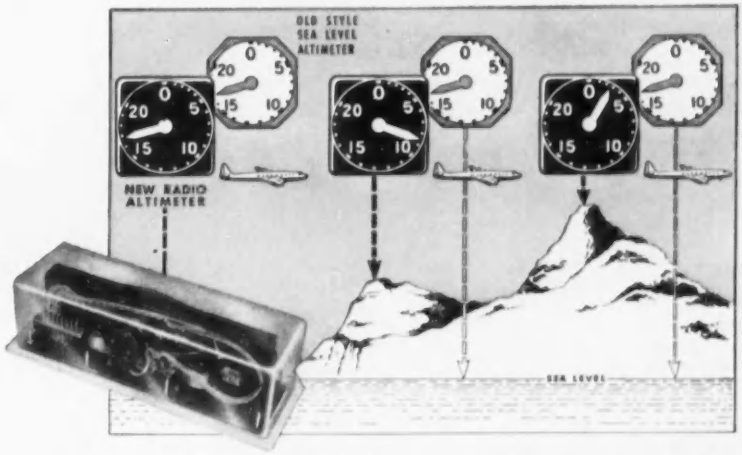

TEFLON tetrafluoroethylene resin is used as cable insulation in this new radar altimeter. One of these cables carries microwave energy from the magnetron oscillator tube to the antenna. The other cable provides interconnection within the transmitter-receiver unit. (Cable used in this altimeter is manufactured by Surprenant Mfg. Co., Clinton, Massachusetts.)

A new radar altimeter, made by the Raytheon Manufacturing Company, Waltham, Massachusetts, furnishes continuous terrain-clearance information and flashes a warning light when a preset minimum is reached. Du Pont TEFLON was selected as the insulation for cabling in this altimeter because of its ability to perform under the wide range of temperatures encountered in the aviation field.

TEFLON tetrafluoroethylene resin is used in electronics equipment as molded components, tape, and extruded insulation. The excellent dielectric properties of TEFLON, even at ultrahigh frequencies, and its moisture resistance are particularly important in the electronics field. Heat resistance is frequently essential, too, especially with the present trend to miniaturization of electronics equipment, which results in increased operating temperatures.

To evaluate Du Pont TEFLON for your own use, get property and application data by mailing coupon.

SEND FOR MORE INFORMATION

For complete details that will help you further evaluate Du Pont TEFLON for use in your product-development programs, mail the coupon at the right.

E. I. du Pont de Nemours & Co. (Inc.), Polychemicals Department
Room 227 Du Pont Building, Wilmington 98, Delaware.
In Canada: Du Pont Company of Canada Limited, P.O. Box 660, Montreal, Quebec

Please send me complete property and application data on Du Pont TEFLON.

I am interested in evaluating this material for

_____

_____

Name _____

Firm Name _____

Position _____

Type of Business _____

Street Address _____

City _____ *State* _____

Couch
Rugged

RELAYS

Specify the COUCH MODEL 2A or 4A relay whenever HIGH SHOCK - HIGH VIBRATION capabilities are required and for DRY-CIRCUIT applications.

VIBRATION . . . 5 to 25 cps @ 0.4" peak to peak excursion; 25 to 2000 cps @ 20G acceleration; No contact opening, relay energized or de-energized.

SHOCK ELECTRICAL . . . 75G for 10 milliseconds minimum. No contact opening, relay energized or de-energized.

SHOCK MECHANICAL . . . 200G minimum . . . no physical damage to relay or change in electrical characteristics.

Models 2A and 4A are subminiature, hermetically sealed, D.C. relays which meet and in several respects exceed the requirements of MIL-R-5757B. They are actuated by a "balanced-armature" rotary motor. Both models are particularly suited to dry-circuit switching applications.

LEADING PARTICULARS

Ambient Temp.:	−65°C to +125°C
Weight:	3.2 oz. maximum
Height of Case:	1½" maximum
Diameter of Case:	1 3/32" maximum
Terminals:	Flattened & pierced
Contact Arrangement:	DPDT — Model 2A 4PDT — Model 4A
Contact Material:	Fine silver to molybdenum
Operation:	Simultaneous operation, simultaneous release, no contact bounce
Pull-in-power (Coil):	⅜ watt — Model 2A ½ watt — Model 4A

Test Data and Literature on Request

Built-in Dependability

S. H. Couch Company, Inc.

NORTH QUINCY 71, MASSACHUSETTS

Want more information? Use post card on last page.

Electric Co., Chicago; model 61; 700 watts; temperature range 600 F to 1,000 F). Pots and wheels are enclosed in asbestos shielding. In the top of each shielding box is a stainless plate with a slot through which about ⅛ inch (adjustable) of the wheel protrudes. The knurled wheel picks up solder from the pot and presents it at the slot. The operator rubs the end of the capacitor, with the lead wire held in place, over the slot to make the solder junction.

Ultrasonic Dicing of Germanium

STAINLESS STEEL tubes are preventing warpage from brazing and increasing the life of tools made by the Cavitron Equipment Corp., Long Island, N. Y. for ultrasonic dicing of germanium.

The type 304 stainless steel tubes were adopted, after consultation with engineers of Superior Tube Co., Norristown, Pa., to replace carbon steel tubes in the Sheffield-Cavitron ultrasonic machine tool.



Construction of stainless steel cutter

▶ **Brazing**—Usually a number of tubes are brazed together into a bundle of the same shape as the cut to be made. With carbon steel tubing, the tubes frequently warped at brazing temperature and the tool was rejected. Replacement with type 304 stainless tubing eliminated the warping and gave longer tool life on the production line.

Long tool life is particularly important because of the time required to make the complex bundles of tubing, which are also used to slice and dice quartz crystals and to drill and form ceramic electronic tube spacer elements.

▶ **Dicing**—The tool tip used to dice germanium in the mass pro-

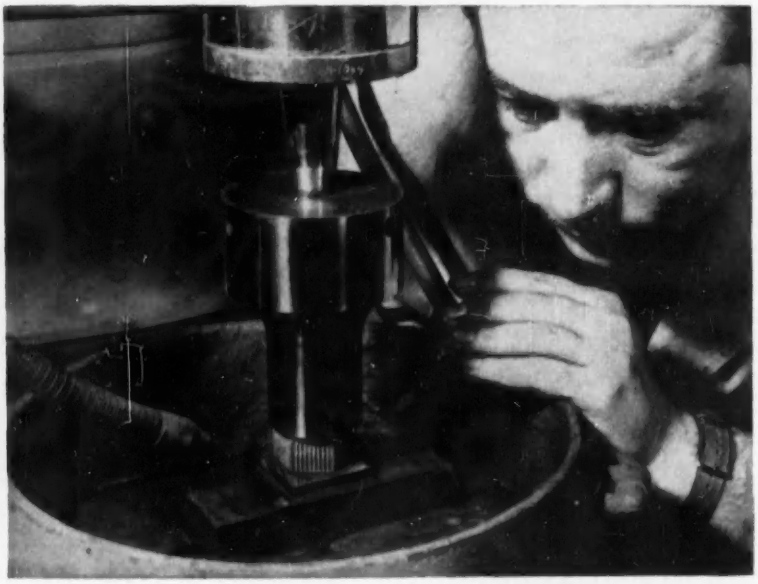

Dicing 271 disks of germanium from thin slab in one operation, using stainless steel cutters on ultrasonic machine tool. Abrasive particles in water suspension are directed across work by two hoses

YES . . . 2 OUT OF 3 ELECTRONIC ENGINEERS SPECIFY MOLONEY TRANSFORMERS FOR TRANSMITTERS

Big league designers recognize that the key man on a transmitter team is the dependable transformer. Therefore, it is not surprising that 2 out of every 3 transmitter manufacturers specify Moloney Transformers. That's a .667 batting average and that's good in any league.

With Moloney in the lineup . . . you aren't fielding a rookie . . . but a seasoned veteran.

For your transmitter specify a league leader.

- **Modulation Transformers**
- **Modulation Reactors**
- **Rectifier Transformers**
- **Filter Reactors**

Write for Catalog SR 206 "HyperCores for Magnetic Components" and Catalog ST 3506 "Magnetic Components for Electronic Applications."

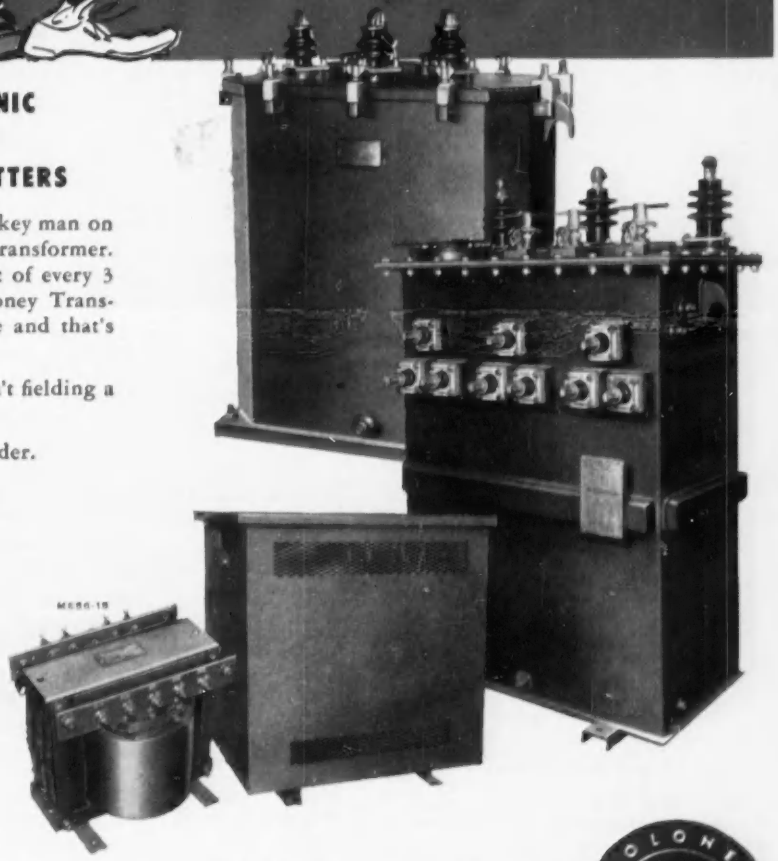

MOLONEY ELECTRIC COMPANY

Plate and Filament Transformers • Chokes • Unit Rectifiers • Modulation Transformers and Reactors • Pulse Transformers and Charging Chokes • HyperCores for Magnetic Components Developmental Magnetic Components • Power and Distribution Transformers

SALES OFFICES IN ALL PRINCIPAL CITIES • FACTORIES AT ST. LOUIS 20, MO. AND TORONTO, ONT., CANADA

marion
advancement in instrument design

WHAT HAPPENED ?

SCHEDULE MAINTENANCE

STUDY PRODUCTIVITY

Glass-to-metal sealed ELAPSED TIME indicators. Compact, low cost, tamper-proof. Standard ASA-MIL dimensions, 2½" and 3½" sizes. Easy to read standard size counter registers 1/10 hour steps to 9999.9 or hour steps to 99999. Hermetically sealed. Shielded. Starts, operates continuously from −55° C. to +85° C. For 110-125 or 220-250 volt 50 or 60 cycle A.C.

marion meters
MEDALIST
marion electrical instrument company
GRENIER FIELD—Manchester, N. H., U.S.A.
Copyright ©1956 Marion
Visit Marion at Booth 738 at Western Show, Los Angeles, August 21-24

FULLY ENCLOSED TRANSFORMERS

FOR TELEVISION AND RADIO INDUSTRIES

See the Modern series of newly engineered transformers radio and electronic circuits, Crestrol line of voltage fluctuation control transformers and all the standard CREST equipment you have relied on in years past.

CREST
ONE SOURCE FOR ALL YOUR TRANSFORMER NEEDS
CRESTRAN
Hundreds of modern transformers—Voltage controls—Equivalent parts for over 200 sets.
WRITE DEPT. E7 FOR COMPLETE CATALOG

Please send me your Catalog No. 554
Name
Position
Address
Firm
City Zone State
CREST TRANSFORMER CORP.
1814-36 W. North Ave. · Chicago 22, Ill.

Want more information? Use post card on last page.

duction of transistors consists of 271 2-inch lengths of 19-gauge type 304 needle tubing. These are silver-brazed into a hexagon-shaped bundle resembling a honeycomb. After the bundle is formed it is cut in half to give two complete tools, each ¼-inch deep.

The tubes are assembled with such precision that tolerances well below 0.0005 inch are held. This would not be possible if the tubing warped. The ability of the stainless tubing to hold a sharp clean edge also contributes to the quality of the work.

Automatic Etching of Transistor Pellets

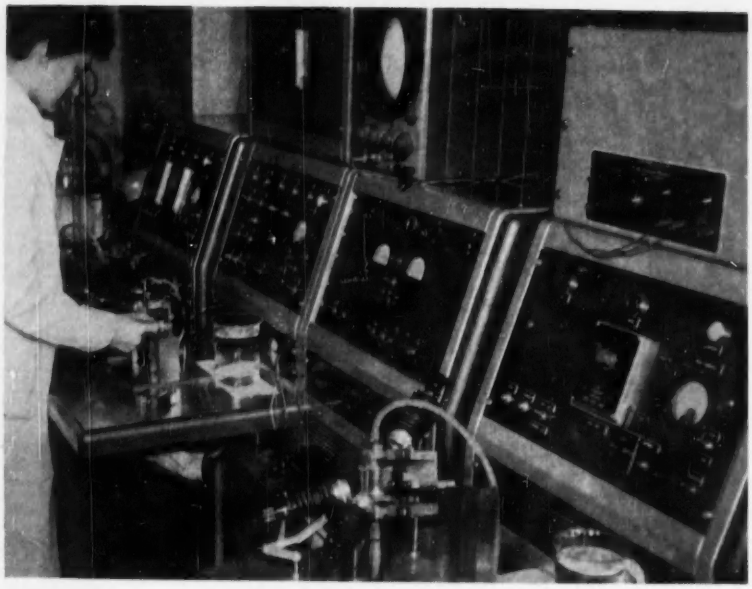

Battery of automatic etching machines producing surface-barrier transistors. Operator merely transfers work carriers from one setup to the next. These machines automatically etch concentric holes on opposite sides of the germanium pellet so the hole thickness remaining between them is less than 0.0002 inch, then plate the holes with indium

GERMANIUM OR SILICON pellets mounted on stems of surface-barrier transistors are electrochemically etched with jets of acid under photoelectric control in the Lansdale, Pa. plant of Philco Corp. Precisely machined work carriers make possible the accurate positioning required for mechanization of the sequence of operations involved in producing concentric holes on opposite sides of the tiny germanium pellets.

▶ **Washing** — A unique jet-type washer is used to direct a stream of high-purity water at the pellet after it has been soldered into position on its lead in preparation for etching of holes. The washer is also used between the various stages of etching and plating. The operator merely places the work carrier in the groove of a tilted slide and allows it to drop down against a stop inside the washer. This automatically positions the pellet directly in the path of circu-

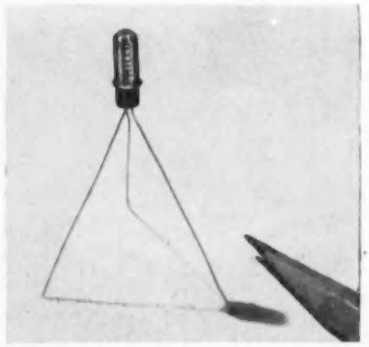

Example of transistor now in mass production, with pencil shown alongside for size comparison

CLEANING THE INSULATION from enameled magnet wire, laboratory technician prepares to check conductor to see that it measures correctly after running through insulating machines.

CHECKING MAGNET WIRE FOR UNIFORM DIAMETER

She can help you get firmer coils in your winding room

One of the most important properties of magnet wire—if you are to get good winding room performance, firm coils – is uniformity of diameter.

To be sure you get uniform diameter in Anaconda Magnet Wire, samples from *every machine* are checked *every day* in our Quality Control Laboratory. This assures that the conductor stays within specified tolerances during manufacture.

Constant check on quality of Anaconda Magnet Wire – from raw material through manufacture to finished product and packaging–is one reason why Anaconda wire has so many boosters among winding room superintendents.

See the Man from Anaconda and arrange a production run in your winding room. Anaconda Magnet Wire can help you eliminate incoming inspection, cut rejects, get longer break-free runs. Offices in 27 cities – see "Anaconda" in your phone directory. Anaconda Wire & Cable Company, Magnet Wire Headquarters, Muskegon, Mich.

SCHEDULE A PRODUCTION RUN OF **ANACONDA®**

QUALITY-CONTROLLED **MAGNET WIRE**

ridiculous!
you can't mix magic and
Pulse Transformers

but—sir—**you're wrong**
and here's why...

Samples appear with almost magic speed when you turn your pulse transformer problems over to Aladdin. We have a long list of stock items, plus the know-how to meet your specific performance requirements—if you'll give us just a hint about the circuit and what it's supposed to do.

Our construction is standard. We're big enough to stock thousands of standard core parts in readiness for your orders. We move with magic speed when we learn of a new requirement. We deliver quality components on schedule.

Send the coupon for our engineering bulletins.

Aladdin
RADIO INDUSTRIES, INC.
Pioneers in Permeability Tuning

ALADDIN RADIO INDUSTRIES, INC.
717 Murfreesboro Road, Nashville 2, Tenn.
Send me technical information on Pulse Transformers.

NAME _____
COMPANY _____
ADDRESS _____
CITY _____ STATE _____

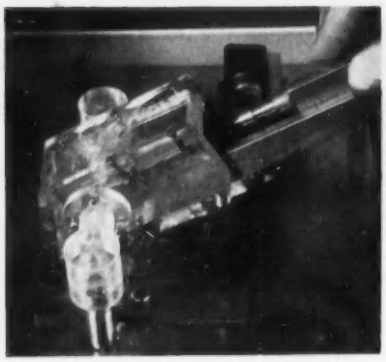

FIG. 1—Sliding work carrier into jet-type washer

lating water spray. The washer is constructed entirely from transparent plastic pieces, as shown in Fig. 1.

▶ **Rough Etching**—After washing, the work carrier that holds the transistor stem is transferred directly to the positioning blocks of the rough etching setup and pushed into position as shown in Fig. 2, so the pellet is in a horizontal plane. Here tiny streams of chemicals are directed at the pellet from above and below to etch out roughly the desired depressions on the sides. The rough etching is done on a time basis, with occasional visual monitoring through the transparent plastic housing of the etcher. Strong flood lamps illuminate the etcher from both sides to increase the rate and uniformity of etching.

The etchant is a 5-percent solu-

FIG. 2—Rough etching position, with operator pushing transistor between opposing jets inside transparent plastic cage



MISSILE SYSTEMS

AERIAL CAMERAS



STRUCTURAL TESTING

FLYING SUITS

AIRBORNE COMPONENTS



COMPONENT DE-ICING

PRECISION INSTRUMENTS



BATTERIES



LIQUID STORAGE

ELECTRONIC EQUIPMENT



ROCKETS



INDUSTRIAL PROCESSES

Here's where G-E heating equipment can help you keep components at operating temperatures

Whenever your equipment, complete systems, or manufacturing process requires the addition of heat to assure proper functioning, General Electric specialty heating equipment can help you quickly and economically.

Problems of supplying heat at high altitudes, keeping critical fuels at correct temperatures, maintaining missile components in a "ready to fly" condition, providing the best thermal environment for manufacturing processes, reducing dangerous component icing in flight, helping to keep personnel comfortable when exposed to extreme cold, providing the optimum operating temperature for electronic and hydraulic components, duplicating high-temperature conditions for structural testing, and many other special applications have all been solved by General Electric specialty heating equipment.

LET US ANALYZE YOUR SPECIALTY HEATING PROBLEM

A General Electric specialty heating expert is available to work on your particular heating requirement. So, if you have any specialty heating problem, contact your G-E Apparatus Sales Office or send coupon below for more information.

GENERAL ELECTRIC

SEND FOR FREE BULLETIN ON G-E SPECIALTY HEATING EQUIPMENT

General Electric Company
Section L224-8, Schenectady 5, N. Y.

Please send me bulletin GEA-6285, G-E specialty heating equipment.

☐ for immediate project
☐ for reference only

Name .....

Position .....

Company .....

City ..... State .....

"....and pick up the man from PHILLIPS"

Time flies . . . so does your Phillips man. That's part of the *Phillips Plan* to help meet those project deadlines. If your relay requirements are special, ask about the *Phillips Plan*—a combination of engineering skill* and personal service that is unique in the industry. Contact the Phillips office nearest you.

*FOR EXAMPLE:
***Phillips Engineered Relays* are meeting the extremely specialized requirements of guided missile applications.**

20410 TYPE 2 — Hermetically-sealed multi-contact relay. Flange mounting, maximum 14 pin, solder terminals. O.D. 2-1/2" W x 2-1/2" L x 5" H.

TYPE 2AC — Multi-contact AC relay. Fast operating. O.D. 1-15/32" W x 4" L.



TYPE 15QA — Miniature relay, single pole. Nominal sensitivity .200 watts, available with solder terminals or printed circuit terminals, single hole mounting. Coil available to 60 volts DC.

MULTI-CONTACT, POWER, HERMETICALLY SEALED RELAYS - ACTUATORS

PHILLIPS

A THOR CORPORATION SUBSIDIARY

PHILLIPS CONTROL CORPORATION . . . JOLIET, ILLINOIS

SALES OFFICES: NEW YORK - PHILADELPHIA - SAN FRANCISCO - DENVER - SEATTLE
SANTA MONICA - CLEVELAND - DALLAS - BOSTON - WASHINGTON

Want more information? Use post card on last page.

tion of sulphuric acid. For this electrochemical etching the work carrier serves as one electrode and the other electrodes are inserted in the acid lines.

The etching liquid comes from large glass bottles behind the etching console. Air pressure in the bottles produces the required pressure at the jets. When a bottle empties to a certain point, a snap-action switch is tripped by the reduced weight of the bottle. This in turn starts a pump that refills the bottle.

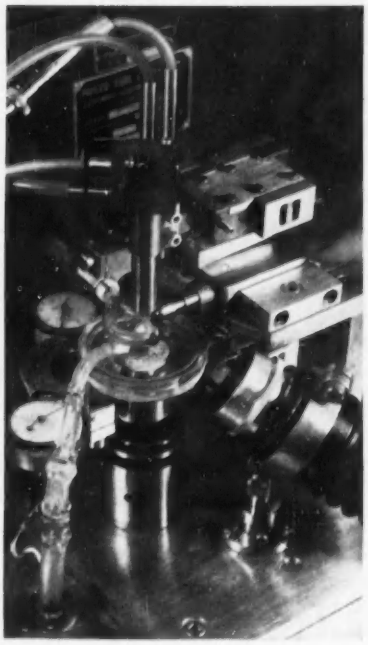

FIG. 3—Precision etching head, showing operator pushing work carrier into position. Outer housing has been removed for clarity

The pumping action is stopped automatically by another weight-sensing switch when the bottle is nearly filled again. Used acid is collected in separate containers, because recirculation of acid would introduce diminishing acid strength as an uncontrolled variable.

▶ **Precision Etching**—After rough etching and washing, the carrier goes to the precision etching setup of Fig. 3, where the underside is etched by a single upward-aimed jet. This jet comes up through an intense beam of light that is focussed on the hole being etched. The

horizons unlimited . . .
for new two-stage booster?

Pump Offers Top Volumetric Efficiency!!

Facts are facts . . . and though this new pump has many unique features worthy of individual headline treatment . . . we prefer to offer it to design engineers in the form of specification data, performance curves, etc. With this information . . . and the knowledge that it is the newest addition to the world's largest vacuum pump line . . . we feel its potentials will warrant its being specified for

. . . dependable, trouble-free service
. . . the highest volumetric efficiency
. . . and the highest dollar return per CFM available in any high vacuum pumping sytem.

Request complete data or contact one of our competently staffed district offices . . . in Baltimore, Charleston, W. Va., Charlotte, Chicago (La Grange), Cleveland, Detroit, Houston, Los Angeles, New Orleans, New York, Philadelphia, Pittsburgh, San Francisco, St. Louis, and The International Sales Office, 90 West St., New York 6, N. Y. Call or write today!

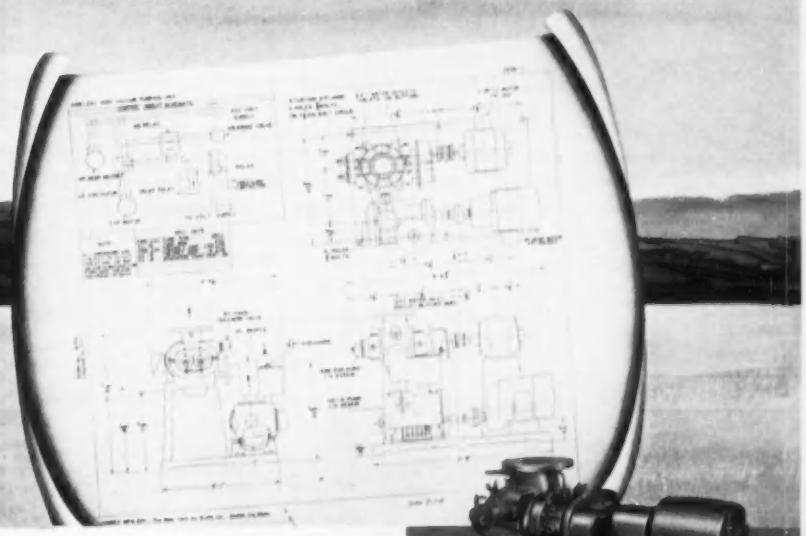

SPECIFICATION DATA
Model KMB-230 Two Stage Mechanical Booster Vacuum Pump

Ultimate Pressure (McLeod Gauge)	0.1 Micron
Free Air Displacement	230 CFM
RPM	3600/640
Motor H.P.	2 and 1
Oil Capacity	5 Pints
Cooling	Water
Shaft Seal	Mechanical
Shaft Diameter	3/4-3/4
Inlet Connection	4" Flanged
Outlet Connection	1¼" Screwed
Net Weight, Complete	1010 lbs.

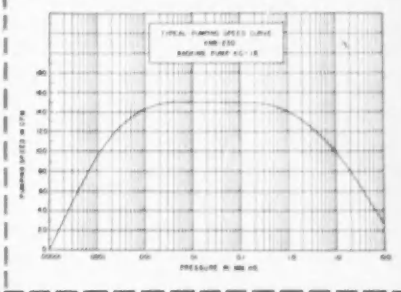

KINNEY MFG. DIVISION
THE NEW YORK AIR BRAKE COMPANY
3565 WASHINGTON STREET • BOSTON 30 • MASS.
INTERNATIONAL SALES OFFICE, 90 WEST ST., NEW YORK 6, N.Y.

• Please send complete data on the new Kinney KMB-230 Two-Stage Mechanical Booster Vacuum Pump.

Name .....
Title .....
Company .....
Street .....
City ..... State .....

Want more information? Use post card on last page.

MEAT & POTATO RELAYS

If you don't really need super-this, high-that or ultra-something else in a relay you are to be envied, not scorned. Then you should be assured that Sigma makes just plain relays too. They're not really "plain", but well-designed for certain jobs that they perform commendably. They don't have wrap-around windshields and back-up lights, but they get you there and they bring you back.

There was a time when four just such relays (Types 4, 5, 6 and 41) were *the* basic Sigma lines. Now, of course, there are sixteen of these basics and some of them are super-sensitive, high speed or ultra ultratissimo. It is perhaps significant that the old stand-bys are still best sellers.

Here they are, and they're for sale:

Sigma Series 4
GENERAL PURPOSE
MEDIUM SENSITIVITY
Balanced armature design. SPDT. High reliability. Medium priced. 20-50 mw sensitivity. Switches up to 2 amps. resistive (28 VDC, 115 VAC) for 100,000 operations.



Sigma Series 5
VERY SENSITIVE
HIGH STABILITY
Withstands aircraft vibration on inputs as low as 5 mw; undamaged by 500 g shocks. Sensitivity range 1-40 mw, 35 basic standard adjustments.

Sigma Series 6
POLARIZED
NULL SEEKING,
BIASED or LATCHING
Contacts up to 4PDT, 5 amps. nominal rating. Sensitivity 8-44 mw (Latching: 22-450 mw).



Sigma Series 41
SENSITIVE
LOW COST AC
SPDT shaded pole construction. Unusually quiet. Sensitivity 0.2-1.0 v-a. Contact ratings up to 5 amps. Voltage operated, current operated; 16-400 cycle versions; also DC and high speed keying types.

All four relays are available in a wide variety of mounting enclosures. Catalog on request.

SIGMA

SIGMA INSTRUMENTS, INC.,
62 Pearl Street, So. Braintree, Boston 85, Massachusetts

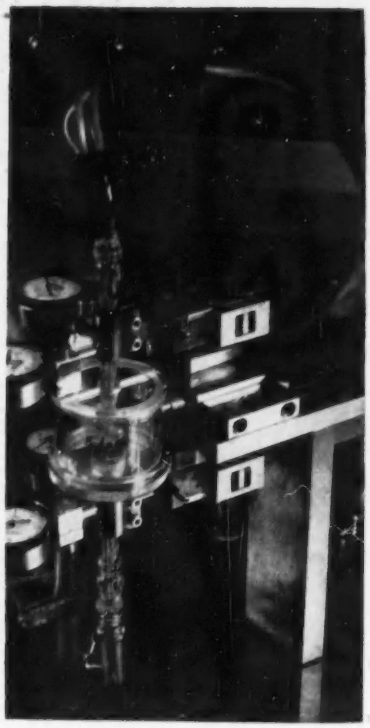

FIG. 4—Precision indium plating setup using jets for plating indium in etched holes on germanium. Dial gages serve for making precision head adjustments

light activates the germanium, so that more carriers are released and etching is correspondingly speeded up. The light also concentrates the etching action in a smaller hole for this final precision etch.

Aspirator tubes on each side of the germanium draw off the etchant after use, so that none is recirculated by the jet in this critical operation.

A small phototube mounted directly over the germanium monitors the amount of light that comes through as the emitter hole is deepened by the etching action. When this transmitted light reaches a certain intensity that has previously been correlated with the desired thickness of material remaining between the holes, the phototube triggers a solenoid valve that automatically stops the flow of etchant.

A stream of air is blown down onto the top surface of the germanium, past the phototube lens system, to prevent accumulation of etchant in the upper rough-etched

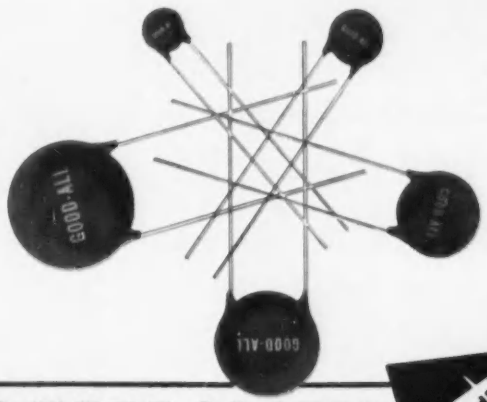

EPOXY COATED CERAMIC DISCS

. . . at No Premium Cost!

Good-ALL capacitors

High Voltage Breakdown Strength

Excellent Moisture Resistance • Durable • Attractive

Good-All's tough, durable EPOXY coated ceramic disc capacitors combine excellent dielectric strength and stability with high humidity resistance. Good-All's exclusive EPOXY coating process results in an intimate bond between the coating and the edge surface of the ceramic. This bond serves to block the voltage breakdown path across the ceramic edge. No wax coating is required on EPOXY coated discs.

TEMPERATURE COMPENSATING EPOXY DISC CAPACITORS

Good-All has designed a full line of TC discs in accordance with RETMA specification REC-107-A (class 1). These units are well suited for resonant circuits or other applications where HIGH Q and STABILITY of capacitance is essential. Small size gives an inherent advantage in VHF and UHF applications.

SPECIFICATIONS—Working Voltage: **600 VDC** • Flash Test Voltage: **1500 VDC** • Power Factor: **Less than .1% @ 1 MC** • Leakage Resistance: **Greater than 10,000 megohms** • Leads: **#22 gage tinned copper wire** • **Capacity Tolerance: ±5%, ±10%, ±20%**

MAXIMUM DIAMETER

Temperature Coefficient	1/4	5/16	1/2	5/8	3/4
P-100	1-3 mmf	4-9 mmf	10-30 mmf		
NPO	2-12	13-22	28-60	61-75 mmf	76-110 mmf
N-33	2-15	16-27	28-60	61-75	76-110
N-80	2-15	16-27	28-60	61-75	76-110
N-150	2-15	16-30	31-60	61-75	76-110
N-220	3-15	16-30	31-75	76-100	101-140
N-330	3-15	16-30	31-75	76-100	101-140
N-470	3-20	21-40	41-80	80-120	121-170
N-750	5-25	26-50	51-150	151-200	201-290
N-1400	15-50	51-100	101-200	200-250	251-470
N-2200	47-75	76-100	101-200	201-275	276-470

CAPACITANCE CHANGE VS. TEMPERATURE IN °C



Good-All's complete line of EPOXY coated ceramic disc capacitors are designed to fit both standard and specialized applications. Write or wire today for catalog containing more information on our TC discs and other EPOXY coated disc types listed below.

BY-PASS Good-All Type B (RETMA CLASS 2, Z5Z)
DUAL SHIELDED Good-All Type C
AC LINE BY-PASS Good-All Type D
STABLE Good-All Type E and EE
HIGH VOLTAGE Good-All Type G
TRANSISTOR CIRCUIT Good-All Type H

Our Sales Representatives will be happy to supply you with sample EPOXY coated discs for test against your specification.

GOOD-ALL ELECTRIC MFG. CO. OGALLALA, NEBR

A LEADING MANUFACTURER OF TUBULAR CAPACITORS

PRECISION
Continental Connectors

mechanical connect and disconnect
SCREWLOCK* CONNECTORS

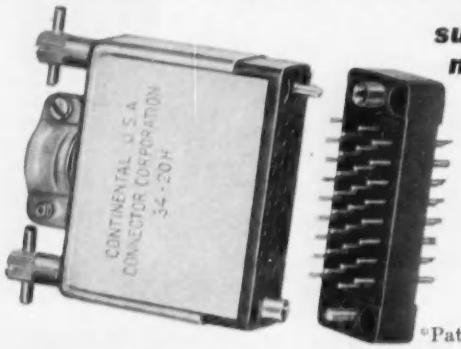

subminature and miniature Series 20

Available in various contacts (7 thru 104 for Series 20; 7 thru 50 for Series SM20). With or without aluminum hoods. For #20 AWG wire. Current rating: 5 amps. Voltage breakdown: 2100V, RMS.

*Pat. No. 2746022

POLARIZING SCREWLOCKS*

Screwlocks provide a secure contact even under severe vibration conditions. They also eliminate the need for prying, "rocking" or forcing the connector when disconnecting the plug from the receptacle.



connectors with polarizing screwlocks

Easy Release—Series E-Z 16

Individually spring loaded pin contacts assure quick release with low insertion force and practically no disengagement force. 12, 18, 24 or 34 contacts for #16 or #12 AWG wire, or solderless wiring taper pin.



Hermetic Seal—Series H-20

Mates with Series 20 receptacles. For #20 AWG wire. Current rating: 5 amps. Voltage breakdown: 2200V, RMS. Plug contacts individually compression-sealed in glass.



High Voltage—Series 14

Available in 7, 9, 10, 15 and 18 contacts. High barriers around pins prevent arcing up to 4500 volts. Contacts are gold plated over silver. Current rating: 10 amps.



Technical data on these connectors, and special designs requiring the use of sub-miniature, printed circuit, hermetic seal, pressurized, high voltage or power connectors are available on request. Write today for complete catalog.

Electronic Sales Division
DeJUR-Amsco Corporation,
45-01 Northern Boulevard, Long Island City 1, N. Y.

DeJUR

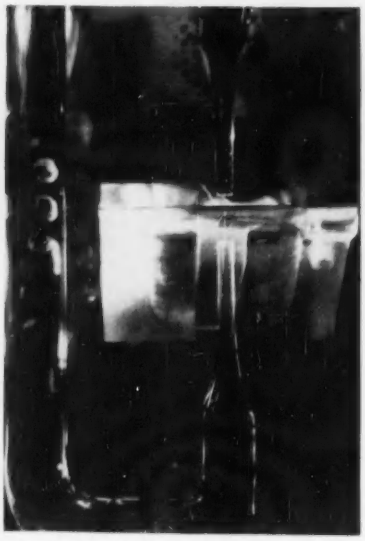

FIG. 5—Highly magnified view of jets used for electroplating indium on germanium pellet

hole, since this would interfere with thickness monitoring.

▶ **Plating** — After another wash, the work carrier goes to the indium plating setup of Fig. 4. Here both sides of the germanium are plated simultaneously with indium from a solution of indium sulphate. Again the jets are positioned above and below the pellet, as in Fig. 5. Electrodes are located in etchant lines just as for etching and aspirators are positioned alongside to

FIG. 6—Optical setup for checking concentricity of etched holes in germanium pellet. Required precision of alignment increases with operating frequency of transistor. Production and inspection controls are now adequate for at least 100-mc transistors

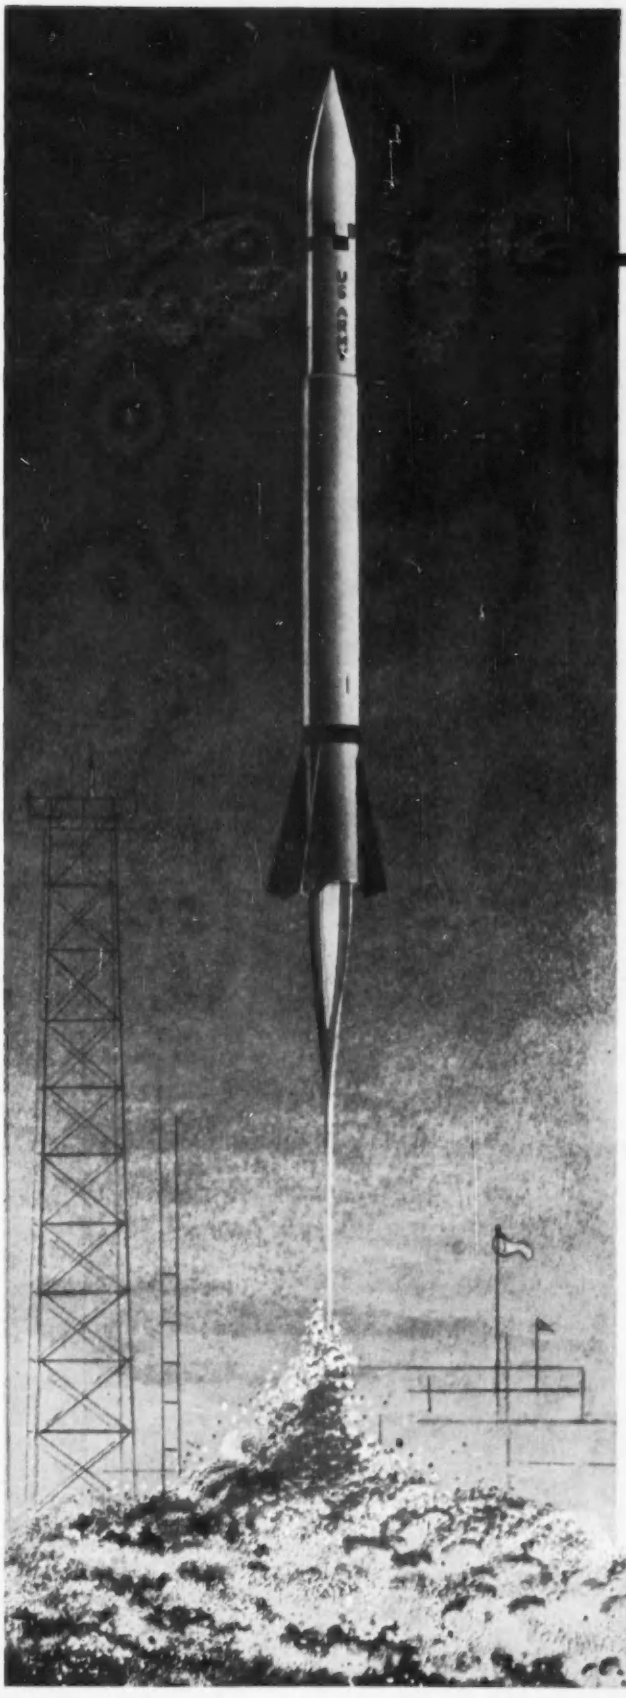

WHEN RELIABILITY IS A *must!*

2-1-0 *Fire!*

COMPLETE RELIABILITY

The culmination of all efforts is squeezed into one breathless moment . . . *here* is where reliability counts.

Astron's Meteor subminiature paper capacitors are advance-designed for reliable operation at temperatures up to +125°C without derating. Exceptional capacitance stability of Meteor type AQ and TQ over the wide range of —65°C to +125°C is provided by Astron's newly developed impregnant X-250*. High insulation resistance, low power factor, unusually low resonance loss, and high test voltage are achieved in a compact, rugged unit.

The Astron Meteor surpasses all applicable military specifications including MIL-C-25A . . . available in a wide range of case styles with extended foil or inserted tab construction . . . hermetically sealed in glass-to-metal closures for complete protection under severe environmental conditions.

Where higher temperature is a factor Astron's Meteor Type XQF is the answer. This metal-cased polyester plastic capacitor has been designed for completely reliable operation up to +150°C without derating. Physically and electrically it surpasses government and commercial requirements.

ASTRON
CORPORATION
255 GRANT AVENUE, E. NEWARK, N. J.

Export Division: Roche International Corp., 13 East 40th St., N. Y., N. Y.
In Canada: Charles W. Pointon, 6 Alcina Ave., Toronto 10, Ontario

*Trademark

Want more information? Use post card on last page.

Here ...is what you've been asking for...

STANDARD printed circuit TOLERANCES

...for lowest cost!



NOW, after five long years of production experience on well over 5000 different purchase orders, we are proud to offer you this technical bulletin. We are confident that you will accept this material as the standard of the industry! Every item in this bulletin has already been adopted in varying degree by the larger well-known electronics manufacturers.

The present state of the "printed circuit" art dictates (and our experience has proved) that DESIGNS BASED ON THESE STANDARDS ARE THE ONES THAT STICK! These standards are practical and realistic, not experimental, not based on laboratory techniques, but sound bases to incorporate in your purchasing, engineering and production manuals. Furthermore, *their cost stays down where you want it!*

Your own product reliability can be based on and guaranteed by the use of Printed Circuits by Photocircuits Corporation.

Consult our Engineering Department or any of our Sales-Engineering Field Offices.

Ask for our Technical Bulletin P-9, "STANDARD *Printed Circuit* TOLERANCES."

EXCLUSIVELY PRINTED CIRCUITS and Associated Sub-Assemblies
ADVANCED TECHNIQUES & RESEARCH
MAXIMUM EXPERIENCE

Photocircuits CORPORATION

Dept. E-7, GLEN COVE, NEW YORK
GLen Cove 4-8000 • FLushing 7-8100

Sales-Engineering Field Offices: BOSTON • CHARLOTTE, N. C. • CHICAGO • COCOA, FLA. DALLAS • DAYTON, O. • LOS ANGELES • ROCHESTER, N. Y. • SPOKANE • KANSAS CITY



FIG. 7—Transistor in position between dual microscope lenses of concentricity checker

draw up the electroplating liquid.

The jets are initially turned on for a fraction of a second with the electric current in the etching direction, to produce a virgin surface for plating. When the current is reversed at the end of this interval, indium is plated onto the germanium to form electrodes.

▶ **Concentricity Checking** — After indium plating, concentricity of the etched holes on opposite sides of the germanium pellet is checked in the dual optical setup shown in Fig. 6. The work carrier is placed in the holding fixture of the comparator with the germanium pellet in a vertical plane and is moved into position between the lenses of two microscopes as in Fig. 7.

The work carrier is racked in and out until the etched hole on one side of the germanium is exactly centered in one microscope. The operator can then read the amount of deviation from concentricity on a graduated scale in the other microscope.

Coining Saves $74,000 on Waveguide Flanges

REDESIGN OF A waveguide flange to permit production by coining reduced machining to one simple grinding operation at Lord Machine Co., Waltham, Mass., and thereby saved up to $74,000 a year for one user of this component.

The part originally was made from a piece of steel machined all over. In another run, the flange was made from a drop-forged

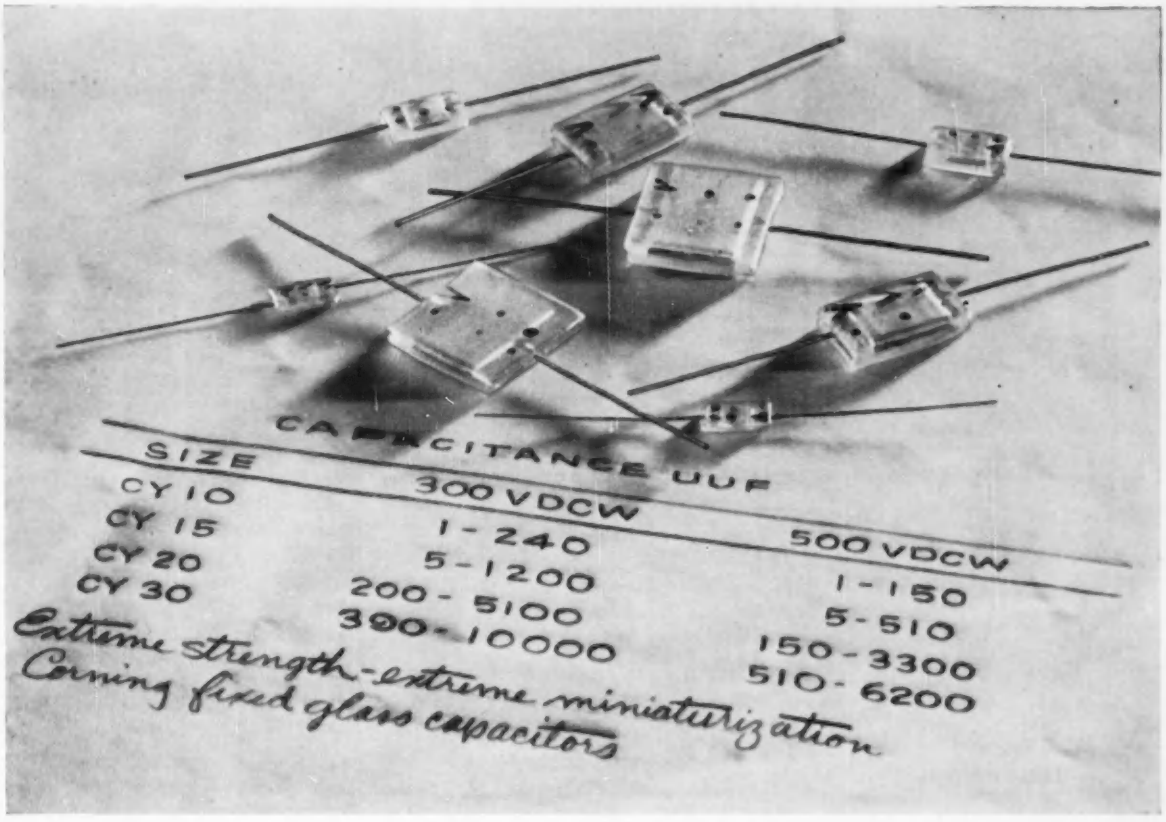

You'd have to smash a Corning Capacitor before you could alter its values by mechanical shock

That's how rugged these miniature fixed glass capacitors are. ("Miniature" means about one-third smaller than other kinds of equal capacitance.)

Their strength comes from the way we make them. Layers of conductor and dielectric are sealed together under heat and pressure into a monolithic structure. No mechanical shock short of shattering the seal alters the value. Speaking of values, the table illustrated above shows them.

Because everything is sealed in the same material as the dielectric, nothing outside can get inside.

You can use these capacitors to temperatures of 125° C. and higher with proper voltage derating. Even after repeated temperature cycling, the TC remains the same. And TC stays within close limits over a wide temperature range, varies little between capacitors. Capacitance drift is so close to zero that it's generally less than the error of measurement.

We can make capacitors to your electrical and physical specifications over an unusually varied range. Single, self-supported units can be designed for high voltages or high capacitances. Series parallel combinations still further extend the range.

Circle the reader service of this publication, or write direct for more information about Corning Fixed Glass Capacitors, prices and samples.

Ask for information on these other Corning Capacitors:

Medium Power Transmitting—CY-60 and CY70. Ideal for mobile RF transmitters.

Canned High Capacitance—provide the advantages of rugged glass design to your specifications.

Subminiature Tab-Lead—up to 90% less volume compared to pigtail types. To your specifications.

Special Combinations—the performance and benefits of glass in infinite shapes, sizes and leads. To custom order.

Other electronic products by Corning Components Department:

Fixed Glass Capacitors*, Transmitting Capacitors, Canned High-Capacitance Capacitors, Subminiature Tab-Lead Capacitors, Special Combination Capacitors, Direct-Traverse and Midget-Rotary Capacitors*, Metallized Glass Inductances, Resistors.

Distributed by Erie Resistor Corporation

CORNING GLASS WORKS, 94-7 Crystal Street **CORNING, N. Y.**

Components Department, Electrical Products Division

Corning means research in Glass

Want more information? Use post card on last page.

used by
LEADING MANUFACTURERS!
of transistorized radios

1/2" TRANSISTOR I. F.
RI·trans

designed to meet any transistor impedance

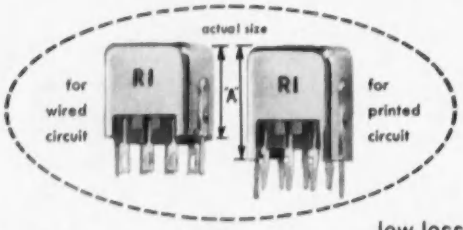

top and bottom tuned • higher efficiency • low loss dielectric base material

available in wired or printed circuit types

	type I		type II		type III	
	W.C.	P.C.	W.C.	P.C.	W.C.	P.C.
capacity in mfd.	65-450	65-450	125-450	125-450	140-450	140-450
"Q"	200 max.	200 max.	200 max.	200 max.	110 max.	110 max.
dim. "A"	45/64	27/32	37/64	23/32	37/64	23/32

low voltage class 2
DISC CAPACITORS
RI·CAP K-500 series



cap. in mfd.* +100% −20%	.001	.005	.01	.02	.03	.05	.10	.20
"A" dim.	.285	.285	.340	.400	.575	.595	.720	.720

*Above values also available in ± 20% tolerance

W.V.—30 VDC P.F.—3% max. at 1 KC
I.R.—2500 megohms T.V.—2 X rating min.
T.C.—from 25°C to 10°C not greater than 20%, and 25°C to 65°C not over 60%

built by RI economical quantity production process

RADIO INDUSTRIES, INC.
5225 no. ravenswood ave. • chicago 40, ill.

write for details and prices

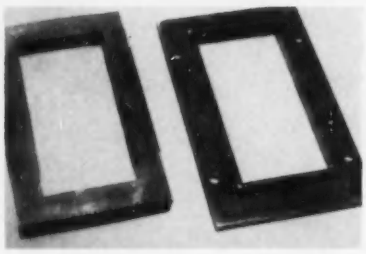

Finished steel waveguide flange for radar t-r tubes used for low-frequency scanning, at right, was coined in heavy presses from blank shown at left

blank, machined and broached, but this also proved costly.

An attempt to draw the part from a flat strip was unsuccessful, but led to the idea of coining it in heavy presses. Coining, derived from the ancient process of striking coins, is a squeezing operation used by stampers to force cold metal into shapes of different thicknesses and with sharp corners. This proved highly satisfactory. No machining is required except that the back is ground to provide a flat surface. Tolerances of 0.005 inch are held with high surface finish.

The 1956 John Woodman Higgins Redesign Award, annually donated by the Worcester Pressed Steel Co. of Worcester, Mass., was awarded to owner Francis B. Lord for his design for coining.

Ultrasonic Unit Combines Stripping and Soldering

POLYVINYL ACETAL ENAMEL insulation is removed and wire is soldered to coil terminals in a single fast operation through use of high-power ultrasonic soldering equipment developed by Aeroprojects Inc., West Chester, Pa. Without stripping and without the use of flux, the ends of the wire are securely soldered to the pretinned copper terminals.

▶ **Advantages** — Besides reducing direct labor cost, this method also reduces the normally high rejection losses resulting from nonuniformity accompanying a hand stripping and wrapping operation.

By the hand stripping method, the stripped part of wire is often

NEW NATVAR ISOGLAS®

for continuous performance at 150°c.









Natvar Isoglas gives heavy duty equipment extra protection against frequent overloads beyond Class B rating. This glass fabric, coated with a newly developed isocyanate type resin is outstanding in its

- resistance to heat
- resistance to crazing and cracking
- resistance to solvents including the askarels
- toughness and abrasion resistance
- wet dielectric strength
- low temperature flexibility
- fungistatic qualities.

Natvar Isoglas may now be used with great savings where expensive Class H materials were formerly used to solve temperature problems during manufacture of transformers, motors, generators, converters, heavy duty relays, reactors and other types of equipment not requiring a Class H rating.

Technical data and samples are available on request.

Natvar

Natvar Products

- Varnished cambric—cloth and tape
- Varnished canvas and duck
- Varnished silk and special rayon
- Varnished—Silicone coated Fiberglas
- Varnished papers—rope and kraft
- Slot cell combinations, Aboglas®
- Isoglas® sheet, tape, tubing and sleeving
- Vinyl coated—varnished—lacquered tubing and sleeving
- Extruded vinyl tubing and tape
- Styroflex® flexible polystyrene tape
- Extruded identification markers

Ask for Catalog No. 23

NATVAR CORPORATION

FORMERLY THE NATIONAL VARNISHED PRODUCTS CORPORATION

TELEPHONE RAHWAY 7-8800 | CABLE ADDRESS NATVAR: RAHWAY, N. J.

201 RANDOLPH AVENUE • WOODBRIDGE, NEW JERSEY

Celco TOROIDS

... Offered in a wide range of sizes

#50 wire on .062" ID
#15 wire on 9" OD

Whether it's a complex 10 winding magnetic amplifier or a simple choke . . . at Celco each toroid is precision-made. New core materials are used in Toroidal magnetic amplifiers, reactors and transformers to achieve maximum performance.

At Celco, the proper matching of cores, winding, handling, impregnation, encapsulation and electrical history of the final assembly is carefully controlled to maintain the original design characteristics.

Our years of design, development, and production know-how are available for application to your specific **TOROIDAL** problems.

For immediate attention, call RAmsey 9-1123 — or write today.

Celco *Constantine Engineering Laboratories Co.*

MAHWAH, N. J.
RAmsey 9-1123

Your plant is only hours away by the Celco Air Fleet

Setup for hand dipping of unstripped polyvinyl acetal enamelled wire in molten solder on hot plate, with ultrasonic unit immersed in solder

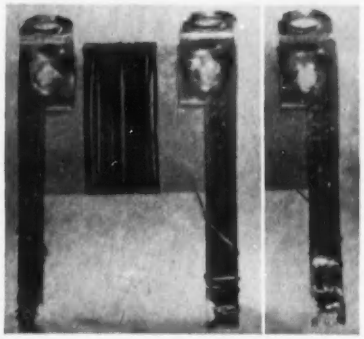

Method of wrapping unstripped coil leads around terminals preparatory to soldering and appearance of one terminal after soldering

not even wrapped around the terminal; instead, the insulated wire is placed in contact with the terminal. Then, by normal soldering methods, a bad joint would usually result.

By ultrasonic soldering with equipment powerful enough to remove the insulation, the soldered joint can be made successfully every time because the human element has been eliminated. The wire is stripped and soldered where the connection is required.

▶ **Technique**—After wrapping the wire around the terminal, the assembly is dipped into a soldering pot containing 60-40 or 50-50 tin-lead solder at approximately 650 F. The terminal ends are brought up close to the tip of an S-3-H-55-8 Sonobond unit. This ultrasonic soldering head, in conjunction with a

CHATHAM ELECTRONICS AT WORK

"Measure of the 4th Dimension"

Manufacturers of Components and Equipment of Outstanding Dependability

Breaking today's research time barrier . . . the solving of problems to be encountered tomorrow . . . these are the achievements of Chatham since its inception. Major design advances – the tangible results of this continuous research – are reflected in every unit in the broad list of components and equipments currently supplied to Industry, Science and the Armed Forces. The end result is a new conception of dependability and functional efficiency . . . directly measurable in terms of feature-by-feature product superiority. Write for product data and information today, on Chatham manufacturing and research capabilities.

Chatham Electronics
DIVISION OF GERA CORPORATION
Livingston, New Jersey — Branch Offices in Principal Cities

DESIGNERS AND MANUFACTURERS OF ELECTRONIC TUBES, SELENIUM RECTIFIERS, AIRCRAFT CONVERSION EQUIPMENT AND CUSTOM COMPONENTS

Where dependability is vital...

METEX RF SHIELDING CONTROLS RADIO NOISE!

In radar systems — as in all types of noise-sensitive electronic devices — more and more design engineers are turning to METEX RF Shielding Products as the most practical and effective method of suppressing radio noise.

METEX Shielding Materials are formed from *knitted*, metallic wire for maximum *conductivity*. The inherent *resiliency* of the knitted structure provides a continuous line contact between imperfect mating surfaces with minimum contact impedance. The countless, interlocked loops, formed from continuous wire strands, impart maximum *cohesion* with no loose strands or frayed fibres.

This unique combination of electrical and mechanical properties not only re-establishes electrical conductivity across joints, but conforms to wide irregularities in mating surfaces with minimum closing pressure.



METEX Electronic Weatherstrip, RF Gaskets and Combination Fluid and RF Sealing Gaskets are available in a wide variety of types and sizes to solve your RF noise problems. Write for full information *today!*

Send for your copy of this fact-filled METEX Handbook NOW!

ELECTRONICS DIVISION

METAL TEXTILE CORP.

ROSELLE • NEW JERSEY

6-063

Each terminal of coil in turn is held against ultrasonic soldering head immersed in solder

specially designed tip, delivers the ultrasonic energy where it is most effective to do this operation. In less than 2 seconds, the two terminals are stripped and soldered. The operation is acomplished at a temperature which insures a good connection yet not so high as to damage the wire.

Tube Printer

A NEW IMPRINTING machine can apply company names, contract numbers or any other imprint to cylindrical objects including vacuum tubes up to 12 inches in diameter and 7 inches long.

Operation requires no skill on the part of the operator. The dies

CORNELL-DUBILIER

FIRST AGAIN



160°

150°

first and only

+160°C

and +130°C

molded mica capacitors

140°



(EQUIVALENT TO MIL SIZES CM15, CM20, CM25, CM30, CM35)

130° NO VOLTAGE DERATING EVEN AT MAXIMUM TEMPERATURES

TO SOLVE your high temperature component requirements count on these unique new C-D capacitors, outstanding result of many thousands of man-hours of engineering, development, and 45 years of priceless capacitor manufacturing experience. Write or wire collect for engineering samples and new Bulletin 422-4 on this outstanding C-D EXCLUSIVE. Cornell-Dubilier Electric Corporation, Dept. K-76, South Plainfield, N. J.

FULL RATED VOLTAGE AT HIGH TEMPERATURE EXTREMES—No voltage derating required over respective operating temperature ranges —55°C to +160°C (HX types) and —55°C to +130°C (H types).

EXCELLENT CAPACITANCE-TEMPERATURE STABILITY—In all characteristics up to and including characteristics F (0 to +70 ppm/°C.).

ABSOLUTELY WAX-FREE. No internal or external wax impregnation or other meltable coating material used in these units.

RUGGEDIZED, electrically, mechanically. New moisturetight seal, developed specifically by C-D for high temperature operation. Will withstand vibration, impact, high ambient temperatures.

IN 300v and 500v DC working, up to and including 7500 mmf. in 160°C (HX types) and 15,000 mmf. in 130°C (H types).

ONSISTENTLY EPENDABLE

CORNELL-DUBILIER CAPACITORS

PLANTS IN SO. PLAINFIELD, N. J.; NEW BEDFORD, WORCESTER AND CAMBRIDGE, MASS.; PROVIDENCE AND HOPE VALLEY, R. I.; INDIANAPOLIS, IND.; SANFORD, VARINA & FUQUAY SPRINGS, N. C.; SUBSIDIARY: RADIART CORP., CLEVELAND, O.

THERE ARE MORE C-D CAPACITORS IN USE TODAY THAN ANY OTHER MAKE

ACEPOT*
ACETRIM*

Sub-Miniature Potentiometers and Trimmers

½" size, precision wire-wound, up to 250K, ±.3% linearity

setting *new* standards for *dependability* in sub-miniaturization

Let the facts speak for themselves! ACE Sub-Miniature Precision Wire-Wound Potentiometers and Potentiometer Trimmers are the result of 4 years development and over a year of successful use by leading electronic equipment manufacturers. Users have conclusively proved that ACEPOTS and ACE-TRIMS meet requirements for space and weight saving compactness, while at the same time meeting MIL specs' most stringent qualifications for performance and *dependability*. Why invite trouble with untested components when you can *protect your reputation with* ACEPOT and ACETRIM . . . the subminiature potentiometers and trimmers proved in actual use.

Condensed Engineering Data

	ACEPOT (potentiometer)	ACETRIM (trimmer)
Resistance Range	200 ~ to 250K ± 2%	10 ~ to 150K ± 3%
Linearity	±3%	±3%
Resolution	extremely high	excellent
Ambient Temperature	– 55° C to 125° C*	– 55° C to 125° C
Torque	low or high	low or high

The above specifications are standard — other values on special order.

Available in threaded bushing, servo, flush tapped hole or flange mounting, and ganged units. All units sealed, moistureproofed, and anti-fungus treated. Meet applicable portions of JAN specs and MIL-E-5272A standards.

*New X-500 ACEPOT operates to a *new* high of 150° C.

Expedited delivery on prototypes; prompt servicing of production orders. Send for Fact File and application data sheets.

*trademarks applied for

ACEPOT*
ACETRIM*

ACE ELECTRONICS ASSOCIATES

Dept E, 101 Dover St. • Somerville 44, Massachusetts

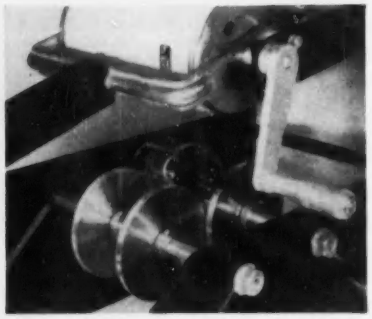

Tube to be imprinted is placed on free-turning disks, cylinder holding inked rubber type is lowered and crank is turned to place desired imprint neatly on tube base

used are the same conventional inexpensive rubber type used in office stamps and are easily changed. Make-ready takes but a few seconds. Up to 400 pieces can be imprinted in one hour. This Murco Midget imprinter is made by Murco Mfg. Co., Delray Beach, Florida.

Winding Focus Coils With Aluminum Foil

A NEW TECHNIQUE for winding focus coils involves coating aluminum foil with a thin layer of aluminum oxide and then winding this foil without additional insulation. The oxide film, though only a few

Test setup for foil coating and winding. Power supply for producing anodic coating is on overhead rack

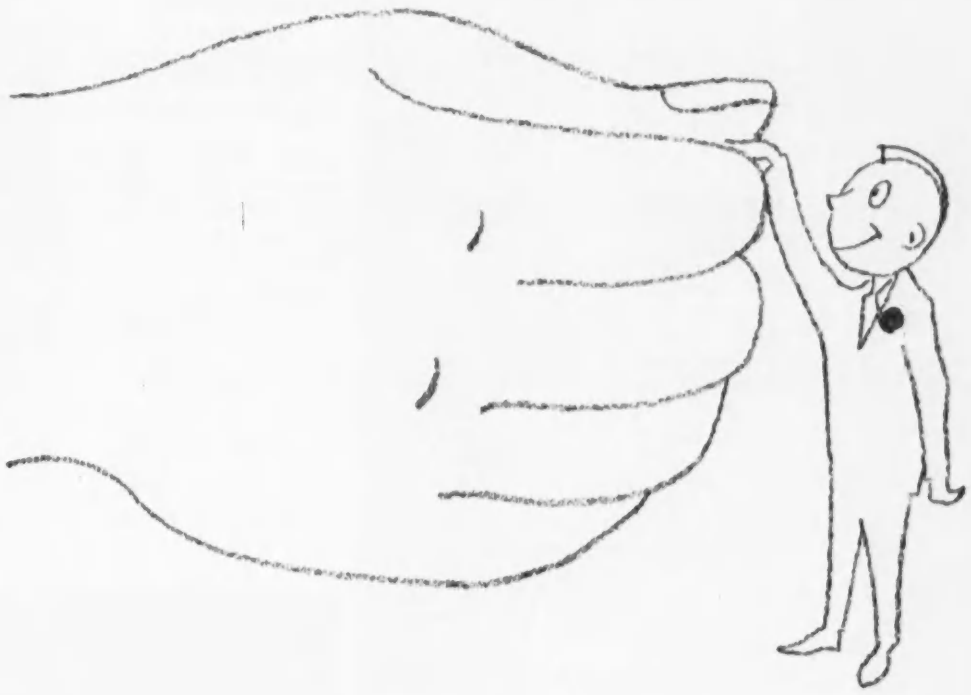

SHAKE HANDS with a GIANT!

electronics introduces you to a $6.8 billion market

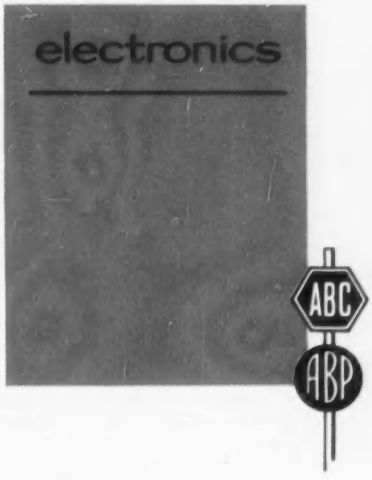

The editors of **electronics** have seen an industry grow for 25 years . . . grow into a giant.

These editors today serve all segments of the electronic industry. Consequently, they offer the advertiser a magazine that *penetrates* all segments.

Penetrating this unique industry means reaching every important man in it.

Shake hands with all of them . . . and you're shaking hands with a *giant*.

You *can*, too . . . in **electronics.**

ABC ABP

electronics

...of course!

A McGRAW-HILL PUBLICATION • 330 West 42nd Street • New York 36, N.Y.

New high-vacuum pump

heats faster
cools faster
for faster cycling

CVC's KS-200 oil diffusion-ejector pump.

You can complete more process cycles an hour and cut maintenance costs with this new *CVC* oil diffusion-ejector pump.

The KS-200 is designed especially for TV tube aluminizing, vacuum-arc melting of metals, and other repetitive processes that require **pressures in the 0.5 to 10 micron Hg range.**

Faster heating. Four heaters (combined capacity, 2000 watts) heat the pump's fluid from a cold start to operating temperature in only seven minutes.

The heaters sit in cylindrical wells that jut up into the pump fluid from the bottom of the boiler—an arrangement that combines the low heat loss of an internal-immersion heater with the easy maintenance of a heater mounted externally.

Faster cooling. An internal coil in direct contact with the pump fluid cools it enough for safe exposure to atmosphere in only one minute, a saving of four to five minutes over old designs.

No valves needed. Convaclor-12 pump fluid gives you shorter warm-up and cool-down times with the KS-200. The saving offsets the longer cycling required by most high-vacuum pumps when used without valves.

With Convaclor-12 fluid the pump's ultimate pressure is 6 x 10^{-5}mm Hg. You can reach 1 x 10^{-5}mm Hg with Convoil-20 fluid, but speed and throughput become slower in the 1 to 10 micron range. See graph below.

The KS-200 costs $390 F.O.B. Rochester (price subject to change without notice). For full technical data, write for Bulletin 5-31.

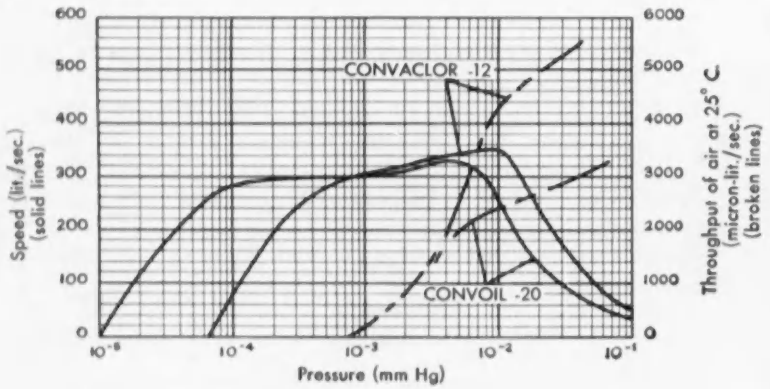

Consolidated Vacuum
Rochester 3, N. Y.
a division of **CONSOLIDATED ELECTRODYNAMICS CORPORATION,** *Pasadena, California*

Sales Offices: Albuquerque • Atlanta • Boston • Buffalo • Chicago • Dallas • Detroit New York • Pasadena • Philadelphia • San Francisco • Seattle • Washington, D. C.

millionths of an inch thick, is able to withstand usual turn-to-turn voltages. Since this film is so thin, a tightly wound coil is nearly a solid block of aluminum.

▶ **Heat Problems**—In foil windings with plastic layer insulation, some attempts have been made to get the heat out of the coil through the ends of the coil. This is quite successful if the coil is a short solenoid. If the length of the coil is great enough so that an appreciable temperature gradient exists down the axis of the solenoid, some trouble may be experienced due to the nonuniform current distribution in the sheet of foil. Since the center portion of the solenoid is hotter than the ends, more current per unit length flows in the portion

Aluminum-foil solenoid producing 850 gauss for focusing traveling-wave tube. At rear is solenoid housing complete with magnetic shield and cooling blower. Coil alone here is 12¾ inches long and weighs 12 lb

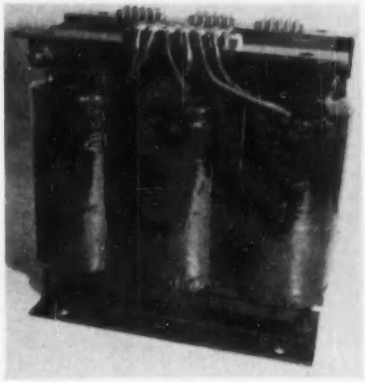

Experimental three-phase transformer wound with aluminum foil. On overload test, winding temperature reached 350C without damage

Standardization saves you

TIME and MONEY

with

HUDSON

Precision Drawn

CASES-COVERS

3 MODERN PLANTS

Offering Precision Fabrication of:

STEEL
BRASS
ALUMINUM
COPPER
MU METAL

Including:

CERTIFIED ALLOY WELDING
CERTIFIED SPOT WELDING
SILVER SOLDERING
BRAZING

- PRECISION DRAWN CLOSURES
- QUALITY METAL STAMPINGS
- SHEET METAL WORK

Call or write for prices on standard closures or send drawings for quotations on special parts or sub-assemblies.

Ask for your copy of the new Hudson Catalog

Hudson Specialized Production Methods...

Hudson standardized production makes it possible to solve even unusual closure problems quickly, with standard stock components. HUDSON offers the highest quality precision drawn closures at commercial prices. The standard line includes over a thousand types in sizes ranging from large to miniature, most available with a wide range of optional features. Check your closure requirements with HUDSON to assure maximum economy — fastest possible delivery!

HUDSON TOOL & DIE COMPANY • INC

118-122 SOUTH 14th ST., NEWARK 7, N. J.

Telephone: HUmboldt 2-8561

Now!... Phaostron custom panel meters are available in

colors

at no additional cost

Time-tested and proven movements, anti-magnetic shielding, insulated zero adjustments and fine accuracy are familiar features of *Phaostron Custom Panel Meters* ... now, something new has been added...

COLOR-CUSTOMIZED PANELS

Handsome harmonizing colors that will give a touch of distinction to your equipment. Send us a color swatch and we will make Phaostron *color*-customized panels to match... and at no extra cost!

Phaostron Custom Panel Meters, nine types in 77 Standard Ranges are available at your Parts Distributor. For special requirements, write to the Product Development Department for practical recommendations.



2½" or 3½" square meter

4" x 6" rectangular meter with mirrored scale also available illuminated



2½" or 3½" round meter

Your Key to Excellence

Phaostron Instrument & Electronic Co.

151 PASADENA AVE., SOUTH PASADENA, CALIF.

of the winding near the ends than at the center.

In some applications, such as focus coils for traveling wave tubes, it may be found that a tube will focus when the focus coil is cold but will not focus properly when the coil reaches operating temperature.

▶ **Getting Rid of Heat**—It now appears that the best way to remove the heat from a winding is to remove it from the outer surface of the winding. There is more surface available for cooling by water or forced air. The field can also be made to remain more uniform. By using such an extremely thin film for insulation between layers, the thermal insulation between the winding hot spot and the outside is almost nonexistent. Also, aluminum oxide appears to have a much higher thermal conductivity than the organic materials usually used for layer insulation.

▶ **Temperature**—Aluminum oxide melts at 2,050 C and retains its insulating qualities well past the 660 C melting point of aluminum. Practical considerations such as start and finish insulation and solder for termination currently set the tentative limit for continuous operation at 350 C, however. Coils have been run at this temperature continuously, and cycled from this temperature to very low temperatures. Others have been heated to this temperature and then placed in a pan of water. None of these

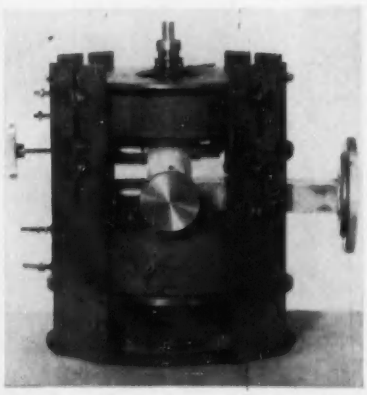

Aluminum-foil focus coils in use on Eitel-McCullough klystron here have less weight and lower power requirements than equivalent copper-wire coils

All Hughes diodes resemble each other—externally. Germanium point-contact or silicon junction, they are all glass-bodied* and tiny (actual dimensions: 0.265 by 0.123 inch). But minute, meticulously controlled variations in the manufacturing process impart individual characteristics to the diodes, make them just right for specific applications. This gives you the opportunity of selecting from a line which includes literally hundreds of diode types.

So, when your circuitry requires varying combinations of such characteristics as . . . high back resistance . . . quick recovery . . . high conductance . . . or high temperature operation, *specify Hughes*. You will get a diode with mechanical and electrical stability built in. You will get a diode which was manufactured first of all for reliability.

*Nowhere else have glass packaging techniques been developed to a comparable extent, for the Hughes process has many unique aspects. They are difficult to duplicate, yet are instrumental to the manufacture of diode bodies which are completely impervious to contamination and moisture penetration.

For descriptive literature please write: HUGHES

SEMICONDUCTORS
HUGHES PRODUCTS
Los Angeles 45, California

HUGHES PRODUCTS

A DIVISION OF THE HUGHES AIRCRAFT COMPANY

© 1956, H. A. C.

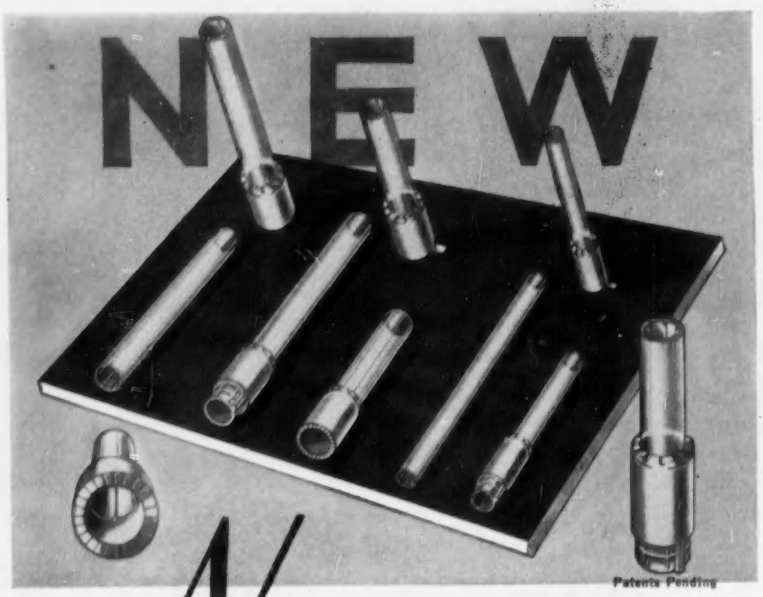

NYLON COIL FORMS

A NEW PRODUCT INTRODUCED BY

CLEVELAND CONTAINER CO.

Makers of CLEVELITE* . . .
the QUALITY name for Phenolic Tubing

CLEVELAND'S NYLON FORMS . . .

. . . are a one-piece precision molded, high temperature form for use with threaded cores.

. . . eliminate costly assembly operations as they can be had with the collar as an integral part of the form.

. . . collars are notched to prevent slipping turns, speeding winding operations.

. . . edges are serrated to provide greater friction when engaged with winding arbor.

. . . have six internal ribs enabling cores to be pressed into the form, eliminating time consuming, hand threading operations.

. . . have unique patented chassis lock, eliminating costly mounting clips.

. . . resist electrolysis indefinitely.

. . . available in all R.E.T.M.A. standard colors, for easy identification . . . in certain lengths to fit 8/32 and 1/4-28 core sizes.

*Reg. U. S. Pat. Off.

THE CLEVELAND CONTAINER COMPANY
6201 BARBERTON AVE. CLEVELAND 2, OHIO
PLANTS AND SALES OFFICES:
CHICAGO • DETROIT • MEMPHIS • PLYMOUTH, WIS. • OGDENSBURG, N.Y. • JAMESBURG, N.J. • LOS ANGELES
ABRASIVE DIVISION at CLEVELAND, OHIO
Cleveland Container Canada, Ltd., Prescott and Toronto, Ont.

Representatives:
NEW YORK AREA: R. T. MURRAY, 604 CENTRAL AVE., EAST ORANGE, N. J.
NEW ENGLAND: R. S. PETTIGREW & CO., 62 LA SALLE RD., WEST HARTFORD, CONN.
CHICAGO AREA: PLASTIC TUBING SALES, 5215 N. RAVENSWOOD AVE., CHICAGO
WEST COAST: IRV. M. COCHRANE CO., 408 S. ALVARADO ST., LOS ANGELES

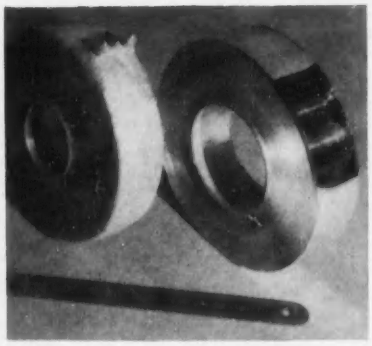

Aluminum-foil focus coils for klystron, before and after encapsulation with epoxy resin

abuses have any effect on the coils that can be observed.

▶**Space Factor**—In sharp contrast to the 65-percent space factor of a conventionally insulated wire-wound coil, use of a microscopically thin film of aluminum oxide on strip aluminum can result in space factors better than 95 percent. In a typical case, the total size of a foil winding may be very near to that of a copper winding for the same amount of power consumed, when provisions for cooling are taken into account.

In some cases the winding size may be somewhat smaller for the same amount of power consumed due to a lower temperature rise and thus less resistance change as the wire reaches operating temperature. Figure 1 compares equivalent wire-wound and foil-wound coils where the foil coils actually consumed less power. The



FIG. 1—Comparison of power requirements for copper-wire and aluminum-foil coils used for focusing a klystron. Data for curves was obtained in laboratory of Eitel-McCullough, Inc. Power saving with aluminum is due to better thermal conductivity within the aluminum coil

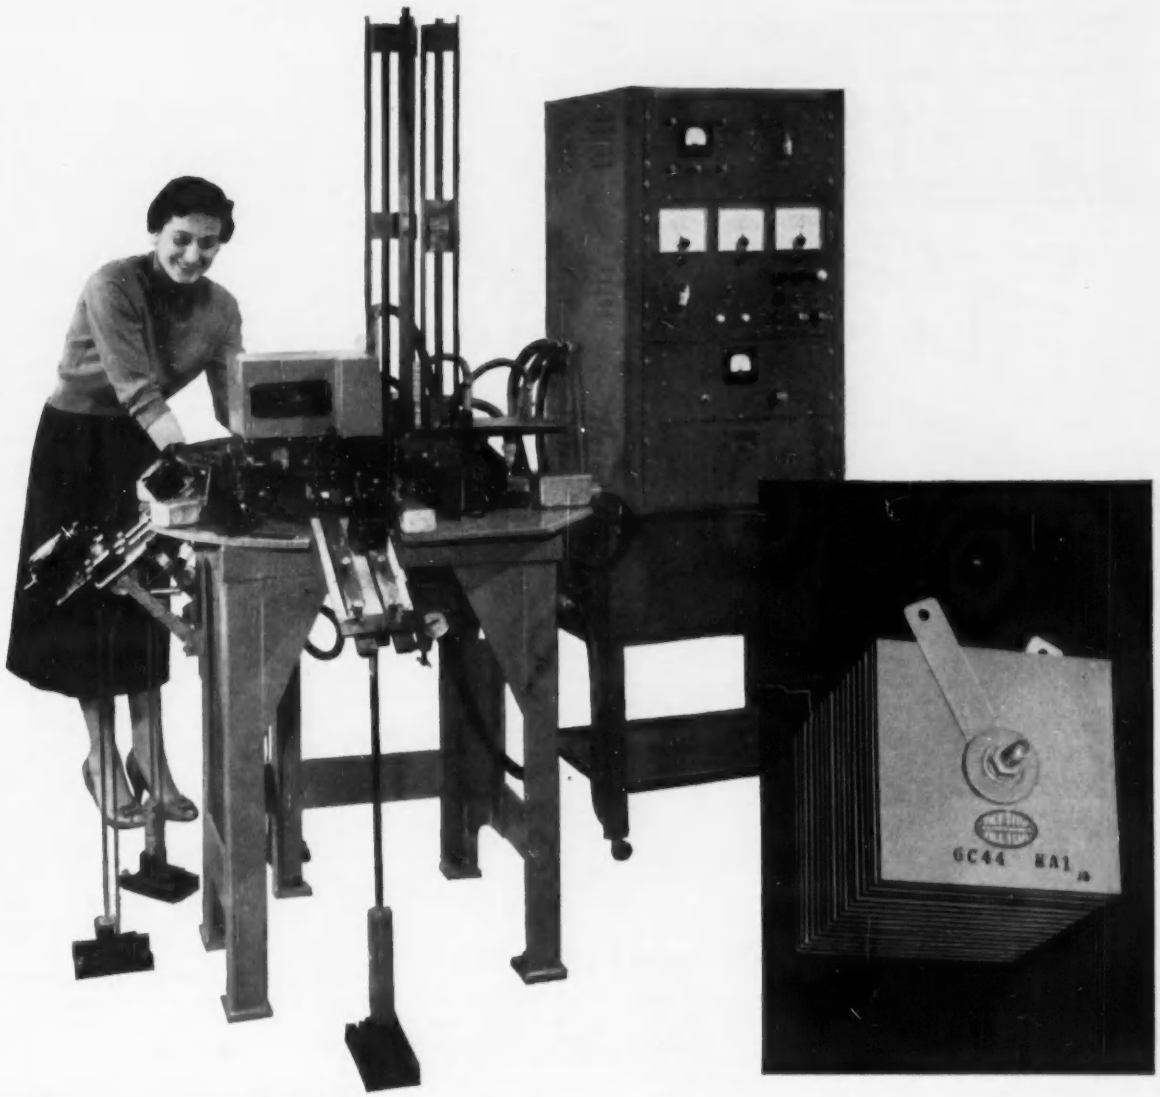

You get only the best when you specify Westinghouse selenium stacks

Typical of the precision controls employed in the manufacture of Westinghouse selenium cells is the automatic cell tester shown above. This ingenious machine tests electrical characteristics of every cell, eliminating all human errors and assuring uniformity of the finished product.

Automatic controls are also employed at all other possible points in the process, reducing variability to a minimum. Contamination of the process is eliminated by air conditioning and precipitron cleaning.

These are reasons why Westinghouse selenium stacks are the highest quality rectifiers available today.

For all the facts, call your Westinghouse sales engineer. He'll show you why Westinghouse selenium stacks have the lowest forward aging rate in the industry. J-21948

WATCH WESTINGHOUSE!

*WHERE **BIG** THINGS ARE HAPPENING **TODAY!***

Want more information? Use post card on last page.

LAB PULSESCOPE

by Waterman

MODEL S-5-C

Size: 13" x 16½" x 14½"

ANOTHER EXAMPLE OF Waterman PIONEERING...

The LAB PULSESCOPE, model S-5-C, is a JANized (Gov't Model No. USM/24C) compact, wide band laboratory oscilloscope for the study of all attributes of complex waveforms. The video amplifier response is up to 11 MC and provides an equivalent pulse rise time of 0.035 microseconds. Its 0.1 volt p to p/inch sensitivity and 0.55 microsecond fixed delay assure portrayal of the leading edge when the sweep is triggered by the displayed signal. An adjustable precision calibration voltage is incorporated. The sweep may be operated in either triggered or repetitive modes from 1.2 to 120,000 microseconds. Optional sweep expansion of 10 to 1 and built-in markers of 0.2, 1, 10, 100, and 500 microseconds, which are automatically synchronized with the sweep, extend time interpretations to a new dimension. Either polarity of the internally generated trigger voltage is available for synchronizing any associated test apparatus. Operation from 50 to 400 cps at 115 volts widens the field application of the unit. These and countless additional features of the LAB PULSESCOPE make it a MUST for every electronic laboratory.

WATERMAN PRODUCTS CO., INC.

PHILADELPHIA 25, PA.

CABLE ADDRESS: POKETSCOPE

MANUFACTURERS OF

PANELSCOPE*
S-4-C SAR PULSESCOPE*
S-5-C LAB PULSESCOPE*
S-11-A INDUSTRIAL POCKETSCOPE*
S-12-B JANized RAKSCOPE*
S-12-C SYSTEMS RAKSCOPE*
S-14-A HIGH GAIN POCKETSCOPE*
S-14-B WIDE BAND POCKETSCOPE*
S-14-C COMPUTER POCKETSCOPE*
S-15-A TWIN TUBE POCKETSCOPE*
RAYOHIC* Cathode Ray Tubes and Other Associated Equipment

*T. M. REG.

MEMO... Write for details today!

WATERMAN PRODUCTS

size was the same in both cases.

Since the size of an aluminum foil winding is nearly the same as for copper and the density of aluminum is much less than that of copper, the weight of a typical coil can be greatly reduced. The ratio of density of copper to aluminum is about 3, but the aluminum is packed much more tightly so the actual gain in weight will be closer to two to one. Many things will affect this, such as the type of impregnating varnish in a copper-wire coil and the exact space factors achieved by the two methods.

▶ **Future**—Some work has already been done on techniques for winding small aluminum-foil transformer and relay coils at high speed to compete with wire-wound coils in large-quantity production.

Assembling Coil Strip With Automatic Screwdriver

SELF-TAPPING SCREWS are fed and driven automatically in a setup used at Radio Condenser Co., Camden, N. J., for anchoring a three-coil Bakelite strip to its die-cast single-piece coil shield.

A pivoted holding fixture swings out from under the Detroit power

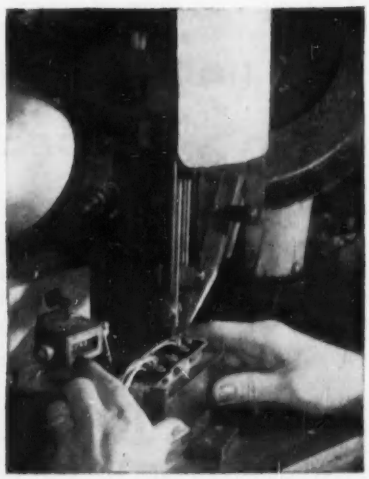

Loaded work fixture is in assembly position, with automatic power screwdriver bringing down next screw to be driven. Pivot for fixture is at left of operator's left hand

wish you were here!

. . . helping us to develop "another Martin First" . . . the Air Force I.C.B.M. "TITAN".

For when you combine the creative challenge of conquering outer space with the advantages of living in the uncrowded and colorful Rocky Mountains . . . you will have the ultimate in realizing your professional aspirations

This year, plan to take your vacation in Colorado and while you are enjoying the beauty of the Rockies, take time to stop in and talk with us. IT MIGHT BE THE TURNING POINT IN YOUR LIFE.

If your interest in a professional career is associated with missile development . . . you belong at MARTIN-DENVER

MARTIN
DENVER DIVISION

Emmett E. Hearn, Emply. Dir., Dept. H-5, P.O. Box 179, Denver, Colorado

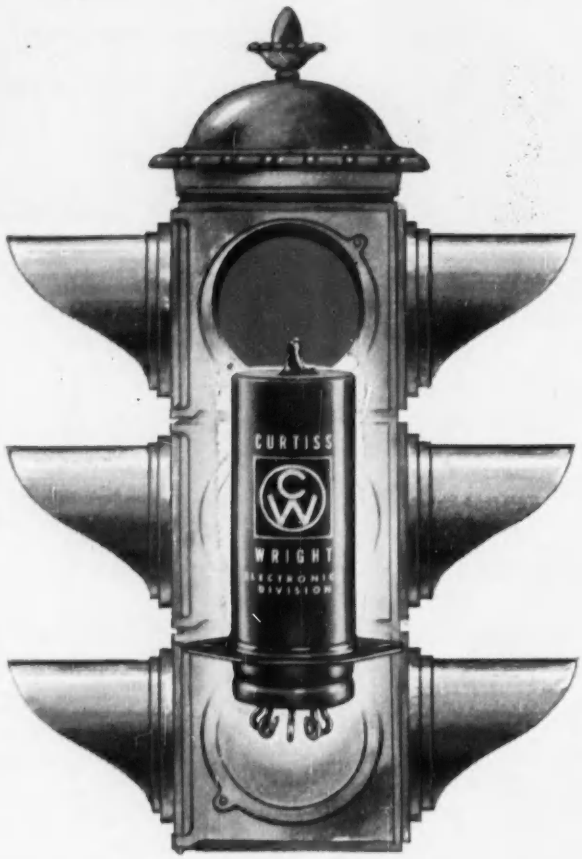

Dependable STOP and GO Control
The Curtiss-Wright "Snapper"
THERMAL TIME DELAY RELAY

For applications of time delay in electrical circuits the "Snapper" thermal time delay relay makes and breaks contact with positive action. The switching takes place with a minimum of arcing and thus potential chatter is eliminated, insuring long life.

The "Snapper" has single-pole double-throw contacts, operates throughout an ambient temperature range, is hermetically sealed and gas filled and is reliable and rugged. It is available in a metal envelope in either (7 or 9 pin) miniature or (8 pin) octal and also in a glass envelope in 9 pin only. The delay periods are preset in metal from 3 to 120 seconds and in glass from 5 to 60 seconds.

Curtiss-Wright also manufactures the "Snapper" High-Low Differential Thermostat. This unit meets industrial and military needs. Write to Thermal Devices Division for complete information.

ELECTRONICS DIVISION
CURTISS-WRIGHT
CORPORATION • CARLSTADT, N. J.

screwdriver for loading. The operator first drops in the three-coil shield, then drops the coil assembly into the shield. The coil forms slide over projecting metal studs that come up from the fixture through the coil shield. The strip itself is positioned by smaller studs at the ends of the fixture. After loading, the operator swings the fixture into position and pushes a foot pedal to initiate driving of the first screw. Three more screws are driven in rapid succession, swinging the fixture to the new position each time. This technique is possible because the screw holes are positioned on the arc of a circle having the same radius as the pivoted fixture.

Magnetic Base Holds Lamp and Magnifier

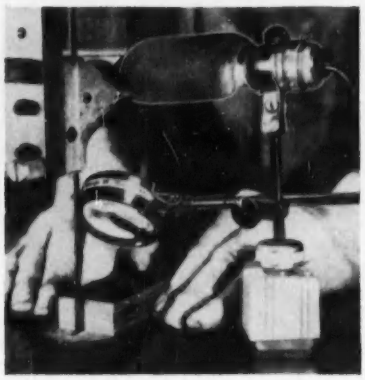

New production aid mounted on band saw helps operator follow fine scribed line precisely when cutting aluminum block

A FIVE-POWER magnifying glass mounted on the same adjustable magnetic-base holder as a lamp reduces rejects when drilling prototypes of etched-wiring boards or performing other delicate machine operations on electronic components. The base mounts equally well on flat or curved surfaces and provides a magnetic pull of 65 lb. A knurled aluminum locknut permits setting the upright at any desired angle quickly. Another adjustment permits rotating the 2-inch magnifying lens at any angle or plane. The tiny lamp is made by Enco Mfg. Co., 4520 W. Fullerton, Chicago.

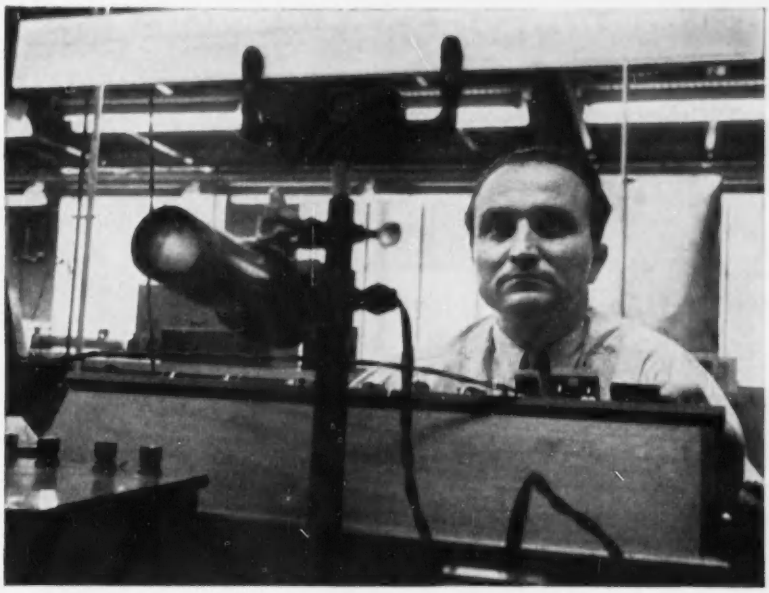

Scientist at control box of a Sanford-Bennett High-H-Permeameter measures hysteresis loop of Indox ceramic magnet.

How temperature affects magnets

An interview with Dr. Rudolf K. Tenzer, scientist, The Indiana Steel Products Company

BECAUSE PERMANENT MAGNET remanence changes, resulting from varying temperatures, often necessitate corrections, compensations, or allowances, Dr. Tenzer undertook a series of studies on the subject. Some of the data used by him in answering the questions posed below resulted from work sponsored by the Wright Air Development Center of the U. S. Air Force. Reprints of an article by Dr. Tenzer on the subject are available by writing The Indiana Steel Products Co., Dept. A-7, Valparaiso, Ind.

Question: How does the remanence of permanent magnets vary with temperature?

Answer: Normally, remanence decreases with an increase in temperature . . . becoming zero at the Curie point, where all ferromagnetic properties vanish.

Question: Does a change in temperature result in a permanent change in remanence?

Answer: Not necessarily. Investigations which we have conducted show that temperature effects on ferromagnetic materials reveal both non-reversible and reversible variations.

Question: Can the result of these influences be evaluated?

Answer: Proper measuring techniques will evaluate the non-reversible variations as well as the reversible variations.

Question: Are non-reversible variations permanent changes in the remanence of a magnet?

Answer: Non-reversible variations are permanent until the initial remanence is restored by remagnetizing. This effect is not the same as irreversible metallurgical changes which prevent restoration of initial remanence by remagnetizing.

Question: What are reversible variations in remanence?

Answer: When a magnet has been stabilized for a certain temperature range, remanence variations within this temperature range are reversible.

Question: How are magnets stabilized for a given temperature range?

Answer: The magnet is exposed to repeated temperature cycling over a given range until the non-reversible variation becomes zero and remanence at room temperature remains the same for each additional cycle.

Question: Can the amount of remanence variation with temperature be predicted?

Answer: Our experiments in this field have produced quantitative results which can be used in predicting both the reversible and the non-reversible variations in remanence resulting from temperature change.

Question: Over what temperature range can these measurements be applied?

Answer: Our initial work in this field has been carried out in the temperature range from −60°C to 350°C.

Indiana expands research and production facilities

Currently under construction at Valparaiso, Ind., is a half-million dollar addition to the main plant of The Indiana Steel Products Co. The new structure will provide facilities for expanded research of magnetic materials, and increased production of Indox ceramic permanent magnets.



"Cattle Magnets" protect Bossie from stomach-aches

Cows often consume nails, staples and wire with their food. This causes a disorder called "hardware disease." To prevent it, you can feed Bossie an Indiana "Cattle Magnet." The magnet remains in her first stomach, gathering the stray metal. This keeps it from passing to her other stomachs (she has four, you know) where it can cause great distress.

THE INDIANA STEEL PRODUCTS COMPANY
VALPARAISO, INDIANA
WORLD'S LARGEST MANUFACTURER OF PERMANENT MAGNETS

INDIANA
PERMANENT
MAGNETS

New Products

Edited by WILLIAM P. O'BRIEN

76 New Products and 67 Manufacturers' Bulletins Are Reviewed . . . Control, Testing and Measuring Equipment Described and Illustrated . . . Recent Tubes and Components Are Covered

FREQUENCY METER

features high accuracy



VARO MFG. CO., INC., 2201 Walnut St., Garland, Texas, announces the model 6503 frequency meter featuring accuracy of better than 0.01 percent. Frequency range is 397 to 403 cps. A switch permits using the meter to measure any frequency in the range 370 to 430 cps to an accuracy of better than 0.1 percent.

The meter is completely insensitive to waveform. It will accurately measure the repetition rate of voltage spikes, sawtooth waveforms, or badly distorted sine waves. It will measure frequency of any input signal voltage between 6 and 250 v without need for adjustment.

Model 6503 consists of a model 6600 frequency deviation multiplier and a model 6505A frequency meter. The frequency deviation multiplier multiplies by 10 the difference between the measured frequency and 400 cps. Thus, a 399-cps input applied to the input appears at the output as a 390-cps signal. This frequency is measured to 0.1 percent accuracy by the 6505A frequency meter.

MINIATURE RECTIFIER

for tv applications

GENERAL ELECTRIC CO., Schenectady 5, N. Y., has announced a new twin diode, miniature Vac-u-Sel rectifier for use as a horizontal phase detector in place of 6AL5 tubes in tv sets. The new semiconductor is especially adapted for automatic assembly operations using printed circuits.



It is built to withstand prolonged exposure at 90 percent humidity, is capable of operation at high ambient temperatures, and has rugged tinned leads.

▶**Characteristics**—The rectifier features a minimum forward current of 25 μa at −20 v. The characteristic capacitance per section is approximately 50 $\mu\mu$f, with negligible unbalance.

MICROWAVE ABSORBER

for free space rooms

EMERSON & CUMING, INC., 869 Washington St., Canton, Mass., has announced a new series of broadband microwave absorbers for use in free space rooms. Designated Eccosorb FR, the absorbers are rigid foam blocks which reflect less than 2 percent of incident energy. The material will not burn, making it ideal for use at indoor antenna test locations. It will not absorb moisture and therefore is also useful out of doors.

Available in three types, dependent upon the frequency range to be covered, Eccosorb FR is easily installed in the microwave darkroom. It is white surfaced for good light reflection. A special type which can be walked upon is supplied for floors.

DIGITAL RATIOMETER

high speed precision unit

FRANKLIN ELECTRONICS INC., East 4th St., Bridgeport, Pa. High speed

...a knee -for every need

—including low B+ deflection

Peak plate currents are checked in production on universal dynamic testing equipment built by Sylvania engineers.

For all your TV designs, Sylvania offers a complete line of deflection amplifier tubes with proper plate knee characteristics to meet every deflection need.

And Sylvania offers you the Sylvania-originated type 25DN6 designed to deliver high peak currents for proper deflection in low B+TV designs.

All Sylvania deflection tube types are tested under an exhaustive dynamic testing program. Critical parameters are checked 100% in production and double checked in destructive life tests in universal equipment specially designed by Sylvania engineers to simulate circuit conditions existing in the modern television receiver.

Whatever your needs, 70°, 90° or 110°, Sylvania can fill your vertical and horizontal deflection socket—backed by exhaustive reliability tests under actual operating conditions.

SYLVANIA®

SYLVANIA ELECTRIC PRODUCTS INC.
1740 Broadway, New York 19, N. Y.
In Canada: Sylvania Electric (Canada) Ltd.
University Tower Bldg., Montreal

LIGHTING • RADIO • ELECTRONICS • TELEVISION • ATOMIC ENERGY

electronic digitizing is employed in this 4 digit ratiometer which is useful in many automatic control applications, such as digital indication of mechanical position, process data logging, checking of precision resistance components and control of resistance winding machines.

Model 330 ratiometer provides a discrete 4-digit indication of the ratio between two voltages or resistances stable to 0.01 percent. The ratiometer measurements are independent of reference excitation accuracy. Readings take less than 10 milliseconds and up to 60 channels may be scanned per sec. In addition to a visual display, provisions are included for a digital readout to printers or card and tape punches.

MOUNTING TERMINALS

require no riveting



CAMBRIDGE THERMIONIC CORP., 445 Concord Ave., Cambridge 38, Mass., announces the first of a series of three new barbed and press mount terminals. These press mount solder terminals, designated series PM do not require riveting or swaging. They are designed to be press mounted into snug holes in all kinds of material, including laminated or cast material of 3/32 in. thickness or more.

Once inserted the new terminals have great holding power and will not come loose even under extreme shock or vibration. Ideal for mounting in blind holes or flush mounting in through holes, series PM sizes correspond to the dimensions of the following terminals: 1724, X2034 and X1558. When mounted the PM-1724 terminal is 23/64 ths, the PM2034 is 9/32 nds and the PM-1558 is 7/32 nds.

Complete specifications, information and prices are available by writing the company.

TEST PROBE & HOOD

for use with cro's

ALLEN B. DUMONT LABORATORIES, INC., 760 Bloomfield Ave., Clifton, N. J., has available a fixed-ratio test probe which permits observation of signals in circuits with high source impedance without loading the circuit. Together with the new probe, the availability of a 3-in. rubber viewing hood for cro's has been announced.

▶ **Specifications**—Offering 10 megohms input impedance, type 2613 fixed-ratio test probe is a general purpose, attenuator probe, which has a frequency range from d-c to 10 mc. The attenuation ratio is 10 to 1. A capacitive trimmer adjustment on the probe permits frequency compensation by matching input impedances of oscillographs having inputs within the range of 10 to 80 $\mu\mu$f.

The type 2621 three-in. rubber viewing hood is furnished with a mounting clip for fastening to the panel bezel of an oscillograph.

POWER TRANSISTOR THERMOMETER

with high thermal impedance

B&B ENGINEERING ASSOCIATES, RFD No. 1, Concord, N. H. Model 1 power transistor thermometer is a compact, battery powered instrument for measuring temperature. The sensing element is normally mounted with the same screw (or stud) as the power transistor being observed, with the power transistor on one side of the heat dissipator and the sensing element on the other side. The high thermal impedance and small physical size of the sensing element minimizes heat conduction and radiation from the transistor mounting.

▶ **Specifications**—Scale ranges are 35 to 85 C and 95 to 185 F. Accuracy is ±1 deg C with measuring unit within normal room temperatures. Battery life is approximately 250 hr. Weight is 1¾ lb. The unit is 4 in. wide by 6 in. long by 2¾ in. high. Sensing element is ¾ in. diameter by 5/64 in. thickness. Hole diameter is 0.196 in. Price is $87.50 complete with sensing element and battery.

PARALLEL T FILTERS

for printed circuit uses

THE NEWTON CO., 55 Elm St., Manchester, Conn., announces a new line, the series L. G. filters. These filters are parallel networks which are used for nearly complete elimination of 30, 60 or 120 cps frequencies. Design has made them

Only

ELECTRO TEC

PRECISION-MINIATURE

slip ring assemblies AND COMMUTATORS

for all these advantages:

EXCLUSIVE* *ELECTRO TEC* TECHNIQUES

insure closer tolerances, absolute uniformity, and the ultimate in miniaturization

Electro Tec units are the product of an exclusive manufacturing technique that results in accuracy unattainable by conventional fabricating methods. In this process a plastic is moulded around the wire leads. Accurate machining reduces this blank to the proper shape, complete with grooves. Hard silver is deposited into the grooves by electroplating to produce the required rings. Final machining insures concentricity and dimensional accuracy. The result is one-piece, unitized construction with conducting rings of 70 to 95 Brinell hardness.

Diameters of these assemblies range from .045" to 24" cylindrical or flat. Cross-sections may range from .005" to .060" or more. Rings are polished to a jewel-like finish and can be held to 4 micro-inches or better. Even the smallest sizes withstand a 1000 V.A.C. breakdown test. Most types easily withstand rotational speeds up to 12000 rpm.

ELECTRO TEC Assemblies are Specified by the Nation's Leading Precision Instrument and Equipment Manufacturers for Proven Greater Dependability, Longer Life, Smoother Functioning.

The uniformly superior performance of Electro Tec slip ring and commutator assemblies in thousands of industrial and governmental applications has resulted in wide adoption of these component units by most leading manufacturers of precision instruments and equipment. Although these products provide improved performance and extra dependability, prices are strictly competitive. Write today for fully illustrated literature.

- ONE PIECE, UNITIZED CONSTRUCTION
- ABSOLUTE MINIMUM TORQUE FRICTION
- DIAMETERS FROM .045" TO 24.0"
- MINIMUM 1000 V.A.C. HI-POT INTER-CIRCUIT
- UNIFORMLY HARD SILVER RINGS PLATED INTO GROOVES ON PRECISION MACHINED ONE PIECE PLASTIC FORM
- SPECIAL SURFACE DEPOSITS PREVENT TARNISH, MINIMIZE FRICTION, BRUSH NOISE AND PRACTICALLY ELIMINATE WEAR

ELECTRO TEC CORPORATION

SO. HACKENSACK NEW JERSEY

PRODUCTS OF PRECISION CRAFTSMANSHIP BY A NEW AND REVOLUTIONARY PROCESS

*PAT. NO. 2,696,570

MAGNETIC METALS COMPANY

For magnetic amplifier core applications

Centricores

. . . toroidal wrapped magnetic cores of high permeability alloys which include materials with high squareness ratio and low coercivity, or high initial permeability. Active types are carried in stock. Test methods and engineering data are presented in Magnetic Amplifier Core Bulletins.

Stamped Rings

. . . laminations which exhibit highest obtainable physical, thermal, mechanical and magnetic stability. Such rings can be stamped as thin as .004". *Write for Bulletin C1.*

DU Laminations

. . . stampings which permit production use of economical pre-wound coils and provide uniformity of magnetic amplifier performance. *Write for Bulletin D1.*

MAGNETIC METALS COMPANY
21st & HAYES AVENUE • CAMDEN, N.J.

Electromagnetic Cores and Shields

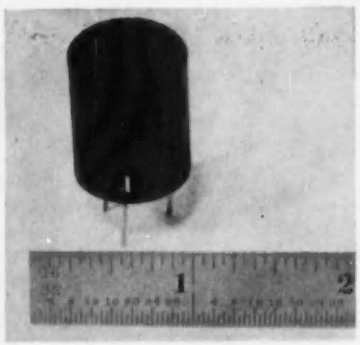

especially adaptable for printed circuit applications in that there are three leads which may be inserted with printed circuit boards and dip soldered.

It has available a wide range of impedances and voltage ratings. The filters give a minimum of 45-db attenuation at the null frequency.

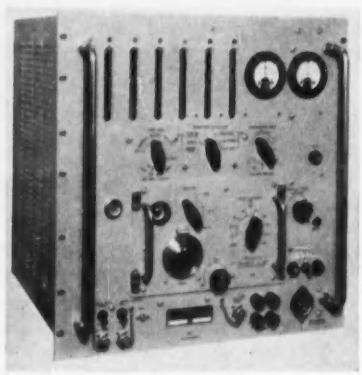

FREQUENCY METER
displays in digital form

NORTHEASTERN ENGINEERING, INC., Manchester, N. H. Frequency counter No. 14-20 FM, a commercial version of the military type AN/USM-26, is a precision direct reading type frequency meter which displays the measured frequency automatically in digital form. Frequencies measured may be periodic or random; 10 cps to 220 mc. The counter may also be used to measure time intervals, pulse length, frequency drift and total events.

Basic feature of the unit is a precision time base generator, operating from a crystal-controlled 100-kc precision oscillator, which opens and closes a gating circuit. Period or time intervals are measured by reversing the roles of the time-base generator and the signal

RCA ELECTRON TUBES IN INDUSTRY

For dependable control . . . always use

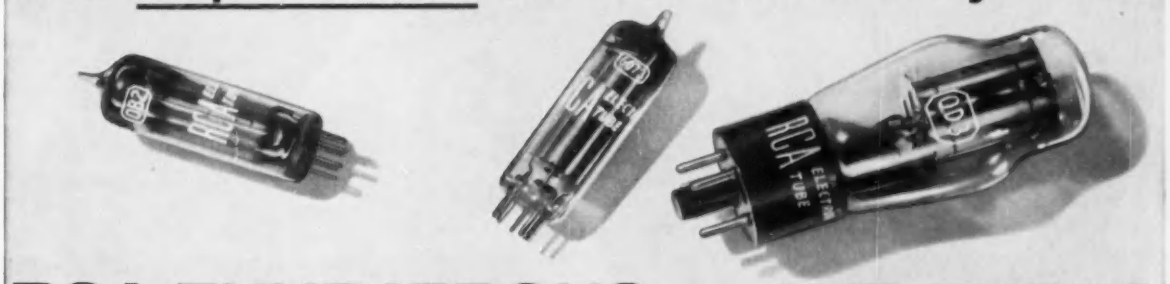

RCA THYRATRONS and VR TUBES

At the heart of industrial-electronics equipment are electron tubes. The continuous operation of many industrial production lines *depends* on the performance of these tubes—thyratrons for "on-off" operations, voltage-regulator tubes for dc voltage stability.

RCA . . . world renowned for advanced-design superior-quality electron tubes . . . offers a group of Thyratron and Voltage-Regulator tube types specifically designed for *dependable* control of industrial-electronic apparatus. Shown here are 10 of the RCA types most frequently specified.

RCA TYPE	DESCRIPTION
	Voltage-Regulator Types For regulation of dc voltage supplies for amplifiers, oscillators, etc. Also can be used as relaxation oscillators.
0A2—miniature 7-pin base 0A3—octal 6-pin base 0B2—miniature 7-pin base 0C3—octal 6-pin base 0D3—octal 6-pin base	
6073—miniature 7-pin base 6074—miniature 7-pin base	Like 0A2 and 0B2 but having very stable characteristics and intended for applications critical as to shock and vibration.
	Relay Type For use where "on-off" control of low-current electrical circuits is required.
5823—miniature 7-pin base	
	Thyratron Types Primarily intended for high-sensitivity relay control circuits.
2D21—miniature 7-pin base 2050—octal 8-pin base	

Send for these booklets today!

#RIT-104—Receiving-Type Tubes for Industry and Communications . . . contains up-to-date data on 130 RCA receiving-type tubes especially suited to industrial electronics.

#1D-1020-A—RCA Interchangeability Directory of Industrial-Type Electron Tubes . . . time saving information. Lists industrial tubes of 26 manufacturers and gives RCA direct replacement types or RCA similar types, whichever is available.

Write: RCA, Commercial Eng., Sec. . .G19Z Harrison, N. J.

NAME .....

COMPANY ..... TITLE .....

ADDRESS .....

.....

RCA® **TUBES FOR INDUSTRIAL-ELECTRONICS**

Radio Corporation of America, Harrison, N. J.

ALWAYS REPLACE WITH RCA ELECTRON TUBES—AVAILABLE THROUGH YOUR LOCAL RCA DISTRIBUTOR. FOR FASTEST SERVICE, CONTACT HIM DIRECTLY.

NEW!





CRAMER

automatic reset
INTERVAL TIMER

NEW—Full-vision 300° protected dial for fast, accurate readings.

NEW—Large friction setting knob with integral push button.

NEW—Repeat accuracy within ±½ of 1% of full scale.

NEW—15-amp. open-blade switches, positive quick-make, quick-break operation.

NEW—Multi-position terminal block offers wiring flexibility, side or rear connection.

Powered by the high-torque (30 in. oz. @ 1 r.p.m.) Cramer synchronous motor, the Type 241 Automatic Reset Interval Timer has been designed and tested to new standards for *maintained* accuracy over a long service life. Available in ranges from 15 seconds through 24 hours. Write for complete information.

SPECIALISTS IN TIME CONTROL

CRAMER CONTROLS CORPORATION
Formerly The R. W. Cramer Co., Inc.
BOX 3, CENTERBROOK, CONNECTICUT

Cramer TIMING DEVICES

19CR98

under measurement.

Complete technical characteristics are available from the company.

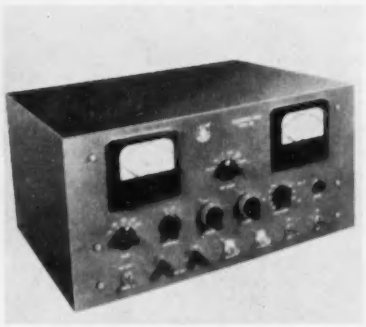

ELECTRONIC LOAD
compact and easy to operate

BRISTOL ENGINEERING CORP., Bristol, Pa. Model 102 electronic load is a precision device which combines in a single, compact unit all of the conventional instrumentation required for the complete testing of regulated and unregulated power supplies.

▶ **Makeup**—The unit comprises a group of paralleled power tubes, a wide-band modulation amplifier, a variable bias supply, a mechanical keying device, and an a-c vtvm.

Physical size, compactness, ease of operation and reliability in continuous use make the unit suitable for field production testing as well as for laboratory use.



TINY ACCELEROMETER
variable reluctance type

NORTH AMERICAN INSTRUMENTS, INC., 2420 N. Lake Ave., Altadena, Calif. Model A-8 miniature accelerometer of the variable reluctance type was developed primarily for flight test application. The

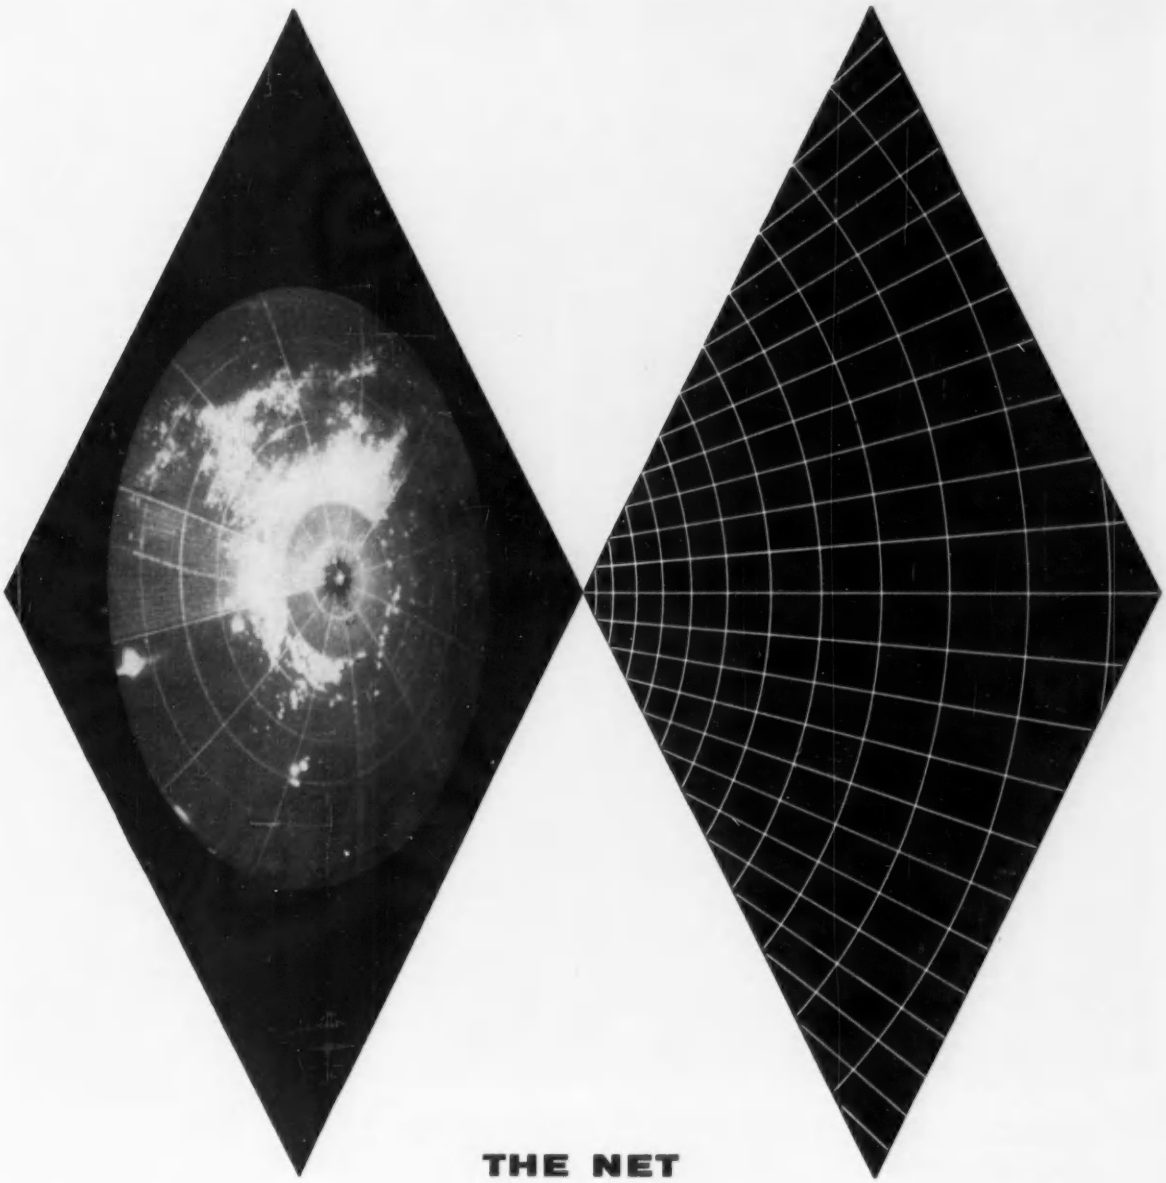

THE NET

America's most potent protective weapon has been announced by the Army.

It is the new Martin Missile Master, the country's first electronic system designed to coordinate and control an integrated network of radar surveillance, target detection and anti-aircraft missile battery operation.

Now fully proved out and ready for installation, Missile Master offers pushbutton protection for whole cities and strategic areas.

The system collects information on the position, identity and flight data of all aircraft entering the network. This data is stored electronically and distributed to display consoles in the Operation Center and at the missile batteries.

Thus, the activity of Nike batteries and other advanced weapons in the system are centrally coordinated and controlled.

This important new weapon system is one of the great defense developments of our time.

MARTIN

Want more information? Use post card on last page.

dynamic characteristics of the unit allow measurement of accelerations from static to vibration frequencies as high as 1,000 cps for the 300 g instrument.

▶**Other Uses**—Applications also include measurement and control with indicating, recording and control systems adapted to the operation with variable reluctance-type transducers. Small size and weight permit its use in vibration studies where the instrument must not load the member in which the vibration occurs, yet performance is comparable to standard size accelerometers.

▶**Further Data**—Model A-8 is available in ranges from ±5 to ±300 g although higher and lower ranges are available on special order. The unit weighs 1 oz and is in the form of a cube ¾ in. on a side. Output is 40 mv per v input for full scale input and the accuracy is better than 1 percent under constant ambient conditions.

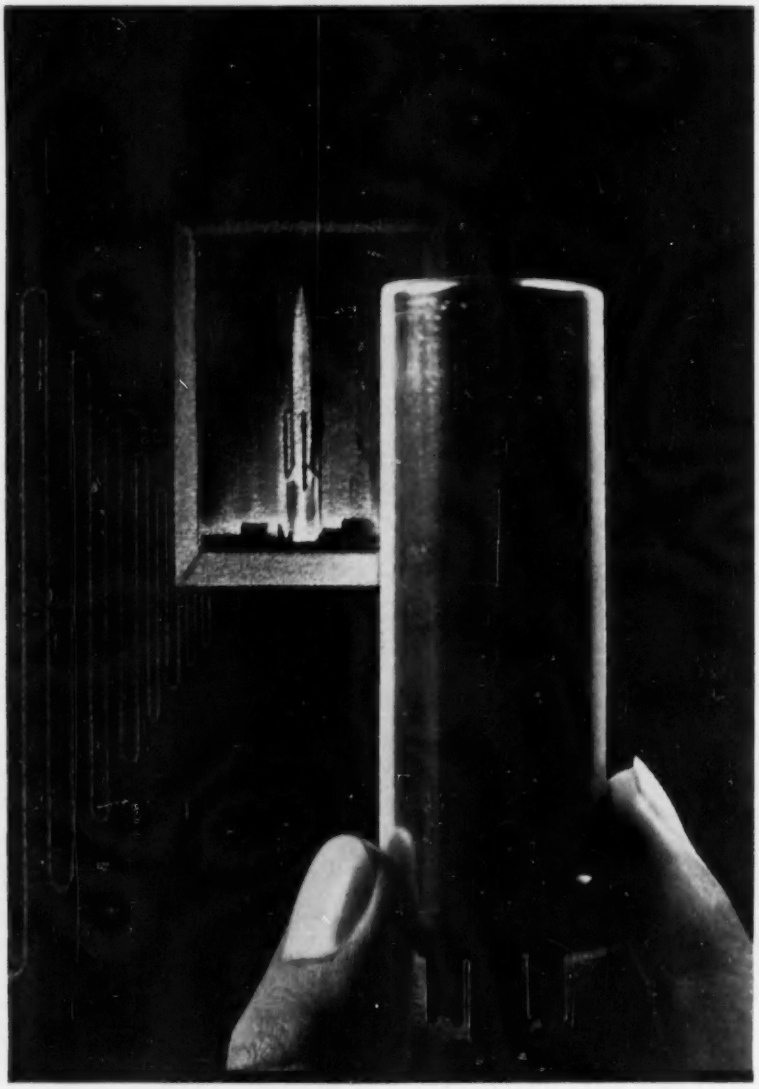

PACKAGED FREQUENCY MANAGEMENT



JK-SULZER
Frequency Standard

The JK Miniature Transistor Crystal Oscillator package is a complete, plug-in signal source providing maximum stability under the most severe ambient military conditions. In this small, compact package is a perfect integration of precision crystals, transistorized circuitry and temperature control. Available over the frequency range of 1 kc to 10 megacycles.

For your most precise laboratory measurements, the JK-SULZER 1 megacycle Frequency Standard, using the famous JK-G12A Glasline Crystal, provides stability of better than 1 part in 10^9 per day. Frequency variable over a range of 0.9 cycles or more and capable of being reset to 5 parts in 10^{10}.

JK-G12A
Precision Glasline Crystal

JK PRODUCTS

Write for Literature

James Knights Co.
Sandwich, Illinois

NIBBLING TOOL
is hand operated

HARRISON RADIO CORP., 225 Greenwich St., New York 7, N. Y. A new hand operated nibbling tool will cut round, square or keyed holes of any size or shape over 7/16 in. in formed sheet metal such as cabinets or radio chassis without distorting the original form.

Maximum thickness of material that can be cut by this tool is as follows: 18 gage (0.047 in.) steel, and 16 gage (0.063 in.) aluminum.

The units are priced at $3.85 apiece, and replacement punches, if ever needed, are available at $1.70 each. Price of the tools per

New C-D-F Plastic Spiral Tubing reduces unit costs, improves products

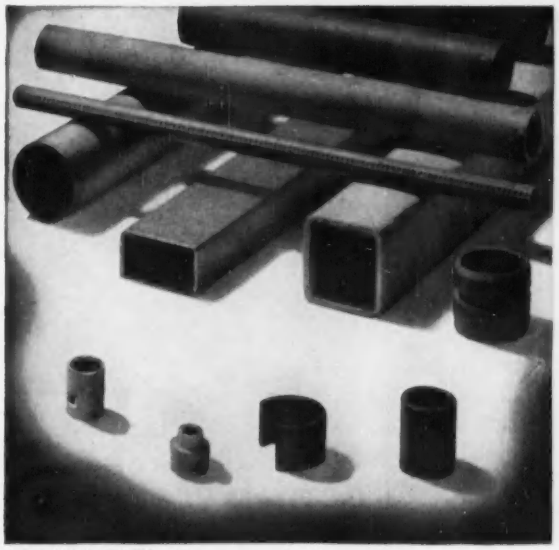

C-D-F SPIRAL TUBING offers many advantages to the cost-conscious design engineer and purchasing agent. It is low-cost, moisture-resistant, high-strength, and easy to fabricate. It has sufficiently low dielectric loss properties and good dielectric strength for many applications.

Using C-D-F's new Spiral Tubing is a way of saving money in buying electronic insulation . . . without lowering the electrical and mechanical characteristics of the part required. This special tubing is a high-strength plastic made from paper or vulcanized fibre that is spirally wound. It is available in two basic forms in various grades: (1) as plain untreated tubing. (2) as impregnated tubing containing various types of thermosetting insulating varnishes.

BUY ONLY THE PROPERTIES YOU NEED

Spiral Tubing can be used to replace rolled or molded laminated phenolic tubing in many cases. As the degree of moisture resistance and mechanical strength is established during the manufacturing process, you specify . . . and buy . . . only those properties required for the application. C-D-F also offers complete designing, machining and assembly. You can get finished components, or random length tubing, with fast deliveries. Write for Technical Folder ST-53 and samples, after checking our catalog in Sweet's Design File. Call the C-D-F sales engineer listed there—he can save you time and money immediately with C-D-F Spiral Tubing!

CONTINENTAL DIAMOND FIBRE

CONTINENTAL-DIAMOND FIBRE DIVISION OF THE BUDD COMPANY, INC.
NEWARK 16, DELAWARE

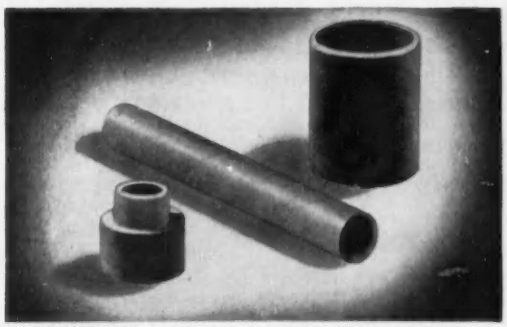

A VERY HARD TUBE is supplied in C-D-F Grade 6A. The parts shown have maximum mechanical strength, lowest water absorption rate under immersion conditions and most stable dielectric loss properties. Fine for bushings and cores.

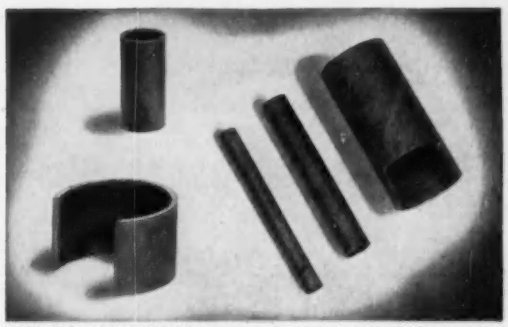

THIN-WALL SPIRAL TUBING has good concentricity and is tough. Note thin wall construction, cleanness of machining, variety of shapes. C-D-F Spiral Tubing is easily machined, formed, punched. Made in many grades for special applications.

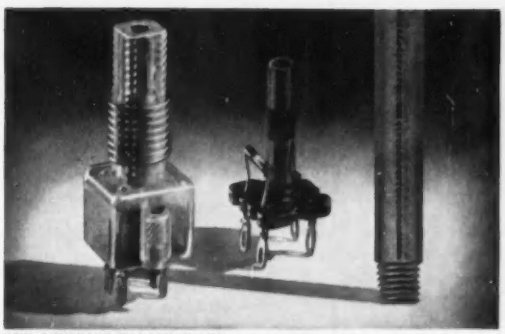

NEW CONSTANT TORQUE TUBING, for permeability tuning with iron cores, features exact internal threading with three point suspension of the core to prevent binding . . . *no* external embossing to lower dielectric strength. Write for samples.

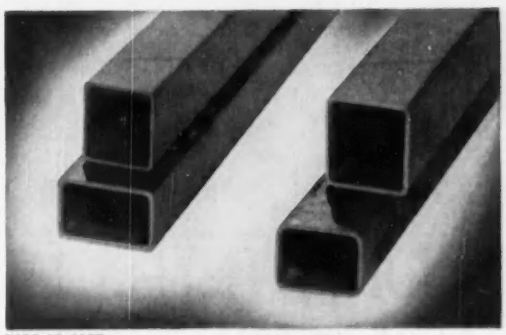

HARD OR SOFT, square or rectangular coil-form tubing is made for solenoid and transformer applications. Sides are straight with minimum gap in paper winding. Supplied in soft, varnished kraft, or hard, rigid tubing.

ENGINEERS, PHYSICISTS

Electronics

If you can do original work

. . . you should consider The Johns Hopkins University Applied Physics Laboratory (APL), where creative ideas are recognized and supported.

The Laboratory is primarily concerned with research, development and engineering of guided missiles and missile systems. A sizeable program of fundamental research is concurrently in progress.

APL is responsible for technical direction of the Navy's Bumblebee guided missile program. As pioneers in guided supersonic flight, APL developments include the first supersonic ramjet, and the missiles TERRIER, TALOS, and TARTAR. The Laboratory presently is engaged in further development of these and more advanced missiles.

An organization of and for scientists and engineers, APL's staff of 1200 includes nearly 500 professional men. Two features distinguish the organization: (1) the self-impedance of staff members who work in an atmosphere of free inquiry and are unhampered by the usual administrative details, (2) the fluidity of relationships among the groups engaged in the many areas of technical endeavor.

Problems are attacked by teams, each composed of members drawn from all requisite professions. A close contact between research and engineering is maintained. This team approach allows each staff member to acquire broad knowledge of the problem under attack, find his creativity heightened and supported. Salaries are comparable to those of other R & D organizations in the missile field. Relocation expenses are paid for applicants selected.

Our new air-conditioned laboratories are exceptionally well equipped. Their location in the Washington, D. C.-Baltimore periphery places staff members near fine housing in all price ranges and near recreational and cultural facilities. Several excellent universities in the area make it convenient for staff members to avail themselves of our liberal educational benefits.

OPENINGS EXIST IN:

ANALYSIS: Dynamic analysis of closed-loop control systems; analysis and synthesis of guidance systems; counter-counter measures systems; electrical noise and interference.

DESIGN: Control and guidance circuitry; telemetering and data-processing equipment; microwave components, antennas, and radomes; transistor and magamp applications; external missile systems.

TEST: Prototype engineering and field test evaluation.

For Additional information write: Professional Staff Appointments

The Johns Hopkins University Applied Physics Laboratory

8609 Georgia Avenue, Silver Spring, Md.

dozen is $43.20; $38.40, if bought in 6 dozen lots.

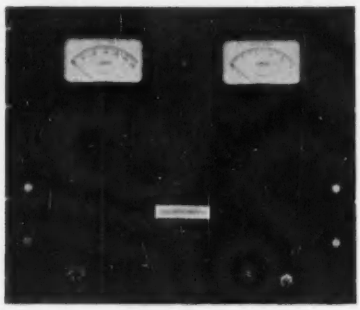

D-C POWER SUPPLY
uses silicon rectifiers

STATOR ELECTRIC CORP., 46-25 58th St., Woodside 77, N. Y., has announced a new d-c power supply using silicon rectifiers. Input is 208-220 v, 60 cycles, 3 phase; and output, 220 v d-c, 5 amperes.

▶ **Other Features**—Regulation is 5 percent for 20 percent to full load. Ripple is 50 mv. Ambient temperature is −55 C to +85 C. Dimensions are 19 in. wide by 15¾ in. high.

Unit price is $975. The same unit magnetically regulated is $1,175.

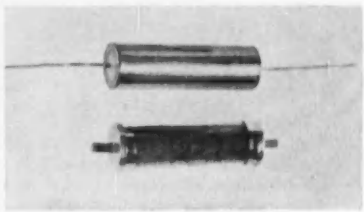

TEFLON CAPACITORS
for high-temperature usage

CONDENSER PRODUCTS CO., 140 Hamilton St., New Haven, Conn., has introduced two new Teflon dielectric capacitors specifically designed for high temperature usage in guided missiles and other airborne applications. They are smaller than others designed to give the same electrical characteristics at temperature ranges of from −70 C to +200 C. They equal or exceed requirements of MIL-C-25. These capacitors were developed for applications where small dielectric absorption and capacitance changes are necessary.

Capacitance range is from 0.001

in color tv, too

CRUCIBLE PERMANENT MAGNETS

for beam correctors, color purifiers and color equalizers
give maximum energy . . . minimum size

Designers of electronic and control equipment can count on a *consistently higher* energy product with Crucible alnico magnets. *It means greater power from a minimum size magnet!*

And they're available in practically any size you want—from a fraction of an ounce to several hundred pounds. What's more, Crucible alnico permanent magnets can be sand cast, shell molded, or investment cast to your exact size, shape, or tolerance requirements.

Crucible has been a leading producer of these permanent magnets ever since alnico alloys were developed. And their manufacture is backed by over a half century of fine steelmaking experience. That's why so many magnet applications begin at Crucible.

Crucible Steel Company of America,
The Oliver Building, Mellon Square,
Pittsburgh 22, Pa.

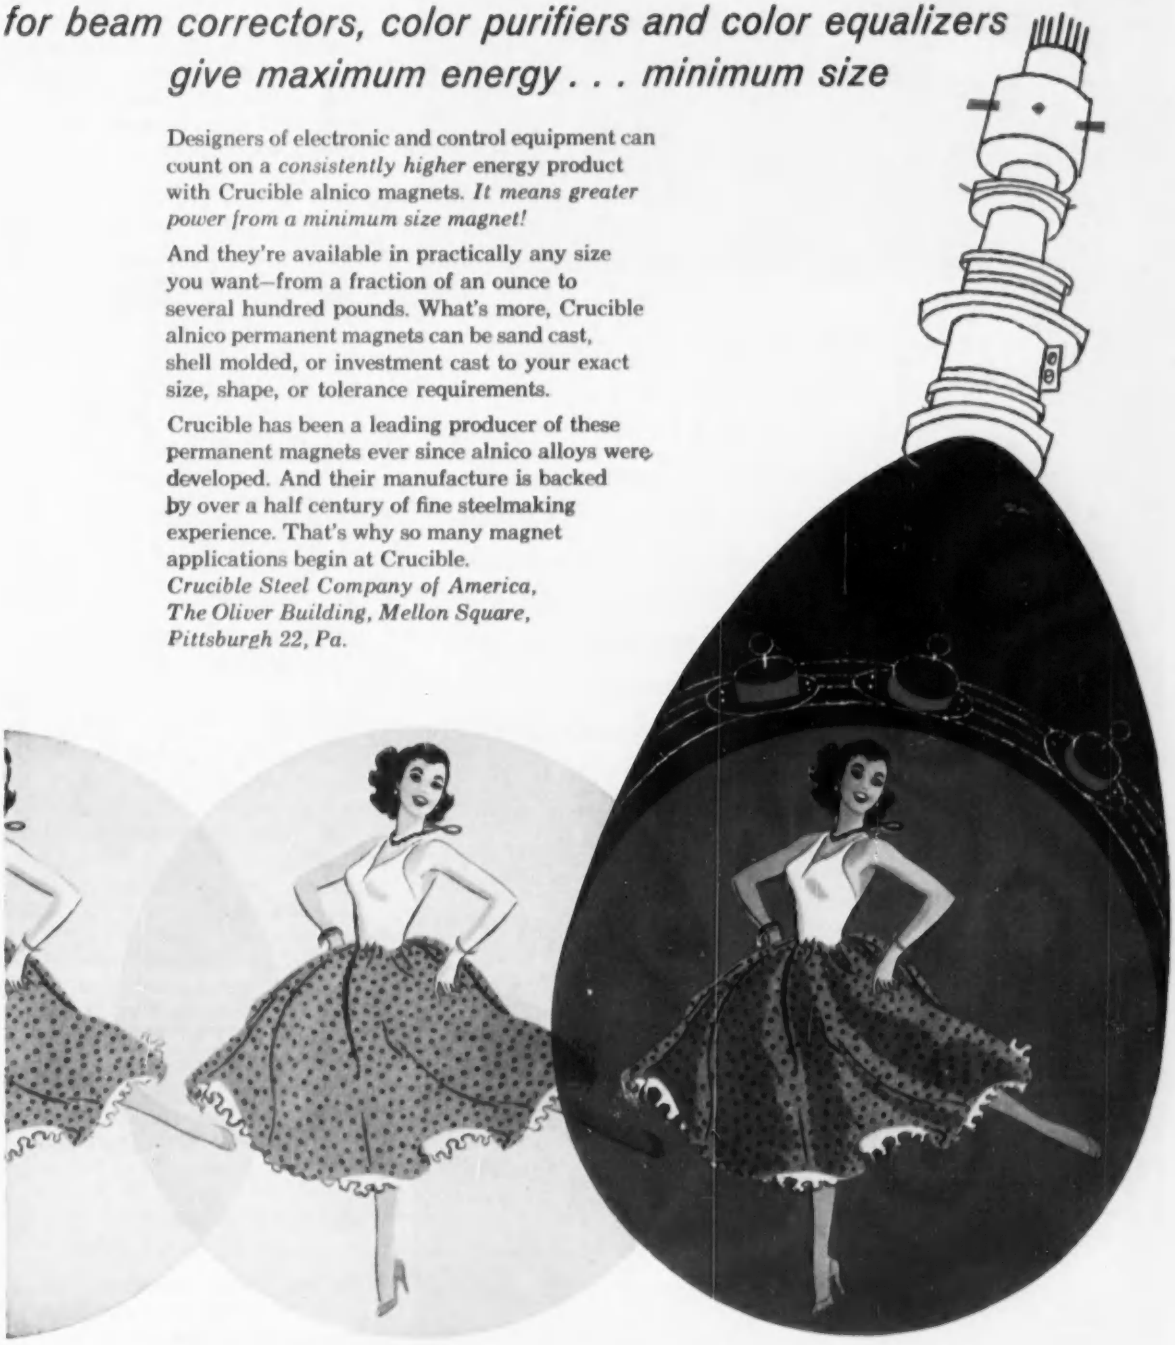

CRUCIBLE first name in special purpose steels

Crucible Steel Company of America

Want more information? Use post card on last page.

HANDLES

• SIX TYPES and sizes to suit nearly every requirement. USECO's standard handles are made of half hard brass, nickel plated. Stainless steel handles available on special order. Other finishes include cadmium and black oxide. Supplied with or without ferrules. Furnished in 5/16" 18 thread. Available with or without nuts and washers. For Engineering Manual and complete information please address Dept. 16

See us at the WESCON Show—Booth #239.

ADJUSTABLE HANDLE *(illustrated at top)—An all-purpose handle with adjustable center spacing from 4 inches to a maximum of 6 inches. (On special orders an unlimited maximum center spacing can be furnished.) Height above panel can vary from 1⅛ to 2 inches.*

HANDLE	PART NO.	WIDTH	HEIGHT
HANDLE	1005	6.437	1.750
HANDLE	1007	6.000	1.500
HANDLE	1010	4.250	1.500
CABINET HANDLE	1115	3.000	1.500
ADJUSTABLE HANDLE	1025	4" to 6"	1.500
ECONOMY HANDLE	1030	3" plus; in	1.437
		1/16" increments	

U. S. ENGINEERING CO., INC.

A Division of Litton Industries, Inc.

521 Commercial Street, Glendale 3, California

μf to 1.0 μf. Standard capacitance tolerance is ±20 percent.

One of the new capacitors, the TACM type, is hermetically sealed in tubular brass shells. The other, type TAG, is glass encapsulated. Type TACM operates at temperatures up to and including 200 C. Type TAG operates up to and including temperatures of 170 C.

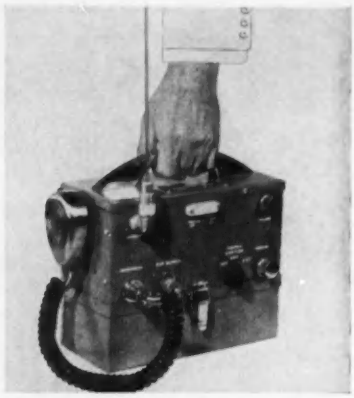

LIGHT 2-WAY RADIO
meets FCC and FCDA demands

INDUSTRIAL RADIO CORP., 428 N. Parkside Ave., Chicago 44, Ill., has announced a 2-way portable radio measuring only 10 by 4½ by 9¾ in. and weighing only 11 lb complete with long-life batteries. Model H/M Pak-Fone features loudspeaker operation, relay operated squelch system, volume control and an on-off indicator light.

A power cable connector is also provided for an external power supply, such as the UPC-100 which operates from 6, 12 and 24-v storage batteries and 117 v a-c.

Performance meets all FCC and FCDA requirements for municipal and industrial portable radios.

HOOK-UP WIRES
available in varied colors

REVERE CORP. OF AMERICA, Wallingford, Conn., is now manufacturing Permacode hook-up wires, combining high temperature operating characteristics with permanent and positive identification. The new wires, insulated with extruded du-Pont Teflon suitable for continuous operation up to 210C, are available in 15 solid colors and any combina-

Your future in **MICROWAVES** *at the*



HUGHES RESEARCH LABORATORY

The Microwave Laboratory at Hughes conducts fundamental research and long-range development in the field of microwave components and techniques. The antenna program is concerned with research on linear and two-dimensional arrays of slot radiators; transmission and radiation of surface-guided waves; very high resolution radar antennas; and the development and engineering of airborne communication, navigation and fire control antennas.

Instrumentation is developed for new measuring equipment to meet needs of the program. This has included development of automatic impedance and antenna pattern recorders, microwave power supplies stabilized in amplitude and frequency, microwave circuitry, and microwave applications of ferrite devices.

Scientific Staff Relations

HUGHES

RESEARCH AND DEVELOPMENT LABORATORIES
HUGHES AIRCRAFT COMPANY
Culver City, Los Angeles County California

These positions in the Microwave area are open now in the Hughes Research Laboratory:

MICROWAVE ENGINEERS

with experience in magnetrons, klystrons, microwave transmitter and receiver circuitry, microwave mixers, duplexers and cavities.

VIDEO CIRCUIT ENGINEERS

with experience in video amplifiers, pulse circuitry, coding and decoding circuits, and delay lines.

MICROWAVE STANDARDS ENGINEERS

to do precise calibration from primary and secondary standards, using the finest facilities available for standards calibration.

MICROWAVE ENGINEERS

to participate in basic research on microwave breakdown in gases or wave propagation in ionized gases.

MICROWAVE ENGINEERS

to participate in development of new techniques for measurement of the magnetic and electric properties of materials at microwave frequencies.

You are invited to send resumes of your education and experience to the address at left.

VACATIONING IN SOUTHERN CALIFORNIA? YOU ARE INVITED TO VISIT HUGHES.

EAGLE
Microflex Reset Timer

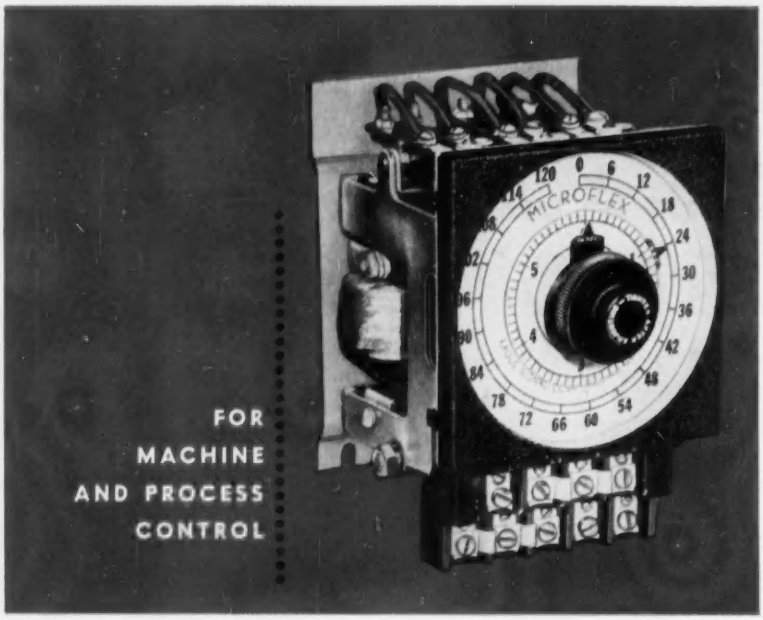

Insures "20-to-1 ratio" accuracy

Time settings of pinpoint accuracy are a reality, thanks to the Microflex double dial. It takes one complete turn of the *inner* dial to advance the *outer* dial just one division. That's a 20-to-1 ratio, made possible by the patented Microflex threaded axle and pinion (see sketch). Examples of resultant accuracies are ± 1/60 of a second on a 20-second dial, and ± 1/10 of a second on a 120-second dial.

The Microflex Reset Timer is driven by a heavy-duty industrial synchronous motor. Contacts are tripped closed or open after a preset time interval. Starting and resetting are electrically controlled. Microflex offers over 150 timer operating combinations, plus a wide range of long or short time periods. It's ideal for applications like molding presses, dielectric heating, automatic mixing, die casting machines, machine tools and rubber curing.

Write for free Automation Booklet and Bulletin 110.

MAIL COUPON TODAY

EAGLE SIGNAL CORPORATION
Industrial Timers Division, Dept. E-756
MOLINE, ILLINOIS

Please send free Automation Booklet and Bulletin 110 containing complete data on Microflex Reset Timers.

NAME AND TITLE

COMPANY

ADDRESS

CITY ZONE STATE

tion of 2, 3 or 4 colors.

The wires are available in nominal 0.010 in. or 0.015 in. wall thicknesses, and are constructed to meet requirements of military specification MIL-W-16878/A, types E and EE.



TINY POTENTIOMETER
operates to 150 C

ACE ELECTRONICS ASSOCIATES, 103 Dover St., Somerville 44, Mass., announces the X-500 Acepot, a ¼-in. subminiature, precision wire-wound potentiometer which operates in the temperature range from —55 C to a high of 150 C.

▶ **Specifications**—Resistance range is 200 ohms to 250,000 ohms ±2 percent; linearity, ±0.3 percent; weight, ¼ oz. It is available in threaded bushing, servo, flush tapped hole, or flange mountings and up to 6-gang units. It meets applicable portions of JAN specs and MIL-E-5272A standards.

MEMO-SCOPE
stores traces indefinitely

ADVANCED ELECTRONICS MFG. CORP., 2025 Pontius Ave., Los Angeles 25, Calif. The MemoScope 103, a storage oscilloscope, forms and retains

for **LOW-DISTORTION**
amplification
of **WIDE-BAND**
signals . . . use **SIE**
DIRECT-COUPLED
AMPLIFIERS

When your signals include frequencies from below 1 cps to above the audio range, a true direct-coupled amplifier gives the FLATTEST response over the WIDEST range with the LOWEST noise, distortion, and phase shift.

For voltage gain from transducers of all kinds, use the Model D-1. It will drive a 'scope, direct-writer, oscillograph, or magnetic recorder.

SIE MODEL D-1
Direct Coupled Amplifier

Input Impedance: 10 megohms or open grid, single ended or differential.
Noise: Less than 10 microvolts, wide-band.
Gain: 80,000, ± 1db, 0 to 50 kc.
1,000, ± 1db, 0 to 120 kc.
Drift: Less than 3 millivolts per hour, referred to input.
Maximum Output Signal: 80 volts into high impedance, 25 ma. into 1000 ohms. (Distortion less than 1%)

Price: **$515**

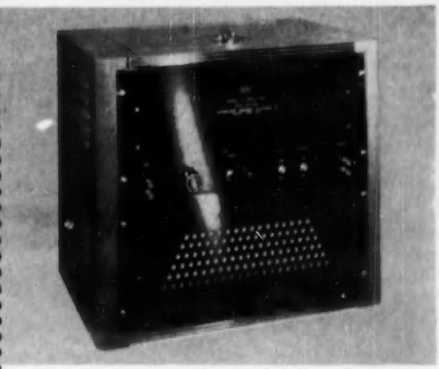

For power gain — to drive Helmholtz coils, servo motors, or small shakers — use the Model B.

SIE MODEL B
Direct Coupled Amplifier

Input Impedance: 500,000 ohms.
Voltage Gain: 2.5. *Power Gain:* 30,000.
Power Output: 6 watts into 100 ohms.
Frequency Response: 0 to 20,000 cps ± 1 db.
Output: 25 volts RMS at 250 milliamperes.

Price: **$575**

You can use the D-1 to drive the B — they rack-mount together perfectly!

SOUTHWESTERN INDUSTRIAL ELECTRONICS COMPANY

SIE

Industrial Instruments Division

P. O. BOX 13058 • 2831 POST OAK ROAD • HOUSTON 19, TEXAS

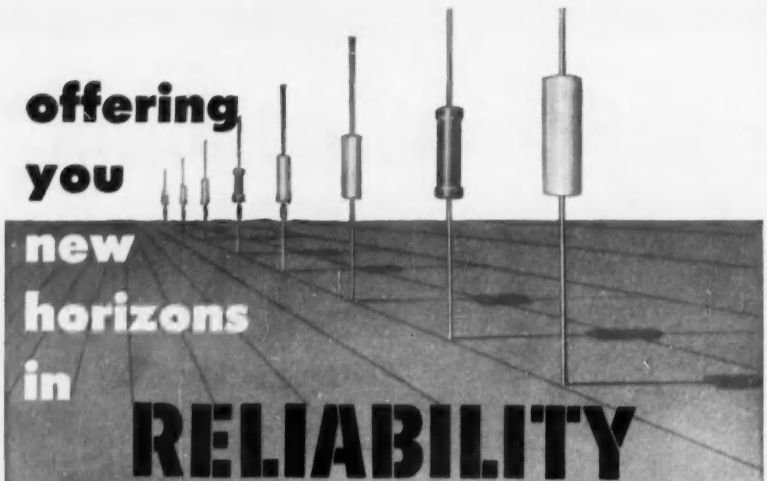

offering you new horizons in

RELIABILITY

Electra deposited carbon resistors

STANDARD - MOLDED - HERMETICALLY SEALED

Electra is a pioneer and today a recognized leader in the manufacture of Deposited Carbon Resistors. Production runs into tens of thousands of resistors every day. And reflected in every shipment is a degree of *manufacturing skill* made possible only by this pioneer work and production leadership.

This skill, coupled with devotion to exacting quality control, is making possible new and brighter horizons of reliability. In Electra Deposited Carbon Resistors you get precision, small physical size, a wide range of resistance values and low cost. You get all this, plus Electra reliability. Put Electra reliability into your products. It costs no more. Write today for complete details. Made to meet or exceed specifications MIL-R-10509A and proposed MIL-R-10509B.

Electra MANUFACTURING COMPANY
4051 Broadway, Kansas City, Mo.
WEstport 1-6864

Please send me details on Electra Deposited Carbon Resistors.

Standard ____ Molded ____ Hermetically Sealed ____

Name _____

Company _____

Street _____

City _____ State _____

traces at a constant intensity until they are deliberately erased by the operator. This feature permits the study of transient electrical phenomena as short as 10 μsec in duration, presentation of tube or transistor characteristics without the necessity of repetition, display of frequency response curves without the need of a sweep generator, spectrum analyses and the like.

Plug-in vertical amplifier units allow new amplifier characteristics as different units become available, increasing the range of application. For comparison purposes, a number of traces may be written and stored on the 103. The stored trace, immediately visible and of constant high brightness, is readily seen in a brightly lighted room, and may be easily photographed.

▶ **Other Features**—The unit offers a vertical amplifier sensitivity of 10 mv d-c; sweep speeds up to 100 sec full-scale; and direct reading calibrations of amplitude and time.

Complete specifications and prices are available.



OSCILLOPROBE
and video amplifier

LINEAR EQUIPMENT LABORATORIES, INC., Intervale Road, Boonton, N. J., is marketing a low-capacitance oscilloprobe and video amplifier designed to extend the utility of oscilloscopes for making accurate observations of waveforms. The instrument consists of a shielded, low capacitance (1.5 to 2 $\mu\mu$f) probe and an associated video amplifier with a gain of 40 to compensate for the probe attenuation. The overall bandwidth is within 3 db from 5 cps to 12 mc. The amplifier may be used separately to provide a gain of 40, or with the probe to provide attenuations of $\times 1$, $\times 0.1$ and $\times 0.01$.

Used with an oscilloscope, the

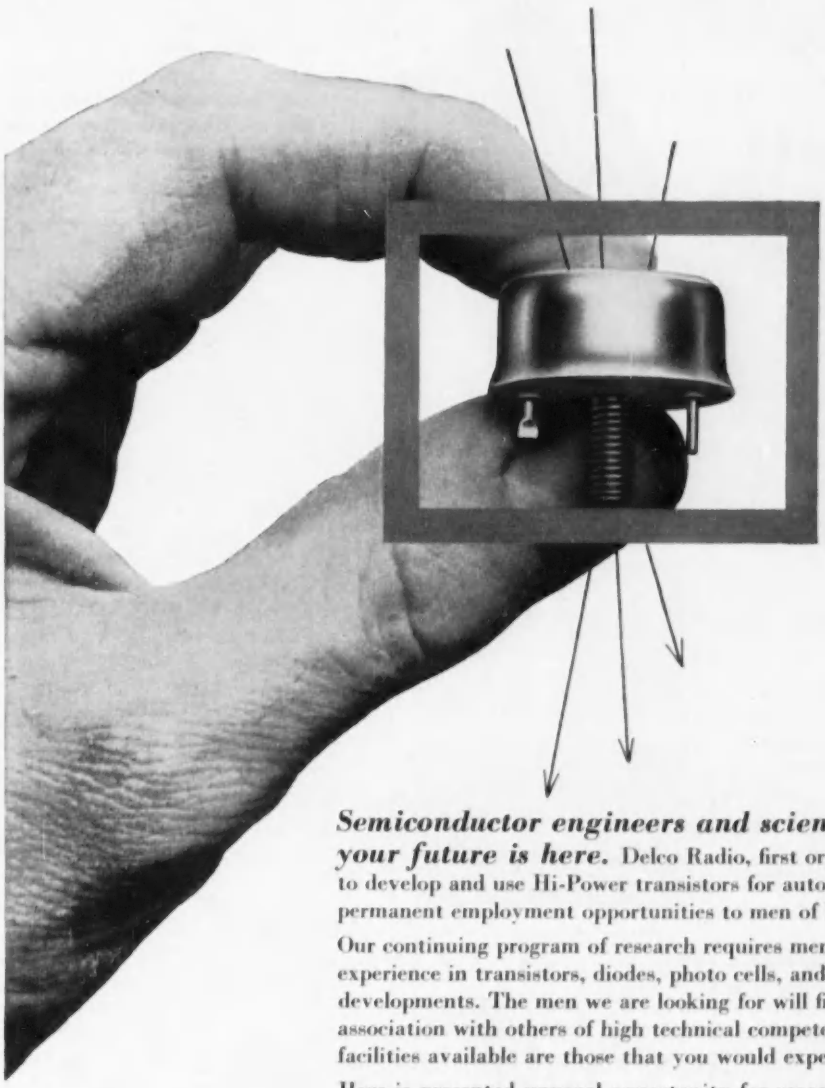

Semiconductor engineers and scientists . . .
your future is here. Delco Radio, first organization to develop and use Hi-Power transistors for automotive application, now offers permanent employment opportunities to men of highest caliber.

Our continuing program of research requires men with advanced training and experience in transistors, diodes, photo cells, and other semiconductor developments. The men we are looking for will find the satisfaction of association with others of high technical competence. Furthermore, the type of facilities available are those that you would expect to find in General Motors.

Here is presented unusual opportunity for recognition and achievement in the realm of research and development of semiconductor devices and their processing.

Upper level positions are open for those who qualify.

You will find pleasant living conditions in our central Indiana community. If you are qualified and would like a permanent position of importance within our organization, write to us now. Your letter will be held in confidence. Address: Personnel Director, Department G.

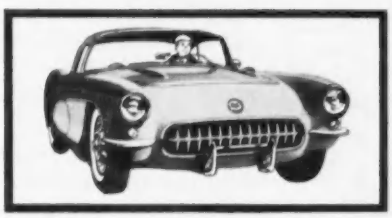

DELCO RADIO—first to make transistor-equipped radios for automobiles—now offers many challenging opportunities for physicists, physical chemists, electronic and mechanical engineers and other professional men interested in research and development of transistors and other semiconductor devices or their processing and production. Apply now for permanent positions with this rapidly expanding activity in this division of General Motors.

GM GENERAL MOTORS

Delco Radio

DIVISION OF GENERAL MOTORS, KOKOMO, INDIANA

NOW!

Gamewell gives you

7 NEW PLUS FEATURES

in RL-270A Precision Pots

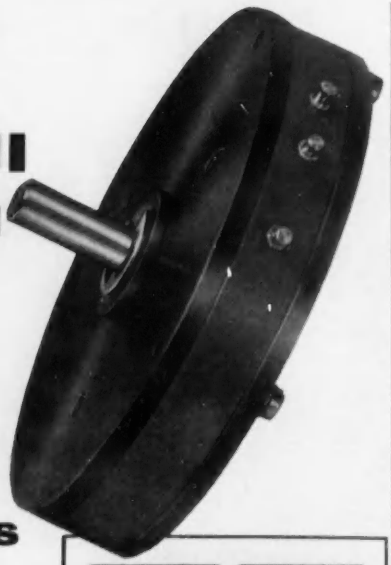

The completely new Gamewell RL-270A series of Precision Potentiometers greatly extends performance and dependability.

Here are the important extras . . .

- New housings are dimensionally stable, withstand higher temperature, and are inherently moisture and fungus resistant.
- Positive precious metal spring contacts (A at right) give dependable low-resistance contact, even under severe and prolonged vibration and shock.
- Closer tap spacing.
- Redesigned shaft and slit-ring (B at right) reduces electrical noise and minimizes wear.
- Longer wearing insulation-bridge joint.
- Wide selection of resistance alloys for optimum performance.
- Made for continuous operation from −70° F to +300° F.

These RL-270A features meet high standards for linearity and dependability, yet compare in price with the best commercial precision pots.

THE GAMEWELL COMPANY
NEWTON UPPER FALLS 64, MASS.
In Canada: Northern Electric Co., Ltd.







Model Numbers & Sizes

All dimensions same, except "A"

RL-270A-1¼	1¼ inches
RL-270A-1⅝	1⅝ inches
RL-270A-2	2 inches
RL-270A-3	3 inches
RL-270A-5	5 inches

Send for complete technical story

Get the specifications sheets for all sizes — available now. They give the complete information to specify and use this new RL-270A series.

GAMEWELL®

PRECISION POTENTIOMETERS

Manufacturers of Precision Electrical Equipment since 1855

HF-3A oscilloprobe permits observation of signals in a circuit with negligible resultant loading or detuning, or otherwise affecting the normal performance of the circuit.

LARGE COAX
for high power uses

ANDREW CORP., 363 E. 75th St., Chicago, Ill., announces a 9-in. rigid coaxial transmission line for very high power application at frequencies up to 550 mc. The new line can handle average powers of 300 kw at 150 mc, and peak power of 3.0 megawatts. It has a 50-ohm characteristic impedance, and attenuation of 0.042 db per 100 ft at 150 mc.

The line comes in 20-ft sections and features a quick-assembly flange using only 1 bolt, instead of the many bolts required by conventional flanges. A complete complement of elbows, gas barriers, adaptors, power dividers, tuners, slotted lines, hangers and other associated equipment have been designed and are available for prompt delivery.

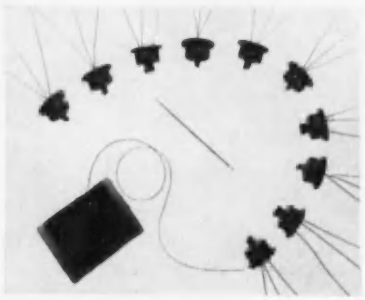

TRANSISTORS
for audio amplifier uses

GENERAL ELECTRIC CO., Syracuse, N. Y., has announced ten new *pnp* transistors made of germanium and produced by the alloy junction process. They include 6 different types for the output stage of an audio amplifier and 4 types for the driver stage.

▶ **Specifications**—Current gain of the output type is maintained at an essentially constant value for collector currents from 1 ma to 200 ma. The 2N186A, 2N187A and 2N188A are rated at a 180-mw power collector dissipation at 25 C. Types 2N186, 2N187 and 2N188 are rated

BEAM SWITCHING TUBES *Simplify* CIRCUITRY

IN UNLIMITED APPLICATIONS

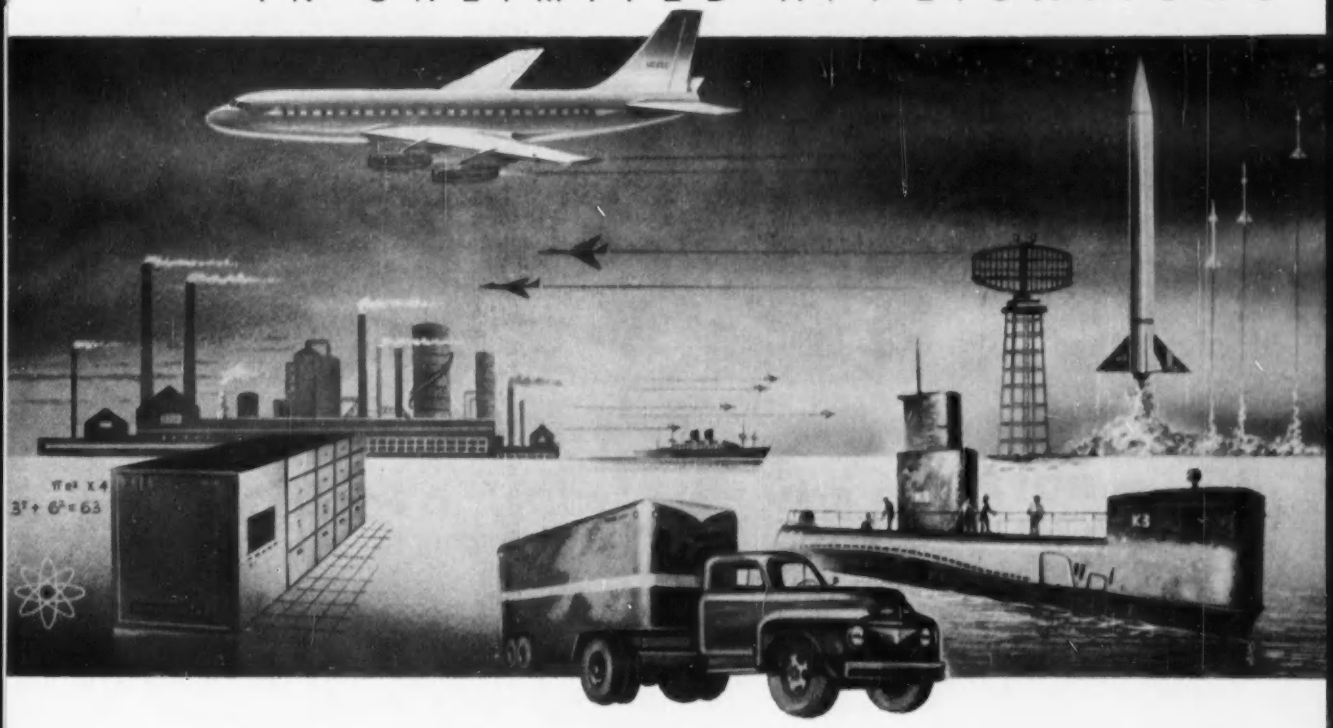

GREATLY REDUCE THE TOTAL NUMBER OF RESISTORS, CONDENSERS, TUBES, SOCKETS AND OTHER COMPONENTS.

The Beam Switching Tube has introduced new standards of simplicity and reliability in the design of most electronic systems. It is so versatile that any desired type of sequential, random switching or distribution of any number of positions can be obtained. Design engineers now have available new high levels of speed, reliability and economy in solving difficult instrumentation problems in unlimited applications such as:

- COUNTING
- GATING
- TIMING
- DISTRIBUTING
- SAMPLING
- CASCADING
- MULTIPLEXING
- MATRIXING

Send for latest circuit information on the Beam Switching Tube.

LIFE TESTS INDICATE A LIFE SPAN OF 50,000 HOURS.

For further information write

HAYDU

BROTHERS OF NEW JERSEY

PLAINFIELD, NEW JERSEY SUBSIDIARY OF BURROUGHS CORPORATION

CONTI

Are Your Components Guilty of RADIO NOISE?

POTTER *can tell you "why"*

POTTER *can tell you "how"*

and **POTTER** *can make the FILTER that will confirm that "how"*

Once it's stated completely and correctly, a problem is half solved. Potter can put the facts and figures of your problem on paper . . . can chart its limits in laboratory tests . . . can engineer the solution. And Potter can embody that solution in subsequent design and production.



Call Potter to engineer, design and produce the filter to solve your radio interference problem. Write for Bulletin 41A.



THE **potter** COMPANY

SPECIALISTS IN FIXED PAPER® CAPACITORS SINCE 1925

1950 SHERIDAN ROAD
NORTH CHICAGO, ILL.

at a maximum power collector dissipation of 75 mw at 25 C. The 4 driver types (2N189, 2N190, 2N191 and 2N192) in a class A operation have a minimum power gain rating of 37 db, 39 db, 41 db and 43 db respectively at 1 mw power output. Typical base current gains are 24, 36, 54 and 75 respectively. All 4 are rated at a maximum power collector dissipation of 75 mw at 25 C. They have a maximum storage temperature rating of from —55 C to 85 C.

Prices of the 10 new audio amplifier transistors in quantity lots to equipment manufacturers range from $1.40 each to $2.35 each.

TAPE WINDERS
for toroidal coil field

UNIVERSAL MFG. CO., Hillside, N. J., announces a new series of automatic tape winding machines for the toroidal coil field. The new tape winders offer revolutionary operational and performance features including core turning table with automatic feed and variable pitch control, automatic tape cutting device and special manual feeding attachment for hand winding when desired.

Series incorporates 3 models, U-9, U-14 and U-20, to wind tape from $\frac{3}{8}$ in. to 1 in.

CIRCUIT MODULES
and breadboard kit

AEROVOX CORP., New Bedford, Mass., has announced a new concept in electronic circuitry and assembly, in the form of standard-circuit modules and handy breadboard for simplifying and speeding up experimental and prototype assemblies. Engineers can work up breadboard layouts by simply

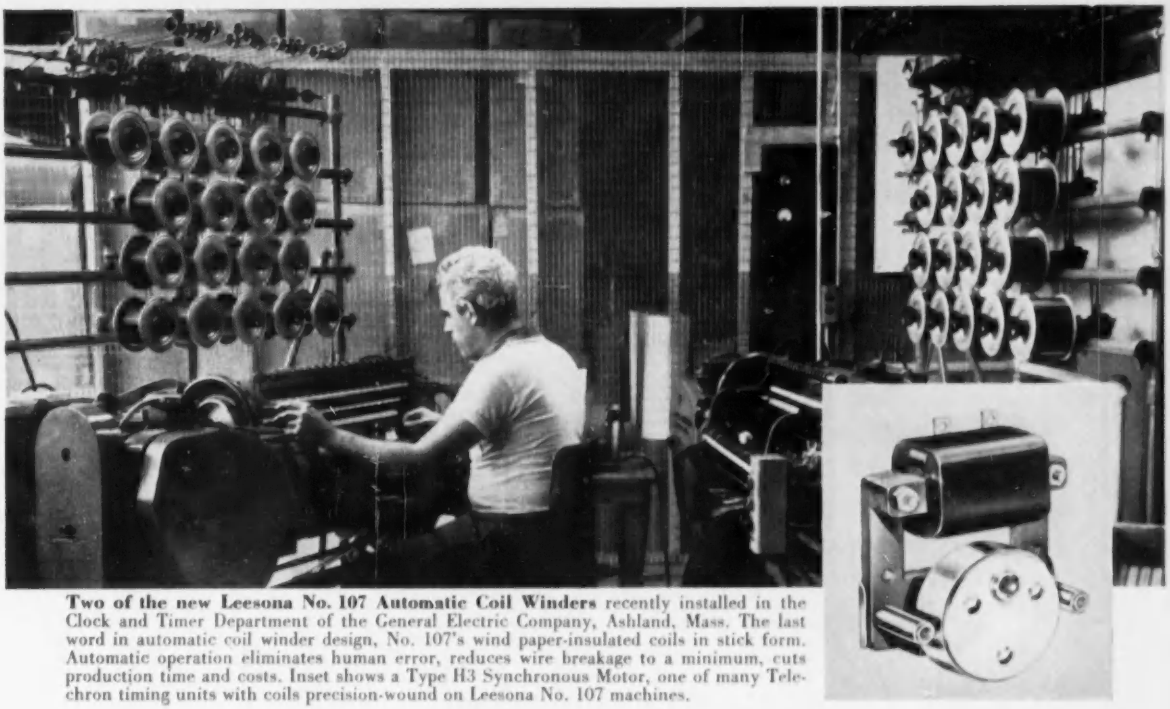

Two of the new Leesona No. 107 Automatic Coil Winders recently installed in the Clock and Timer Department of the General Electric Company, Ashland, Mass. The last word in automatic coil winder design, No. 107's wind paper-insulated coils in stick form. Automatic operation eliminates human error, reduces wire breakage to a minimum, cuts production time and costs. Inset shows a Type H3 Synchronous Motor, one of many Telechron timing units with coils precision-wound on Leesona No. 107 machines.

Clock and Timer Department, General Electric Company selects Leesona Coil Winders as standard equipment

General Electric Department adds No. 107 machines for proved production advantages

The synchronous timing motors made by the Clock and Timer Department of the General Electric Company are famous for accuracy and dependability.

One reason why is the high efficiency maintained by this department of the General Electric Company, in its wide range of coil winding operations. Leesona Coil Winders are standard equipment at General Electric Telechron plants — and during a recent expansion of production facilities, Leesona No. 107 Automatic Coil Winders were important new additions.

Leesona No. 107 machines are fully automatic. Every feature is designed to produce compact, uniform, paper-insulated coils — in fastest time — with minimum operator attention — at lowest cost. This General Electric department reports:

"The Short Paper Attachment on our Leesona No. 107 Coil Winders is a big advantage. Allowing an initial paper insert of 1 7/16", it eliminates the usual 2 3/4" insert when starting winding. On these particular coils the result is considerable savings in wire."

Get the Whole Story

on how Leesona No. 107 Automatic Coil Winders can bring new, profit-boosting efficiency to your own coil winding production. For complete details on this advanced machine — and other helpful coil winding information — check and mail the coupon today.

B.5.4



FOR WINDING COILS
IN QUANTITY...ACCURATELY
...AUTOMATICALLY...USE
UNIVERSAL WINDING MACHINES

UNIVERSAL WINDING COMPANY

P. O. BOX 1605, PROVIDENCE 1, RHODE ISLAND, Dept. 127

Please send me

- ☐ Bulletin on the Leesona No. 107 Automatic Coil Winder.
- ☐ Condensed catalog of Leesona Winders.
- ☐ Bulletin on the new Leesona *Pay-As-You-Profit Plans* for purchasing or leasing modern coil winding machinery.

Name.....*Title*.....

Company.....

City.....*Zone*....*State*.....

Eimac preformed finger stock is the inexpensive, efficient answer to many circuit and equipment design problems . . .

Used for efficient electrical contact in high-frequency tuning devices, in coaxial tube sockets, for electronic weather stripping around access doors in equipment, and for dozens of other purposes, resilient silver-plated EIMAC finger-stock is outstanding.

EIMAC finger stock is accurately heat-treated to maintain uniform mechanical properties, can be fitted around a ½-inch radius, and may be fastened by screws, rivets, clamps or soft soldering.

A size for every need —

Single Edge	Width	Double Edge	Width	Klystron Types
CF-100	17/32	CF-200	13/16	CF-700
CF-300	31/32	CF-400	1 17/32	CF-800
CF-500	1⅜	CF-600	2¼	

For further information write our Application Engineering Department

Eimac

EITEL-McCULLOUGH, INC.

SAN BRUNO CALIFORNIA

The World's Largest Manufacturer of Transmitting Tubes

plugging in complete basic-circuit modules in the breadboard sockets, and completing the necessary connections with banana-plug jumpers plus the basic bus-bar wiring of the breadboard.

▶ **Modules**—These commercialized modules are now available in seven circuits or block diagrams. Each module includes all necessary components on the stacked wafers wired together by the riser conductors and provided with base prongs for plugging into a socket.

▶ **Kit**—The complete introductory kit includes seven standard-circuit modules; one 12-position module breadboard; 50 banana plugs. A module catalog and instruction manual go with the kit.

SWITCH
is acceleration-sensitive

MAXSON INSTRUMENTS, Division of the W. L. Maxson Corp., 47-37 Austel Place, Long Island City 1, N. Y. This acceleration-sensitive switch has a snap-acting switch element capable of being set precisely, in manufacture, to open or close when the desired level is reached.

▶ **Data**—These switches are rated at 30 v, one ampere inductive or two amperes resistive load. They can be furnished to operate at any level from 2.5 to 15 g absolute with precision of ±0.2 g; higher g ratings are available on special order. Frequency range is 0 to 10 cps; shock resistance is 25 g for 11 millisec, on all 3 axes. These switches are designed to function through a temperature range of −60 to +180 F and to withstand 100-percent humidity at 160 F.

▶ **Uses**—Typical applications are: g-limiting switch for autopilots,

FOR ELECTRONIC AND ELECTRICAL APPLICATIONS . . .

only one insulation

Combines

ALL THESE ADVANTAGES

- ***TOTAL* Permanent Dimensional Stability**
- **Continuous Hi-Temperature Performance: to 950° F.**
- **Moldability to ±.001" Tolerances**
- **Thermal Expansion Matching Steel**
- ***POSITIVE* Bonding and Permanent Anchorage of Inserts**
- **Resistance to Radiation, Water or Oil**
- **High Dielectric Strength: 400 Volts/mil**
- **Excellent Arc Resistance: 250 Seconds ASTM**
- **Extremely Low Loss Factor: 1 meg — 0.014**

SUPRAMICA® 555 CERAMOPLASTIC . . .

. . . has many **important** properties that will significantly **improve** your product's performance! No need to choose or balance insulation advantages . . . specify SUPRAMICA® 555 for the most **nearly perfect** combination. This unique formulation of high quality electrical glass and pure synthetic mica has the built-in versatility to surpass extra-stringent performance requirements. For complete technical information about SUPRAMICA 555 ceramoplastic insulation, and MYCALEX design and custom precision-molding services, write to Department 224.

CRITICAL PARTS
MOLDED OF SUPRAMICA 555 CERAMOPLASTIC FOR BETTER PERFORMANCE

SUPRAMICA DIVISION

MYCALEX

CORPORATION OF AMERICA

GENERAL OFFICES AND PLANT:
CLIFTON BOULEVARD
CLIFTON, NEW JERSEY

SALES OFFICES:
CHICAGO

OF AMERICA

WORLD'S LARGEST MANUFACTURER OF GLASS-BONDED MICA AND CERAMOPLASTIC PRODUCTS

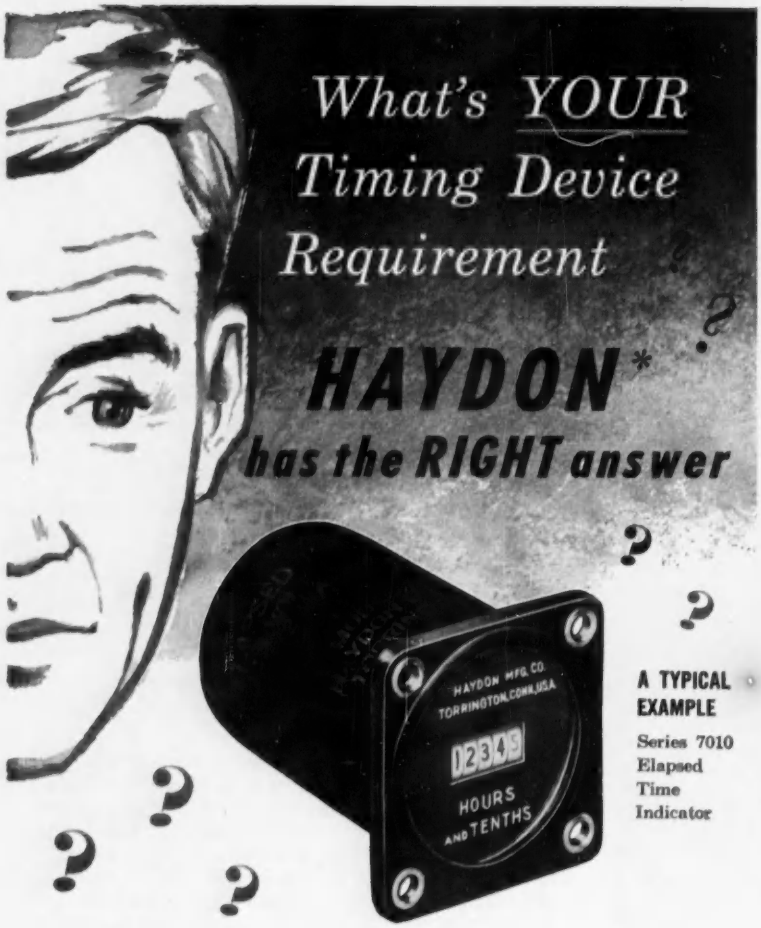

THE RIGHT MOTOR . . . *unusually compact, fully enclosed mechanism, controlled lubrication, simple, accurate and dependable, operates in any position.*

THE RIGHT DESIGN . . . *for any application because you can select from the full line of HAYDON STANDARD interval timers, time delay relays, cycle timers, and elapsed time indicators.*

THE RIGHT FACILITIES . . . *because HAYDON has the fully integrated engineering and manufacturing facilities to produce and deliver quality on time . . . economically . . . in large or small lots.*

THE RIGHT SALES SERVICE . . . *because the HAYDON Field Engineer in your area is a Timing Specialist fully qualified to counsel you. He's listed in your Yellow Pages. Have him come in to discuss your requirements . . . or, if you prefer, write to us direct.*

*Trademark Reg. U.S. Patent Office

HAYDON AT TORRINGTON
HEADQUARTERS FOR TIMING

A Subsidiary of General Time Corp.

HAYDON Manufacturing Company, Inc.
2431 ELM STREET, TORRINGTON, CONN.

control of g-warning light, safety devices based on sensing dangerous levels of acceleration or vibration and controls in guided missiles.

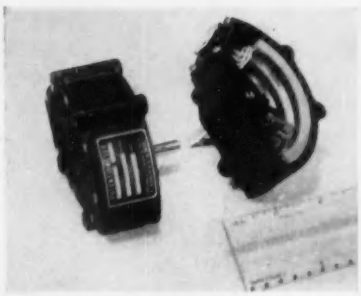

PRECISION POT
a rugged device

MINCO ENGINEERING AND MFG., 801 8th St., S. E., Minneapolis 14, Minn. A rugged precision potentiometer adapted to flight test, servo feedback and telemetering applications is announced. Housed in a cast aluminum case, this rotary sector pot is designed to withstand up to 40 lb side load on the shaft while operating. It is also gasket and O-ring sealed against immersion to 15 psi.

▶ **Other Data**—Additional specs are: dual element, 4,800 ohms each element; dual wipers each element and pickoff; up to 2 w dissipation per element; 110 deg active travel, 5 deg over-travel each end; and resolution 1/17 deg.

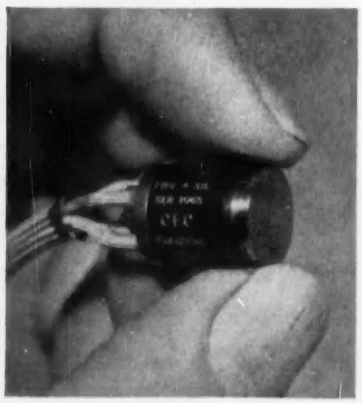

PRESSURE PICKUP
for high temperature use

CONSOLIDATED ELECTRODYNAMICS CORP., 300 N. Sierra Madre Villa,

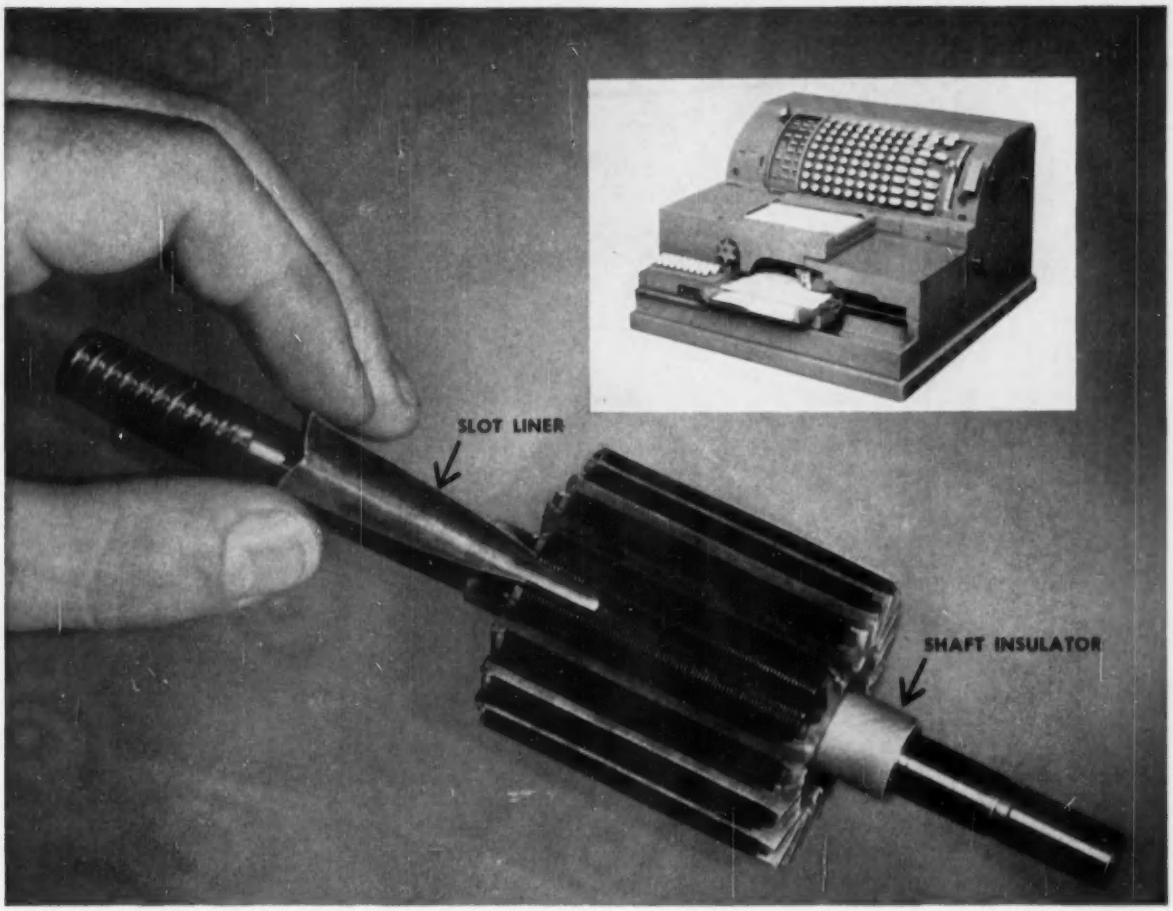

National Cash Register Co. reports:

Motor insulation with MYLAR® provides improved performance, longer life

"We use Du Pont 'Mylar' for insulation in our business-machine motors because of high dielectric strength and resistance to degradation through heat and age." This is the report of the National Cash Register Company, Dayton, Ohio, which uses "Mylar" laminated to rag paper for the armature slot liner and shaft insulator. This successful application of "Mylar"* has effectively increased service life of the motors, especially in areas where high humidities have created problems in insulation resistance.

Since "Mylar" is the strongest of all plastic films, thinner gauges are possible. This makes for reduced cost, weight and space. Laminates with "Mylar" have good forming and cuffing characteristics for ease of application.

Whether you make heavy-duty motors or tiny capacitors, you may be able to improve performance and increase the over-all value of your product by using "Mylar." For more information on this versatile film, mail the coupon below.

DU PONT
REG. U.S. PAT. OFF.

BETTER THINGS FOR BETTER LIVING
...THROUGH CHEMISTRY

DU PONT
MYLAR®
POLYESTER FILM

*MYLAR *is Du Pont's registered trademark for its brand of polyester film.*
In Canada, "Mylar" is sold by the Du Pont Company of Canada Limited, Films Div., P.O. Box 660, Montreal, Quebec.

E. I. du Pont de Nemours & Co. (Inc.)
Film Dept., Room E-7, Nemours Bldg., Wilmington 98, Del.

Please send your booklet on motors insulated with "Mylar" polyester film (MB-5).

We are interested in "Mylar" for_____

Name_____

Firm_____

Address_____

City_____ State_____

exceptionally stable by-pass capacitors

—Solar ceramic bodies DA, WA & WG

Constantly advancing Solar research brings you small-size discs in unusually stable bodies. Solar's technically proven ceramic formulations provide flat temperature coefficient and low power factor throughout a broad capacity range. These discs are available not only in GMV, but due to their stability can be produced to 10% and 20% tolerances.

A ceramic formulation can be furnished to yield optimum performance under conditions of your particular application. Capacities for typical ranges are shown below. Note the unusual stability of the new "WG" Body for radio and television temperature range.

DA Medium "K" — Extreme Temperature Range

Solar Style	CD 8	CD 12	CD 16	CD 20	CD 24
Max. Dia.	5/16	7/16	9/16	11/16	13/16
Max. Cap. mmf	150	400	740	1200	1750

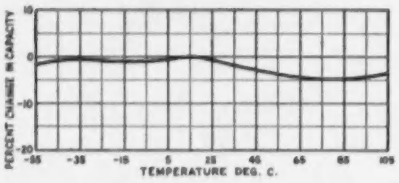

WA High "K" — Wide Temperature Range

Solar Style	CD 8	CD 12	CD 16	CD 20	CD 24
Max. Dia.	5/16	7/16	9/16	11/16	13/16
Max. Cap. mmf	390	1000	1850	3000	4500

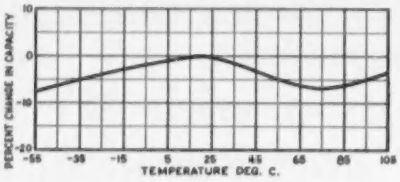

WG High "K" — Moderate Temperature Range

Solar Style	CD 8	CD 12	CD 16	CD 20	CD 24
Max. Dia.	5/16	7/16	9/16	11/16	13/16
Max. Cap. mmf	700	1800	3300	5400	8000

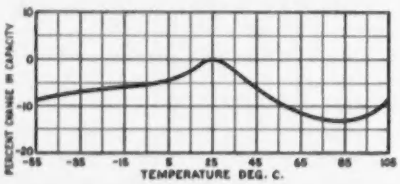

Normal Ratings: 500 V; 1½% max. PF; min. IR; 7500 Meg.

Write for literature, or the complete Solar catalog.

"QUALITY ALWAYS"

SOLAR MANUFACTURING CORP.
New York, N.Y.

SOLAR

SALES OFFICES: *46th & Seville, Los Angeles 58, Calif.*
4000 W. North Ave., Chicago 39, Ill.

CERAMIC CAPACITORS • PRINTED NETWORKS • PIEZO CERAMICS

Pasadena, Calif. Type 4-316 pressure pickup operates continuously up to 600 F. It is available in both gage and differential types.

The new unit is ¼ in. in diameter, ¾ in. long and weighs 15 grams with its 30 in. of insulated, permanently attached, 4-conductor cable.

Unbonded strain-gage windings connected in a four-arm bridge comprise the sensing elements of this variable-resistance-type transducer.

New fabricating techniques, centering about an all-welded internal construction, suit the pickup to such applications as static and dynamic flight-load testing, engine studies, and supersonic-speed tests where external cooling methods are impractical.

POTTED POTS
in several types

CLAROSTAT MFG. CO., INC., Dover, N. H., has available a line of potted or encapsulated potentiometers. These "Potpot" units may be had in both wire-wound and composition-element types, including the series 48 and 49 miniature controls, the 43, 37 and 51 medium-sized controls, and again the larger 58 and 10 wire-wounds. The neatly molded, smooth, green-colored encapsulating material means water- and vapor-tight molded enclosures, embedding the entire unit with the exception of the external shaft assembly and terminals. A special water-tight assembly for the shaft bushing completes the sealing.

Designed specifically for MIL-STA-202 test specification, the units also meet the necessary salt-spray, humidity and temperature cycling

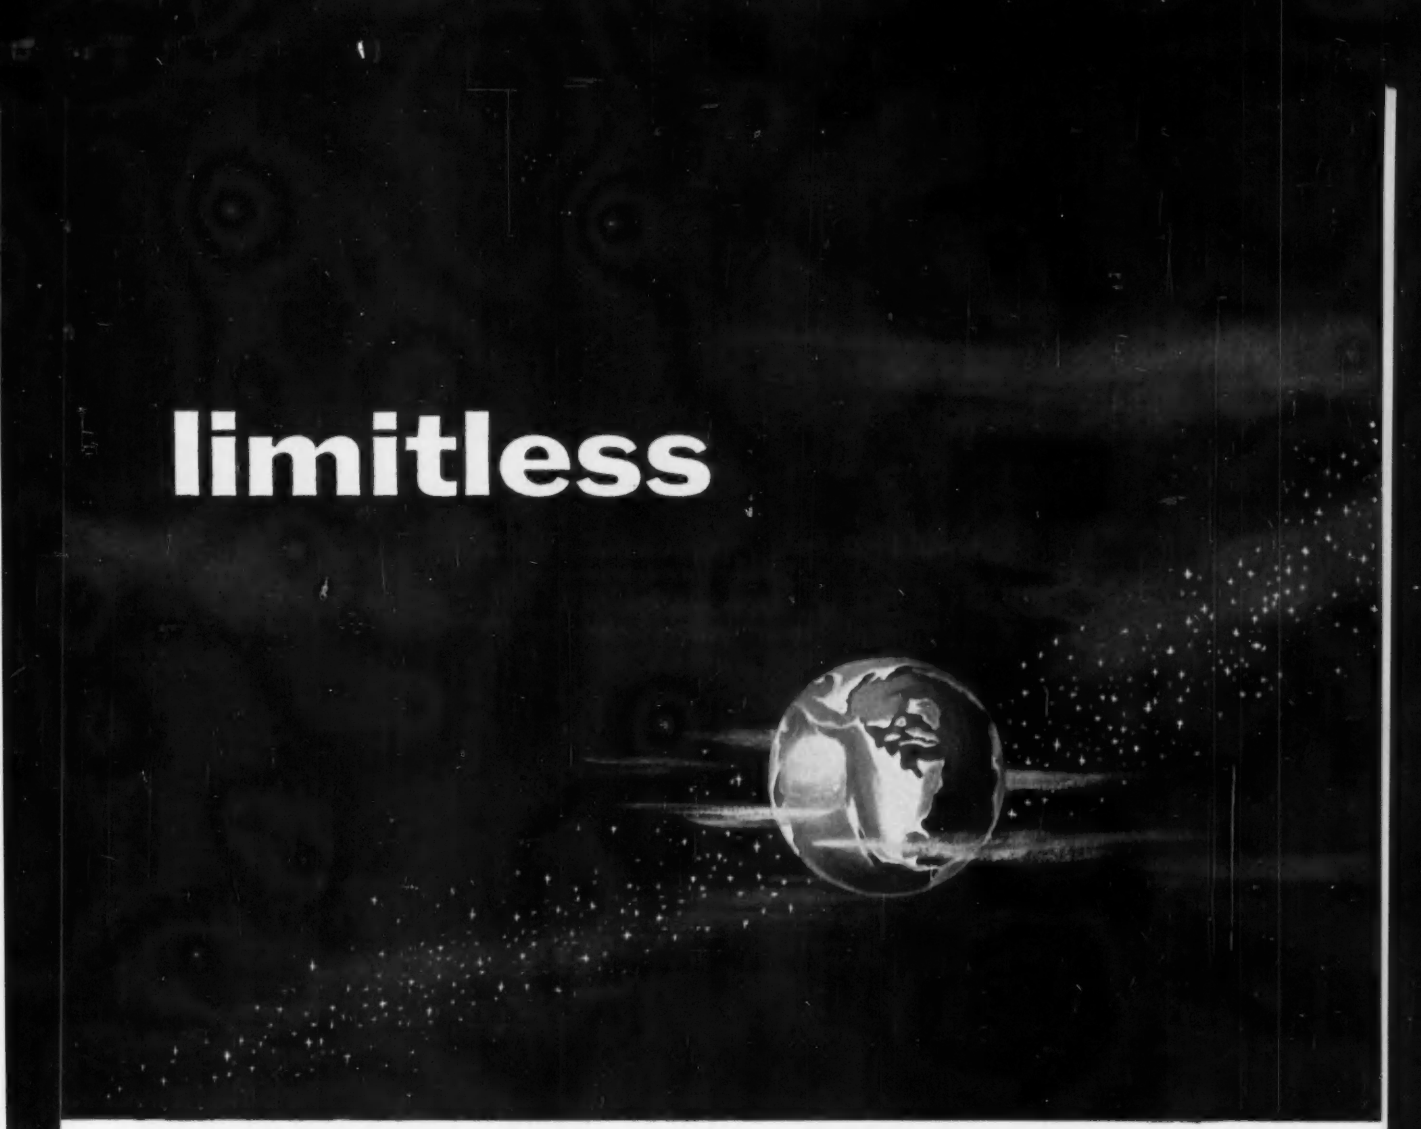

as the future of UNIVAC®

When planning your future, it is necessary to choose that company which presents the most complete program for you. The opportunity at Remington Rand Univac can only be limited by the individual. Excellent salaries, benefits and educational programs are yours to guarantee this limitless future.

At UNIVAC you will be working with men who developed much of the basic knowledge of computers—who designed and produced components being used by the manufacturers in the field—*who set the standards that the others follow.*

Now is the time to come to Univac where ambition and professional skill find their reward in limitless opportunities in an expanding organization.

Immediate openings for:

• Computer Sales Engineers • Product Planning Engineers • Technical Liaison Engineers • Proposal and Quotation Experts • Metallurgists • Contract Administration Engineers • Field Location Engineers • Instrumentation and Component Sales Engineers • Electronic Engineers • Mathematicians • Physicists • Mechanical Engineers • Programmers • Logical Designers • Production Engineers



® Registered in U. S. Patent Office

Send complete resumé to

Remington Rand Univac

DIVISION OF SPERRY RAND CORPORATION

AT ANY OF THESE THREE PLANT LOCATIONS

MR. D. A. BOWDOIN Dept. JP-2 2300 W. Allegheny Ave. Philadelphia, Pa.	MR. R. K. PATTERSON Dept. JS-2 1902 W. Minnehaha Ave. St. Paul W4, Minn.	MR. FRANK KING Dept. JN-2 Wilson Avenue South Norwalk, Conn.

Have you received your copy?



VALUABLE NEW
TECHNICAL DATA
DESIGN IDEAS
MATERIEL INFORMATION

Send for
"Introduction to
Fiberglas Fabrication"
by
KOCH FIBERGLAS

FREE!

TENTH ANNIVERSARY 20-PAGE ILLUSTRATED MANUAL

Every day, Koch Fiberglas is filling new uses in your industry

Koch cases for electronic equipment will not dent, are impervious to moisture, vapor, fungus, mildew and corrosion. They are shock and vibration-proof when fitted to Koch specifications with special hair-latex shock pads. Can be self-palletized for fork lift. Can be insulated by Koch with foamed-in-place plastic. Koch cases are air-tight; require no paint or outer packaging for long-range storage or overseas shipment. Re-usable, so cost amortizes through re-use. Withstand parachute drops from any height, free falls onto water or snow from 500 feet, or submersion.

For manual, write on your business letterhead to Dept. EBB.

KOCH
PRONOUNCED "KOKE"
FIBERGLAS
CORTE MADERA, CALIFORNIA

One of the world's largest fabricators of molded Fiberglas products

requirements of MIL-E-5272 climatic standards. They feature excellent shelf life. Electrical specifications are those for the given Clarostat control type.

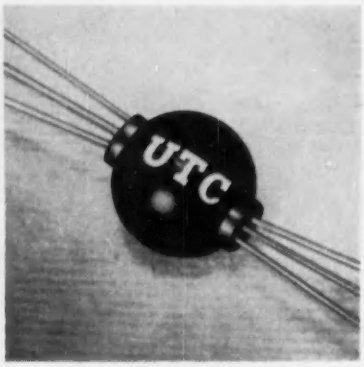

PULSE TRANSFORMERS
have varied applications

UNITED TRANSFORMER CO., 150 Varick St., New York 13, N. Y., has released a new series of miniature pulse transformers hermetically sealed by the vacuum mold epoxy process. These units are suited to a wide variety of blocking oscillator, interstage, and low level modulator applications.

▶ **Service**—They are designed for service from —70 to +130 C and fully meet MIL-T-27 specifications. Thirteen types cover the range from 0.05 to 25-μsec pulse width with exceptionally low rise time. All units are three winding 1:1:1 for maximum flexibility of application.



MAGNETIC AMPLIFIER
for analog computers

AIRPAX PRODUCTS CO., Middle River, Baltimore 20, Md. The Ferrac amplifier is a ferromagnetic amplifier for analog computers. It is a d-c to d-c amplifier powered directly from a 115-v, 400-cps line. Full linear output of ±7.5 v is obtained with ±300 μa input. The

To the ENGINEER of high ability

AiResearch is looking for your kind of engineer. Through the efforts of engineers like yourself our company has become a leader in many outstanding aircraft accessory fields. Among them are: air-conditioning and pressurization, heat transfer, pneumatic valves and controls, electric and electronic controls, and the rapidly expanding field of small turbomachinery. AiResearch is also applying this engineering skill to the vitally important missile accessory field.

Our engineers work on the very frontiers of present day scientific knowledge. We need your creative talents and offer you the opportunity to progress by making full use of your scientific ability.

Positions are now open for aerodynamicists...mechanical engineers...physicists...specialists in engineering mechanics...electrical engineers ...electronics engineers.

For further information write today to Mr. Wayne Clifford, THE GARRETT CORPORATION 9851 S. Sepulveda Blvd., Los Angeles 45, California. Indicate your preference as to location between Los Angeles and Phoenix.

THE GARRETT CORPORATION
AiResearch Manufacturing Divisions

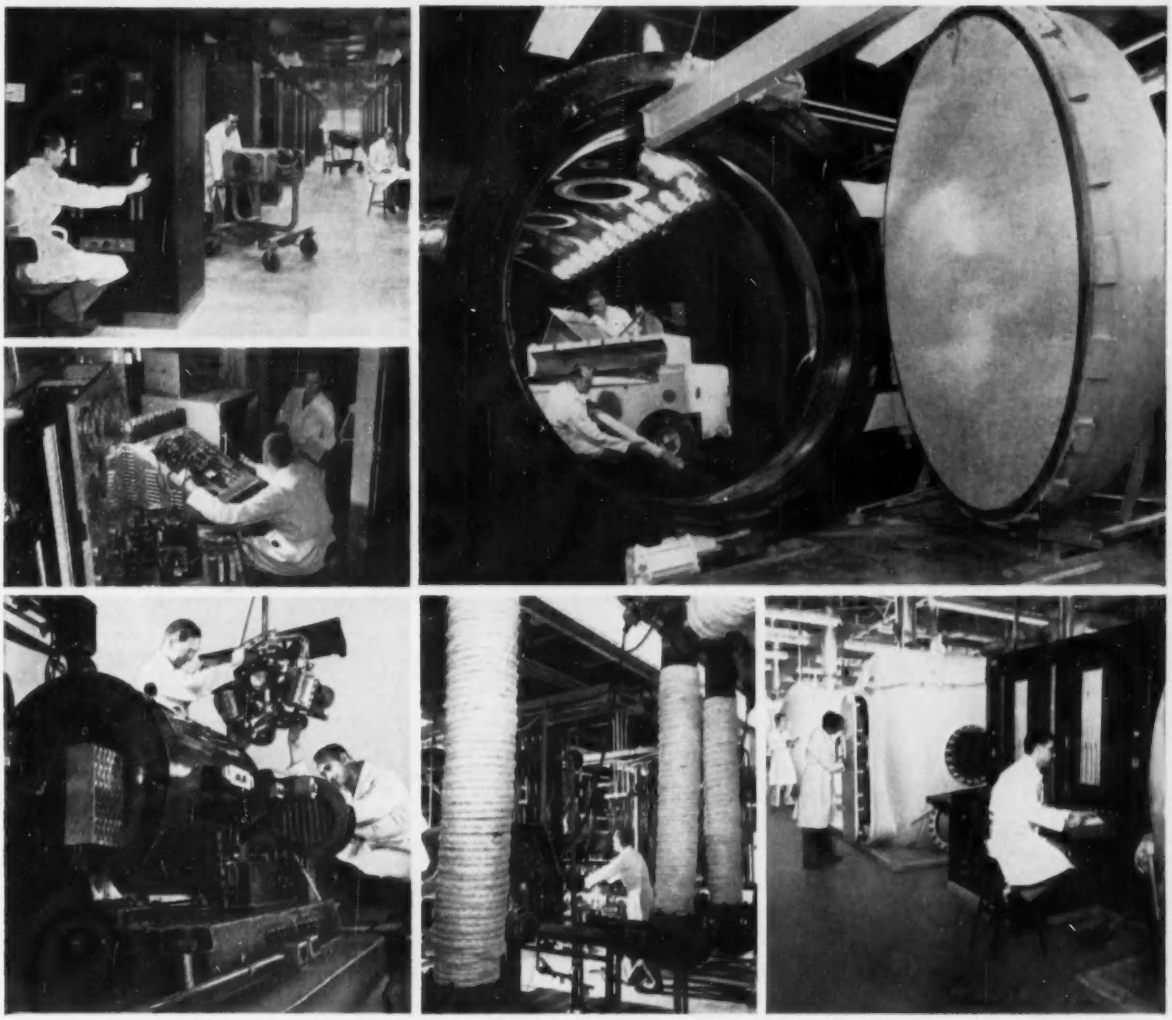

New AiResearch Production Test Laboratory in Phoenix, Arizona

Finest production test facilities

prove aircraft system compatibility

Testing of critical aircraft components and systems is now performed on a precision production basis in these completely equipped laboratories.

Here, in more than 75 test cells and test stands, finely-engineered AiResearch products are given every test necessary to insure perfect operation.

Altitudes are simulated from 1,000 feet below to 75,000 feet above sea level; pressures up to 1,000 psi; temperatures from −80° F to +1,000° F; air flow up to 1410 pounds per minute.

Units tested include gas turbine engines, air turbines, air turbine starters, pneumatic controls, cabin pressure regulators, valves, refrigeration turbines, heat transfer equipment and complete systems employing these and additional components.

These unsurpassed test facilities are another reason why you can rely on the performance of AiResearch products.

Qualified engineers are needed now. Write for information.

THE GARRETT CORPORATION

AiResearch Manufacturing Divisions

Los Angeles 45, California • Phoenix, Arizona

Designers and manufacturers of aircraft systems and components: REFRIGERATION SYSTEMS • PNEUMATIC VALVES AND CONTROLS • TEMPERATURE CONTROLS CABIN AIR COMPRESSORS • TURBINE MOTORS • GAS TURBINE ENGINES • CABIN PRESSURE CONTROLS • HEAT TRANSFER EQUIPMENT • ELECTRO-MECHANICAL EQUIPMENT • ELECTRONIC COMPUTERS AND CONTROLS

HIGHEST
INSULATION RESISTANCE
and
CAPACITANCE STABILITY

LOWEST
POWER FACTOR
and
SOAKAGE

fci
POLYSTYRENE and TEFLON CAPACITORS

OPERATING TEMPERATURE
up to 85°C. for Polystyrene
up to 200°C. for Teflon

AVAILABLE IN
hermetically sealed glass tubes with metal end caps

style CP06 metal shells with glass-seal buttons

bathtub cases with low-loss glass terminals

style CP70 metal cans with low-loss glass terminals

SPECIAL UNITS — INCLUDING MULTI-SECTION BLOCKS — AVAILABLE ON SPECIAL ORDER OR MADE TO SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

	POLYSTYRENE	TEFLON
Operating Temp. Range	−55°C. to + 85°C.	−55°C. to + 200°C.
Voltage Range, DC	100 to 30,000	100 to 30,000
Capacitance Range	.001 to 20 mf	.001 to 20 mf
Power Factor	.02% @ 1 kc	.02% @ 1 kc
Dielectric Absorption	.01%	.01%
Voltage Derating at 85°C	none	none
Voltage Derating at 125°C	not operable	none
Voltage Derating at 150°C	not operable	none
Voltage Derating at 200°C	not operable	33%
Temperature Coefficient	−100 ppm/°C.	−50 ppm/°C.
I.R. at Room Temperature	10^7 megohms/mf	10^7 megohms/mf
Capacitance Stability	0.1%	0.1%

fci film capacitors, INC.
3400 Park Ave., New York 56, N.Y. • Phone CYpress 2-5180

amplifier is so stable that null balancing windings and auxiliary circuits are unnecessary. Bandwidth is at least 8 cps per each 1,000 ohms in a control loop.

▶ **Further Information**—Two independent control windings enable the Ferrac amplifier to be used in summing and multiplying circuits. Lead and lag networks can be introduced as readily as with electronic amplifiers. Two signals can be mixed in a Ferrac amplifier even though they have no common ground. Complete analog computers, simulators and automatic controls can be assembled using Ferrac amplifiers as basic building blocks.

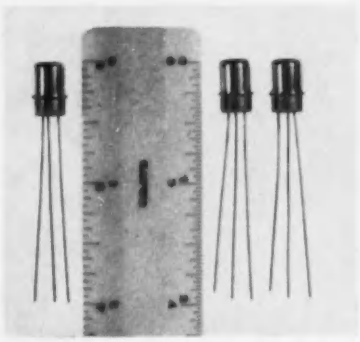

TRANSISTORS
designed for audio stages

PHILCO CORP., 4700 Wissahickon Ave., Philadelphia 44, Pa. The 2N223, 2N226 and 2N224 medium-power transistors are specifically designed for the audio stages of transistorized radios. In driver and class B push-pull operation, these hermatically sealed, *pnp* transistors provide up to 300 mw audio output at battery supply voltages of 3 to 12 v.

Extremely linear d-c amplification up to 100 ma of collector current assures minimum distortion. Output transistors 2N226 and 2N224 can be made available in matched pairs. They are available in production quantities.

DIGITAL MAGNETIC TAPE HANDLER
features new design

KEY ELECTRIC CORP., 287 Post Ave., Westbury, L. I., N. Y. Increased

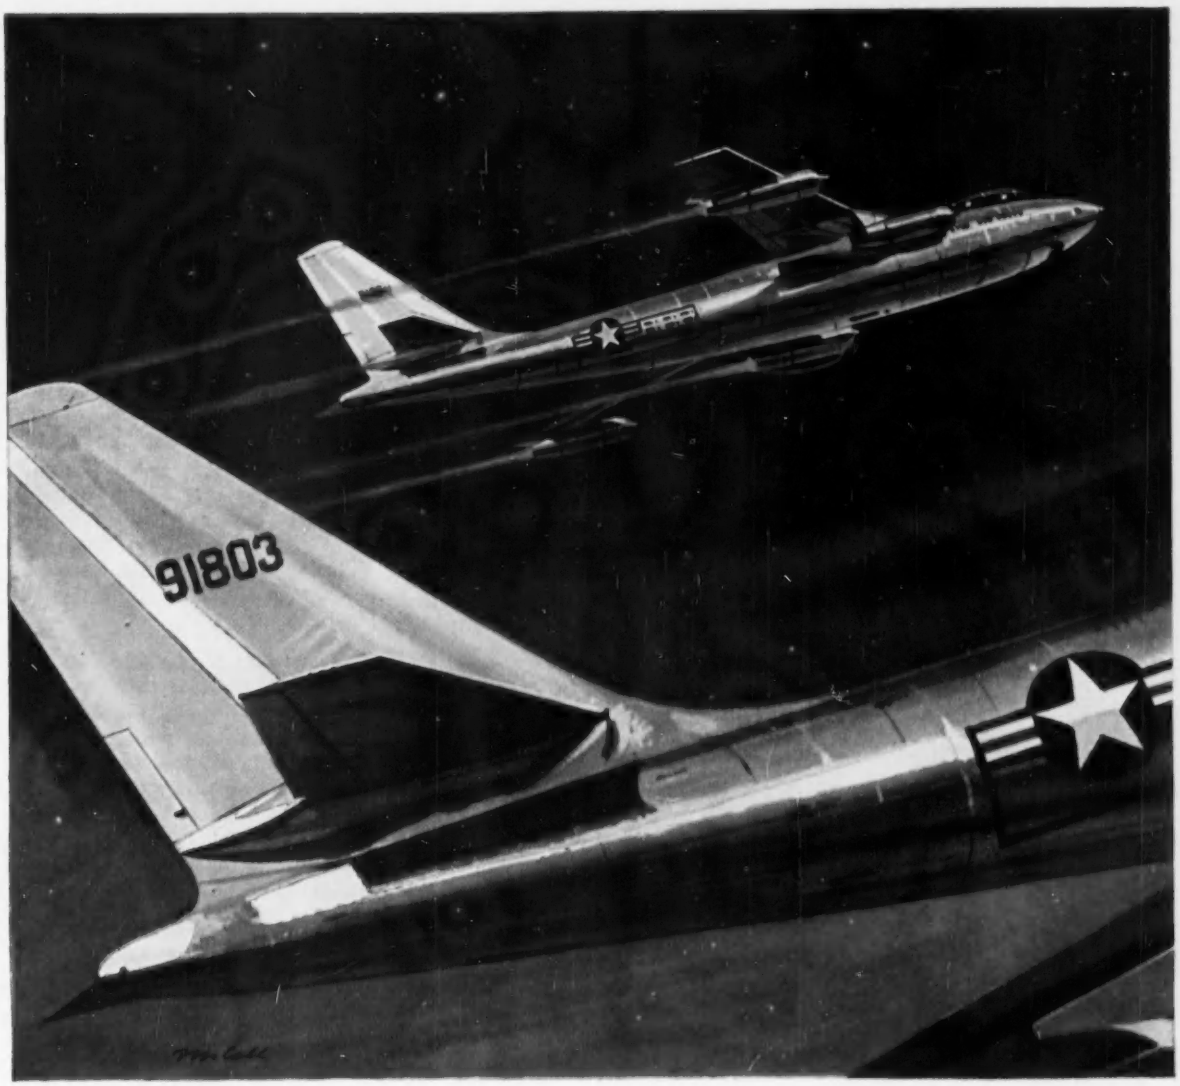

OLIN ROLL-BOND GOES 8 MILES UP WITH THE STRATEGIC AIR COMMAND

Packed into the sleek fuselage of the B-47 is several million dollars worth of electronic equipment essential to its mission. Some of the most delicate and vital units are housed in cases made of Olin Roll-Bond to ensure that exactly the proper temperature will be maintained regardless of external conditions.

Only one method will do the job perfectly —seamless tubes that are an integral part of the case wall itself. Olin Roll-Bond, proved in hundreds of thousands of refrigerator evaporators, embodies this principle and is equal to the task.

If *your* job calls for a system of tubing for the purpose of heat exchanging, a call to Olin is the first step to a better product made more efficiently.

PAT. NO. 2,690,002

The Original Patented Process

Olin ROLL-BOND

a product of the Metals Division

Raytheon Manufacturing Company supplies vital electronic equipment used in the all-weather B-47. When selecting a material for the temperature regulating cases, Raytheon turned to Olin, the largest supplier of bonded evaporators to the refrigeration industry.

OLIN MATHIESON CHEMICAL CORPORATION

Where can you use VARFLO?

(the highly flexible Class B Sleeving and Tubing that licks Class A in performance—equals it in price)

• MORE FLEXIBLE — can be bent, even tied in knots, without cracking or crazing.
• MORE RESISTANT to water, alkalis, mild acids, common solvents, oils and greases.
• LONGER LASTING at high temperatures — withstands hundreds of hours at 300°F.
• INHERENTLY STRONGER — stands up under vibration, varnishing, baking. Good shelf life, too.
• MORE STABLE—retains dielectric value when pulled back during soldering.
• WIDER RANGE — available in 3 NEMA grades, 10 colors, coils, 36" lengths or shorter pieces.

Cuts inventory, too!

Superior to Class A insulation in performance — yet on a par with it in price — Varflo Sleeving and Tubing can be used economically for all Class A and Class B installations. This low-cost adaptability of Varflo enables many of our customers to achieve substantial savings in inventory. Available in NEMA Grades A-1 and B-1 tubing and Grade C-2 sleeving.

Perhaps Varflo can solve your insulating problems. Describe them in a letter — no cost or obligation for our recommendations.

FREE TEST SAMPLES
Mail coupon for yours

VARFLEX CORPORATION
506 W. Court St., Rome, N. Y.

Please send me free folder containing description and test samples of Varflo Sleeving and Tubing. I am particularly interested in insulation for

.....

Name .....

Company .....

Street .....

City ..... Zone ..... State .....

Varflex CORPORATION
Makers of Electrical Insulating Tubing and Sleeving

reliability for digital computing and data processing systems is provided by model 101 digital magnetic tape handler. Magnetic amplifier reel servos provide improved dependability, greater power output, and smaller size than the v-t amplifiers they replace.

▶ **New Design**—In this design, depth behind the panel has been reduced to 9 in., a 25-percent reduction in volume over previously available digital tape transports. Start-stop time is less than 5 milliseconds; and complete remote control of start, stop, reverse, and speed change functions is provided. Standard models have either 6 or 8 tracks, and dual tape speeds of 60/15 or 30/15 ips.

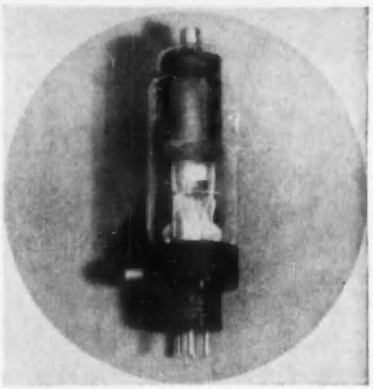

THYRATRON
mercury-vapor type

NATIONAL ELECTRONICS, INC., Geneva, Ill. A new 2.5-ampere d-c thyratron has been added to the company's line of industrial tubes. The tube, designated as the NL-632B, is a mercury-vapor shield grid thyratron. It is designed and

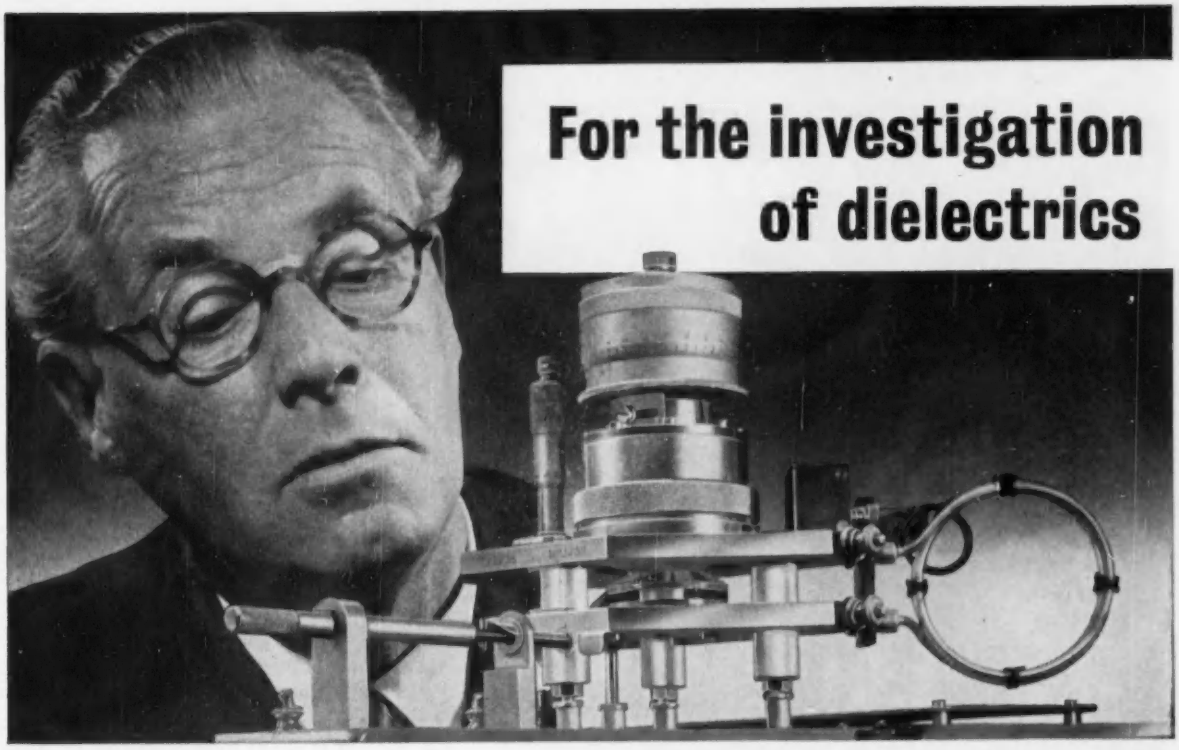

For the investigation of dielectrics

The MARCONI Dielectric Test Set *Type TF 704B*

The Marconi TF 704B Dielectric Test Set allows precise evaluation of the permittivity and phase defect of dielectric materials in the frequency range 50 kc to 100 Mc.

The principle of measurement is to introduce the sample under test into a tuned circuit and then, by means of a square-law voltmeter with high-discrimination mirror galvanometer, note the changes in circuit conditions.

The heart of the Test Set is the jig holding the sample under test. There is one jig for solid specimens and another for liquids. The jigs are masterpieces of the instrument maker's art; their high-quality construction is a blend of precision and ruggedness, which ensures accuracy and stability.

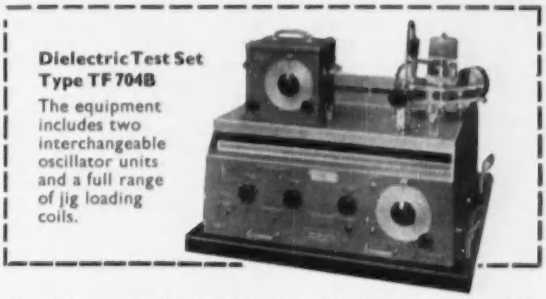

Dielectric Test Set Type TF 704B
The equipment includes two interchangeable oscillator units and a full range of jig loading coils.

In addition to the investigation of dielectrics, the high-frequency performance of resistors, capacitors, cables, etc., can be determined over a wide range.

MARCONI INSTRUMENTS

Marconi - since 1897

44 NEW STREET · NEW YORK 4

CANADIAN MARCONI COMPANY,
6035, COTE DE LIESSE,
MONTREAL 9, CANADA.

HEAD OFFICE: MARCONI INSTRUMENTS LTD., ST. ALBANS, HERTS., ENGLAND

TCAI

Here is the most compact centrifugal blower unit made . . . EAD's high-velocity subminiature centrifugal blower is only 2⅛" long, weighs only 6 ounces, yet it can move 13 cfm of air at a velocity of 3,000 feet per minute—and the volume holds up at high static pressures. It is driven by EAD's new one-inch diameter motor. The metal blower housing can be rotated to any position desired for maximum efficiency in cooling radar equipment, amplifier units, transmitter equipment, oscillators, and in other applications where high temperatures in confined areas demand miniaturized blowers with the highest possible performance characteristics. EAD's subminiature blower units meet all applicable MIL specification, and low temperature rise makes them suitable for high altitude and high ambient temperature operation.

CFM	13 @ 0" SP 10 @ 1.0" SP	7 @ 0" SP 5 @.2" SP
MAX. SP.	2.5	0.6
RPM	20,000	11,000
AMPS	0.1	0.06
WATTS	10.0	6.0
CAPACITOR Mfd/Volts	0.25/220	0.1/220
WEIGHT (OUNCES)	6	6
MODEL NO.	B2GIQ-C	B2HIY-C

Modifications of standard models or completely new designs can be engineered to meet your special cooling needs. Write for complete information.

EASTERN AIR DEVICES, INC.

SOLVING SPECIAL PROBLEMS IS ROUTINE AT EAD

INDUCTION MOTORS · CENTRIFUGAL BLOWERS · TACHOMETER GENERATORS · FANS · ALTERNATORS · GEAR MOTORS

387 CENTRAL AVENUE • DOVER, NEW HAMPSHIRE

specially tested for use in frequency-changer type resistance welders.

▶**Technical Data** — Ratings are: filament volts, 5; filament current, 4.6 amperes; anode current, 2.5 amperes d-c; peak anode current, 30 amperes; peak inverse and peak forward volts, 1,500; and maximum averaging time, 15 sec.

POWER TRANSDUCER
in a variety of sizes

CEDAR ENGINEERING INC., 5806 W. 36th St., Minneapolis 16, Minn., has announced a servomechanism that translates lateral force to direction and speed regulation with 200 to 1 mechanical power amplification.

This power transducer is available in a variety of fractional h-p sizes with a wide selection of gear train assemblies whereby the direction and speed of the servo can be controlled in proportion to displacement of the input shaft. It can be used in proportional open-loop systems, or can be arranged with feedback for a closed-loop system.

REFERENCE CAVITIES
for X-band applications

MICROWAVE ASSOCIATES, INC., 22 Cummington St., Boston, Mass., has developed the MA-318 series of temperature compensated reference cavities for use in automatic frequency control applications and as fixed frequency stabilizers in radar beacons and other microwave systems.

▶**Improved Form**—Because of improved form factor packaging and extra rugged construction, the cavities are ideally suited for airborne

supersonic flight

. . . NATURE'S SEVEREST TEST

PROVES *Constantin*

glass-to-metal seal quality

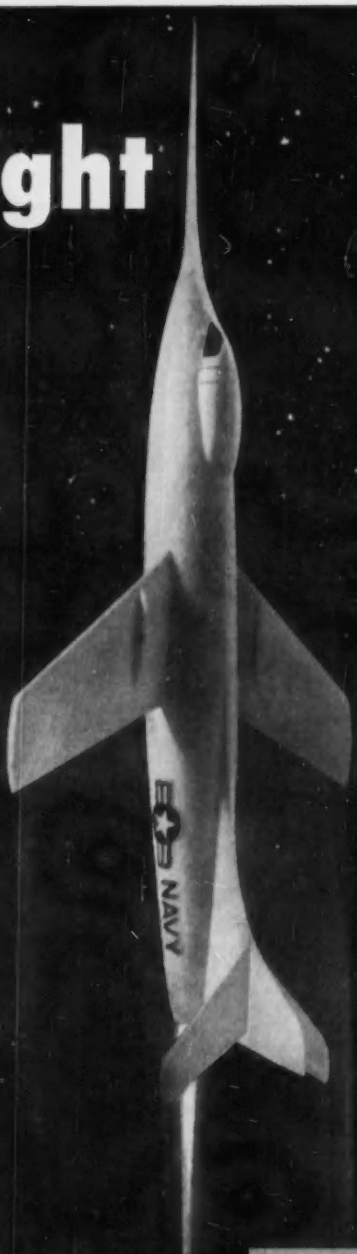

Tomorrow's aircraft must be built to withstand great extremes of temperature, pressure and vibration — every component must perform its functions accurately and dependably at speeds of 2,000 miles per hour or more.

Constantin vacuum-tight, glass-to-metal seals were developed to meet the great extremes of operating conditions that lie ahead. Never-ending research and development are carried on by Constantin's resourceful design engineering staff to insure maximum performance and non-leakage. This quality control and development make Constantin units *ideal* for use with complex systems or miniaturized components.

This long experience in the design and manufacture of thousands of types of glass-to-metal seals will solve the most difficult vacuum-sealing problems.

Write today to find out how this experience and design versatility will help you.

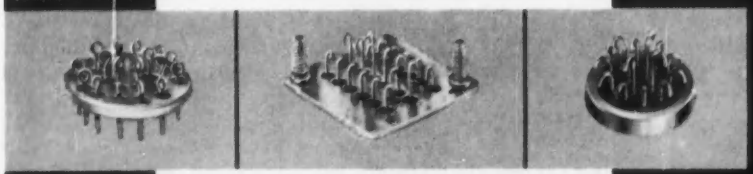

"QUALITY WITH CONFIDENCE"

L. L. Constantin & Co.

MANUFACTURING ENGINEERS

ROUTE 46, LODI, N. J. • 187 SARGEANT AVE., CLIFTON, N. J.

TRANSISTOR MOUNTS • SINGLE TERMINALS • COMPRESSION HEADERS • END SEALS • CRYSTAL BASES • CONNECTORS • MINIATURIZATION

West Coast Representative: Heim and Scheer, 11168 Santa Monica Blvd., Los Angeles 25, Calif. — GRanite 7-3208

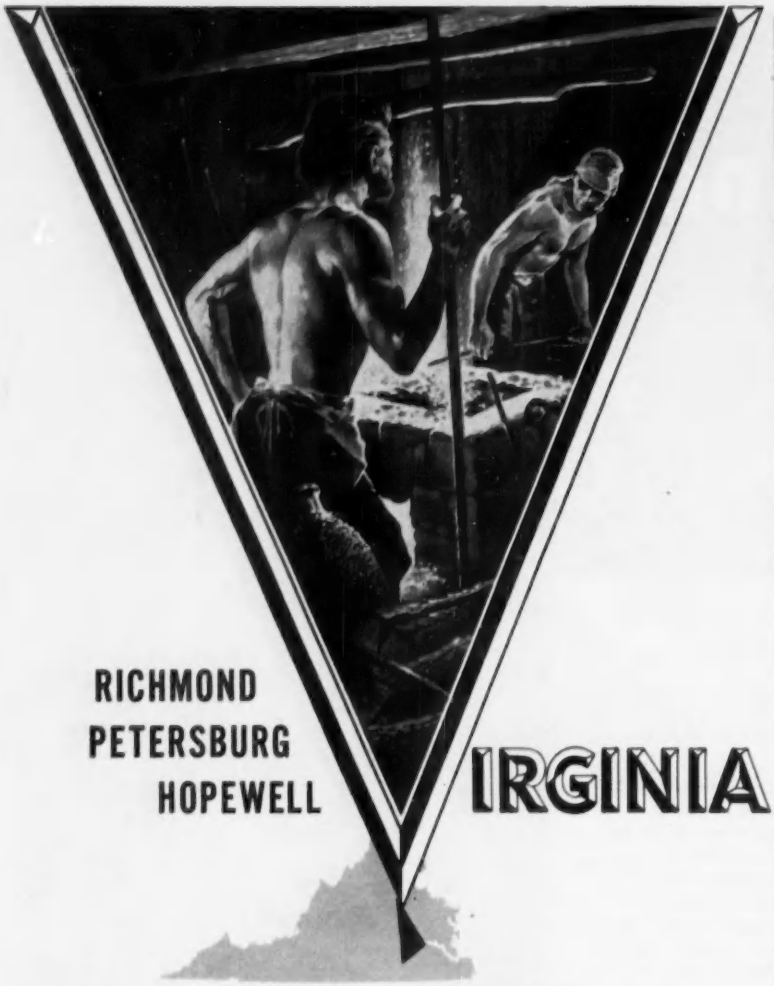

THE HOME OF AMERICA'S FIRST IRON WORKS
...is a choice industrial home for your plant

"IRON BY WHITSUNTIDE NEXT." That was the promise John Berkeley sent to the Virginia Company in 1622 from his iron works on Falling Creek. Sadly, he and his plant vanished in the Indian massacre of that year. But his smelter was the first in the nation, and marked the earliest industrial development of today's fast-growing Richmond-Petersburg-Hopewell triangle.



FACTORY PLUS FACTORS in this area range from conservative Southern manpower to a mild Southern climate. And here you get these competitive advantages close to the great northern markets, with favorable rates to the Mid-west.

FIVE MAIN LINE RAILROADS and 56 truck lines roll in coal, chemicals, lumber, resin, peanuts, soybeans at short-haul cost. Hampton Roads opens world markets and sources of supply. And a deepwater channel brings ocean freighters directly to your plant.

AMPLE ELECTRICITY at low cost flows from VEPCO's modern power network . . . with 300,000 kilowatts of new capacity added since 1954, and 300,000 more now under construction. For complete facts on taxes, zoning, water . . . or for confidential help in finding a specific type location . . . write or phone VEPCO, serving the TOP OF THE SOUTH.

VIRGINIA ELECTRIC and POWER COMPANY

Clark P. Spellman, Director—Area Development
Electric Building, Richmond 9, Virginia • Phone: 3-4261

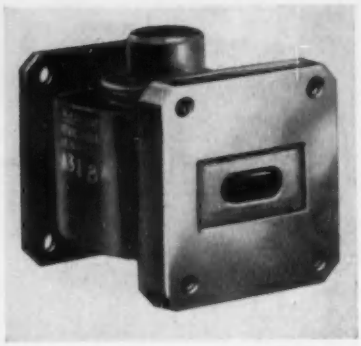

radar beacon applications where weight, space, pressure extremes and vibration considerations are of paramount concern. The cavities require no matching and are available for use at fixed frequencies from 9,250 to 9,350 mc.

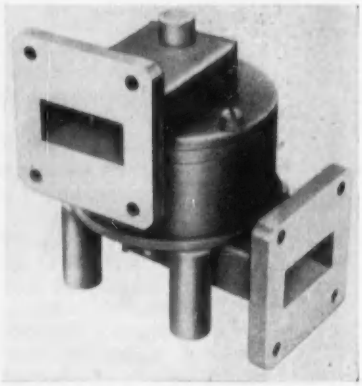

ROTARY JOINT
for airborne equipment

AIRTRON INC., 1103 W. Elizabeth Ave., Linden, N. J. The RE 51/U is a new microwave rotary joint with a peak power rating exceeding 600 kw at atmospheric pressure. Available in both unsealed or pressurized versions, it is used with 1.250 by 0.625-in. waveguide.

Other characteristics include a maximum vswr of less than 1.10 over the frequency range of 8,500 to 9,600 mc. Variation of vswr with rotation is negligible throughout the total angular travel. Operating life is in excess of 10 million revolutions. Mechanical design features assure stability of electrical characteristics throughout the life of the high-power joint.

Lasting accuracy of rotation is maintained by large diameter preloaded bearings. Pressurization is

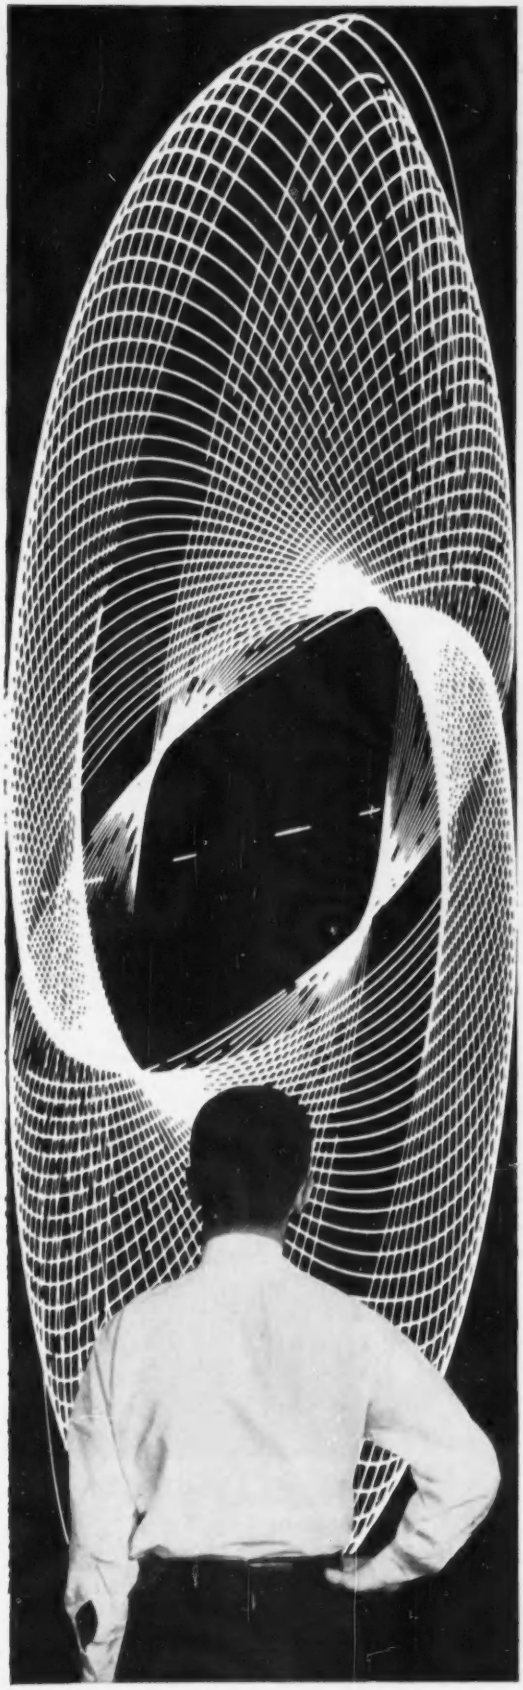

as an Autonetics Engineer... you can achieve science-fact far stranger than science-fiction

Today at AUTONETICS there are elaborate automatic control systems actually being developed, designed and *produced* in quantity that make the mechanics of the wildest space fantasies look ordinary.

For example, where in the pages of science-fiction is there a robot that compares with AUTONETICS' new airborne digital computer? This 3-cubic-foot brain can solve mathematical problems in one second that would take a math whiz with pencil and paper 9 hours, or require a clothes closet full of ordinary computer equipment. It can continuously integrate 93 quantities simultaneously ... through 51 removable panels of etched, transistorized circuitry.

This is only one example of AUTONETICS' far-reaching electro-mechanical technology. There are hundreds of other areas of equally advanced opportunity in missile guidance, flight control, fire control and special automatic controls. Among your tools are the latest data processing equipment, plus modern and complete environmental and flight test facilities. AUTONETICS' scientific leadership is setting the pace in this field with its unique 10-year backlog of know-how.

OPPORTUNITIES FOR:

Computer Specialists
Electro-Mechanical Designers
Environmental Test Engineers
Electronic Component Evaluators
Instrumentation Engineers
Fire Control Systems Engineers
Flight Control Systems Engineers
Electronics Research Specialists
Computer Programmers
Computer Application Engineers
Automatic Controls Engineers
Electronic Engineering Writers
Inertial Instrument Development Engineers
Preliminary Analysis and Design Engineers
Also Openings for Draftsmen and Technicians

CONTACT: Mr. R. C. Smith, AUTONETICS Engineering Personnel Office, Dept. 991-20EL, P. O. Box AN, Bellflower, California

Autonetics

A DIVISION OF NORTH AMERICAN AVIATION, INC.

AUTOMATIC CONTROLS MAN HAS NEVER BUILT BEFORE

If You Can Imagine It...

PHALO Can Mold It!

We know there are molded shapes in plugs, strain reliefs, harnesses and other molded insulations that we have not even dreamed of as yet . . . but maybe you have, or will soon!

When you do come up with the first shape of its kind, we modestly suggest you get in touch with Phalo. Judged by past *and* present performance, Phalo is your most direct answer when the question is special molded shapes in insulation. Phalo can show you a list of some of America's finest firms who have proven how really specialized Phalo's services can be!

Ask For The Complete Phalo Catalog



PHALO

PLASTICS CORPORATION

The Custom Insulation House

CORNER COMMERCIAL STREET
WORCESTER, MASS.

Insulated Wires, Cables — Cord Set Assemblies

accomplished by an O-ring gasket located on the weather side of the bearings. This protects the latter from corrosion due to atmospheric conditions as well as eliminating dirt contamination problems during the life of the bearing.



CIRCUIT DESIGNER
with reuseable components

POMONA ELECTRONICS CO., INC., 1126 W. Fifth Ave., Pomona, Calif. A new circuit designer provides quick positive facilities for rapidly synthesizing and testing innumerable circuits without consuming an inch of solder or drilling a single hole. Every component is reuseable again and again.

▶ **Other Features**—All connections are visually traceable with color coded leads, plugs and jacks. Where temporary special instrumentation is required, the unit is especially advantageous, since the rapidity of circuit set-up and dismantling reduces to a minimum the time and equipment tied up in the test.

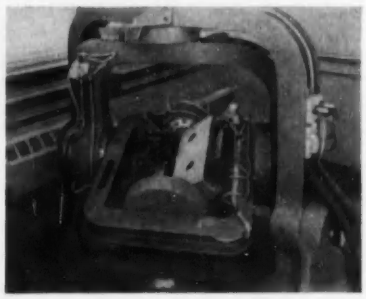

FLIGHT SIMULATOR
three-axis type

COLOR TELEVISION INC., 935 E. San Carlos Av., San Carlos, Calif. Equivalent flight conditions of modern high-performance aircraft in pitch, roll and yaw can be repro-

Westinghouse
BALTIMORE DIVISIONS

can give you the

RIGHT COMBINATION

At the Baltimore Divisions of Westinghouse, an engineer will find not just one, but a combination of ALL the factors that go to make up a successful and rewarding engineering career. The company will help you to continue your education, by paying all tuition expenses while studying for your Master's or Doctor's degree. Opportunities for advancement are excellent, and you'll be working on interesting, challenging projects with some of the leaders in the electronics field. There's real job stability—because you will be working for a CAREER company. And, you'll like living in Baltimore. Both you and your family will enjoy the pleasant surroundings and all the advantages of a big city . . . with small town charm.

TO APPLY

Send letter outlining your education and experience to:
Technical Director, Dept. 339
Westinghouse Electric Corporation
Friendship Airport, Baltimore, Maryland

CURRENT OPENINGS

CIRCUITRY
MICROWAVES
SERVOMECHANISMS
MAGNETIC AMPLIFIERS
DIGITAL COMPUTER DESIGN & APPLICATION
FIRE CONTROL SYSTEMS
OPTICS
COMMUNICATIONS
PACKAGING
TRANSFORMERS
ANALOG COMPUTER DESIGN
VIBRATION
RADAR DESIGN
FIELD ENGINEERING
INFRARED TECHNIQUES
ANTENNAS
TECHNICAL WRITING

VISIT US DURING YOUR VACATION

A convenient interview can be arranged during your vacation. Naturally, reasonable expenses between your home and Baltimore would be reimbursed by Westinghouse. We will be happy to send further details.

Westinghouse
BALTIMORE DIVISIONS

Want more information? Use post card on last page.

electronic counter

CAT. NO. — NE — 14-20 FM

ACCURATE • DIRECT READING
INSTANTANEOUS • SIMPLE
RELIABLE

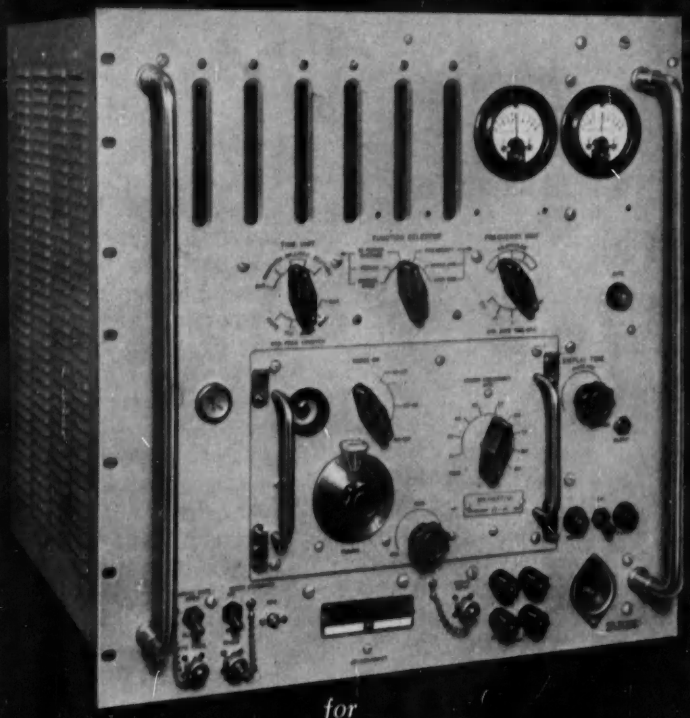

for

FREQUENCY MEASUREMENTS
10 CPS TO 220 MC;
TIME INTERVAL 1 MS TO
100 DAYS; PULSE LENGTH,
REP. RATES, FREQUENCY DRIFT

northeastern NE **engineering**

Manchester New Hampshire

duced rapidly by this 3-axis flight simulator. Voltage analogs of the vectors representing these factors are fed as individual command signals to the flight table. The instrument can operate directly from the output of a computer such as the REAC.

▶ **Performance**—Specifications include the following: In roll, approximate maximum acceleration is 40,000 deg per sec^2 and approximate maximum velocity is 250 deg per sec. While maximum displacement is ± 120 deg, the table can be shifted to provide motion of 210 deg in one direction and 30 deg in the other.

In pitch, approximate maximum acceleration is 20,000 per sec^2 and approximate maximum velocity is 150 deg per sec. Maximum displacement is ± 90 deg. In yaw, the maximum acceleration is 8,000 deg per sec^2 and the approximate maximum velocity is 125 deg per sec. Maximum displacement is ± 90 degrees.

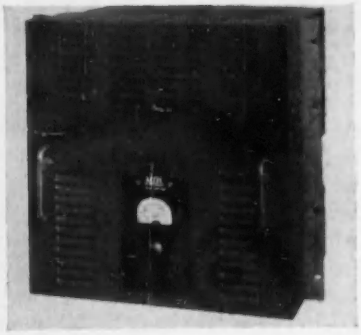

AMPLIFIER
high power, low distortion

ALTEC LANSING CORP., 9356 Santa Monica Blvd., Beverly Hills, Calif. The 260A is a 260-w amplifier of low distortion and wide frequency range intended for p-a and industrial control applications where long life and minimum maintenance are paramount.

▶ **Specifications** — Power is available continuously at 2 percent or less distortion over full frequency range of 40 to 15,000 cps.

Output connections provide for low-impedance speaker loads and 70-v line; also a 65-ohm tap for 140 v line or 117-125 v to operate

STAR
ELECTRICAL PORCELAIN

for **unusual** applications

We have facilities for compounding formulas to meet specific needs—whether it be very dense or highly porous material, permeable or vitreous, resistant to heat, electricity, weather, chemicals or abrasion. Consult STAR engineers on any special requirements. Send for catalog.

over 55 years in business

MAKERS OF ELECTRICAL PORCELAIN SINCE 1899, LAVOLAIN®, VITROLAIN®, THERMOLAIN®, NUBLAC®, COMMERCIAL WHITE® AND HUMIDOLAIN®

the **STAR** porcelain company

42 Muirhead Avenue, Trenton 9, N. J.

California Representative: Edwin E. Starr, 4101 Rhodes Ave., North Hollywood, Cal., STanley 7-5879

WELMET

0 1 2 3

METAL FILM RESISTORS

The Welwyn Welmet provides considerably greater stability than is obtainable in deposited carbon types. A Welmet, in fact, closely approximates the stability of a wire-wound resistor, yet is smaller in size and lower in cost.

Resistance Range 1000 to 1,000,000 ohms.

Tolerance . . . ±1%, ±2% or ±5% — closer tolerance in matched pairs can be supplied to special order.

Stability . . . The resistance value will not change more than 0.05% over a period of six months.

Stability Under Load . . . The long term change in ohmic value due to full power loading will not exceed 0.1%.

Temperature Coefficient:
The temperature coefficient depends on resistance value, and lies between 300 and 360 parts per million per degree centigrade. The coefficient is positive in all cases, and in general the lower ohmic values have the higher temperature coefficient in the stated range.

Welwyn Welmet resistors are available in small production quantities for test and laboratory purposes.

Complete specifications and prices on request

Welwyn International, Inc.

3355 Edgecliff Terrace, Cleveland 11, Ohio

manufactured in England and Canada

TEMP-R-TAPE

PRESSURE-SENSITIVE

TEFLON TAPE

TEFLON tape with a silicone polymer adhesive backing. An easy-to-apply Class H insulation for slot lining, bundling, splicing, wrapping. Excellent adhesion, elongation and dielectric over entire -100°F to 400°F temperature range. 6 mil and 13 mil thick in rolls and sheets.

FREE SAMPLE and data sheet.

CHR *Write direct or use magazine inquiry card.*

THE CONNECTICUT HARD RUBBER CO.

407 East St., New Haven 9, Conn., SPruce 7-3631

for complete
selection of Basic Requirements
for your Coil Winding needs it's . . .

Coil Winding Equipment Co.

write for complete
technical literature

COIL WINDING EQUIPMENT CO., Oyster Bay, New York

CONTROL FORCE MEASURING SYSTEM

that provides



1. Accurate measurements of better than 1/2%.
2. Accurate measurements of pressure, force, acceleration, and position among others.
3. High gain with a frequency response of 15 cps.
4. Excellent operation under adverse environmental conditions.
5. Miniaturized and ruggedized construction.
6. Direct operation from resistive type transducers.

RADIATION Inc. Melbourne Fla. Orlando Fla.

Electronics • Avionics • Instrumentation

Personnel Inquiries Invited

PRECISION TRANSDUCERS



PRESSURE OPERATED POTENTIOMETERS

Outputs: Linear and nonlinear functions of applied pressure.
Resistances: 100 to 50,000 ohms.
Ranges: 0-5 to 0-5000 psi.
Types: Absolute and differential.
Vibration Ambient: 0 to 55 cps, 0 to 500 cps, and severe vibration 25g to 2000 cps.
Construction: Hermetically sealed.

Write for Pressure Operated Potentiometer Bulletin

ULTRA-SENSITIVE PRESSURE SYSTEM

Output: 50 volts at full scale.
Range: ±¾ psi, differential.
Resolution: 1 x 10^{-6} psid.
Zero stability: Better than 1 x 10^{-3} psid.

Write for Bulletin EPMS

RESISTANCE BRIDGE PRESSURE PICKUPS

Sensitivity: 5 mv/v at full scale.
Ranges: 0-10 to 0-1500 psi.
Types: Absolute and differential.
Construction: Hermetically sealed.

Write for Bulletin No. 7

RATE OF CLIMB

Outputs: 5 volt signal and/or dial indicator.
Range: ±25,000 ft./min.
Time constant: 0.2 sec. at sea level to 2 sec. at 50,000 ft.

Write for Vertical Speed Transducer Bulletin



RESISTANCE THERMOMETERS

Resistance: 5 to 500 ohms at 32°F.
Materials: Platinum or nickel.
Range: −350 to +2000°F.
Types: Liquid, surface, gas.
Characteristics: Corrosion proof, severe vibration ambient, fast speed of response.

Write for Resistance Thermometers Bulletin

"For Transducers See Trans-Sonics"

Trans-Sonics, Inc.

P.O. BOX 328 • LEXINGTON • MASSACHUSETTS

motors at various frequencies. Protection is by thermal cutout. Filament warmup period, controlled by delay relay, permits remote full on-off control.

DIGITAL VTVM
designed for rack mounting

HYCON ELECTRONICS, INC., 321 So. Arroyo Parkway, Pasadena, Calif. Model 615R digital vtvm is a direct-reading unit. A 3-digit counter eliminates interpolation and parallax errors, makes accurate readings easy, and avoids multiple-scale confusion.

► **Features**—Standard features include an automatic off-scale indicator and illuminated decimal-point and polarity signs. One-millivolt sensitivity is provided on the low scale, and accuracy is 1 percent on d-c and resistance, 2 percent on a-c.

Special accuracy of 0.1 percent, as well as complete facilities for automatic print-out, are available on special order. Price of the unit is $397.



TRANSFORMERS
new encapsulated type

ELECTRO ENGINEERING WORKS, INC., 401 Preda St., San Leandro, Calif. Epseal, a new transformer encapsulation process in combination

HERE'S BIG HELP IN TERMINAL WIRING!

The correct wire to correct terminal every time!

The New

JONES FANNING STRIP

Connections are made through Fanning Strip, on bench or anywhere apart from barrier strip, and quickly slipped into assembly.

Use with Jones Barrier Terminal Strips, Nos. 141 to 142, for 1 to 20 terminals.

Simplifies soldering. Insures correct connections. Saves time. Ideal for harness or cable assembly. Brass terminals, cadmium plated. Bakelite mounting. Send for complete data.

Howard B. Jones Division
Cinch Manufacturing Corporation
Chicago 24, Illinois
Subsidiary of United-Carr Fastener Corp.

ELECTRONIC ENGINEERS

don't get lost in the crowd!

We're growing every day at Electronic Engineering Company. But our growth is on a sound financial and organizational basis that assures your never getting lost – no matter how large we become.

If you're a qualified electronic engineer looking for the opportunity to gain recognition through significant achievement in the field of creative electronics, we invite you to join our staff.

Your talents will never get lost here!

Send a resume of your background to Bob Lander

Electronic Engineering Company
of California
180 SOUTH ALVARADO STREET
LOS ANGELES 57, CALIFORNIA

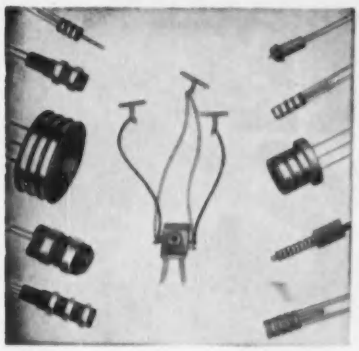

Miniature and Sub-Miniature

SLIP RING ASSEMBLIES
BRUSH BLOCK ASSEMBLIES
COMMUTATORS

and other
Electro-Mechanical Components

PRECISION MADE TO YOUR OWN SPECIFICATIONS

Precision molded products with exacting tolerances in precious and non-precious solid metals of all alloys. All types of Thermo-Plastic and Thermo-Setting materials.

Slip Ring Assemblies fabricated or one-piece precision molded to your specifications in Nylon, Kel-F, Mineral filled Mellamine, Phenolic, and other materials. Rings and leads spot welded or brazed together for positive electrical circuit.

Our Swiss methods and techniques are geared to meet exacting requirements. We invite your inquiries.

COLLECTRON CORPORATION

MUrray Hill 2-8473 • 216 East 45th Street • New York 17, N. Y.

IMPREGNATING
SEALING
DIPPING
INSULATING
BLENDING

POTTING
HEAT CONDUCTING
MOISTURE PROOFING
FUNGUS PROOFING
ENCAPSULATING

WAXES BIWAX COMPOUNDS

Standard compounds available from stock.
Samples and specifications on request.
Modifications developed and produced to meet specific requirements.
Information relating to your problem will enable us to make recommendations. Write to

BIWAX CORPORATION 3445 HOWARD ST. SKOKIE ILLINOIS

experience pays

let TWS* prepare
your industrial literature

*TECHNICAL WRITING SERVICE
McGraw-Hill Book Co.
330 W. 42nd St., N.Y.C.

send for information

Want more information? Use post card on last page.

THIS IS REPLACED WITH THIS

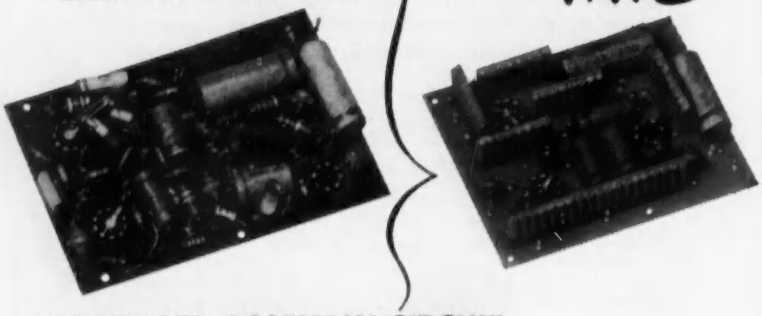

*PACKAGED ASSEMBLY CIRCUIT

PAC-Facts

REDUCED COSTS
PAC requires fewer insertions. Simplified equipment. Smaller chassis area. Reduced inspections. Fewer items purchased. Fewer chassis holes. Simplified chassis wiring.

UNIQUE TERMINAL DESIGN
The Erie PAC terminal provides a "U"-shaped cross section and tapers in both planes to assure easy insertion, self-adjusting—rigid fit, and large contact area.

FLEXIBILITY
All Resistance values between 5 ohms and 50 megohms. Wide range of capacitor temperature characteristics. Parallel and series arrangements readily obtained. Excellent circuit flexibility thru use of printed wiring type base.

REDUCED CHASSIS AREA
Chassis area is reduced by use of the vertical plane design feature. 15 components per square inch.

Erie's new Packaged Assembly Circuit is able to reduce assembly and labor costs for electronic component users by simplifying automation. By employing standard size resistor and capacitor pins, a PAC module can be assembled simply, automatically, and economically.

PAC will drastically reduce the number of component insertions in TV, radio, computers, and other electronic equipments by combining up to 90 components into one PAC module. The illustration above clearly exemplifies how Erie's Packaged Assembly Circuit will clean up and simplify nearly any printed circuit board. The original conventional design, at left, contains 44 individual components. The electrically equivalent Erie PAC design, at right, contains but 16 individual units—*a savings of 64% in the number of insertions.*

Experimental PAC Design Kits have been prepared and are available at a moderate cost. The 5% PAC Kit includes 195 different resistance and capacitance values, strips, wiring boards, clips, eyelets, and other material essential for building complete PAC circuits. The 10% PAC Kit contains 105 values along with the other items, and the 20% PAC Kit has 54 values plus equipment. This Design Kit is your key to cost savings.

Write for Erie Engineering Bulletin No. 450-1

ERIE electronics

ERIE ELECTRONICS DIVISION
ERIE RESISTOR CORPORATION
Main Offices and Factories ERIE, PA.
Manufacturing Subsidiaries
HOLLY SPRINGS, MISSISSIPPI • LONDON, ENGLAND • TRENTON, ONTARIO

with unique coil construction, offers reduced temperature rise in miniature size transformers, built to operate in higher ambient temperatures required for aircraft and missile applications.

Temperature rise as low as 50 per cent of that for comparable units has been achieved in units employing the Epseal process, enabling the use of ambient temperatures as high as 125 C without penalty on size.



SHIELDING BEADS
of nickel-zinc ferrite

FERROXCUBE CORP. OF AMERICA, 35 E. Bridge St., Saugerties, N. Y. Supply leads in radio, tv and radar sets often form an easy path along which an h-f, i-f or pulse signal can be carried from the output stage back to the input. A simple capacitive decoupling of the lead will not always be satisfactory, due to possible parasitic resonances. For the same reason, an extra series self-inductance will not in all cases give the desired effect.

Parasitic resonances may be prevented by introducing an ohmic damping in this inductance. Stringing Ferroxcube shielding beads on leads increases the lead inductance so that the lead will act as a h-f choke and at the same time damp any signals above a cutoff frequency, dependent upon the material because of the high losses in the ferrite.

Complete data are given in engineering bulletin FC-5112A.

FERRITE ISOLATOR
is an X-band circulator

CANOGA CORP., Van Nuys, Calif. Model 6332 Ferrite isolator is a nonreciprocal waveguide device used to isolate medium power klystrons and magnetrons from their



loads. It is essentially a modified polarization circulator employing permanent magnets and containing two sets of integral external dummy terminations. The external loads are capable of handling higher powers than internal types and also make possible the short length of 2.25 in.

▶ **Specifications**—The isolator may be pressurized to 30 psi absolute and will handle 25 kw peak, 25 w average power over the 8.5 to 9.6 kmc band. The isolation is 10 db minimum, the insertion loss is 0.5 db maximum and the vswr is 1.35 maximum over the band. Isolation over a 7-percent band is 20 db.

STUDIO TV CAMERA
priced at $3,500

DAGE TELEVISION DIVISION, Thompson Products, Inc., Michigan City, Ind. Model 320-A studio tv camera features a 4-unit, hinge-mounted chassis and plug-in hinge-secured amplifier strips, providing easy accessibility to all components without the need for tools.

Provision is made for 4 lenses which may be quickly interchanged from the operator's position.

Adaptable to film use, model 320-A is suited for closed-circuit

ERIE

YOUR SOURCE FOR HIGHEST QUALITY

Electro-Mechanical

ASSEMBLIES

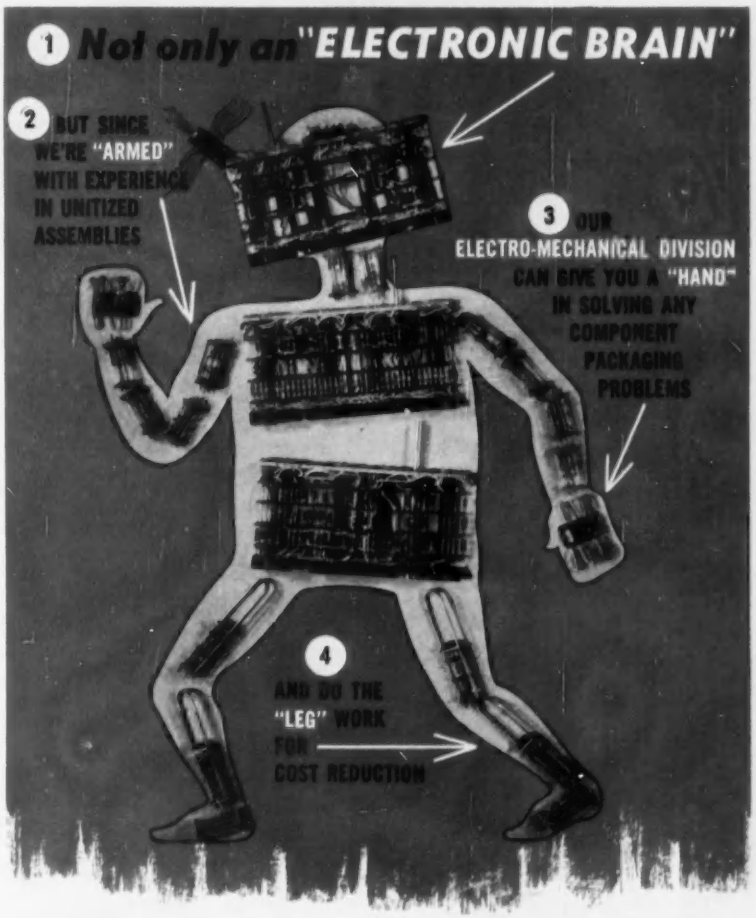
1 Not only an "ELECTRONIC BRAIN"
2 BUT SINCE WE'RE "ARMED" WITH EXPERIENCE IN UNITIZED ASSEMBLIES
3 OUR ELECTRO-MECHANICAL DIVISION CAN GIVE YOU A "HAND" IN SOLVING ANY COMPONENT PACKAGING PROBLEMS
4 AND DO THE "LEG" WORK FOR COST REDUCTION

We have the unique *combination* of facilities for producing electronic components, molded plastic parts, metal stampings and embossed wiring boards, for Electronic and Mechanical Custom Assemblies.

By subcontracting certain basic assemblies to ERIE, you, the manufacturers, can devote more of your engineering time to the design of new equipments and development of end use systems, and save on your final unit costs.

Take a close look at your *present* and *future products!* Could you subcontract part of them to our Electro-Mechanical Division and realize a cost advantage? Or could our experience in unitized assemblies offer you some of the plus advantages of easier servicing?

Erie Resistor will welcome the opportunity of consulting with you in analyzing your equipment to take advantage of our facilities. Write for a copy of Bulletin 460.

ERIE electro-mechanical

ERIE ELECTRO-MECHANICAL DIVISION
ERIE RESISTOR CORPORATION
Main Offices: ERIE, PA.
Factories: ERIE, PA. • LONDON, ENGLAND • TRENTON, ONTARIO

For additional information on all items on this page, use post card on last page.

A NEW Kearfott WESTERN DIVISION PASADENA, CALIFORNIA

Combining in one organization a sales, service, engineering and manufacturing group to better serve the Western customers of KEARFOTT COMPANY. Expanded production areas—additional equipment and the latest progressive assembly facility for the production of gyroscope, control components, navigational systems, radar components and test equipment.

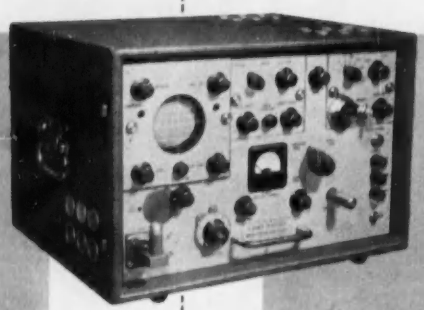

• KEARFOTT
universal test sets for X, Ku and C bands

Low cost testing with one convenient unit containing:
Spectrum Analyzer
Power Monitor
Wavemeter
Signal Generator
ONE portable unit does it *all*, on the bench—or in the field.

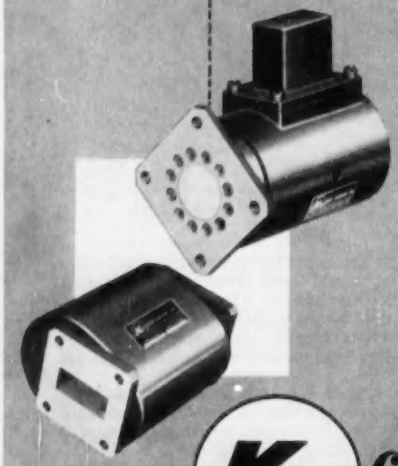

• KEARFOTT
new rotation-type FERRITE ISOLATOR*

The new Ferrite Isolator is a useful device with applications such as oscillator isolation with the following advantages to system performance:
Reduces long-line loading
Prevents undesired frequency shift
Insures uniform power output
Improves transmitted pulse spectrum

*Patented

Kearfott COMPANY, INC.
LITTLE FALLS, NEW JERSEY
WESTERN DIVISION
3883 VINELDO AVE., PASADENA, CALIF.
A SUBSIDIARY OF GENERAL PRECISION EQUIPMENT CORPORATION

SALES OFFICES
EASTERN OFFICE: 1378 Main Ave. Clifton, N. J.
MIDWEST OFFICE: 188 W. Randolph St. Chicago, Ill.
SOUTH CENTRAL OFFICE: 6115 Denton Drive Dallas, Texas

Write or call today for detailed information on Kearfott Ferrite components and Microwave equipment.

tv applications in addition to broadcast use.

List price is $3,500.



TEST CHAMBER
altitude simulation type

THE AMERICAN RESEARCH CORP., 11 Brook St., Bristol, Conn., has built an altitude simulation test chamber with a temperature range of from—100 F to +500 F, without modification.

The chamber incorporates a 64-cu ft test space. It includes completely automatic operation, air circulation, mercury manometer calibrated in thousands of feet, and a safety thermostat to protect heaters against accidental burnout.

The chamber provides accurate simulation of atmospheric conditions at high altitude under ultrasonic velocities, and the controls are designed to duplicate the results of rapid changes in acceleration.



METAL UNIT MOUNT
for vibration protection

ROBINSON AVIATION, INC., Teterboro, N. J. The K375 all-metal, lightweight unit mount has been engineered for vibration protection of all airborne electronic equipment used in jet aircraft and winged missiles. With a low natural fre-

quency of 6 to 9 cps, this versatile mount is readily adaptable to many applications in which outdated mounts of the AN8008 type have been used in the past.

Vibration isolation efficiency is 90 percent at 30 cps and improves at higher frequencies. Met-L-Flex resilient cushions are constructed of stainless steel and are unaffected by temperature extremes, solvents, oil, sunlight and ozone. A nonlinear spring rate and the highest damping is inherent in the all-metal construction of the mount.

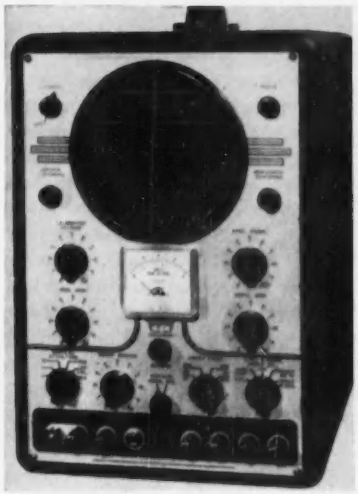

CRO
priced at $249.50

THE TRIPLETT ELECTRICAL INSTRUMENT CO., Bluffton, Ohio, has introduced a new cro, model 3441-A. It bears a U.S.A. dealer net price of $249.50. A general description of the model 3441-A along with its outstanding features and technical information will be found in available data sheets.

SYNC GENERATOR
uses phantastron counters

KAY LAB, 5725 Kearney Villa Road, San Diego 12, Calif. The APG-4 RETMA sync generator utilizes phantastron counter circuitry. The unit provides horizontal drive, vertical drive, mixed blanking and composite sync. Phantastron counters, which have been used for many years in precision timing applications and military radar equip-

—*Dredge Mining in South Carolina*

speaking of heavy minerals....

VITRO'S across-the-board position in atomic energy and related technologies gives it unusual insight into untapped industrial potentials. From this vantage point, it has diversified into rare earths and heavy minerals through association with Crane Co. in the operation of Heavy Minerals Co.

Heavy Minerals owns large deposits of source materials for thorium, titanium, zirconium, and rare earth ores near Aiken, S. C., and Panama City, Fla. A processing plant under construction at Chattanooga, Tenn., will produce thorium and thorium compounds, misch metal, rare earth chemicals, zirconium compounds and related products. Pechiney of France, holder of many patents in rare earths and heavy minerals, retains a minority interest in the company.

Heavy Minerals' deposits contain a number of heavier rare earths including europium, gadolinium and yttrium, many of which are considered important in nuclear development.

There are many projected uses for these products in the field of nuclear applications for control and shielding, x-ray sources, capacitors, vacuum tubes, television color tubes and catalytic reactions. New and unique production processes by Heavy Minerals Co. make these products available in separated forms at high purities and greater quantities.

For detailed information write **HEAVY MINERALS CO.**, *an associated company of*

Vitro CORPORATION of AMERICA
261 Madison Ave., New York 16

Research, development, weapons systems
Nuclear and process engineering, design
Refinery engineering, design, construction
Uranium mining, milling, processing, refining
Rare metals, rare earths, heavy minerals
Ceramic colors, pigments, fine chemicals

For additional information on all items on this page, use post card on last page.

For Precision Parts with HIGH THERMAL SHOCK RESISTANCE

specify

DIAMONITE

high alumina ceramics

with all these highly-developed properties, too!

Precision hard soldering and brazing by induction heating imposes brutal punishment on the material used for positioners. Hundreds of times a day, day in and day out, it is heated by contact with the work at temperatures over 1000°F, then air quenched as the next set-up is being made.

Diamonite's great thermal shock resistance, high softening temperature and low co-efficient of thermal expansion meet the exacting requirements of this gruelling service with a large factor of safety.

PROPERTIES AVAILABLE IN DIAMONITE

Composition	to 97% Al_2O_3
Tensile Strength	to 28,500 p.s.i.
Modulus of Rupture	to 49,500 p.s.i.
Compression Strength	to 500,00 p.s.i.
Impact Resistance	.23 / .25 Izod
Specific Gravity	to 3.82
Pore Volume	less than 1%
Softening Temperature	1850°C
Thermal Conductivity	.02 -/cal/sec/cm²/cm/°C.
Average Co-efficient Thermal Expansion cm/cm/°C	25°/700°C 7.3x10⁻⁶
Volume Resistivity, (Ohms per CM³ (	250°C 2.0x10¹⁴
	500°C 1.3x10¹¹
Te Value	
Vol. Res. 1 megohm	over 1,100°C
Dielectric Constant K @ 25°C	10¹⁰~ 8.77
Dielectric Loss Factors	25°C 10⁶~ .0009
Hardness	Mohs 9+
Water Absorption*	Absolute Zero
Thermal Shock Resistance†	**over 1,000°C**

* Determined Electrically after 48 hours immersion in water.

† Withstands repeated heating to this temperature and air quenching without loss of strength.

These unique qualities and the other highly-developed physical and dielectric characteristics of Diamonite, as shown in the table above, offer many opportunities for more efficient design and performance in the field of electronics.

If you require precision parts with any combination of these properties, Diamonite's electronic and ceramic engineering staff and product development facilities are at your service in working out the details of your application.

Send your prints and specifications to

Visit the Diamonite Exhibit
WESCON SHOW
Booths 1227, 1228, Pan-Pacific Auditorium
Los Angeles, August 21, 22, 23, 24

DIAMONITE products division

U. S. CERAMIC TILE COMPANY
Canton 2, Ohio

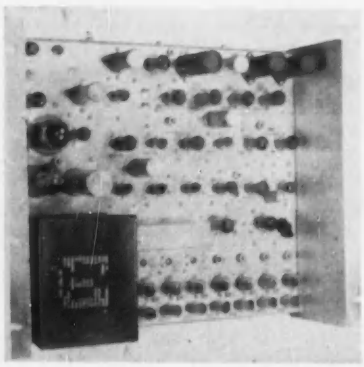

ment, assure reliable and continuous trouble-free operation.

All critical pulse widths are delay-line controlled thus obviating any possibility of any incorrect sequence since all are derived from the same source. The entire composite sync signal is formed in one circuit. All rise and fall times are identical as equalizing, sync and serrated vertical sync pulse since all are generated by the same new bistable multivibrator. The generator may be locked to line, locked to internal crystal or triggered externally. Phase control is provided on the line locked position. The unit is available for either rack mounting or as a portable unit.

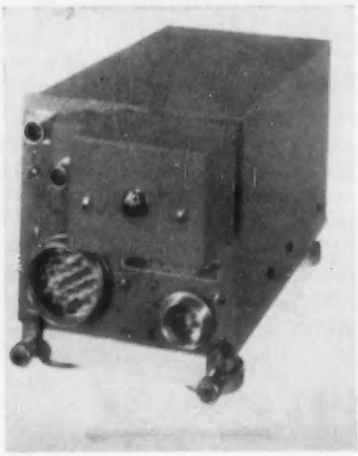

ADF UNIT
weighs only 19.1 lb

AIRCRAFT RADIO CORP., Boonton, N. J., has announced a miniature automatic direction finder or radio compass, weighing 19.1 lb. Type 21 adf unit is a 3-band superheterodyne receiver, complete with power unit, receiver, control unit, indica-

tor, loop, loop housing, and all connectors. It is designed for use in all types of aircraft.

▶ **What It Does**—The type 21 provides reception of and direction on l-f range and broadcast stations in the 190 to 1,750 kc spectrum. A hermetically sealed loop assembly which penetrates only 1¾ in. beyond the skin of the aircraft is used. The unit has provisions for compensation of as much as 25 degrees of compass error from local field distortion. Installations may be single or dual.

The new adf was designed for reliability, serviceability, power drain and stability under adverse environmental conditions and power supply voltage change.



TINY RESISTORS
the 3-w axial-lead type

OHMITE MFG. CO., 3677 Howard St., Skokie, Ill. The tiny 3-w axial-lead vitreous enameled resistor is now available in a wide range of resistance values, from 1 to 10,000 ohms. It is only ¼ in. in diameter and ⅞ in. long.

▶ **Other Features**—These resistors are simple to mount by their tinned wire leads and occupy small space because of the absence of mounting brackets. Axial-lead resistors, particularly the small sizes, are especially suited for printed circuits, terminal board, and point-to-point wiring applications.

The small resistors are wire-wound units with steatite cores and a special-formula, vitreous-enamel coating. The resistance wire and terminal lead are both welded to the end cap, thus assuring perfect and permanently stable electrical connections.

All parts of the resistors are thermally balanced, so as to expand and contract as a unit. This enables the resistors to stand up

BOURNS
new
Bourdon tube
pressure transducers
—a complete line designed for high range—with stainless steel or beryllium copper construction.

actual size

Bourns—designer and manufacturer of its own Bourdon tubes—now brings this proved component to absolute and differential pressure potentiometers. Three instrument models are provided for an extensive range of applications.

Model 704
Differential Pressure Potentiometer—*for corrosive fluids*
This unit has a stainless steel Bourdon tube and fittings, to withstand fuming nitric acid and other corrosive fluids. All mechanical joints are Heli-arc welded. The instrument will measure differential pressure between two high pressure sources.

Model 705
Absolute Pressure Potentiometer
This absolute pressure potentiometer measures pressures in ranges of 0-100 to 0-1000 psia—extending the range of Bourns Aneroid Capsule instruments.

Model 706
Differential Pressure Potentiometer—*for non-corrosive fluids*
The Bourdon tube in this high range instrument is made of berryllium copper for use with non-corrosive fluids. With the low pressure port vented to the atmosphere, this unit can be used as a gage pressure instrument.

All models have a durable stainless steel case . . . compact configuration . . . excellent linearity, resolution and hysteresis. The rugged linkage system and Bourdon tube assembly provide excellent shock, vibration and acceleration characteristics. All models are now in quantity production. Write for new literature.

COPR. BL

BOURNS LABORATORIES
General Offices: 6135 Magnolia Avenue Riverside, California
Plants: Riverside, California—Ames, Iowa

For additional information on all items on this page, use post card on last page.

$20,000 IN SALES SAVED

by a CHICAGO STANDARD STOCK TRANSFORMER

For Reeve Electronics, Inc., of Chicago, Illinois

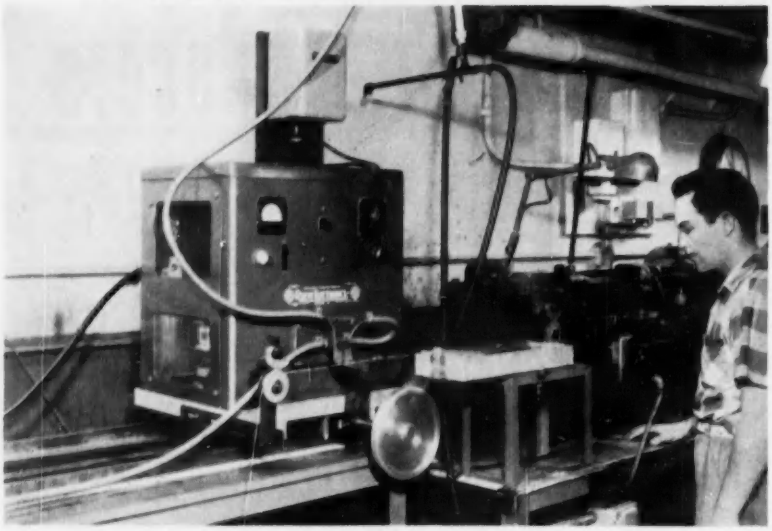

Reeve manufactures custom-made, high frequency heating equipment, including a device to eliminate hand retwisting and retinning of cut standard wire. It applies a high frequency pulse to the point at which the wire is to be cut, forming a solid bundle of the wire strands that resists the strain of cutting and stripping.

Normally sold individually, Reeve received orders for fourteen of these units —all with firm delivery dates within a five week period. All parts could be obtained in time, except for one special choke. This stumbling block was removed, however . . . when they found that Chicago Standard Transformer C-1414 met the required specifications . . . and was *immediately available from stock.*

RESULT:

Reeve was able to meet their customers' delivery deadlines. This would have been impossible if they had to wait for the production of a "special" transformer.

LET CHICAGO STANDARD STOCK TRANSFORMERS SOLVE YOUR TRANSFORMER BOTTLENECKS

FREE

The latest Chicago Standard catalogs listing over 1100 stock transformers

CHICAGO STANDARD TRANSFORMER corporation

3501 Addison Street • Chicago 18, Illinois

Export Sales: Roburn Agencies, Inc.
431 Greenwich St., New York 13, N. Y.

under high operating temperatures without loosening of terminals or cracking, and subsequent entrance of moisture.



GENERATOR
delivers random pulses

UNIVERSAL ATOMICS CORP., 19 E. 48th St., New York 17, N. Y. Model 422 completely transistorized, portable random pulse generator is designed for use in radiation and electronic laboratories, and for field testing of radiometric equipment. The 6-lb unit delivers random pulses at a controlled rate from 10 to 1,000 pps. It operates for over 100 hr from 4 standard 1½-v flashlight batteries, at 5 mv to 5 v output, from a 100-ohm impedance source.

The random pulse generator comes in a 9-in. by 7-in. by 6-in. case and the price is $199.50.

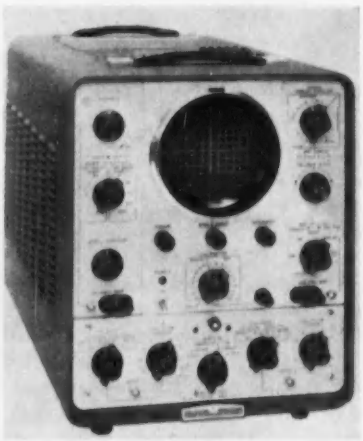

H-F OSCILLOSCOPE
magnifies 100 times

HEWLETT-PACKARD CO., 395 Page Mill Road, Palo Alto, Calif., has announced model 150A, a new 10-mc oscilloscope that magnifies 100 times. The d-c to 500 kc horizontal

amplifier provides sweep magnifications of 1, 5, 10, 50 and 100 times, which together with the special horizontal position control offer a means of fine adjustment and examination of any 10-cm portion of the magnified range. Full sweep range is 0.02 μsec per cm to 15 sec per cm.

▶ **Other Details** — Triggering may be internal, external, or from the line voltage on positive or negative level and slope. Sweep circuit may also be set for a triggered-single sweep.

The main vertical amplifier has a pass band from d-c to 10 mc with optimum transient response and rise time less than 0.035 μsec. A fixed delay of 0.25 μsec permits viewing the leading edge of the signal triggering the sweep. The vertical amplifier is driven by plug-in vertical preamplifiers of shallow drawer construction for optimum accessibility and maintenance.

C-BAND MAGNETRON
miniature type

BOMAC LABORATORIES, INC., Beverly, Mass. The BL206 miniature C-band magnetron is ruggedly built and will withstand shock stresses of 10,000 g longitudinally and 1,000 g laterally. Tuning is adjustable by a set screw to produce high precision tuning throughout the frequency range. The tube is manufactured as a complete package unit —no accessory equipment is required. Frequency drift is less than 0.05 mc per deg C. Operating time is 7 sec; weight, 6.5 oz; dimen-

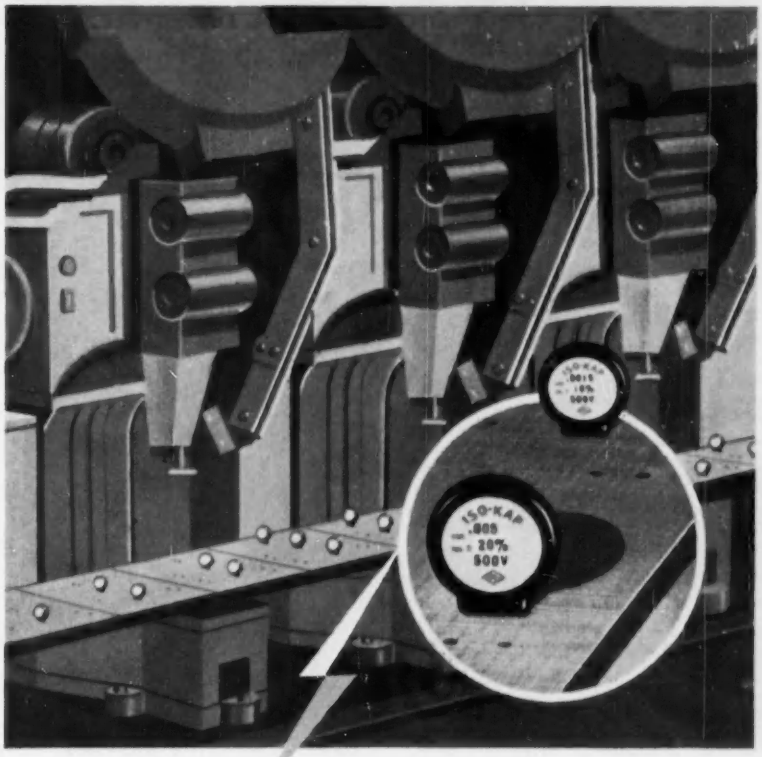

Fast, positive insertions
in automatic assembly

Centralab Molded Disc Ceramic Capacitors

The only completely insulated ceramic disc capacitor. Breakdown to ground in excess of 3000 V. D. C.

Unaffected by extremes of vibration; by ozone, salt water, or any known acid or solvent at room temperature.

Leads dimensioned to meet automation standards.

- Thickness, diameter, and lead spacing always exact—for trouble-free feeding.
- Leads always on perfect center line — never offset.
- Lead strength greater than the tensile strength of No. 20 wire — leads can't pull out.
- Clearly labeled to avoid confusion and mistakes, in either machine- or hand-insertion. Stamped with capacity, voltage, rating and tolerance.

Write for engineering bulletin EP-48, for detailed technical information.

Centralab A DIVISION OF GLOBE-UNION INC.
D-2256
914G East Keefe Avenue • Milwaukee 1, Wisconsin
In Canada: 804 Mt. Pleasant Road, Toronto, Ontario

For additional information on all items on this page, use post card on last page.

AUTOMATIC PRODUCTION AND QUALITY CONTROL TESTING

with the CTI Supertester

The CTI Supertester is an automatic, precision instrument for production testing, fault analysis, and preventive maintenance. It checks electronic and electrical products more completely and in a fraction of the time required by present methods.

Providing complete flexibility and rapid interchangeability between products, the Supertester can be programmed for any combination or sequence of the following measurements:

Impedance	A-C Voltage	Leakage
Resistance	D-C Voltage	Continuity

★ REDUCE TEST COSTS

Requiring only an untrained operator, the Supertester frees valuable technical personnel for specialized work. One Supertester is the equivalent of a series of custom built, single product testers, or a benchful of precision bridges and meters.

★ SPEED PRODUCTION

Complex circuits, gain and frequency measurements, involved relay operations — all are checked at the rate of 180 tests per minute. Hours of manual test procedure have been reduced to minutes. Time is not wasted checking good units.

★ INCREASE PRODUCT QUALITY

Accurately checking every production unit against design values and tolerances, the Supertester does not overlook tests or pass questionable circuits. Original specifications are tirelessly and rigidly adhered to. Instead of checking only the essential circuit parameters, the Supertester tests equipment completely, quickly, and at far less cost.

Proved in Use!

The Supertester is being used daily by a number of the nation's leading manufacturers. Their testing applications include printed circuits, telemetering units, guided missile circuitry and pre-flight tests, and aircraft electronic equipment.

Whatever the problem, rigid test specifications, high production rates, or reducing test costs, automatic testing is the solution, and the CTI Supertester has proved itself to be the efficient, money saving means to this solution.

See this equipment at Booth No. 1065 during Wescon In Los Angeles.

COLOR TELEVISION INCORPORATED — CTI — SAN CARLOS 1, CALIF.

sions, 3¼ in. high and 1¼ in. in diameter.

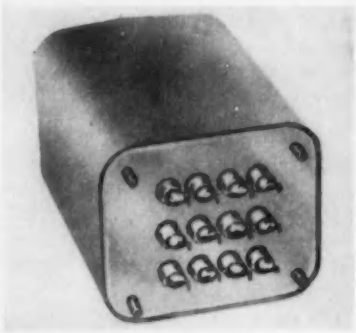

TRANSFORMERS
in standard MIL cases

UNITED TRANSFORMER CO., 150 Varick St., New York 13, N. Y. Seventeen new hermetic sealed filament transformers are conservatively designed to exceed MIL-T-27 specifications and to provide a maximum of reliability through low temperature rise and high insulation safety factors. For maximum versatility in application, these units are provided with 105/115/210/220 v primaries as well as bearing both military and industrial ratings. Units range from 6.3 v, 0.6 ampere output to 5 v at 75 amperes and from 1,500 to 21,000 v test.



SPAGHETTI TUBING
made from Teflon

PENNSYLVANIA FLUOROCARBON CO., INC., 1115 N. 38th St., Philadelphia 4, Pa. A wide range of sizes of spaghetti tubing made from Teflon is now being offered. It has good dielectric strength (500 to 1,000 v per mil); lowest dielectric constant (2.0) and dissipation factor (0.0002) of any solid dielectric; and no change of electrical proper-

ties with temperature (−100 C to +250 C) or frequency (60 cps to 100 mc). The tubing is not affected by moisture.

The spaghetti made from Teflon is used for instrument tubing, sheathing for several wires, and with bare wire as a replacement for hook-up wire insulated with Teflon. Assembly of aircraft and communication electronic equipment is speeded up when Teflon is used because it simplifies the soldering technique since Teflon is not harmed by the hot barrel of the soldering iron.

MICROWAVE LINK
for color television

LAMBDA - PACIFIC ENGINEERING, INC., 14725 Arminta St., Van Nuys, Calif., has available a new color tv microwave link, convertible from 0.1 w to 1.0 w. It is a companion to the widely used 1.0-w Lambda link. It has a frequency range from 5.9 to 7.2 kmc, and is available with program channel. Further information is available from the manufacturer.

POWER SUPPLY
for high-power klystrons

LEVINTHAL ELECTRONIC PRODUCTS, INC., 2760 Fair Oaks Ave., Redwood City, Calif. Developed as a bombarder power supply for high-power klystrons, this unit provides up to 3 amperes at 4,000 v with 0.1-percent ripple. The d-c supply is isolated 50 kv above ground. Voltage is continuously variable

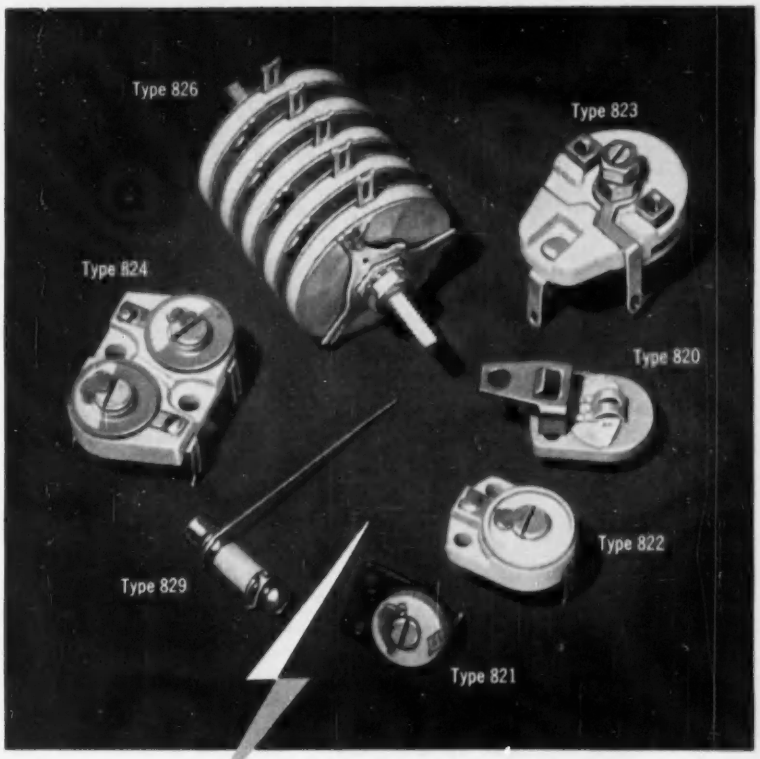

CRL The most complete line
of Ceramic Trimmer Capacitors

All units rated 600 V. D. C. W., 1500 V. D. C. test

Capacity range from .5 to 125 mmf.

Small size—light weight

Power factor less than 0.2% at one megacycle

Eight standard types. Special designs engineered to specifications.

- Rotors and stators ground optically flat, to insure dependability and accurate retrace.
- Lightweight rotors always in balance and under heavy spring pressure. Provide excellent stability under vibration without special locking device.
- All units easily adjusted. Full capacity range is obtained with 180° rotation. Equal stability is maintained at any position from minimum to maximum.

For further information, write for Technical Bulletin 42-101R1.

Centralab A DIVISION OF GLOBE-UNION INC.
9140 East Keefe Avenue • Milwaukee 1, Wisconsin
In Canada: 804 Mt. Pleasant Road, Toronto, Ontario

D-2356

For additional information on all items on this page, use post card on last page.

precision components pay off in performance...

THE A. W. HAYDON CO. SPECIAL TIME DELAY RELAY **never gives in to severe vibration, shock or sustained acceleration. Positive detent arrangement maintains time setting under all conditions. Large adjusting knob facilitates changing of time setting. Stepless clutch drive minimizes clutch error.**

SPECIFICATIONS

1.* **Voltage Range: 24-29 Volts DC at 68°F.**

2. **Accuracy over Calibrated Range of adjustment:**
   (a) **±0.1 second or ±1% of setting, under condition 1.***
   (b) **±0.15 second or ±2% of setting, over wide temperature range.**

3. **Meet Military Specs. for temperature, altitude, sand and dust, fungus, salt spray, radio filtering.**

4. **Vibration: 5-55CPS with total excursion 0.060".**

Current ratings at 29 Volts and room temperature:

1. **Motor— 25 Milliamps**
2. **Clutch— 200 Milliamps**
3. **Contacts— 1.0 Amp inductive**

Time delay period can be adjusted in 2/10 second increments over range of 0.2—30 seconds.

preferred where performance is paramount...

(Catalog on Request)

The **A.W. HAYDON Company**

235 NORTH ELM STREET, WATERBURY 20, CONNECTICUT

Design and Manufacture of Electro-Mechanical Timing Devices

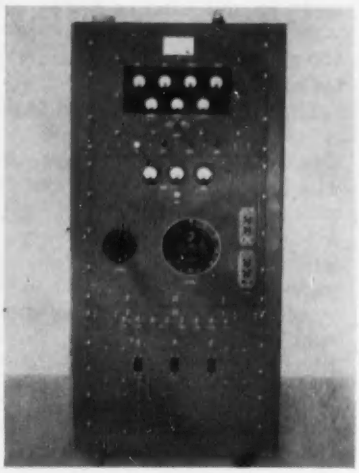

over the 0 to 4-kv range.

Included in the supply is provision for filament power to 6 filaments each insulated at 50 kv from ground and each variable up to 6 v a-c at 70 amperes.

Also included are facilities both to meter and control remotely a 50-kv d-c power supply for providing beam voltage to the tube. The unit is completely interlocked and designed for interlocking with auxiliary external units. Power input is 230 v, 3-phase, 60 cps at about 5 kw per phase.

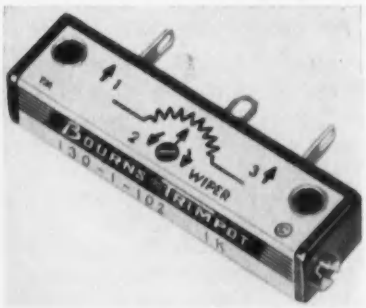

TRIMMING POT
with solder-lug terminals

BOURNS LABORATORIES, 6135 Magnolia Ave., Riverside, Calif., has announced the model 130 subminiature Trimpot with solder-lug terminals and a high usable potentiometer range of at least 98 percent. Designed for use where wire-to-wire splicing is not convenient or practical, it permits wiring direct to the instrument, using simple soldering or dip-soldering techniques. The unit is

screwdriver adjusted over 25 turns. It is available in 11 standard resistances from 10 to 20,000 ohms in resolutions ranging from 2.0 to 0.02 percent.



TRANSFORMERS
used with power supplies

STERLING TRANSFORMER CORP., 297 North 7th St., Brooklyn, N. Y., has available a line of transformers for use with electronically regulated power supplies. These transformers are especially designed to allow for the drop across the series regulator tube. They and their associate filter chokes are available hermetically sealed for military application as well as in commercial end-bell versions.

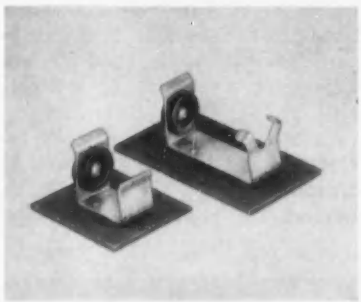

BATTERY CLIPS
for transistor circuits

CAMBRIDGE THERMIONIC CORP., Cambridge, Mass., has announced two new silver-plated battery clips for use with transistorized circuitry. They have been designed to lock simply yet stand up and remain secure even under extremely rough handling. They feature a positive low resistance contact. The silver plating resists corrosion even under battery leakage.

The clips mount simply with only

RADIO
INTERFERENCE
AND FIELD INTENSITY
measuring equipment

Stoddart equipments are suitable for making interference measurements to one or more of the following specifications:

AIR FORCE—MIL-I-6181B
150 kc to 1000 mc
BuAer—MIL-I-6181B
150 kc to 1000 mc
BuShips—MIL-I-16910A (Ships)
14 kc to 1000 mc
SIGNAL CORPS—MIL-I-11683A
150 kc to 1000 mc
SIGNAL CORPS—MIL-S-10379A
150 kc to 1000 mc

The equipments shown cover the frequency range of 14 kilocycles to 1000 megacycles.

Measurements may be made with peak, quasi-peak and average (field intensity) detector functions.

F.C.C. PART 15—Now in effect, the revised F.C.C. Part 15 places stringent requirements upon radiation from incidental and restricted radiation devices. Stoddart equipment is suitable for measuring the radiation from any device capable of generating interference or c-w signal within the frequency range of 14 kc to 1000 mc.

Write Stoddart Aircraft Radio Co., Inc., for your free copy of the new revised F.C.C. Part 15.

NM-10A (AN/URM-6B)
14 kcs to 250 kcs

NM-20B (AN/PRM-1A)
150 kcs to 25 mcs



NM-30A (AN/URM-47)
20 mcs to 400 mcs



NM-50A (AN/URM-17)
375 mcs to 1000 mcs



The **Stoddart NM-40A** is an entirely new radio interference-field intensity measuring equipment. It is the commercial equivalent of the Navy type AN/URM-41 and is tunable over the audio and radio frequency range of **30 CPS to 15 kc.** It performs vital functions never before available in a tunable equipment covering this frequency range. Electric and magnetic fields may be measured independently over this range using newly developed pick-up devices. Measurements can be made with a 3 db bandwidth variable from 10 CPS to 60 CPS and with a 15 kc wide broadband characteristic.

STODDART *Aircraft Radio Co., Inc.*
6644-A SANTA MONICA BLVD., HOLLYWOOD 38, CALIFORNIA · Hollywood 4-9294

Stupakoff
Kovar HARD-GLASS Seals

PERFECTLY FUSED BOND eliminates "leakers"

The single terminal hermetic seals shown here are among the most widely-used of literally hundreds of designs of Stupakoff Kovar Hard-Glass designs.

At the right is a typical cross-section showing how hard glass and Kovar alloy are intimately fused in an oxide bond that forms a true hermetic seal. Because the thermal expansion of Kovar exactly matches that of hard borosilicate glass, Stupakoff Seals are free from strain over the entire working temperature range.



Principal sizes available are:

Dimension A
Over-all length..... .220 in. to 3 1/16 in.
Dimension B
Flange to lead end.... .110 in. to 2 7/8 in.
Dimension C
Cup diameter..... .119 in. to .625 in.
Dimension D
Terminal diameter.... .015 in. to 3/16 in.
Special sizes can be made if desired.

Terminals may be solid or tubular, with plain ends, or with flattened and punched or hook ends, as shown in the photograph.

WRITE for catalog 453A, which gives complete data and dimensions of all standard Stupakoff Kovar Hard-Glass Hermetic Seals.

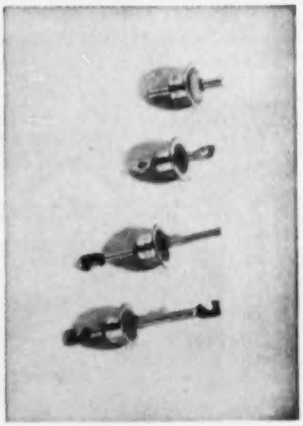

Representative terminal designs are illustrated above.

Stupakoff
DIVISION OF
The CARBORUNDUM Company

Write Dept. E
LATROBE, PENNSYLVANIA

two rivets or eyelets, and are primarily intended for use on one or two cell mercury batteries. Their ready application to transistor circuits, printed or otherwise, provides the answer to many battery-securing problems.

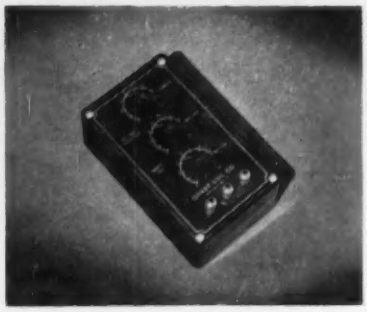

DECADE INDUCTOR
high in performance

COAST COIL CO., 5333 W. Washington Blvd., Los Angeles 16, Calif. Relatively small in size, reasonable in price, but high in performance, the model 100 decade inductor will serve as a convenient circuit element wherever a variable inductor is needed.

Covering the inductance range of 10 mh to 9.99 henries in steps of 10 mh, it measures only 2 by 3¾ by 6¼ in. (excluding knobs and terminals). The high Q inductors used in the decade inductor are adjusted to a tolerance of ± 2 percent.

Complete specifications, which include a-c and d-c ratings as well as typical Q curves are available on request.



MINIATURE RESISTOR
ceramic shell type

REON RESISTOR CORP., 117 Stanley Ave., Yonkers, N. Y., has in produc-

tion a silicone-sealed ceramic shell type resistor. The miniature precision power unit, compact and self-supporting, is resistant to humidity and salt spray military tests.

▶**Advantages**—Ideal for terminal board or printed circuit mounting, the ceramic shell offers uniform outer dimensions and is unaffected by abrasion and rough handling. It can be close mounted while the outer shell is completely insulated and has high dielectric strength. The component is also sealed in non-hygroscopic military grade steatite shells.

▶**Specifications** — Also featured are: low temperature coefficient of ±0.00002 C, wide ohmic range of 0.1 to 55,000 ohms, tolerance of 5 percent to 0.05 percent, and it exceeds MIL-R-26B characteristic G specifications.

Unusual stability is achieved by special design and for maximum environmental protection Reon employs a silicone seal of special flexible formulation.



UNIVERSAL POT
speeds readings

LEEDS & NORTHRUP CO., 4934 Stenton Ave., Philadelphia 44, Pa. Type K-3 universal potentiometer has a reading window that centralizes 3 or 4 dial readings into one single row of digits plus a scale value. Used for measurement of d-c voltage, the instrument has applications in precise temperature measurement, calibration of meters, calorimetry and precise voltage measurements.

▶**Other Features**—The instrument circuit is guarded against static, leakage and effects of high humidity. Thermals usually generated during measurement are eliminated

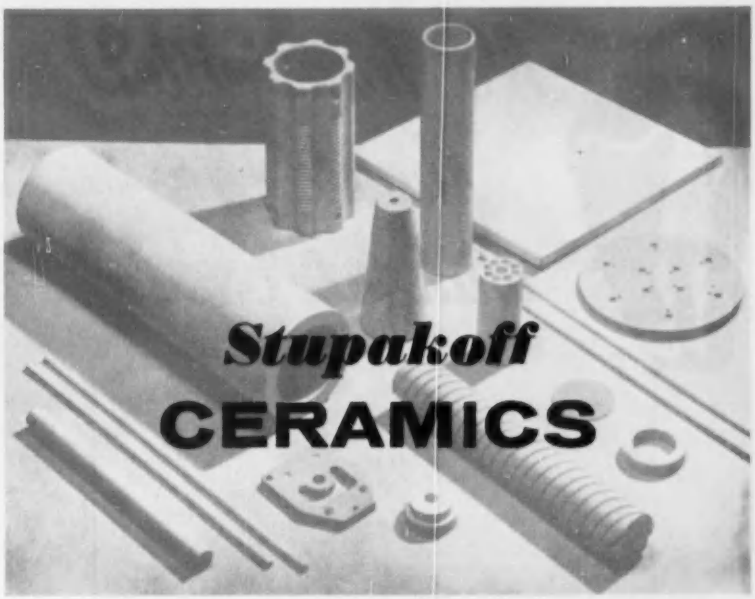

To users of ceramic parts...

is THERMAL SHOCK giving you trouble?

Stupakoff offers a number of ceramic bodies providing exceptional resistance to thermal shock, the most outstanding being STUPALITH, which has withstood over a hundred cycles from 2000° F to liquid air without harm.

are HIGH TEMPERATURES your problem?

Components formed of selected Stupakoff Ceramic Materials will withstand extremely high and prolonged temperatures, without deterioration, even in the presence of many corrosive gases and materials.

would PRECISION-MADE CERAMICS help speed your production?

Stupakoff specializes in the mass-production of precision-made ceramic parts and components. Tolerances of ±0.001 in. are not unusual. Their use in assemblies of electrical and electronic equipment sharply reduces assembly costs, and assures correct functioning of the equipment in service. This precision is particularly valuable in miniaturized assemblies.

Write for the new Stupakoff Ceramic Data Chart

Stupakoff
DIVISION OF
Write Dept. E
LATROBE, PENNSYLVANIA

The CARBORUNDUM Company

For additional information on all items on this page, use post card on last page.

No Transmitter should be without one!

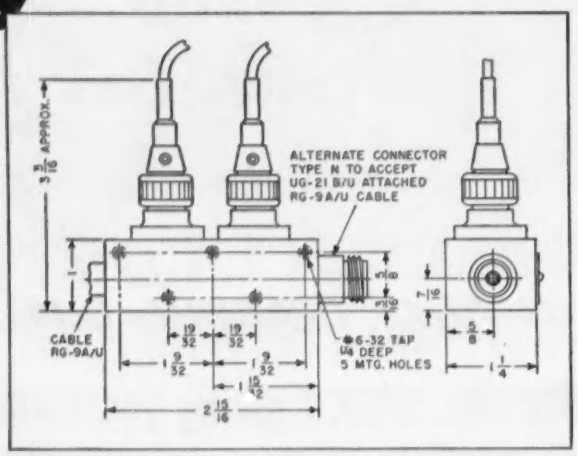

OUTLINE DRAWING MODEL 575N DOUBLE COUPLER



WHEN YOU BUILD MicroMatch Directional Couplers into your transmitters, you add an invaluable feature at extremely low cost — positive confirmation of transmitter performance. Your customers stay sold by the coupler's continuous RF Power indication. Its VSWR monitor, in addition, stands watch over your customer's transmission line and antenna.

Now incorporated in most modern Government and commercial transmitters, MicroMatch Directional Couplers produce an output essentially independent of frequency over the range of 20 to 2000 megacycles. Couplers are adjusted to produce full scale meter deflection at power levels of 1.2 watts to 120 KW. Accuracy of power measurements is plus or minus 5% of full scale. *For complete details on the MicroMatch line of monitoring equipment, write for our 50-page catalog.*

WHEN MICROMATCH IS BUILT IN- YOU KNOW WHAT'S GOING OUT

M.C. JONES ELECTRONICS CO., Inc.
BRISTOL, CONNECTICUT

by the use of a new measuring circuit. An auxiliary potentiometer circuit and connections provide selection of reference potentials to permit use as double potentiometer.



RESOLVER
for missile guidance

DIEHL MFG. CO., Finderne Plant, Somerville, N. J. A new, size 11, high accuracy induction resolver with a total functional error of 0.05 percent has been announced. Designed to meet the environmental requirements of the Armed Forces, the new resolver is completely machine wound. When both the rotor and the stator are machine wound the uniformity of the product yields high performance quality. Further, the resolver has a high input impedance, permitting an excitation voltage of 110 v a-c at 400 cps.

The new resolver can function at a 70,000-ft altitude without pressurization. To enable design engineers to easily adapt it to their applications, the component is provided with a pin-type base and mating connector.

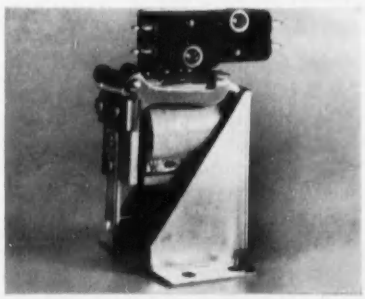

TIME DELAY RELAY
offers high capacitance

E. V. NAYBOR LABORATORIES, 30 Manorhaven Blvd., Port Washington, N. Y. Type TD310 offers a high capacitance time delay relay. Maintaining all the high resistance

advantages of the company's air dashpot time delay relays, the unit affords spdt, contact rating of 10 amperes at 125/250 v a-c or 30 v d-c inductive. Contact ratings are in accordance with MIL-S-6743 and MIL-S-6744. Life, under certain conditions, can be offered to exceed 10 million operations.

▶ **Other Specifications** — Physical dimensions are 1½ by 2 by 2½ in. high for open chassis mounting. Weight is less than 4½ oz.

This unit is also available hermetically sealed in dry nitrogen to withstand altitudes to 70,000 ft. Standard temperature range —55 C to +85 C, but units are available in the range of —65 C to +125 C.

A-C VTVM
a low-frequency instrument

SHASTA DIVISION, Beckman Instruments, Inc., P. O. Box 296, Station A, Richmond, Calif. Model 204 a-c vtvm is designed specifically for accurate measurements of a-c voltages from 0.03 to 300 v full scale in the l-f range of 2 cps to 300 kc.

▶ **Features** — It has a regulated power supply, a large easy-to-read 6 in. meter which provides an effective scale length of 8¾ in., an illuminated range selector switch which displays only the range that the operator is using, and a unique mechanical construction.

▶ **Specifications**—Accuracy is ±½ db from 2 to 3 cps; ±2 percent, 3 cps—150 kc; ± 3 percent, 3 cps—250 kc; ± 5 percent, 2 cps—300 kc. Input impedance is 10 megohms, 3 v to 300 v; 2.6 megohms, 0.03 v

Aximax II airborne fan

FULL SCALE

4 oz. net weight

2" DIAMETER • 1½" LONG

PATENT PENDING

30 200 VOLT 400 CPS 36 WATT

S.P.-INCH W.C.

21,000 RPM

VOLUME-CFM

10 115 VOLT 400 CPS 36 WATT

WRITE FOR ROTRON CATALOG SHEET #50201-1

ROTRON

ROTRON mfg. co., inc.

SCHOONMAKER LANE • WOODSTOCK • NEW YORK

New! And Outstanding!

Advance

LABORATORY-PRECISION

Electronic Instruments

ADVANCE supplies a variety of electronic equipment to the British Government and Armed Forces of the British Empire. All Advance instruments are precision-engineered and functionally designed to provide many years of accurate, trouble-free service, even under difficult conditions.

PROFESSIONAL INSTRUMENTS AT MODERATE COST



ADVANCE RF Q-Meter

■ Priced right, the Laboratory Q-Meter, Model T-1/E, incorporates an overload-proof VTVM indicator. Model T-1/E measures Q, Inductance, Capacitance, and Power Factor at frequencies between 100 Kc and 100 Mc, in six ranges. The frequency oscillator has an accuracy of ± 1%. OUTSTANDING SPECIFICATIONS: Tuning capacitor, calibrated in three scales, indicates Capacitance, 40 to 550 mmfd, ± 2%; Zf (ohms, Mc) 4,000 to 300, ± 2%; Lf² (uH, Mc) 600 to 50, ± 2%. Q is measured in two ranges, 10 to 100, and 40 to 400, with an accuracy of ± 5%. **Only $249.50**

ADVANCE VHF Generator

■ Highly versatile, the ADVANCE VHF Signal Generator, Model D-1/DNA, covers 10 to 300 Mc in six ranges with an accuracy of ± 1%, and offers both square and sine wave modulation, with *direct* calibration. Output voltage, obtained through 75-ohm transmission line, is continuously variable from 1 uv to 100 mv and is calibrated in both uv and db. Accuracy: 10 to 150 Mc, ± 3 db, ± 1 uv; 150 to 300 Mc, ± 4 db, ± 2 uv. Output is modulated 30% (± 3%) by a 1,000 cycles sine wave (± 100 cycles) or by a 1,000-cycle square wave (± 100 cycles.) **Only $395.00**



ADVANCE Audio Generator

■ Model J-2/NA meets the need for a highly accurate Audio Generator with low distortion. Covers the range from 15 to 50,000 cycles in three bands, with an accuracy of ± 2%, ± 1 cycle. The output is continuously variable into 600 ohms: 0.1 mw to 1.0 watt (0.25 to 25 volts) ± 2 db. Maximum into 8 ohms, better than 1 watt. Total harmonic distortion and hum content above 100 cycles is less than 2% at rated output, or less than 1% at 0.1 watt. **Only $149.50**

ADVANCE Precision Attenuators cover the frequency spectrum from audio to UHF. Model A-38 provides four 20 db steps of attenuation and is useful up to 300 Mc. Model A-55 is designed for extreme accuracy in its RF to VHF range. Model A-57 is an absolutely linear device for operation in UHF range.

WRITE TODAY FOR COMPLETE SPECIFICATIONS

Sole Agents for the United States

FISHER RADIO SALES CO., INC. · 21-39 44th Dr., L.I.C. 1, N. Y.

to 1 v. Output impedance is less than 25,000 ohms. Price is $175.

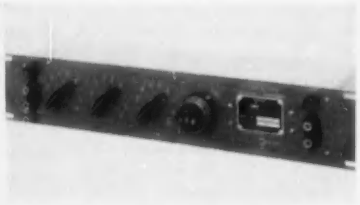

RATIO TRANSFORMER
features high accuracy

GERTSCH PRODUCTS, INC., 11846 Mississippi Ave., Los Angeles 24, Calif., has introduced a new series of standard ratio transformers known as the Radiotran model 10, with a terminal linearity of 0.001 percent. Model 10 has improved accuracy over previous Gertsch standard ratio transformers, plus reduced size (a 3½-in. by 19-in. rack panel).

Ease of read-out and both front and rear input and output terminals are featured. Model 10 operates over the frequency range of 50 to 3,000 cps.



GEAR HEAD
used with size 8 motors

BOWMAR INSTRUMENT CORP., 2617 Pennsylvania St., Ft. Wayne, Ind., has announced an ultraminiature precision motor gear head weighing 1⅛ oz. The 750-GH gear head, designed for adaptation to size 8 motors, measures 0.750 in. in diameter, and, in its solid-type model, is 1 in. long.

Four through-bolts make it adaptable to specially tapped size 8 motors without the use of adapter plates or other accessories, thus eliminating extra weight and removing another variable from the electromechanical assembly using it. Assembly operations may also be

simplified when the direct mounting method can be employed.

► **Uses**—Principal applications include missile control systems, where weight, performance and size are critical; servomechanisms; aircraft control equipment; indicating devices; computers and other precision electromechanical instrument applications.



PRECISION RESISTOR
completely encapsulated

EASTERN PRECISION RESISTOR CORP., 677 Barbey St., Brooklyn, N. Y. Designed to meet the requirements of MIL-R-93 characteristic A, this subminiature precision resistor is completely encapsulated. It measures 0.150 in. in diameter, $\frac{3}{8}$ in. in length.

► **Design**—A new method of mechanically attaching the axial leads to the winding form eliminates the possibility of leads being pulled out during use. This new design also allows for a much greater winding area.

Values up to 500,000 ohms are available with tolerance as close as 0.01 percent. Resistor style NS-6AV will dissipate 0.1 w at 125 C with no derating.



CONTROL THYRATRON
with 3 different bases

GENERAL ELECTRIC CO., Schenectady 5, N. Y., has available 3 new types of its 6.4-ampere negative control characteristic thyratron—

MAGNETIC MATERIAL?

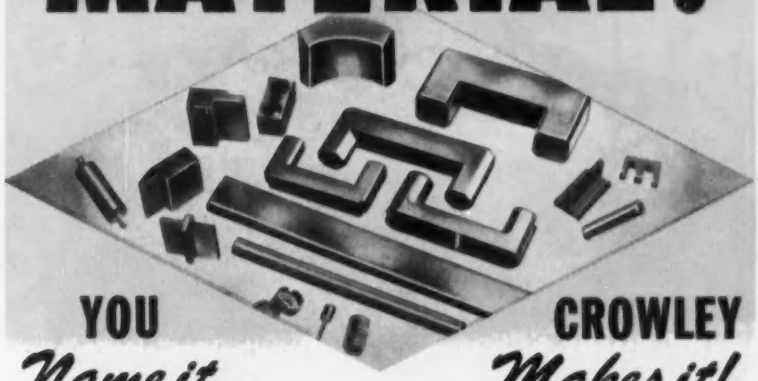

YOU Name it... CROWLEY Makes it!

Croloy Magnetic Ceramic From the simplest to the most elaborate radio cores and tuning slugs and TV deflection yokes and flyback transformer cores, you can bank on **Crowley**, the pioneer and specialist. For Croloy is available in the widest variety of designs, sizes and metallurgical bodies to meet your standard or special electromagnetic specs. Magnetic materials from TV antenna cores to Magnetic Cabinet Door latches.

CROMAG MAGNETS

A ceramic-magnetic material for permanent-magnets available in wide variety of shapes, produced by the outstanding powder-iron-ceramic "know-how." Available in extruded lengths as rods, tubes, square, rectangular or any desired symmetrical shape. Also pressed. Unlimited applications.

CROWLEY POLYIRON

For VHF and UHF... Easily molded to any shape. At microwave frequencies, it provides a permeable dielectric of exceptionally high attenuation. Readily machined with reasonable care and proper equipment.

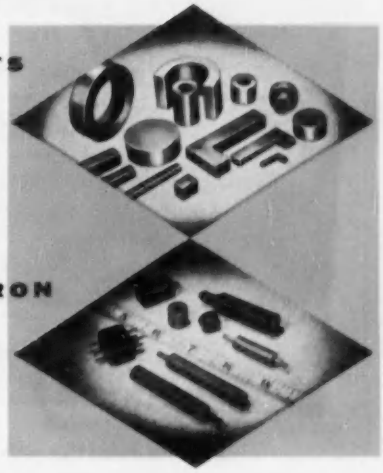

Consult us! Crowley pioneering is now backed by Aerovox research, development and expanded production facilities. And all at your disposal. Send us your powder-iron problems and requirements.

AEROVOX CORPORATION

CROWLEY DIVISION

ONE CENTRAL AVE.
WEST ORANGE, N. J.

In Canada: AEROVOX CANADA, LTD., Hamilton, Ont.
Export: Ad Auriema, 89 Broad St., New York, N. Y. • Cable: Auriema, N. Y.

For additional information on all items on this page, use post card on last page.

Free booklet tells how to...

Add our brains and machines to those you have now...

Here's additional plant capacity ...available now
MECHANICAL DIVISION OF
General Mills, Inc.
• electro-mechanical assemblies or components • fine-pitch, instrument-type gear assemblies
• industrial or military optical assemblies • precision metal cutting, grinding and finishing

You can avoid the pitfalls and problems of plant expansion, yet increase production and cut costs, by putting our experience, equipment and varied skills to work for you. We're equipped to handle the most complex jobs from drawing board stage to final environmental testing. New free booklet describes our facilities, shows our products, names our customers. Write for yours today.

MECHANICAL DIVISION OF General Mills

Dept. EL7, 1620 Central Avenue, Minneapolis 13, Minn.

GL-6807, GL-6808 and GL-6809. All incorporate element and envelope construction designed to provide maximum cooling to eliminate major causes of inoperation resulting in loss of factory time and possible damage to equipment.

▶ **Base Connections**—The GL-6807 has a pin-type base and can be used interchangeably with the GL-5545. The GL-6808 has flexible flying leads and the GL-6809 is made with spade lug terminals extending from the base.

Because they carry high commutation factor ratings they are particularly suited to motor control and other inductive load circuits without cushioning. Their ability to operate over a wide ambient temperature range (—55 to +70 C) and a quick-heating cathode (1 minute) are useful features in industrial applications.

Maximum average cathode current is 6.4 amperes and fault current, 1,120 amperes. Maximum negative control grid voltage before conduction is —250 v; and during conduction, —10 v. Maximum positive control grid current is 0.20 ampere with the anode positive and 0.10 ampere with the anode negative.

PRODUCTION TOOL
for connector soldering

AMELCO, INC., 2040 Colorado Ave., Santa Monica, Calif., announces the Connex, a production tool for faster and more efficient soldering. In use, the connector is snapped quickly and firmly to the Connex, permitting the operator to solder fast from any angle. There is no danger of slips and far less chance for burns. Connex reduces costs by increasing production perform-

ance on all production lines where soldering is involved. Price is $7.00 ($7.50 east of the Rockies).



PRECISION POT
a multiturn unit

SERVONICS, INC., 834 N. Henry St., Alexandria, Va. The Dipot is a high precision multiturn potentiometer which subdivides voltages obtained from matched resistors with a vernier porentiometer. It is effectively an "automized" Kelvin-Varley circuit. The Dipot may be continuously rotated without adverse effects. Through the use of pie wound resistors, instead of a helical coil, phase shift is greatly reduced. A brochure is available telling how it works, giving specifications and applications.

TRANSFORMERS
for printed circuit cards

TECHNITROL ENGINEERING CORP., 2751 North Fourth St., Philadelphia 33, Pa. Designed especially for printed circuit cards, the type P transformers offer a flat profile with sturdy, accurately spaced solder pins.

Both units are 11/32 in. high by 15/16 in. in diameter and are completely encapsulated. Type PE units feature a pin arrangement similar

newest
what's ~~new~~ in electronics?
You'll find it in this
Free Book

This brand-new book is your 1956 guide to the latest advancements to come from the expert electronic engineering and production staffs of Thompson, offering you the most modern facilities to help solve your every electronic problem.

Electronics Division
Thompson Products
2196 CLARKWOOD ROAD
CLEVELAND 3, OHIO

FILL THIS OUT AND MAIL IT Today!

ELECTRONICS DIVISION, DEPT. E-7
THOMPSON PRODUCTS
2196 Clarkwood Road
Cleveland 3, Ohio

Please send me a FREE copy of "Electronics Advancement".

Name _____ Title _____
Company _____
Address _____
City _____ Zone ___ State _____

For additional information on all items on this page, use post card on last page.

RESINITE EMBOSSED COIL FORMS

...can increase efficiency of your iron core insertion production by 20%

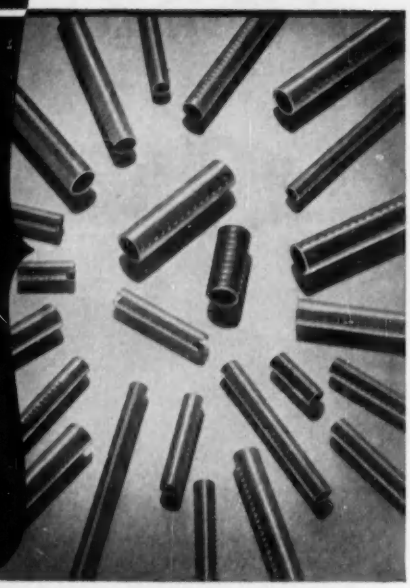

Special embossed construction eliminates torque control problems and stripping . . . prevents breakage or freezing of cores due to cross threading or improper starts.

Custom fabrication to your exact specification assures correct dimensions to within the most critical tolerances, plus uniformity throughout.

Threads are positioned in accordance with your requirement —full thread, each end, one end, center only.

We will furnish—without charge—a pilot production run of custom-made embossed forms to fit your particular application. We will also send a winding mandrel made to the specifications you supply.

Contact us now for full details about this special offer. Request technical bulletin, *Use of Threaded Tubes, Threaded Iron Cores VS. Torque Control.*

▼ ▼ ▼

RESINITE CORPORATION

Sales Representatives in:

New England: Framingham, Massachusetts, Trinity 3-7091
Metropolitan New York, New Jersey: Jersey City, New Jersey, Journal Square 4-3574
Upstate New York: Syracuse, New York, Syracuse 4-2141
Northern Ohio, Western Penn.: Cleveland, Ohio, Atlantic 1-1060
Indiana, Southern Ohio: Logansport, Indiana, Logansport 2555
California: Pasadena, California, Sycamore 8-3919
Canada: Montreal, Quebec, Canada, Walnut 0337

Division of: PRECISION PAPER TUBE COMPANY

2035E W. CHARLESTON ST. • CHICAGO 47, ILLINOIS

to the standard 7 pin miniature, but with the pins on an 11/16 in. diameter. Type PA features an arrangement of pairs of pins, so located that the pins fall at the intersections of a 1/10 in. center grid.

Featuring ferrite cores, this series of transformers can be wound to cover pulse widths ranging from 0.1 μsec to over 2.5 μsec and incorporating a wide variety of turn ratios.

INTERVERTER
power conversion device

THE INTERELECTRONICS CORP., 2432 Grand Concourse, New York 58, N. Y., has announced the Interverter, a voltage regulated d-c to d-c semiconductor power transformer. The ¾ w and 50 w series are illustrated. A miniature, standard and high-power series are available, ranging from ¾ w to 1 kw. A specially designed, high efficiency toroidal core structure is used, powered by the gating generator, and almost any voltage or voltages can be secured. Conversion efficiencies up to 90 percent are obtained. Input voltages of 1.5 v to 60 v may be used. Voltage regulation up to 0.1 percent is available.

► **Advantages**—It uses no moving parts, slip rings, brushes or commutators and maintenance is completely obviated. It withstands the extreme shock, vibration and acceleration encountered in military equipment, and operates over a wide temperature range.

► **Applications**—The miniature series are designed primarily to furnish plate and bias power from the filament battery for missiles, fuzes, telemetering, beacons and other miniaturized equipment. Among the uses of the high-power series

are in high-power transmitters, radar and aircraft.

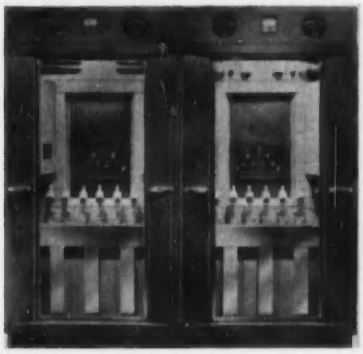

VHF TV AMPLIFIER
for channels 2-6

STANDARD ELECTRONICS CORP., 285 Emmet St., Newark 5, N. J., has developed a compact 25-kw tv amplifier for channels 2-6. Model AL-634 amplifier, priced at $50,000, includes the following characteristics: diminished floor space requirements, 2 cabinets occupying a total of 235 sq ft; reduced weight, 4,000 lb total; low power consumption, 63 kw at 90-percent power factor at black level; and it exceeds all applicable FCC requirements for monochrome and color transmission.

► **Adaptability** — As a result of self-contained, unitized design, where all components are housed in the two amplifier cabinets, the equipment is adaptable to any station layout; thereby providing maximum flexibility and minimum building alterations.

The rectifier unit, in both visual and aural amplifier cabinets, supplies high plate voltage by means of a 3-phase full-wave circuit which utilizes 6 mercury vapor rectifier tubes. A complete system of interlocks, overload circuits and relays, time delays and safety switches protects the equipment from overloads and power transients.

RESISTORS
are highly stable

PHYSICS RESEARCH LABORATORIES, INC., 507 Hempstead Turnpike, W. Hempstead, N. Y., has introduced the complete line of Otto Wolff of

BASIC RESEARCH at los alamos

ABOVE: DR. KEITH BOYER IS SEEN OBSERVING A BEAM OF LOW ENERGY NITROGEN IONS.

The cyclotron shown above is one of the many types of advanced research equipment in use at Los Alamos. This variable energy machine is designed to accelerate high intensity beams of all the hydrogen and helium isotopes.

The Laboratory offers a wide range of opportunities to do research and development work in the fields of Physics, Chemistry, Metallurgy, Mathematics, Computing and Engineering.

If you are interested in learning more about career opportunities at Los Alamos, write—

DEPARTMENT OF SCIENTIFIC PERSONNEL
Division 1003

los alamos scientific laboratory
OF THE UNIVERSITY OF CALIFORNIA
LOS ALAMOS, NEW MEXICO

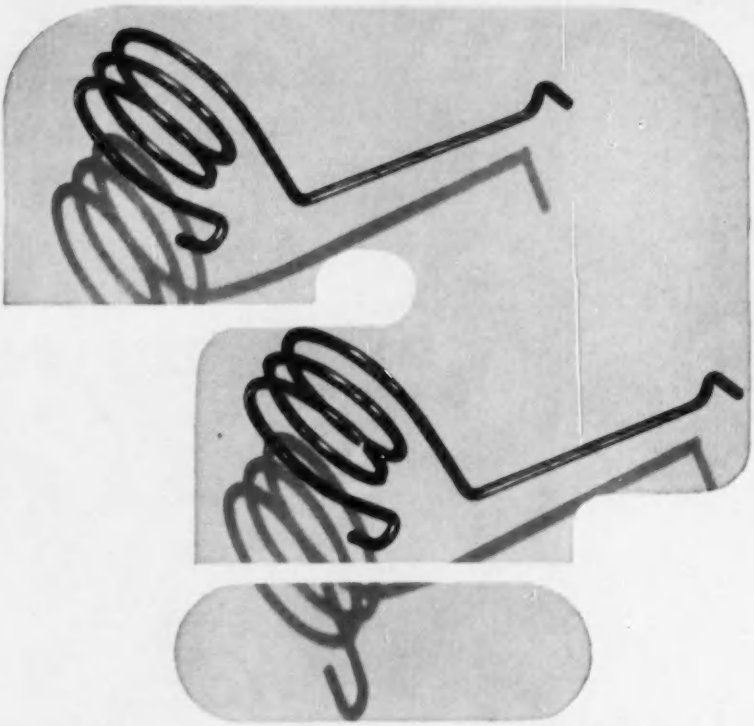

Which Spring Costs More . . . and Why?

■ These springs look identical—and one will work as well as the other, yet one costs more. The higher cost spring was the product of time consuming engineering effort, plus a demand for unnecessary close tolerances and secondary production operations. The other was the simpler, low cost result of Lewis engineering experience and production know-how.

Lewis engineering experience is one of many "extras" you get when you make Lewis your source for springs. Whether it's help in spring design, packaging springs for efficient assembly line handling, or simply a case of getting top quality springs at competitive prices—call on Lewis .

LEWIS SPRING & MANUFACTURING COMPANY
2656 W. North Avenue, Chicago 47, Illinois

Lewis PRECISION SPRINGS

The finest light springs and wireforms of every type and material

Berlin standard resistors. All resistors have accuracies of 0.01 percent and in the air-cooled models may be obtained in power ratings of 1, 10, or 25 w.

The l-w models come in 9 different values, ranging from 100,000 ohms to 0.001 ohm. The temperature coefficient is smaller than 25×10^{-6} ohm per C. The variation in stability is less than 5 parts in 100,000 over a period of one year.

POWER TRANSISTORS
handle up to 20-w input

CLEVITE TRANSISTOR PRODUCTS, 241 Crescent St., Waltham 54, Mass., has announced 6 new germanium power transistors for handling up to 20-w input. They are *pnp* power junction type, and were originally developed to meet U. S. Signal Corps specifications.

Types are available for nominal 12 and 28-v operation, making them suitable for direct use in battery powered equipment. They are particularly suitable for class A operation in the audio output stage of automobile radios. The collector is electrically connected to the metal housing, but where it must be insulated from the chassis, a large mounting flange permits rapid heat flow through the insulating material.

A brochure is available listing complete specifications and performance characteristics.

Literature

Wire-Wound Resistors. International Resistance Co., 401 North Broad St., Philadelphia 8, Pa. Catalog data bulletin D-1a covers MIL type precision wire-wound resistors. It contains comprehensive data on winding techniques, testing, tolerance, inductance, insulation, terminals and temperature coefficient.

Microwave Components and Mechanical Assemblies. J-V-M Engineering Co., 8846 W. 47th St., Brookfield, Ill. A wide range of standard and custom-engineered microwave components and com-

plex mechanical assemblies are featured in an illustrated technical catalog. The microwave components described range from d-c to 40,000 mc and include cavities, adapters, bends, attenuators, loads, tees, twists, directional couplers and similar components and waveguide accessories. Mechanical components and services cover tools, dies, general machining, screw machine and sheet metal.

Snap-Action Switches. Micro Switch, Freeport, Ill., has published a 16-page booklet titled "Micro Tips Digest", containing 43 illustrated descriptions of uses for snap-action switches. The booklet is a compilation of the best ideas for applications of this type of switch, now widely used throughout industry.

Complete with photographs and drawings, the 43 switch application stories describe a wide variety of industrial and commercial uses for snap-action switches to provide improved safety, to lower costs, to increase production and to make electrically operated equipment more automatic.

Simulation Theory and Practice. Berkeley Division, Beckman Instruments, Inc., 2200 Wright Ave., Richmond 3, Calif. Data File 121 gives a simplified short course in the basic theory and practice of analog computers. It explores the various aspects of simulation and describes its convenient implementation with analog computers for solving great varieties of problems in systems design, engineering and industry.

Mathematical background is fully explained, and the data file features a complete presentation on electronic analog simulation equipment. It includes references and bibliography.

Precision Instruments. Advance Electronics Lab., Inc., 451 Highland Ave., Passaic, N. J. A 4-page folder illustrates and describes a line of phase measuring instruments, delay lines and electronic counters. Specifications, prices are given.

Titanium Corrosion Resistance. Mallory-Sharon Titanium Corp., Niles, Ohio. A new bulletin con-

CURTISS-WRIGHT

DYNAMIC CAPACITOR ELECTROMETER

FOR STABLE AMPLIFICATION OF LOW-LEVEL DC SIGNALS

Measures currents as low as 10^{-16} amp. • Extremely high input impedance . . . 10^{15} ohms. • Low drift — less than ± 1 mv per 24 hours. • Uses dependable, durable dynamic capacitor. • Accuracy of ± ½ % full scale. • Only 14" x 10" x 9"

The Curtiss-Wright Dynamic Capacitor Electrometer is ideal for measuring minute currents or voltages from high impedance sources. There is no 60 cps interference since the Dynamic Capacitor Electrometer operates at 1,000 cps. The instrument can be used to measure static charges, potentials of floating grids, insulation leakage currents, capacitor dielectric leakages; and to study transistors and diodes. Its ruggedness, reliability, and high sensitivity make it especially suited for use in the nuclear field as a component in reactor control systems and in industrial control systems employing radioisotopes as energy sources. It can be used for pH determination, and in mass spectrometry. In biophysics and medicine it may be used to measure cell potentials, skin potentials, streaming potentials, injury potentials, and nerve impulses. Besides providing an indication on its own meter, it will operate any standard recorder. For details, write Nuclear Equipment Sales Dept., Curtiss-Wright Corporation, Electronics Division, Carlstadt, N. J.

ELECTRONICS DIVISION
CURTISS-WRIGHT
CORPORATION • CARLSTADT, N. J.

For additional information on all items on this page, use post card on last page.

miniature

ENCAPSULATED

pulse transformers

custom-wound for your needs

Type MILX... for extreme environmental conditions

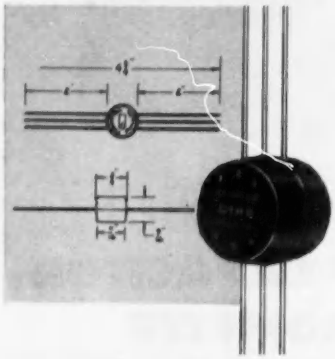

Type M... for subminiature and transistor circuits



Technitrol is equipped to design and produce pulse transformers to meet your particular requirements. Simply let us know your performance specifications. Technitrol's staff of engineers will test sample transformers under actual circuit conditions—assuring proper performance. All charges for this service are included in our low sample quantity price.

Technitrol also makes a full line of lumped and distributed parameter Delay Lines. You may choose from a variety of mountings, or again, our engineers will aid you in developing special designs.

for additional information, write for Bulletin E166.

TECHNITROL

engineering company

2751 North Fourth Street • Philadelphia 33, Pennsylvania

tains currently available data on the corrosion resistance of titanium, and suggests to the product designer where this new metal can be applied to overcome corrosion problems. Various uses of titanium, based on its corrosion resistance, are described, and the booklet contains corrosion ratings for titanium when exposed to many common types of corrosive agents.

Servo Literature. John Oster Mfg. Co., Avionic Division, Racine, Wisc. Four catalog pages, each illustrating and fully describing a type of low inertia servo motor, are now available. Each sheet includes two graphs, dimensional drawings, average characteristics and complete electrical data.

The four servos described are a size 10 servo designed for operation in a special 250-cycle square-wave system; a size 10 designed for use in servo systems where instant response to input signal is a prime requisite; a high performance servo which conforms dimensionally with Navy BuOrd size 10; and a high performance servo which conforms dimensionally with Navy BuOrd size 15.

Frequency Limit Trips. Arga Division, Beckman Instruments, Inc., 220 Pasadena Ave., South Pasadena, Calif. Data sheet El presents the company's line of frequency limit indicators which are designed to monitor supply lines where frequency is critical. The bulletin describes the operation of the unit which comes in two forms: one operates when the frequency is higher than critical; the other when the frequency is lower than critical. They are available packaged together.

Technical data presented include: input voltage (115), nominal frequency (400 cps), l-f warning point (390 cps), h-f warning point (410 cps), accuracy ±1 cps at 400 cps, input power (10 w), harmonic and voltage coefficients (input voltage harmonics of 5 percent or changes of input voltage of ±10 percent), ambient temperature limits (—55 C to +55 C).

Beryllium Copper Springs. The Beryllium Corp., Reading, Pa. A 4-page technical bulletin describes

the use and advantages of Berylco beryllium copper as the heart of a new vibration damping device for mounting electronic components in aircraft.

This case study covers damping units manufactured by the K. W. Johnson Co., Dayton, Ohio. Included in the bulletin are complete data on metal requirements for the Berylco alloy wire mesh springs, as well as design and fabrication considerations. The springs protect equipment under shock load conditions up to 30 g. In addition, the metal must withstand temperatures ranging from —65 to +200 C, high salt spray concentrations, extreme humidity and long storage life.

Molding Compounds. Plastics & Resins Division, American Cyanamid Co., 30 Rockefeller Plaza, New York 20, N. Y., has published a 50-page technical manual entitled "Melamine Molding Compounds."

Subjects covered include descriptions of molding compounds, characteristics of molding compounds, storage and handling, preforming, preheating, molds, design of molded parts, molding procedures, molding variables, finishing, and typical applications of Melamine molding compounds. Individual data sheets on all of the company's Cymel Melamine molding compounds are included.

Solenoids. Comar Electric Co., 3349 Addison St., Chicago 18, Ill. Bulletin No. 200 is a 6-page folder illustrating and describing a line of solid frame a-c and d-c solenoids. Four types of laminated a-c solenoids are covered. Charts, and size and mounting data are included.

Geiger Counter. Nuclear Instrument and Chemical Corp., 229 W. Erie St., Chicago 10, Ill., has available a brochure describing the model 2612L portable Geiger counter for uranium prospecting. Chief features, circuit details and calibration information are included. Price of the unit described is $250.

Magnetic Storage Elements. Epsco, Inc., 588 Commonwealth Ave., Boston 15, Mass., has available engineering data sheets on its low

UNION

Miniature Relays
with the type of
mounting you need







Mountings are no problem when you select UNION Miniature Relays. You can choose from these eight standard mountings, or, if necessary, special adaptions can be made.

1. **Plug-in mount**
2. **Single screw mount**
3. **Center of gravity flange mount**
4. **Double screw mount**
5. **Top flange mount**
6. **Clamp mount**
7. **Bottom flange mount**
8. **Flange mount**

In addition to a wide variety of mountings, UNION Relays are made with a variety of other features such as—

Gold alloy or palladium contacts for unsurpassed contact reliability.

Gold alloy contacts especially fitted for dry-circuitry use.

Coil resistances up to 10,000 ohms for a wide variety of applications.

High vibration and shock resistance available up to 2,000 cycles at 15 G's and shock in excess of 50 G's.

High life expectancy. Tested through 1,000,000 operations.

DC or AC MODELS with identical quality.

Write for complete information, bulletin 1010.







75 Years 1881 1956
OF EQUIPMENT AND SYSTEMS ENGINEERING . . . . .
UNION SWITCH & SIGNAL
DIVISION OF WESTINGHOUSE AIR BRAKE COMPANY
PITTSBURGH 18, PENNSYLVANIA

For additional information on all items on this page, use post card on last page.

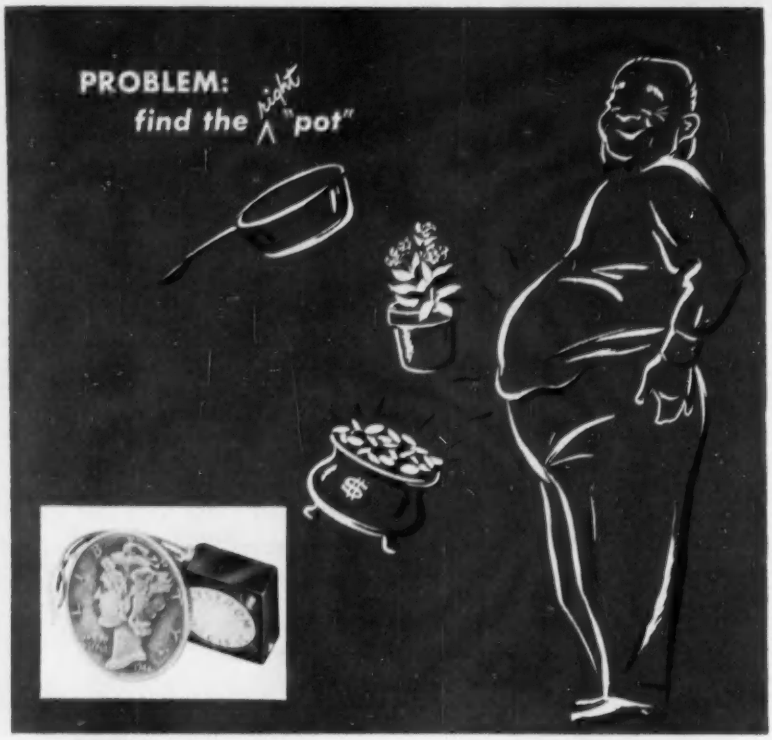

Solution:

. . . **DAYSTROM POTENTIOMETER'S MODEL 300-00,** the tiniest, wire-wound precision "pot" on the market.

The less than dime-sized model, recently improved even over the well performing original, is a fly-weight unit (2 grams) designed for exacting jobs in minute spaces and through extreme temperature ranges.

For your applications demanding higher resistance ranges, plus compactness, the slightly larger Model 303-00 is the answer. Both models are designed for universal adaptability and unlimited stacking (21 per cubic inch for the Model 300-00). Both are immediately available in standard models.

Some outstanding characteristics:

	Model 300-00	Model 303-00
Size	0.5" square by 0.187" thick	0.75" square by 0.28" thick
Weight	2 grams	7 grams
Resistance Ranges	10 ohms to 50K	5K to 125K

Write today for literature on these or any of the many other production or custom-made precision potentiometers available. Names of local representatives on request.

Openings exist for highly qualified engineers.

POTENTIOMETER DIVISION

Daystrom PACIFIC CORPORATION

11150 La Grange Ave. West Los Angeles 25, Calif.

A subsidiary of Daystrom, Inc.

power, medium frequency, subminiaturized magnetic storage elements, suitable for mounting on etched wiring boards. Specifications and dimensional drawings are included.

Resistivity System. Houston Technical Laboratories, a subsidiary of Texas Instruments Inc., 2424 Branard, Houston 6, Texas. Bulletin E-401 illustrates and describes new lightweight portable instruments (signal generator bank and voltmeter bank) for the electrical resistivity method of geophysical prospecting.

Explosion Chamber. Tenney Engineering, Inc., 1090 Springfield Road, Union, N. J., has available a 4-page folder giving complete information concerning design features, construction and test procedures involved with the use of a new explosion chamber. Illustrative photographs, handy reference arrows and simplified ordering data are all prominent features of the folder. An entire range of specifications is included for factual evaluation.

Product Brochure. Gulton Industries, Inc., Metuchen, N. J., has available a 12-page, illustrated guide to the products of its five associated companies: Gulton Mfg. Corp.; Glenco Corp.; Vibr-Ceramics Greibach Instruments Corp.; Thermistor Corp. of America. Included is useful technical information about over 65 diversified advanced Gulton Industries' product lines. Also shown are interesting photographs of individual manufacturing processes involved in the production of these products.

High Temperature Insulation. Insulation and Wires Inc., 1534 Swinney Ave., Fort Wayne 6, Ind. A new 4-page brochure describes and lists a line of class H silicone electrical insulating materials for high-temperature use. A chart compares class A, B, H and C insulations.

Products included are silicone resin insulating varnish, silicone bonded mica-glass cloth and tape, silicone treated glass cloth and tape, silicone-glass laminate, silicone-

treated asbestos cloth and tape, silicone rubber insulated lead wire, silicone rubber-glass tape, silicone resin and rubber-treated glass tubing and sleeving, and silicone bonded glass magnet wire.

TV Picture Tubes. CBS-Hytron, Salem, Mass., is offering the third edition of its reference guide for tv picture tubes. Revised and brought up to date, it provides pertinent data for 258 magnetically deflected picture tubes. Ask for bulletin PA-2.

Resistor Catalog. The Daven Co., 538 W. Mt. Pleasant Ave., Livingston, N. J., has available a 12-page encapsulated wire-wound resistor catalog. Newly developed products, new plastic formulations, new encapsulating techniques, in addition to other improved design and manufacturing features, are presented in detail.

The catalog includes: temperature-sensitive resistors; card-type resistors, miniature d-c voltage divider and d-c networks, toothpick resistors; miniature resistors, subminiature resistors; axial lead types; lug types; MIL types and Daven equivalents.

Magnetic Counters. Sprague Electric Co., 35 Marshall St., North Adams, Mass. Data on the application of magnetic shift register assemblies in magnetic counters is given in engineering bulletin 551. The bulletin gives data on the operation of two types of standard Sprague counters and illustrates a typical decimal counter decade circuit.

Printed Circuit Tolerances. Photocircuits Corp., Glen Cove, N. Y. Technical bulletin P-9 is a 2-page publication entitled "Standard Printed Circuit Tolerances."

Included in the bulletin are such items as diameter tolerances of unplated and plated holes, location tolerances between holes, hole to pattern tolerances, alignment (front to back) tolerances, circuit pattern to outside dimension tolerances, overall dimension tolerances, holes to outside dimension tolerances, line width and spacing tolerances, plating tolerances and others—all hav-

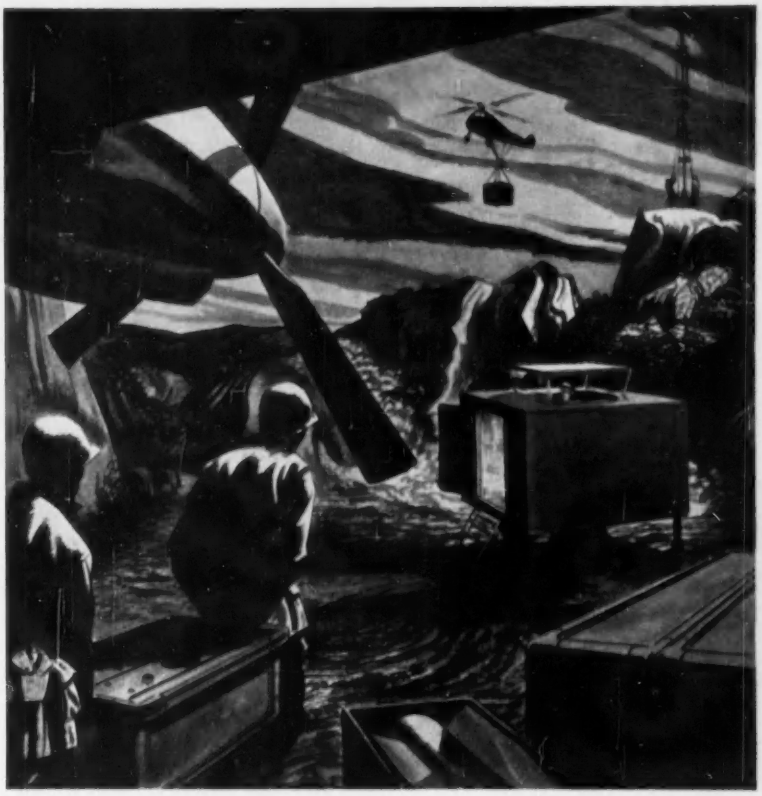

New meaning for the concept of "mobility"...

TRANS-MOBILE PRODUCTS by Craig

Complete air traffic control systems that can be sped to distant destinations by land, sea, or air . . . lightweight antennas that can be flown to remote areas and set up in minutes . . . rugged carriers to keep deadly guided missiles safe in transit — products like these, designed, engineered and pioneered by CRAIG help get vital equipment *where* it's needed — *when* it's needed.

Whether it's a question of prototypes or production — you'll find CRAIG's staff of electronic, mechanical and structural engineers ready to provide practical solutions with trans-mobile products ranging from shelters and carrying cases to fully installed electronic systems.

For further information on trans-mobile products, write or phone:

Craig SYSTEMS, INC.

Dept. B-7, Danvers, Mass.–Danvers 1870

AIR TRAFFIC CONTROL CENTRAL

Mobile, self-contained, fully equipped for control tower operations. Powered by mobile generators or commercial power. Transportable by air, land, or sea.

HF ANTENNA CM1153

Lightweight, rugged — base needs only 4 square feet of ground space. Frequency range: 1-30 megacycles. 20 feet high — 91 pounds complete.

MISSILE CARRIERS

Lightweight aluminum construction. Fully tested for shock, vibration, impact, and submersion.



REUSABLE CONTAINERS

For transporting and storing plane parts, optical and electronic equipment. Aluminum construction. Built to pass all applicable government specifications.

For additional information on all items on this page, use post card on last page.

TRUST

PACE

TO HELP

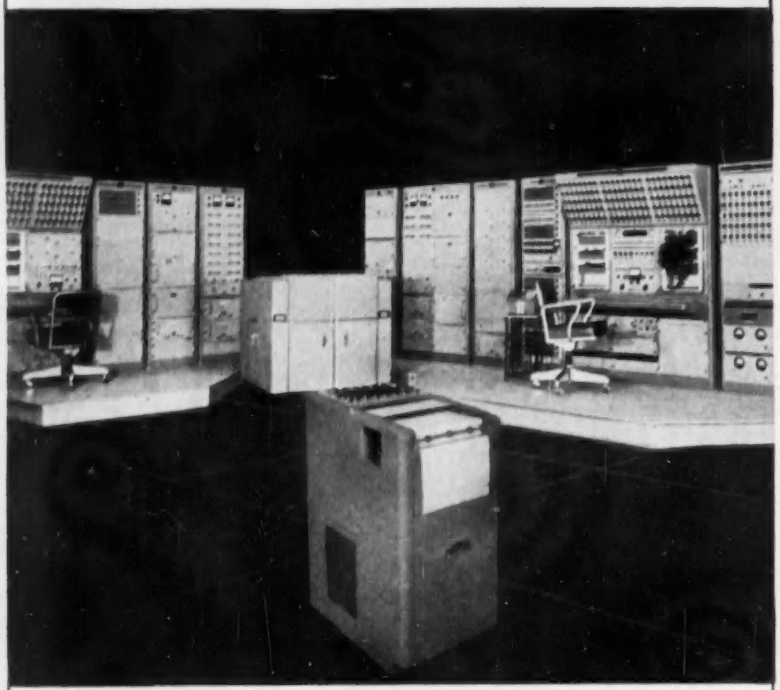

IN THE ENGINEERING PROBLEM

Of infinite help in easing the engineering load is Electronic Associates' PACE Computing Equipment. Each day, more and more major industries are relying on EAI Computing Systems for help in their engineering and development work, for they know they can trust its stability, reliability and operating convenience.

An example of this operating convenience is the push-button operation of the new Six-Channel Recorder, Model 1902A (pictured in the foreground of the computing system above). Push-button controls are provided in this recorder for individual selection of the recording scale factor of each channel — as well as a push-button speed selector which provides essentially instantaneous control of paper speed over the entire recording range. This Six-Channel Recorder provides the ultimate in recording accuracy, sensitivity, chart speed, widest band width, all at the lowest cost.

For detailed information on this equipment — on complete Computing Systems — and on the rental of time and equipment at the EAT Computation Center in Princeton, N. J., write Dept. EL-7, Electronic Associates, Inc., Long Branch, N. J.

ELECTRONIC ASSOCIATES

EAI SETS THE PACE (PRECISION ANALOG COMPUTING EQUIPMENT)

LONG BRANCH, NEW JERSEY

ing to do with design and production specifications of printed circuitry for lowest cost.

Coaxial Tuner. Jasik Laboratories, 61 Second St., Mineola, N. Y. A single-sheet bulletin illustrates and describes type 224 coaxial E-H Tuner, an impedance matching device of novel design which is highly useful for effecting impedance transformation in coaxial line circuits.

The tuners discussed are available in several models. Model 224-A (2,700 to 10,000 mc) is priced at $92; model 224-C (950 to 10,000 mc), $98. When a crystal mount is desired in place of one of the type N fittings, price is $15 extra.

Analog Computers. George A. Philbrick Researches, Inc., 230 Congress St., Boston 10, Mass., has released a 16-page, fully illustrated catalog describing its complete line of electronic analog computers.

Complete descriptions are presented on: areas of application in industry, military and business; modular concept of building new or expanding existing installations; the company's electronic graph paper for instantaneous and automatic calibration of both voltage and time on the oscilloscope and simultaneous display and precise comparison of as many as five variables; K3 series of analog computing components (both linear and nonlinear) for rapid set up of problem where operator has minimum knowledge of electronic circuitry; central signal components; regulated power supplies; K2 series of plug-in components offering the most computing per dollar invested; new function of two variables component; delay line synthesizer and other miscellaneous computing equipment.

Polyester Laminates. Insulation Manufacturers Corp., 565 W. Washington Blvd., Chicago 6, Ill., has published two illustrated booklets on polyester electrical insulating products.

An 8-page catalog on Conolite glossy surface polyester laminates provides technical data, suggested applications, and ordering information for rolls, coils and sheets. Glass

cloth, cotton cloth and paper base combinations are described, as well as a wide variety of fabricated products that may be made from these plastic materials.

The 12-page catalog on Haysite reinforced plastics tells of the exceptional dielectric and physical properties of this inorganic mat-reinforced polyester sheet insulation. Tables and charts describe the properties of the standard grades, and bar graphs compare the physical properties of these reinforced polyester laminates with other electrical insulating laminates. Fabricated and molded parts are described, as well as suggestions for cutting, shearing and machining.

Transmitting and Special-Purpose Tubes. CBS-Hytron, Salem, Mass., has available new reference data for transmitting and special-purpose tubes. Conveniently indexed, the catalog includes data for small transmitting pentodes, triodes and rectifiers, gaseous voltage regulators and reference tubes, and special receiving and military tubes. Ask for bulletin PA-5.

TV Amplifier Specifications. Standard Electronics Corp., 285 Emmet St., Newark 5, N. J., has produced a new tv amplifier specifications bulletin, describing both low and high band 25 kw vhf tv amplifiers. The bulletin contains photographs of the standard electronic amplifiers, a complete explanation of how the equipment operates, 2 pages of illustrations and descriptions of major design features, electrical and mechanical specifications, a tube list, and block diagrams of both aural and visual amplifiers.

Mercury Plunger Relay. Ebert Electronics Corp., 212-26 Jamaica Ave., Queens Village 28, N. Y. Complete description, technical data, and illustrations on the midget Minirelay mercury plunger relay are now available in a new bulletin. The bulletin fully covers operational and construction details, load ratings and typical features.

The Minirelay is rated and proven in use for all loads up to 20 amperes at 115 v a-c and may be had either normally open or normally closed. Actuating coils are

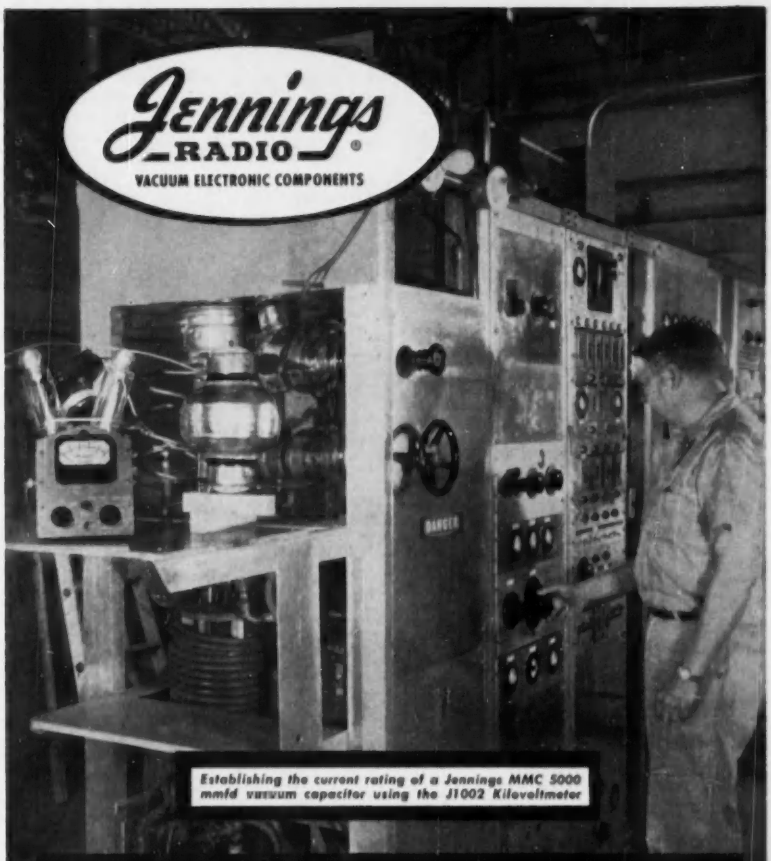

Establishing the current rating of a Jennings MMC 5000 mmfd vacuum capacitor using the J1002 Kilovoltmeter

What is the Current Rating of a Vacuum Capacitor?

The current ratings of all Jennings vacuum capacitors are established on our own 75 KW test transmitter at frequencies of 3 to 16 mc.

At least three capacitors of a given type are tested in the plate circuit of this transmitter. They are mounted in still air, painted with a temperature indicating paint, and allowed to reach a maximum temperature of 175° F.—a conservative figure arbitrarily chosen to give a uniform basis for rating. The current passing through the capacitor at this temperature is computed from the voltage reading of a Jennings J1002 VTVM, which is a peak reading kilovoltmeter that reads directly through a frequency range of 20 cps to 50 mc. The maximum allowable operating temperature is much higher than 175° F. and is different for each capacitor.

Current ratings established in this manner can be doubled by the use of forced air cooling and at least quadrupled by water cooling.

We invite you to send for a recently published catalog summary describing all of our vacuum capacitors, vacuum switches, and high voltage measuring equipment.

JENNINGS RADIO MANUFACTURING CORP.· 970 McLAUGHLIN AVE. P.O. BOX 1278 · SAN JOSE 8, CALIF.

For additional information on all items on this page, use post card on last page.

MIT
LINCOLN
LABORATORY

- Electrical Engineers
- Physicists
- Mathematicians

SAGE (*semi-automatic ground environment*)

AEW (*air-borne early warning*)

WHIRLWIND COMPUTER

SOLID STATE

HEAVY RADARS

MEMORY DEVICES

SCATTER COMMUNICATIONS

TRANSISTORIZED DIGITAL COMPUTERS

If you are interested in participating in any of these programs address:

Research and Development
M.I.T. LINCOLN LABORATORY
Box 7
Lexington, Massachusetts

available in most standard operating voltages.

Instrument Catalog. Allen B. DuMont Laboratories, Inc., 760 Bloomfield Ave., Clifton, N. J. A 12-page folder offers a quick reference instrument catalog. Included are illustrated detailed descriptions and prices for a line of h-f and l-f instruments, accessory instruments, recording equipment and accessory equipment, cro's and accessory equipment.

Mobile Electronics Laboratory. Cook Electric Co., 2700 Southport Ave., Chicago 14, Ill. The Electronics Systems Division of the company, in *Newsletter* No. 1, Vol. 7, illustrates and describes the mobile electronics laboratory that was custom engineered and equipped for the Airborne Instrumentation and Standards Branch, Electro Mechanical Laboratory of the Army at White Sands Proving Ground. The lab described is an example of the company's ability to design, fabricate and deliver a unit meeting or exceeding customers' specifications.

Subminiature Connectors. Cannon Electric Co., 3208 Humboldt St., Los Angeles 31, Calif., has issued a complete new engineering bulletin on the type D subminiature connectors, code D-6.

The connectors described are designed for miniature equipment and components requiring rack and panel chassis construction in electronics, radio, aviation, automation, instruments and other fields.

The 8-page, 2-color bulletin contains actual size photographs of D miniatures; dimensional data, soldering, mounting and shell deviations; standard assemblies and variations, also several application photographs.

Controller for H-F Induction Heating. Leeds & Northrup Co., 4934 Stenton Ave., Philadelphia 44, Pa. Complete information about a small-target high-speed Rayotube detector and Speedomax G controller for h-f induction heating is now available in a 2-page data sheet. The sheet describes how this equipment is being used on continuous, batch

and selective induction heating processes.

Included is a full description of the 8891-C Rayotube and the Speedomax G controller. Specifications and standard ranges for both are conveniently tabulated. Ordering instructions are included.

Ask for process data sheet 620 (2).

Relay Specification. American Machine & Foundry Co., 261 Madison Ave., New York 16, N. Y., has available a 12-page article on specifying relays by James F. Rinke. It covers the various factors that should be considered in selecting an electrical relay for a given application. These factors include circuit characteristics, type of switching, actuation power, operating speed, duty cycle, life expectancy, environmental conditions, physical requirements and cost.

Transformers. Sterling Transformer Corp., 297 North 7th St., Brooklyn, N. Y., has available bulletin 2K covering a line of transformers designed to be used for electronically regulated power supplies.

The bulletin provides a tested circuit, and application information that permits construction of a high-performance regulated power supply. Complete electrical and physical ratings of the transformers are listed.

Ferrite Cored Inductors. Aladdin Radio Industries, Inc., Nashville 2, Tenn., has available a new engineering bulletin on ferrite cored inductors. The bulletin contains several new product lines, including the company's Tiny-L inductors, which cover the range from 0.33 to 6.8 microhenries. The company has adopted RETMA increments for the inductance values of all units in the lines described in this bulletin.

Thermistors and Varistors. Victory Engineering Corp., 101 Springfield Road, Union, N. J., has published its sixth edition of a technical catalog describing VECO thermistors, varistors and assemblies.

The catalog will assist engineers and buyers in selecting proper

TIC's Low-Cost High-Power

RWT RESISTRIMS

Now Available In Production Quantities

MANUFACTURER OF THE WORLD'S FINEST POTENTIOMETERS
PIONEER OF PRECISION WIRE-WOUND POTENTIOMETERS
FOREMOST IN THE DEVELOPMENT OF NEW DESIGNS
UNEQUALLED FOR PROMPT DELIVERY-PRODUCTION PROTOTYPE

The RWT is now in full production. This latest addition to TIC's precision trimmer potentiometer line — most complete in the industry — provides a high-power, low-cost, stable, and compact unit for fixed-gain adjustments . . . padding . . . critical bias . . . and balancing adjustments.

The wire-wound RWT incorporates the advanced mechanical design of the popular TIC RFT Metlfilm Trimmer. Permits precise trimming with a unit less than 1/10 of cubic inch in volume. Advanced mechanical design provides: Complete environmental protection with one-piece anodized aluminum base and sealed stainless-steel cover . . . less than 4/10 ounce in weight . . . and precise stable adjustment with a 25-turn, stainless-steel lead screw.

RWT provides standard temperature range from −55°C to +95°C . . . wide resistance range from 50 to 20K ohms . . . and a power rating of 2 watts at 25°C derated to 1/4 watt at 95°C. Special units are also available for operation up to +145°C and power ratings up to 1/4 watt at 125°C.

For complete specifications on the RWT request Bulletin TP-200.

TECHNOLOGY INSTRUMENT CORP.

569 Main Street, Acton, Mass., COlonial 3-7711
West Coast Mail Address, Box 3941, No. Hollywood, Calif., POplar 5-8620

For additional information on all items on this page, use post card on last page.

NEW *Pre-Assembled* NYLON BINDING POST

(PATENT PENDING)

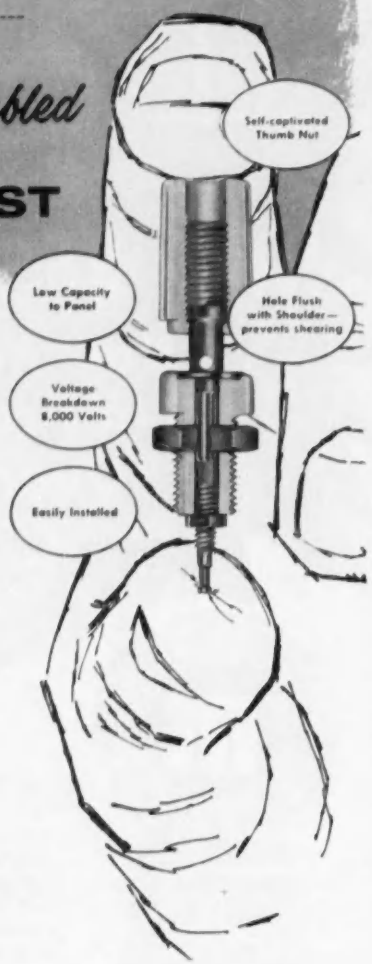

Compact and completely pre-assembled, these rugged "6-way" binding posts are insulated for 8,000 volts breakdown . . . designed for fast, easy mounting. Body is molded of tough, durable, low-loss nylon—shank is silver-plated brass for better contact—easier soldering. (Shank may also be used with solder lug, if desired.) Thumb nut is self-captivated and cannot work loose. Available in 11 bright colors for coded applications. Single 5/16"-32 nut furnished for mounting—no auxiliary mounting hardware required.

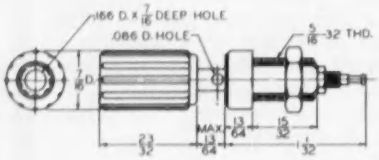

SPECIFICATIONS

Insulation Resistance: Greater than 200 meg. after MIL-T-5422B humidity test.
Voltage Breakdown: 8,000 volts.
Capacity to 1/8" Panel: 3.3 mmf.
Current Rating: 15 amperes.
Body: Molded of low-loss nylon.
Shank: Silver-plated brass.
Mounting: Single 5/16"-32 nut furnished for mounting—no auxiliary mounting hardware required. Mounts in 21/64" hole, "D" hole or double flat hole.
Accepts: .175" Banana Plug, .081" Tip Plug.

NYLON CONNECTORS

Johnson also manufactures a complete line of nylon insulated connectors. For detailed information, write for your free copy of Components Catalog 977.

NYLON TIP JACK AND INSULATING SLEEVE—Complete assembly includes standard nylon tip jack with threaded nylon insulating sleeve. Ideal for patch cords, or panel mounting where an insulated rear connection is desired.

NYLON INSULATED TIP PLUG—Recessed metal head is fully insulated. Metal parts are nickel-plated brass—fits all standard tip jacks.

NYLON INSULATED BANANA PLUG—Nickel-plated brass with nickel silver springs—fits all standard banana jacks.

NYLON INSULATED BANANA JACK—Voltage breakdown: 11,000 volts. Cadmium-plated insert—accommodates standard banana plugs.

E. F. Johnson Company

2310 Second Ave. S.W. • Waseca, Minnesota

Engineers Wanted

For unusual engineering and technical employment opportunities... write to our engineering department.

Capacitors • Inductors • Knobs • Dials • Sockets • Insulators • Plugs • Jacks • Pilot Lights

thermistor or varistor units for their purposes.

Electronic Digital Computer. Logistics Research Inc., 141 Pacific Ave., Redondo Beach, Calif. An 8-page folder illustrates and describes the ALWAC III-E general purpose electronic digital computer designed for a wide range of application to the problems of scientific-engineering-research and business-industrial-financial organizations. Specifications, features and information on operations are given.

Midget Mica-Dielectric Capacitors. Cornell-Dubilier Electric Corp., South Plainfield, N. J. Bulletin No. 422-4 illustrates and describes the molded midget mica-dielectric capacitors now available in three operating temperature ranges: —55 C to 130 C, —55 C to 160 C and the original —55 C to 85 C. Dimensional diagrams, characteristics description, characteristics availability chart and electrical mechanical features are included.

Automatic Controls for Aerodynamic Testing. Hagan Corp., 323 Fourth Ave., Pittsburgh 30, Pa. A 20-page booklet, MSP-133, describes the company's PowrAmp series of components, a high-speed, high-powered line of precision electrical and electronic automatic control equipment for all standard variables. The series discussed is designed for use in aeronautical testing and other facilities requiring exact performance. Typical applications include the control of surge, altitude and mass flow in all types of wind tunnels—subsonic, transonic and supersonic.

Brief descriptions of each device's function and method of operation, essential specifications, photographs and schematic drawings are features of the brochure. Highlighted are transducers, amplifiers, converters, controllers, signal shapers, computers, electrohydraulic pilot valves and other associated components.

TV Amplifier. Standard Electronics Corp., 285 Emmet St., Newark 5, N. J., has published a new 4-page tv amplifier specifications bulletin which describes high-band 50-kw vhf tv amplifiers. The bulletin

contains photographs of the company's amplifiers, an explanation of how the equipment operates, 2 pages of illustrations and descriptions of major design features, electrical and mechanical specifications, a tube list, and block diagrams of both aural and visual amplifiers.

Contact Connectors. Alden Products Co., 117 North Main St., Brockton 64, Mass. A new 4-page brochure, "What's New at Alden's," shows a whole new series of rugged, compact single and multicontact contact connectors. The IMI (integrally molded insulation) connectors discussed feature perfect strain relief, a natural sealing against dust and moisture trapping, shorter leakage paths and greater reliability. The IMI technique is described in detail and illustrations and application of these connectors and unit cables are shown.

Multiple Switch. Switchcraft, Inc., 1328 N. Halsted St., Chicago 22, Ill., has issued a catalog supplement No. S-560 covering their new Multi-Switch. The switch described features a choice of switching functions; flexible tools make it practical to make in any multiple from 2 to 12 stations; choice of mounting centers; plungers—0.050 in. by 0.187 in.—so designed to accept standard push-on buttons; stack switches mounted on a separate plate. Up to 4 stacks can be operated by each button, providing innumerable circuit possibilities.

The bulletin covers illuminated and nonilluminated and ganged assemblies of intercoupled rams of Multi-Switches. Full details and specifications are given.

Magnetic Recording Tape. Audio Devices, Inc., 444 Madison Ave., New York 22, N. Y., has issued a new bulletin on type EP Audiotape, extra precision magnetic recording tape for telemetering, electronic computers and other specialized applications.

The folder lists the physical characteristics and magnetic properties of type EP Audiotape which is made on a base material of cellulose

Regulation in *less than 1/50th cycle...*

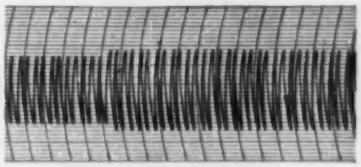

Output of typical electromechanical regulator in response to step change in input voltage. Average correction rate of 6v. per sec.

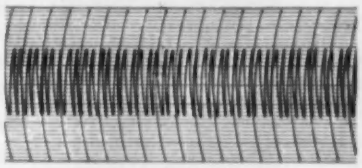

Output of Curtiss-Wright Distortion Eliminating Voltage Regulator from same input. Full recovery in 330 microsec.

Simultaneous two-pen recording of 60 c.p.s. voltage

***PLUS* Pure Sine Wave Power**

CURTISS-WRIGHT LINE REGULATOR

- **Electronically regulates r.m.s. and peak voltage simultaneously to ±1%.**
- **Reduces typical power line distortion to less than 0.3%.**
- **Furnishes 1.4 KVA of distortion-free power.**
- **Introduces no phase shift between input and output.**
- **Simultaneously provides additional 4 KVA of ±1% electromechanically regulated power.**

Faster recovery time (less than 1/50th cycle, or 330 microseconds) plus the unique ability to *eliminate* line distortion — these are the reasons why the Curtiss-Wright Distortion Eliminating Voltage Regulator has been chosen by more and more laboratories and production test departments. Besides general laboratory use, this line regulator provides simpler, more accurate calibration of meters . . . better design of transformers, synchros, motors . . . easier testing of such components, with fewer rejects . . . easier, more accurate measurement of magnetic properties and receiver sensitivity . . . better a.c. computer performance . . . elimination of fast line transient effects. Write for details.

Electronic Component & Instrument Sales Department

ELECTRONICS DIVISION
CURTISS-WRIGHT
CORPORATION • CARLSTADT, N. J.

A COMPLETE SPINNING SERVICE
FOR THE
ELECTRONIC INDUSTRY
Metal Spinning
FROM 10' PARABOLA TO THIMBLE-SIZE CASE
Metal Fabrication
COMBINES SPINNING WITH FABRICATION, WELDING and ANNEALING TO PRODUCE A FINISHED PART. (Gov't. certified welders)
Mu Metal Shields
ANNEALED IN OUR OWN HYDROGEN ATMOSPHERE OVEN
COMMITMENTS SOLICITED. SEND FOR OUR BROCHURE
WE ARE A JOB SHOP — WE HAVE NO PRODUCT OF OUR OWN
TEINER engineering corporation
115-E Madison Street, Malden 48, Mass.

acetate or Mylar polyester film. The publication also includes a price list of reels of various lengths, widths of tape and thickness of base material.

Teflon Tubing. Sparta Mfg. Co., Dover, Ohio. Form No. 564 is a 4-page illustrated bulletin covering the company's new flexible thin-walled and spaghetti tubing made of Teflon. Properties, characteristics, suggested end uses and complete price lists are included.

Electronic Gear. Alden Products Co., 117 North Main St., Brockton 64, Mass. A new bulletin, "Ideas, Techniques, Designs," shows application photos and stories on electronic gear packaged with the company's plug-in components.

Included is a detailed description of two new kits containing all the necessary plug-in components. The kits described permit the user to begin construction and assembly immediately of a piece of electronic gear. In addition, they enable him to evaluate quickly the use of unitized design and construction for his equipment.

Printed Circuitry. Croname Inc., 3701 Ravenswood, Chicago 13, Ill. A 4-page brochure outlines the company's facilities for producing printed circuits by its laboratory approved process, and offers recommendations on the basic steps necessary for exact circuit duplication. Information on quotation and orders is included.

Tiny Metal-Ceramic Receiving Tubes. General Electric Co., 1 River Road, Schenectady, N. Y., has available a 20-page booklet containing additional data on the company's micro-miniature metal-ceramic receiving tubes. Design and construction innovations of the tube are described in the booklet which also contains additional application data, operating characteristics and construction features. Illustrations show the extensive facilities, advanced equipment and the engineering and technical skills employed in the manufacture of the tubes. Ask for booklet ETD-1212-A.

Diffractometer. New Brunswick Scientific Co., P.O. Box 606, New

CODE MARK Anything! WITH

★ CODE MARKING INKS

For Resistors and Capacitors. For Machine or Hand Application.

Whatever the substance, Phillips has an ink to mark it permanently and legibly—or can make one. Marking experts insist on "Clear Print" Wood Block Stamp Pads and Opaque Inks. They get clear, sharp, fast-drying impressions. Also inks for brush, pen, stencil or machine application available in a variety of colors and quantity containers.

★ Quick Laboratory Service On Your Problem Markings.

★ To Permanently Mark . . . Metals, Plastics, Glass, Wood, Paper, Leather, Ceramics—glazed, varnished or lacquered surfaces and virtually every other known material.

CANC INSP RECD 42 35 721 0 PART NO 10 RI

WRITE FOR FREE BOOKLET

L. A. PHILLIPS, President

PHILLIPS PROCESS CO. INC.

192 MILL STREET

ROCHESTER 14, N. Y.

Brunswick, N. J. A 4-page folder illustrates and describes the double crystal x-ray diffractometer, a new research tool for metallurgy, the quartz industry, the production of transistors, the precise determination of lattice parameters and studies of precipitation hardening. Specifications are included.

Meters and Timers. Berkeley Division, Beckman Instruments Inc., 2200 Wright Ave., Richmond 3, Calif. A 4-page folder covers the 7000 series of Eput, frequency, and time interval meters and universal Eput meters and timers. Included are descriptions, applications, specifications and prices.

Magnetic Tape Handler. Key Electric Corp., 287 Post Ave., Westbury, N. Y., has available a specification sheet on the model 101 digital magnetic tape handler. Illustrations, features, description and specifications are included.

Regulated D-C Power Supplies. Lambda Electronics Corp., 11-11 131 St., College Point 56, N. Y. A 6-page folder contains an illustrated description and specifications for the 200 MA series power supply which saves panel space. Prices of the units described range from $149.50 to $189.50.

Features of the power supplies discussed are: fuse failure indicators, transient-free operation, hermetically-sealed transformers and chokes, and service accessibility.

D-C P-M Motors. Barber-Colman Co., 1400 Rock St., Rockford, Ill. Catalog F4344-3 describes a line of fractional h-p d-c p-m motors as well as gearheads, centrifugal blowers and tachometer generators. All are designed for aircraft or industrial applications with many combinations of voltage, output and speed. The motors discussed are available with voltages from 6 to 115 v d-c with outputs up to 1/10 h-p and speeds from 5,000 to 20,000 rpm.

Custom Molding Services. Molded Fiber Glass Co., 4403 Benefit Ave., Ashtabula, Ohio, announces a 16-page catalog descriptive of the com-

NO MICROWAVE SPECIFICATION IS TOO CRITICAL FOR J-V-M*

*CUSTOM BUILDERS AND DESIGNERS OF:

CAVITIES
MIXERS • DETECTOR MOUNTS
DUPLEXERS • MULTIPLIERS
ROTARY JOINTS • BENDS
TWISTS • OTHER COMPLEX
COMPONENTS & ASSEMBLIES

Application-engineered microwave parts and complex assemblies are our specialized field. We'll manufacture components to your prints ...or we will design and integrate them into your application.

You can depend on J-V-M for close coordination, guaranteed electrical performance and "know how" that is attested by innumerable assemblies ranging from dc. to 40,000 mc. now in industrial and military use.

FOR EXAMPLE:

1. Variable vane directional coupler . . . sliding vane type . . . high directivity—low VSWR.



2. Pre-selector-mixer . . . 5 band . . . 50 ohm input impedance . . . high Q double-tuned ganged cavities . . . detector output . . . frequency stable from —55° to +85° C.

CUSTOM-ENGINEERED MICROWAVE PARTS

Get full information on J-V-M standard or custom-engineered microwave parts and components, also complex mechanical assemblies. Request catalog today.

J-V-M ENGINEERING COMPANY

8847 W. 47th ST., BROOKFIELD, ILL.

For additional information on all items on this page, use post card on last page.

Designed for

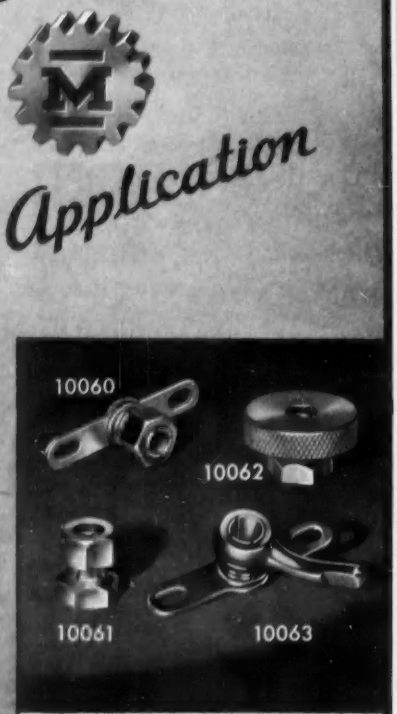

SHAFT LOCKS

In addition to the original No. 10060 and No. 10061 "DESIGNED FOR APPLICATION" shaft locks, we can also furnish such variations as the No. 10062 and No. 10063 for easy thumb operation as illustrated above. All types are available in bright nickel finish to meet Signal Corps requirements or black oxide to meet Navy specifications.

JAMES MILLEN MFG. CO., INC.

MAIN OFFICE AND FACTORY

MALDEN

MASSACHUSETTS

pany's custom molding services. It is intended as a guide for designers interested in the application of molded fiber glass to specific products.

Printed in two colors and illustrated with photographs, line sketches and charts, the catalog describes the molded fiber glass molding process and lists various mechanical, electrical and chemical properties of molded fiber glass. It also lists the fabricating operations which can be performed on this material, and illustrates a number of finished molded fiber glass products.

Room Temperature Bonding. Rubber & Asbestos Corp., 225 Belleville Ave., Bloomfield, N. J., has released an 8-page, profusely illustrated booklet describing application techniques and precautions, advantages and limitations of adhesive bonding at room temperature.

Particular emphasis in the booklet is placed on the new epoxy based adhesives which need neither heat cure nor pressure, and which offer new, high-strength fastening possibilities for plastics, metals and other components.

Also included are helpful tables, charts, photos and data on how to attain longest pot life from two-part formulations; information as to how to speed cures with moderate applications of heat; data on strength vs temperature for epoxy adhesives; cost of heat resistance, and the like.

Voltage Regulator. North American Philips Co., Inc., 750 S. Fulton Ave., Mt. Vernon, N. Y., has available a new engineering bulletin, with data on a new Norelco 3-kva a-c voltage regulator for use with x-ray diffraction equipment. Illustrated with photographs, the literature covers characteristics, including line voltage, output load, output voltage, output current, regulation, load power factor, harmonic distortion and time constant.

Temperature Controller. Minneapolis-Honeywell Regulator Co., Wayne and Windrim Aves., Philadelphia 44, Pa. Specifications sheet S1010-1 describes the model 077 electronic temperature controller. The unit discussed is a nonindicat-

ZOPHAR

---WAXES

---COMPOUNDS

Zophar Waxes, resins and compounds to impregnate, dip, seal, embed, or pot electronic and electrical equipment or components of all types; radio, television, etc. Cold flows from 100°F. to 285°F. Special waxes non-cracking at 76°F. plain or fungicidal. Let us help you with your engineering problems.

For immediate service contact:

L. E. Mayer, Sales Manager
A. Saunders, Technical Director
H. Saunders, Chemical Laboratory

Phone SOuth 8-0907

110 YEARS

ZOPHAR MILLS, INC.
112-130 26th Street,
Brooklyn 32, N. Y.

SINCE 1920 QUALITY WENCO PRODUCTS

SPADE BOLTS

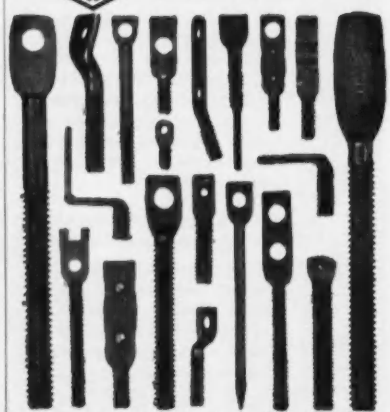

Specialists in designing and manufacturing of all-purpose fasteners and wire forms. Tooled to produce over 1000 styles in any screw size, material, finish, quantity, to your specifications.

Serving Industry for Thirty-five Years

— OTHER PRODUCTS —

Simplex WIRE STRIPPERS & CUTTERS

• TOOLS • DIES • STAMPINGS

Bulletins on complete line upon request

WENCO MANUFACTURING CO

1133 W. Hubbard St., Chicago 22, Ill., U.S.A.

ing device which operates on the balanced bridge principle. It can be supplied as a single point controller, using a single bulb; as a differential controller, for control on the temperature difference between two bulbs; or for cascade control, using two bulbs.

Control-Resistor Catalog. Clarostat Mfg. Co., Inc., Dover, N. H. Just about every type and size control or resistor for the usual run of applications can be found in catalog No. 56. Among the listings are composition-element and wirewound controls in several sizes including miniaturized versions, convenient field-attached shafts and switches, power rheostats, sound-system controls, precision or laboratory-grade controls, wirewound fixed and adjustable resistors, precision deposited-carbon resistors, ballasts, line-voltage regulators, fuse-type resistors, power resistor decade box and the like.

Panel Instruments and Accessories. General Electric Co., Schenectady 5, N. Y. Bulletin GEC-368H is a 12-page booklet describing the features, application, construction, dimensions and other data of 2½, 3½ and 4½ in. sizes. Photographs, diagrams and prices are included.

Thermocouple Circuit Restorer. The Peerless Electric Co., Electronics Division, W. Market St., Warren, Ohio. Catalog R-26 describes the thermocouple circuit restorer, a device for renewing proper electrical conductivity through thermocouples and thermocouple circuits used in heat-treating, melting and other processing operations.

Diagrams, installation photos and recorder chart reproductions illustrate how the Restorer monitors couples and thermocouple circuits transmitting emf to temperature indicators, recorders and controllers.

Magnetic Bobbin Cores. Burroughs Corp., 1209 Vine St., Philadelphia 7, Pa. A new 4-page folder describes the development, characteristics, applications and services available in connection with the line of Bi-

CONDUCTORS AND HARNESS—100% TEFLON*

"TEMPBRAID"

"TEMPBRAID" FOR −90°C. TO +250°C. OPERATION

Wherever cost, space, weight and production time are a problem . . . such as in electronic computor installations—telemetering equipment and missile and aircraft wiring . . . "Tempbraid" offers the solution.

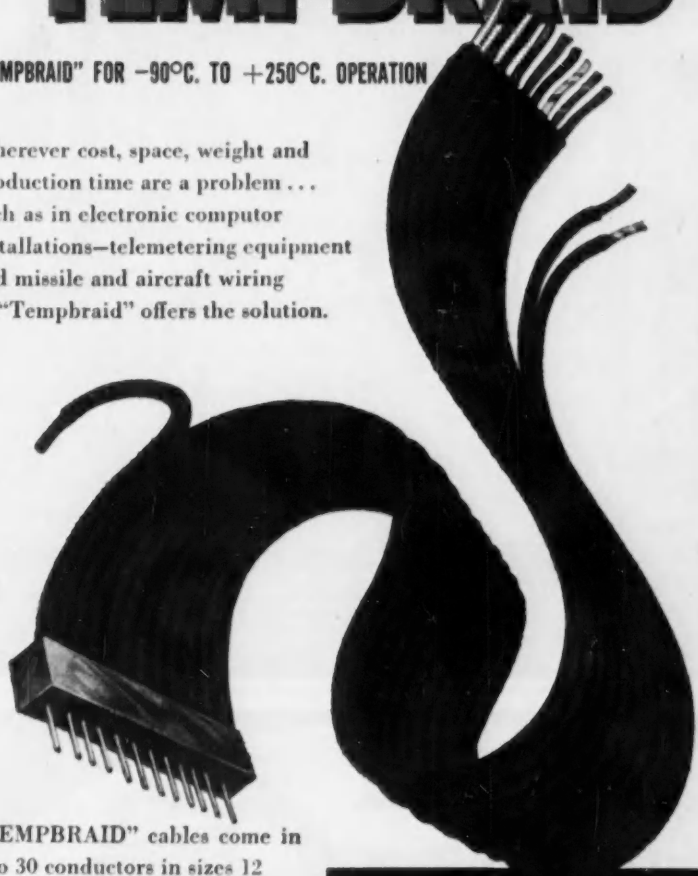

"TEMPBRAID" cables come in 2 to 30 conductors in sizes 12 to 30 AWG. These cables are available with Teflon insulated conductors with a 5 mil (.005") wall, or the conventional Type E and EE insulated conductors that conform to MIL-W-16878, and a combination of coaxial cables.

METALBRAID

A flat harness woven of tin/lead or silver plated copper. This harness eliminates lacing cord, binding posts, cable clamps.

IT SOLDERS IN PLACE

HITEMP WIRES INC.

26 WINDSOR AVE., MINEOLA, NEW YORK

For additional information on all items on this page, use post card on last page.

diodes — transistors — precision resistors

competitive with imported components

NUCLEONIC

products company

manufacturers of electronic components

for full free catalog, WRITE, WIRE or CALL 1601 grande vista avenue, los angeles 23, california AN 2-3503

Specialists in the Unusual

Electroplated WIRE

for many different applications

More and more people are turning to us for electroplated wire. We electroplate by continuous methods a wide variety of wire in a range of diameters from .035" to the smallest available. In our laboratory, Tungsten wire as small as .00015" has been electroplated with Gold . . . New applications for electroplated wires on different base materials are being developed from time to time . . .

Your inquiry is invited. Consult our staff, without obligation, about your specific wire problems.

SINCE 1901

SIGMUND COHN MFG. CO., INC.

121 SOUTH COLUMBUS AVENUE, MOUNT VERNON, N. Y.

BOOTH 1303 at the WESCON SHOW

Mag tape-wound magnetic bobbin cores. Materials, widths, thicknesses and bobbin sizes are listed for standard cores of Molypermalloy and Orthonik. The company points out that these cores feature unusual uniformity to assist the design engineer in the application of magnetic cores as a working component in electronic systems.

Angular Position Encoders. The Electronics Division, The Baldwin Piano Co., 1815 Gilbert Ave., Cincinnati 2, Ohio, has published a comprehensive 8-page bulletin describing new 13-digit and 16-digit optical-type analog to digital angular position encoders.

Well illustrated, the bulletin gives detailed information on the operation and construction of the two models and describes the manufacture of Baldwin binary and other type code disks. Encoder and code disk specifications are included.

Magnetic Shielding. Perfection Mica Co., 20 North Wacker Drive, Chicago 6, Ill. Release 103 describes how to protect tape recordings from various low and high intensity magnetic fields by storing or carrying in Fernetic and Co-Netic protective cans. Typical dimensions and prices are given on Fernetic, Co-Netic, Fernetic-Co-Netic, and Co-Netic-Fernetic rectangular cans, flat sheets, cylinders, crt shields, transformer cans and tachometer shields.

Data sheet 103-A gives terminology and example sheet from laboratory test reports on shielding high, medium and low intensities with Fernetic and Co-Netic magnetic shielding materials.

Digital Pulse Generators. The Jacobs Instrument Co., Bethesda 14, Md., has available a bulletin announcing the Digipulsers, a series of instruments which emit a continuous train of equally spaced pulses. The Digipulsers measure 4¼ by 6¼ by 7 in. and weigh 8½ lb.

The units described, fitted for laboratory and industrial use, may be used as lightweight precision intervalometers in the field or in aircraft. Characteristics are outlined.

Thermocouple Data. Barber-Colman Co., Rockford, Ill. Bulletin F-

5228-3, a 40-page booklet, discusses construction and application of thermocouples and radiation detectors as used on industrial control applications. Included is information on how to check thermocouples, how to make thermocouples, how to select and size thermocouples, plus other useful information for instrument men.

Also given are standard thermocouple temperature-millivolt equivalents with temperatures being expressed on the international temperature scale of 1948. The electromotive force is expressed in absolute units.

H-V Pressurized Connectors. DeJUR-AMSCO Corp., 45-01 Northern Blvd., Long Island City 1, N. Y. The 2-color, 2-page bulletin 46C on the new h-v pressurized precision Continental connectors in 2 and 3 contacts for AN24 shell includes description, specifications, actual size illustrations, mounting and clearance dimensions and electrical ratings.

Soldering Instruments. Adcola, Gauden Road, Clapham, London, S.W. 4, England, has available literature on its soldering instruments and allied equipment designed to accelerate production and reduce manufacturing costs. Included are illustrated data on a quick-heating solder pot, the Secundus electric soldering instrument, the P.V.C. electric stripper and a soldering instrument shield.

Rotating Components. Norden-Ketay Corp., 555 Broadway, New York 12, N. Y. Bulletin 376 is a 4-page folder giving the characteristics of over 138 synchros, servo motors and resolvers. The bulletin was prepared to provide engineers with an easy guide for the selection of rotating components.

Glass-Sealing Alloys. Driver-Harris Co., Harrison, N. J. A 4-page folder contains a description, properties listing and thermal expansion chart for 4 alloys (Therlo, 142 alloy, 152 alloy and 146 alloy) for glass-to-metal sealing of both hard and soft glass. The alloys described are available as rod, wire, strip, sheet foil—and in special shapes.

Brew Delay Lines are

DEPENDABLE

. . . custom made to meet your most exacting requirements

Distributed Constant

Lumped Constant



Ultrasonic

Brew offers complete design, development and large scale production of delay lines to meet your most critical requirements . . . covering an extremely wide range of characteristics . . . for both commercial and government applications.

Each line is custom made to exactly satisfy your needs. You get the benefit of continuous research and development and experience on all type lines. Latest packaging techniques, dependable materials, special manufacturing and test procedures assure you of finest quality, ultra compact units with best possible operational characteristics.

Prompt delivery on prototype and production quantities. Catalog 54 gives the complete Brew story. Send for your copy.

BREW

Richard D. Brew and Company, Inc.
Concord, New Hampshire
design development manufacture

—they're dependable!
UKE
precision, deep drawn
KOVAR
PARTS
—from 1/4" dia. and 3/4" deep, .025" thickness
Consult the Engineering Company for quality parts or sub-assemblies of steel, aluminum, copper, brass, kovar, nickel and monel. Fast, economical service on long or short runs. The most modern machines and micro-precision tools assure highest accuracy.
WRITE TODAY for quotations, sending your sketches or blueprints; no obligation.
THE engineering CO., 27 WRIGHT ST., NEWARK 5, N. J.

For additional information on all items on this page, use post card on last page.

Plants and People

Edited by WILLIAM G. ARNOLD

Industry plant and facility expansions continue at rapid rate as more manufacturers enlarge production space. Changes in engineering and executive personnel are announced by major companies. More acquisitions and mergers are completed.

RCA Unveils New Missile Plant Addition In New Jersey

To Provide the design, engineering, and manufacturing space for the 'Talos' guided missile project, RCA has completed one phase of an enlargement program which more than doubles the engineering space and laboratory facilities of its Moorestown, N. J. missile and surface radar engineering plant. The new building, which joins the original construction, was opened officially by General David Sarnoff and other officers of RCA with the unveiling of a plaque at the dedication ceremonies.

The original plant comprised 145,000 sq ft of total building space and provided employment for approximately 600 people, compared with today's building space of 264,000 sq ft and employment of more than 1,500 persons.

Following the dedication ceremonies, military guests attended a special program which reviewed the firm's defense electronic products activities and achievements.

General Sarnoff, left, and H. R. Wege, manager of missile and surface radar operations

▶**Tubes**—RCA also announced that Leonard Gillon, manager of manufacturing in the television picture tube section of the plant in Marion, Indiana, has been appointed plant manager. He succeeds W. T. Warrender, who has been named general manager of the newly formed components division, with headquarters in Camden, N. J.

Gillon joined the company in 1929 as a machine attendant at Harrison, N. J. In 1940 he was appointed general foreman of the miscellaneous parts department at the company's plant in Indianapolis, Ind., and for 14 years held successive positions there as manager, materials and production controls; superintendent, and then manager, glass receiving tube manufacture.

IT&T Elects President, Sells Capehart, Appoints Engineers

Edmond H. Leavey has been elected president of IT&T, filling the top executive position held by the late William H. Harrison.

Elected a vice-president of IT&T in 1952, he became president of the corporation's central research division in the U. S., Federal Telecommunication Laboratories in Nutley, N. J. in 1953, and president of International Standard Electric Corp. in 1954. He is a director and officer of numerous other IT&T companies.

He has traveled extensively for IT&T in connection with its worldwide operations and, prior to joining the corporation, had extensive experience in both the operational and administrative fields of engineering. He was chief of the logistics division of Supreme Headquarters of the Allied Powers in Europe (SHAPE) before his retirement from the Army with the rank of Major General in 1952.

Edmond H. Leavey

▶**Sale**—The television, high-fidelity phonograph and radio business of IT&T's Capehart-Farnsworth Co. has been sold to the Ben Gross Corp.

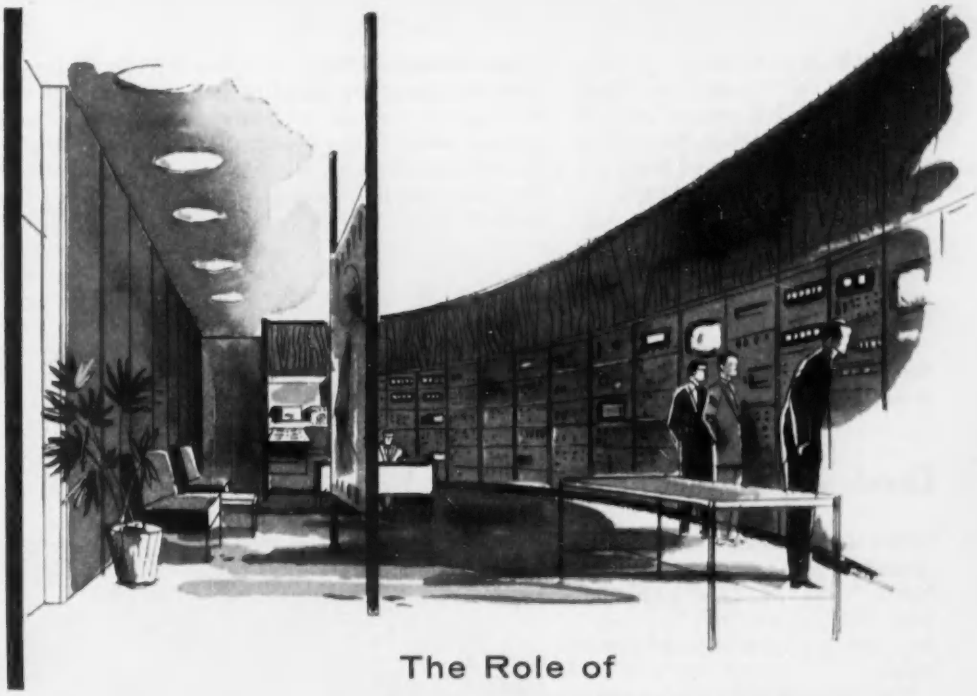

R-W Data Reduction Center now under construction

The Role of INSTRUMENTATION and TEST EQUIPMENT in Systems Work

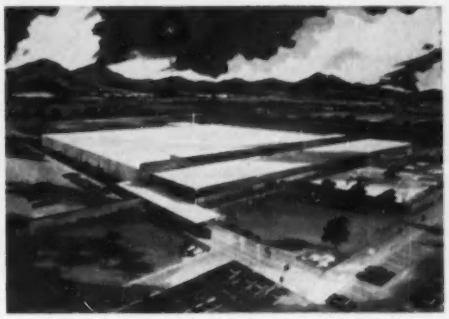

Denver plant now under construction will augment the Division's manufacturing facilities

Instrumentation development

The complexity of modern weapons systems, as well as certain electronics systems for industrial applications, is such that the design and installation of instrumentation for obtaining experimental test data and converting it into usable forms has become a highly specialized field of technology.

A closely related field is that of test equipment needed for the adjustment and maintenance of the end-product hardware, both in the manufacturing plant and in the field. Experience has shown that the effectiveness of a major new system frequently falls short of its potentialities because of inadequate attention to this essential supporting activity.

In The Ramo-Wooldridge Corporation, the Electronic Instrumentation Division has the mission of bringing to the areas of instrumentation and test equipment a level of competence that is adequate to deal with the often very difficult problems that need to be solved in such work.

Assignments undertaken for a number of government and industrial customers include such diverse projects as flight instrumentation, data reduction equipment, and transistorized power supplies. Another important project of this Division is that of providing The Ramo-Wooldridge Data Reduction Center with a system and arrangement of equipment carefully designed to meet the company's specific requirements. Also in progress is the development and fabrication of field test equipment for an electronic system R-W now has in early production.

A unique and important feature has been incorporated into the services offered by the Electronic Instrumentation Division. For each project, an advisory committee is established composed of experienced systems engineers from other divisions of the company. By periodic reviews, such advisory committees assure that the development work of the Electronic Instrumentation Division takes into account the very special and often not well understood needs which arise in systems work.

Further information about this R-W activity can be obtained by writing to the Director, Electronic Instrumentation Division.

The Ramo-Wooldridge Corporation

5730 ARBOR VITAE STREET · LOS ANGELES 45, CALIFORNIA

of New York City. Gross will be licensed on a non-exclusive basis under certain U. S. patents based on inventions of Capehart-Farnsworth employees. Ownership of these patents will be retained by IT&T.

The Ben Gross Corp. has indicated that it will continue with the manufacture of high quality products under the trademark name of Capehart.

Disposition of present inventory and other details are to be determined.

▶ **Appointments**—Robert S. Caruthers has joined the executive staff of IT&T as director of telephone systems research and development. He will coordinate all the work in this field currently being carried on both in the United States and abroad by IT&T and its associated companies.

Caruthers' business career started with the U. S. Bureau of Standards in Washington, D. C., and in 1929 he joined the technical staff of Bell Telephone Laboratories in New York. Later, when operations at Murray Hill were expanded, he was transferred to that point. He joined Lenkurt Electric in 1952 as chief development engineer. He holds more than 20 patents.

Frank M. Viles, Jr., has been appointed technical director of the components division of IT&T's Federal Telephone and Radio Co. in Clifton, N. J. He comes to Federal from Litton Industries, where he was administrative assistant to the general manager.

Leeds & Northrup Opens New Instrument Factory

LEEDS & NORTHRUP CO. officially opened its new instrument plant in North Wales, Pa. Land and buildings cost about $4 million; inventory and equipment about $7 million more.

The manufacturing and office areas provide over 6 acres of floor space and are set in a 129-acre tract.

There will be about 1,300 employees at North Wales, including not only some of the firm's manufacturing people but also some from the departments of engineering, industrial engineering, personnel, accounting and maintenance. The L&N headquarters, and all manufacturing of laboratory instruments, furnaces and certain other products, will remain at the long-established company location in Philadelphia. Products to be produced at the new plant include recorders, combustion controls and other automatic instrumentation.

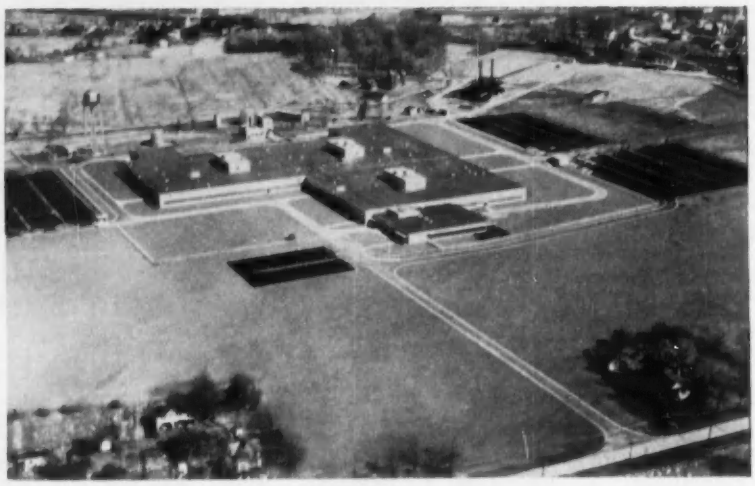

Leeds & Northrup instrument plant in North Wales, Pa.

GE Organizes Industrial Laboratory, Plans Florida Plant

GENERAL ELECTRIC is organizing a new laboratory to concentrate on development of new products, techniques and systems for the industrial electronics field, a business expected to double in size in the next five years.

Donald E. Garr was appointed manager of the new unit in GE's laboratories department in Syracuse.

Garr currently is heading a study team formulating plans for the laboratory, including initial work projects and size and location of a permanent laboratory facility. He previously was manager of electrical engineering at the firm's general engineering laboratory. He joined General Electric in 1936.

Donald E. Garr

G. L. Haller, manager of the laboratories department, said that over twenty GE departments outside the company's electronics division currently have a vital interest either in the manufacture of industrial electronics products or in the sale of systems which lean heavily on such products.

Dr. Haller said that the industrial electronics laboratory will start operations during the early summer with a smali nucleus of engineers working at Syracuse and Schenectady until a permanent headquarters facility is established. He

what is grey matter worth?

For the engineer or scientist who has enough to make him different, ***grey matter*** is worth a rewarding life of creative achievement in a working climate where ideas are King...and the benefits measure up to the man and his mind.

For 56 years Firestone has grown on ***grey matter*** – in Research, Development and Production. Now, simply, we need additional ***grey matter*** for such Firestone "firsts" as the "Corporal" surface-to-surface ballistic missile. Here are just a few of the Engineering activities in which Firestone needs more ***grey matter:***

Electronics Systems
Mechanical Systems
Propulsion Components
Flight Simulation
Mechanical Structures and Dynamics
Stress Analysis
Metallurgical Lab

If you're the man with extra ***grey matter*** who wants the chance to really use it, write us today. We'll put you in touch with a Firestone man who has your kind of ***grey matter***, too.

Firestone

GUIDED MISSILE DIVISION
RESEARCH • DEVELOPMENT • MANUFACTURE

"Find your Future at Firestone"– Los Angeles • Monterey
WRITE: SCIENTIFIC STAFF DIRECTOR, LOS ANGELES 54, CALIF.

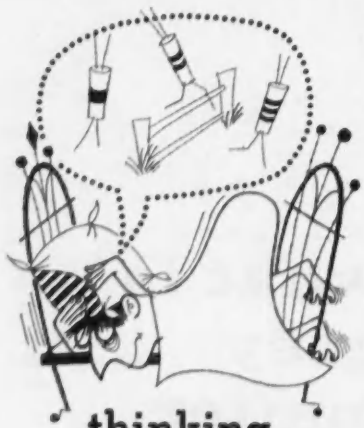

thinking of resistors? think of

SPEER

and send for this valuable catalog!

It will give you helpful information about the complete line of Speer Resistor Products—specifications, characteristics and applications:

- **Fixed Composition Resistors**
- **Phenolic Coil Forms**
- **Iron Coil Forms**

Write for your copy today.

Other Speer Products for the Electronics Industry

anodes • contacts • fixed carbon resistors
coil forms • discs • brushes • battery carbon • graphite plates and rods
also R. F. coils • fixed composition capacitors • chokes made by Jeffers Electronics

SPEER RESISTOR DIVISION
SPEER CARBON COMPANY
Bradford, Pennsylvania

Send me the Speer Resistor Catalog.

Name_____

Title_____

Company_____

Address_____

City_____ Zone____ State_____

Want more information? Use post card on last page.

expects about 50 people to be on the technical staff by year's end.

► **Florida** — GE also announced plans to establish an electronics plant in the St. Petersburg-Clearwater area, the firm's first manufacturing facility to be constructed in Florida.

The proposed plant will produce electronics equipment for Sandia Corp. of Albuquerque, N. M., prime contractor to the Atomic Energy Commission. The General Electric x-ray department will operate the new facility.

The new plant will employ from 600 to 700 people and will have an annual payroll of about four million dollars. A. F. Persons has been named plant manager. Ground will be broken for construction late in May. It is planned to have the plant in operation by December 30, 1956.

There will be 150,000 sq ft of floor space in a one-story manufacturing building and an attached two story office building.

A small number of key employees will be transferred from the headquarters of the x-ray department at Milwaukee, Wisconsin.

NCR Dedicates Electronics Division

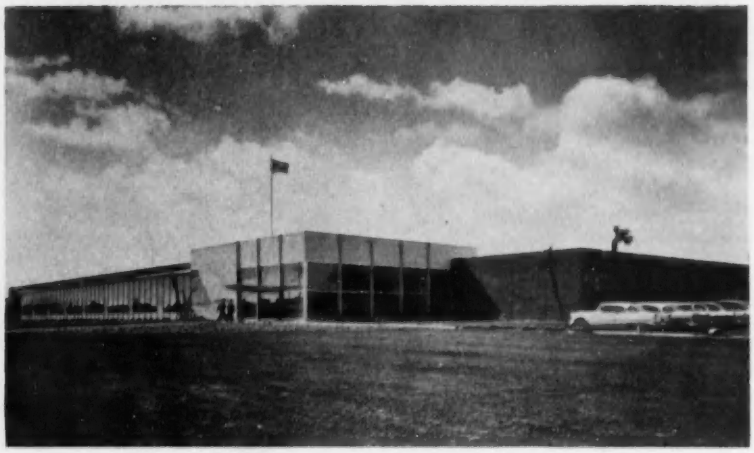

New National Cash Register electronics plant in California

THE NATIONAL CASH REGISTER CO. dedicated its new electronics division in Hawthorne, Calif.

The 52,000 sq ft structure is devoted to research and design activity in advanced electronic computers and auxiliary equipment for business systems. Management at the division includes D. E. Eckdahl, division manager; D. J. Daugherty, manager of engineering department; Marc Shiowitz, manager of product development department; Alfred Doig, manager of special projects department; and R. J. Valenti, manager of engineering services department.

The division has 225 employees, consisting principally of engineers, mathematicians and scientists.

General Instrument Buys Micamold

GENERAL INSTRUMENT CORP. has reached an agreement to purchase all outstanding capital stock of Micamold Electronics Manufacturing Corp. The acquisition is subject to shareholder approval.

Under terms of the agreement, all Micamold's outstanding stock is to be purchased at the approximate book value of its shares on December 31, 1955, $2,494,000 payable 20 percent in cash and the balance in long-term notes maturing annually over a five-year period from March 1, 1958, to March 1, 1962, along with options for the purchase of 210,000 General Instrument shares.

Micamold and its subsidiary report for 1955 combined sales of

$7,350,000 and earnings of $293,000 before taxes. The firm has plants at Brooklyn, N. Y. and Tazewell, Va.

Loral Electronics Builds New Plant

LORAL ELECTRONICS CORP. broke ground for its new plant in New York City on Bronx River Avenue.

The plant will be one story high and three city blocks long. It will occupy 100,000 sq ft of space on five acres.

Leon Alpert, president, stated that this is the first in a series of expansion moves presently being planned.

Texas Instruments Consolidates Divisions

THE semiconductor products and components divisions of Texas Instruments have been combined to improve customer service and to increase production efficiency.

The new semiconductor-components division is headed by vice-president Mark Shepherd, Jr., formerly in charge of the semiconductor products division. J. P. Rodgers, Jr., formerly general manager of the components division, has been appointed assistant vice-president and marketing manager of the new division. Other divisional appointments include: W. E. Love, sales planning manager; Z. W. Pique, sales manager and Leslie King, products manager.

The divisional consolidation has altered the construction plans for the new plant on the recently acquired 250-acre tract near Richardson, Texas. Plans originally called for a 150,000 sq ft plant, but consolidation of the two divisions will increase the new plant size to over 200,000 sq ft. Construction will begin this year, with completion scheduled in 1957.

▶ **Apparatus**—TI also announced new appointments in its apparatus division. They include: Cecil L. Covington, controller; R. E. Houston, personnel director; W. H. Owen, chief industrial engineer; and Ingram Lee II, production manager. In the apparatus division

testing components and complete packages to MIL 5272A?

Read what a user says about Genisco G-Accelerators!

United States Gauge, Sellersville, Pa., recently purchased a Genisco Model B78 G-Accelerator to assist in the development and testing of new instruments. Gauges from 1" size for hydraulic and accumulator applications, to pressure transducers for guided missiles have been tested under acceleration forces up to 75 g's.

Commenting on the performance of the machine, a U.S. Gauge engineer said: "Particularly useful are the rotating pressure ports (air system) and slip rings. In my opinion, the Genisco Model B G-Accelerator is a well-designed piece of equipment, easy to set up and operate, and has required only minor maintenance."

If you need to subject components to simulated g-forces, or to calibrate and evaluate accelerometers, contact your Genisco representative for complete information on Genisco G-Accelerators.

NOW FOUR STANDARD MODELS

MODEL NUMBER	G-RANGE	CAPACITY	RADIUS OF GYRATION
B78	30 to 120	25 lbs.—8" cube	24"
C159	30 to 75	100 lbs.—18" cube	44"
D184	1 to 800	6 1-lb. objects	12"
E185	0.01 to 60	300 lbs.—30" cube	72"

Genisco INCORPORATED
2233 Federal Avenue
Los Angeles 64, California
Reliability first

IMPROVED 214B PULSE AMPLIFIER

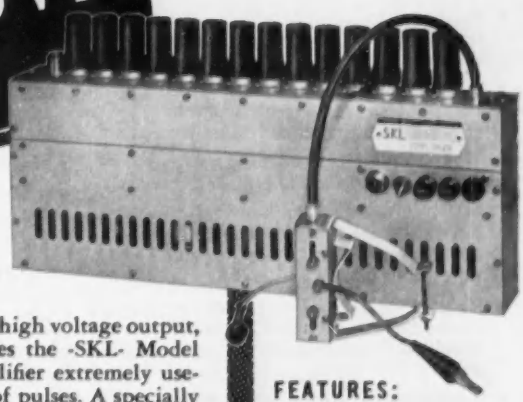

200 CPS to 90 mc BANDWIDTH

Extended bandwidth, high voltage output, and fast rise time makes the -SKL- Model 214B Chain Pulse Amplifier extremely useful for detailed studies of pulses. A specially designed terminating cable provides direction connection to the deflection plates of a cathode ray tube. The flat frequency response and linear phase shift of the Model 214B Chain Pulse Amplifier are valuable in the testing and development of pulse circuits for radar, nuclear, and UHF research.

For further information write for Bulletin 214-2.

FEATURES:

- **Rise Time: 0.006 μsec.**
- **Pulse Gain: 30 db**
- **Maximum Output Voltage: 125V**
- **Bandwidth: 200 cps — 90 mc**
- **Stabilized screen supply**

SKL SPENCER-KENNEDY LABORATORIES, INC.
1320 SOLDIERS FIELD ROAD, BOSTON 35, MASS.

NEW
DIODE-CURVE TRACER

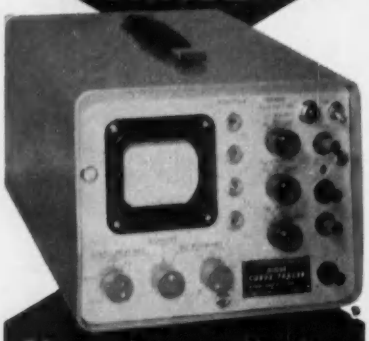

Gives large display *for* all types of diodes

NOW YOU CAN TEST dynamic characteristics of all common types of diodes—including both germanium and silicon—more accurately, rapidly, and easily than ever before

- Full-screen display of forward and reverse characteristics separately gives four times the previous visibility for greater speed and accuracy.
- Feed-out connection permits use of external 'scope for even larger display.
- Dual inputs provide for high-speed comparison or differential checking against standard diode or resistor.
- Forward-scale sensitivity is increased to 1 volt/inch.
- Forward-scale current ranges are 10, 20, and 50 ma/inch; current adjustable from zero to 100 ma.
- Reverse-scale voltage ranges increased to 50, 100, and 250 volts/inch; voltage adjustable from zero to 500 volts.
- Reverse-scale current ranges increased to 1, 10, 100, and 1000μa.
- Provision for diode-capacitance compensation.
- Accuracy ± 5%.
- Size 9-½ × 7-⅝ × 14 inches.

Waters MANUFACTURING, inc.
Wayland, Massachusetts
MFG. INC.
Mail Address: Box 368, So. Sudbury, Mass.
APPLICATION ENGINEERING OFFICES IN PRINCIPAL CITIES

Want more information? Use post card on last page.

engineering department, W. R. Bailey and Ronald F. Keener have been appointed assistant chief engineers, reporting to assistant vice-president H. J. Wissemann.

All those concerned have been with Texas Instruments for several years. John A. F. Gerrard is now director of geophysical research in the central research division of Texas Instruments. He is in charge of basic and exploratory research into technique and instrumentation for geophysical exploration for petroleum and minerals.

Dr. Gerrard was formerly director of geophysical research for Houston Technical Laboratories. He replaced Dr. Hal J. Jones, who is now chief engineer of HTL.

Prior to his coming with the TI companies in 1954, Gerrard was a vice-president of Electro-Technical Laboratories, Houston, and before that was a technical supervisor with Northwest Seismic Surveys, Calgary, and a geophysicist with California Standard Company of Canada.

Simpson Aids U. S. Assistance Program

A. J. Milewski, left, of Simpson in Chicago and N. R. Das Gupta of National Instrument in Calcutta

NIRODE RANJAN DAS GUPTA of India recently made a three-day study of the Simpson Electric Company's Chicago plant to learn more about mass production and specifically about mass production of electrical measuring instruments. He is making a six-month tour of the U.S. as part of the U.S. Technical Assistance Program. His job back in Calcutta is supervisor of repairs at the National Instrument factory.

Simpson also announced formation of an avionics division, headed by Dudley Hansen. It will produce aircraft-indicating instruments.

Ford Motor Company Moves Into Missiles

FORD MOTOR CO. formed a subsidiary company which will span advanced scientific and technological operations ranging from guided missile systems to possible exploration of outer space. Ford's initial commitment for the new firm of $10 million will go for research and development facilities. Total investment in such facilities is expected to run around $14 million.

Called Aeronutronic Systems, Inc., the subsidiary will have its headquarters in California. Construction of research and development facilities for the new firm is expected to start by the end of 1956 and be completed in 1958. Between 1,000 and 2,000 people may eventually be employed in the facility. For production facilities the company will either build new plants or use some of the facilities that Ford has located in the U.S.

Nucleus of the new company will

be a group of scientists and engineers who formerly were organized under the name of Systems Research Corp., a Los Angeles firm engaged in research and development in the design of weapons systems. It was formed by scientific personnel who were formerly with Lockheed's missile systems division.

A seven-member board of directors includes Henry Ford, E. R. Breech, president and board chairman of Ford, respectively; Gerald J. Lynch, director of Ford's office of defense products and governmental relations; Ernst H. Krause and Montgomery H. Johnson of the SRC group and Andrew Kucher, director of the Ford scientific laboratory. A chairman and a seventh member will be announced later.

Lynch, who is resigning his present position with Ford to become president of the subsidiary, said:

"We expect to take a missile or other project and see it through from its very conception to its manufacture, and possibly even to its utilization and maintenance."

"And when the new corporation gets to the point where it is ready to start production, it either will build new plants or use some of the modern, highly versatile facilities which Ford Motor Company has located strategically in all parts of the country."

► **Personnel**—Dr. Krause, formerly president and board chairman of SRC, has been named vice-president—research and development, and Dr. Johnson, who was director of SRC's physics and nucleonics division, has been appointed director of research and development.

In another key assignment, Dr. Joseph V. Charyk, who was vice-president and director of SRC's aerophysics division, has been named head of the aerodynamics and propulsion division.

A former associate director of research at the Naval Research Laboratory in Washington, D. C., Krause was with Lockheed Aircraft before forming SRC.

Johnson also is a former staff member of the Naval Research Laboratory and Lockheed. He is a former faculty member at New York University and the University of Maryland.

Charyk has also served with

NEW *Jewel-bearing "LO-TORK"*

ACTUAL SIZE

0.01 ounce-inches

PRECISION *wire-wound* **POTENTIOMETER**

Jewel bearings for lowest torque, and superior seal against surroundings that contain abrasive dust, make this new, Model LLT ⅞ Waters pot the ideal unit for high-reliability service where minimum torque is essential. With torque low enough to permit actuation by a Bourdon tube or a bimetallic thermal element, this potentiometer offers new advantages in sensitive-instrument applications as well as in computer, servo, and selsyn uses. Check your needs with these specifications:

Maximum torque: .....0.01 ounce-inch
Dissipation: .....one watt at 80° Centigrade
Resistances: .....100 ohms to 100,000 ohms
Weight: .....½ ounce
Outside diameter: 0.885 inch Body depth: ⅞ inch
Linearity: 0.5% standard; on special order, 0.25%
Winding angle: 354° standard; on special order, 360°
Ganging: to six decks with no increase in diameter.

Where the features of a ball-bearing potentiometer are desirable, specify Waters Model LT ⅞ "Lo-Tork" potentiometer.

Write for data sheets on jewel-bearing and ball-bearing precision wire-wound potentiometers.

Do you ever need pots that are "just a bit different"? Maybe we can help you — by modifying a standard Waters design or by taking a bold, new approach. Tell us your need and we'll tell you what we can do.

WATERS MANUFACTURING, inc.
Wayland, Massachusetts
Mail address: P.O. Box 368, So. Sudbury, Mass.
APPLICATION ENGINEERING OFFICES IN PRINCIPAL CITIES

MFG. INC.

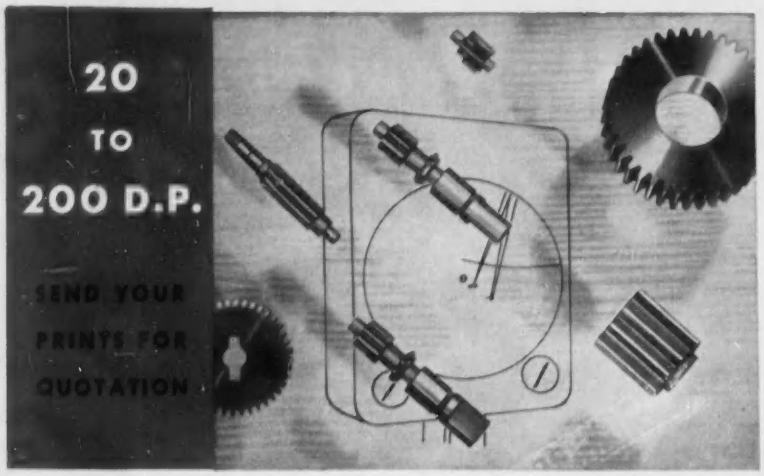

SPURS • HELICALS • WORM AND WORM GEARS • STRAIGHT BEVELS
LEAD SCREWS • RATCHETS • CLUSTER GEARS • RACKS • INTERNALS • ODD SHAPES

THE *Finest* IN GEARS

Beaver Gear Works Inc.

1021 PARMELE STREET, ROCKFORD, ILLINOIS

PIX INTRICATE STAMPING SPECIALISTS

PIX Manufacturing Co., Inc.
81-A Hudson St.
Newark 3, New Jersey

Precision Parts to meet your production and engineering needs. From .002" to .187" thickness. Radio tube parts, drawings, piercing, wire straightening, cutting and forming, relay components, transistor bases, terminal lugs, multi-slide stampings, beryllium copper contacts and printed circuit connectors.

Send sketch or print for quotation.

Lockheed and was on the faculties of California Institute of Technology and Princeton University. He has been associated with the Advisory Group of Aeronautical Research and Development of the North Atlantic Treaty Organization.

IBM Elects Chief Executive

Thomas J. Watson, Jr., left, and Thomas J. Watson, Sr.

THOMAS J. WATSON, JR., has been elected chief executive officer of IBM.

He has been president of the company since January, 1952, and will continue in that office. Thomas J. Watson, Sr. will continue as board chairman.

U. S. Telecommunications Advisory Board Set

A TELECOMMUNICATIONS Advisory Board, under Office of Defense Mobilization chairmanship, was established by Defense Mobilization order.

Primary function of the board is to advise the director of defense mobilization on the effective use of telecommunications programs in over-all government mobilization activities.

The board, to be headed by Major General Jerry V. Matejka, USA, (Ret.), ODM assistant to the director for telecommunications, will be made up of representatives from the Departments of State, Defense and Commerce, the Central Intelligence Agency, Federal Civil Defense Administration and the Fed-

AUTOMATIC
Tape Scheduled
TESTING *with*
the New LAVOIE
ROBOTESTER
for
ELECTRONIC
EQUIPMENT



SETS UP ENTIRE TEST WITHIN HALF A SECOND

Actuated by a simple punched paper tape, the Robotester eliminates the cost and bulk of special program boards, "black boxes" and sample units... does away with tedious hours of preparation. Tapes are easily duplicated or punched on the job for multiple and remote testing. Compact, light weight.

SPECIFICATIONS

Measurement: DC resistance.
Range: 0 to 10,000,000 ohms in 1 ohm steps or ± 1%, whichever is greater. Internal standard resistors are ± 1%.
Tolerance: 5%, 10%, 20% with limits of either "smaller than," "±," or "greater than" selected internal standard. Will reject all resistance values outside standard tolerances. Any of the three tolerance values and three limits may be selected on the tape for any external measurement, and successive tape-programmed measurements need not have the same tolerances. (May be "mixed" in a series of measurements.)
Number of measurements: Between any two of 240 points, or over 57,000 possible measurements per set-up.
Speed: Approximately 120 measurements per minute.
Dimensions: 20" wide x 13¼" high x 18" deep (overall).
Weight: 90 pounds

Lavoie Laboratories, Inc.

MORGANVILLE 1, NEW JERSEY

REPRESENTATIVES

ALBANY, J. A. Reagan Co., Albany 8-5155 — **ATLANTA**, Southeastern Industrial Instruments, Exchange 7801— **BALTIMORE**, Thomas L. Taylor, Belmont 5-9126 — **CHICAGO**, R. Edward Stemm, EStebrook 9-2700—**DENVER**, Allen I. Williams Co., Main 3-0343—**EUCLID, O.**, Electro Sales Associates, Redwood 2-7444 — **FORT WORTH**, Mitchell Spears Co., Walnut 3-8811—**HARTFORD**, M. S. Coldwell, Jackson 2-5832—**LOS ANGELES**, T. Louis Snitzer, Webster 8-2074—**MONTCLAIR, N. J.**, Louis A. Garten & Associates, Pilgrim 6-2900 — **SAN MATEO**, R. L. Pfleiger Co., Fireside 5-1134—**SEATTLE**, Testco, Mohawk 4895—**ST. LOUIS**, Edwin H. Murty, Jefferson 1-2075; Foreign: **Ottawa, CAN.**, Computing Devices of Canada, Ltd., Parkway 8-1761. **N. Y.**, Frazar & Hansen, Ltd., WOrth 4-3454, also **SAN FRANCISCO**, Exbrook 2-5112.

Want more information? Use post card on last page.

eral Communications Commission. Edward Webster will be the FCC representative on TAB.

Audio-Video Names Chief Engineer

IRVING KAUFMAN has been appointed vice-president in charge of engineering at Audio-Video Recording Co. He has been chief engineer of the company since 1955 and will supervise all engineering personnel and facilities.

He joined the firm in 1951 as senior studio engineer. In 1954 he became studio supervisor and was promoted to the position of chief engineer in 1955. In 1956, he was made responsible for all engineering activities.

Prior to joining the company, he was chief engineer at another New York studio for six years.

Sylvania Expands For Microwave, Promotes Six

SYLVANIA plans to expand it microwave tube laboratory by adding a new wing devoted to increased research and development in traveling-wave tubes and other microwave devices. Total of 18,000 sq ft will be added to the present 40,000 sq ft. Construction is to begin this summer for fall occupancy.

The laboratory, built in 1952, is producing traveling-wave tubes under government contracts. Gerald C. Rich is manager of the laboratory.

At least 15,000 sq ft of the new wing will be used for engineering laboratories and offices, while 3,000 sq ft will be devoted to experimental tube construction.

►**Lab** — Earlier Sylvania announced that a microwave physics laboratory had been established in Mountain View, Calif. Activities will be carried out in rented space until permanent facilities are established.

Henry Lehne, general manager of the electronic systems division, said the new laboratory would conduct research and advanced de-

HYCOR
TELEMETERING
FILTERS

Hycor band-pass and low-pass telemetering filters are produced in exact accordance with accepted military standards. In addition to designs which conform to Applied Physics Laboratory specifications, miniature units are available.

Hycor telemtering filters are potted for complete protection against vibration and humidity. The finest components are used to minimize aging effects on characteristics.

Send for **Bulletin TF** *which describes standard types available.*

Hycor engineers will be pleased to quote on your most exacting specifications.

Representatives in Principal Cities

HYCOR

DIVISION OF
INTERNATIONAL RESISTANCE COMPANY

12970 Bradley Avenue, Sylmar 1, Calif.

Want more information? Use post card on last page.

NOW

increased operational versatility . . greater accuracy in RF, VHF and UHF SPECTRUM ANALYSIS

with the IMPROVED

PANORAMIC PANALYZOR

MODEL **SB-8b**

Check these advanced engineering features:

NEW Continuously variable scanning rate from 1 thru 60 scans/sec with one control. Three selectable modes . . . free running, line synch or external synch.

NEW Three selectable types of amplitude displays . . . Square law exponential, Linear 20 db, Log 40 db.

NEW Flat face CRT, edge lit calibrated screen and camera mount bezel for photographic records—optional.

NEW Differential markers to show frequency dispersion available in the Type T-10,000.

The Panalyzor Model SB-8b is available in three types:

Type	Sweepwidth Range	Resolution Range
T-200	200 kc—0 kc	50 cps—4.5 kc
T-1000	1 mc—0 mc	400 cps—10 kc
T-10,000	10 mc—0 mc	9 kc—100 kc

Write today for complete specifications and prices.

PANORAMIC
RADIO PRODUCTS, INC.

Made by the makers of Panadaptor, Panoramic Sonic Analyzer, and Panoramic Ultrasonic Analyzer

10 So. Second Ave., Mount Vernon, N. Y.
MOunt Vernon 4-3970
Cables: Panoramic, Mount Vernon, N.Y. State

Want more information? Use post card on last page.

velopment in the uses of new magnetic materials and gaseous media for microwave electronic control devices and systems for radar, communications and electronic countermeasures.

The new laboratory is the third Sylvania electronics laboratory to be located at Mountain View. The company's microwave tube laboratory was established there in 1952, and the electronic defense laboratory in 1954.

Osmund T. Fundingsland, who has been directing research and development in these fields, will head the new laboratory. Prior to joining Sylvania in 1953, he was with the Air Force Cambridge Research Center. Since 1953 he has been serving as consultant on the Atomic Energy Commission's Project Sherwood at the University of California's Radiation Laboratory.

Arthur L. Aden will be assistant manager of the new laboratory. Since 1953, he has been leading specialized applied physics research for Sylvania.

► **Promotions**—Arthur L. Chapman has been appointed vice-president of manufacturing. A vice-president of the firm since 1950, he most recently had been a vice-president of operations, in charge of the radio and television division.

Arthur L. Chapman

Charles W. Hosterman has been appointed general manager of the electronics division of Sylvania. He has been assistant general manager of the division since 1954. He joined the company in 1943.

Bennett S. Ellefson has been ap-

SANDERS MINICUBE BLOWER

ruggedly constructed for use on aircraft and guided missiles

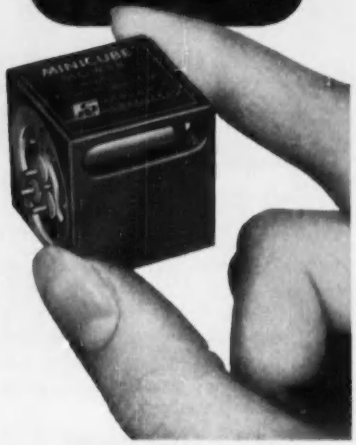

The Sanders Minicube Blower contains both miniature blower and motor in a rugged, 1" cube. A single package, it is designed for use on aircraft and guided missiles operating under severe environmental conditions. It is operable over wide ranges of vibration, acceleration and temperature, and is suitable for many exacting applications.

The Sanders Minicube Blower can be used to:

- Eliminate hot spots in subminiature equipment
- Prevent fogging of lens or viewing glasses
- Cool Klystrons and other electronic tubes and devices
- Maintain uniform flow of air in restricted space

SPECIFICATIONS

Output: 3 cubic feet of air/minute
Input: 400 cps, 4 watts
Voltage: Model 1: 6 volts Model 2: 26 volts
Speed: 22,000 RPM
Size: 1" x 1" x 1"
Weight: 1 oz.

For detailed specifications, write Dept. E-7

SANDERS ASSOCIATES
INCORPORATED
NASHUA, NEW HAMPSHIRE

Want more information? Use post card on last page.

pointed vice-president-engineering and research, and Marion E. Pettegrew has been appointed vice-president-tungsten-chemical and parts operations, of Sylvania.

Dr. Ellefson is responsible for planning and coordinating broad aspects of engineering and research on a company-wide basis. He previously had served since November, 1954, as technical director of Sylvania.

Pettegrew, as a vice-president, will continue to have over-all responsibility for the parts division and tungsten and chemical division. He also continues to have responsibility for parent company supervision of the operations of two wholly-owned subsidiaries, Sylvania Electric of Puerto Rico, and Produtos Eletricos de Mica in Brazil.

Bennett S. Ellefson

Dr. Ellefson joined the Sylvania organization in 1937 as a research chemist, specializing in work on fluorescent materials and glass. He served in various engineering capacities until 1946, when he was appointed director of the central engineering laboratories in New York.

National Semiconductor Selects Research Head

MORTON B. PRINCE has been appointed to the new position of director of research and development for National Semiconductor division of Hoffman Electronics Corp.

Dr. Prince comes to National Semiconductor from Bell Laboratories where he has done developmental work on silicon devices including solar energy converters and power rectifiers. Prior to joining

if you use small
gears & pinions
IT WILL PAY YOU TO CHECK
GRC'S STOCK SHEET
Before you order gears or pinions, see GRC's new Stock Sheet. All items listed are cast from stock dies, individually or in various combinations of gears, pinions, hubs, shafts, etc. Holes, shafts, spacers, shoulders, etc., are made to your exact specifications at no extra tool charge, quantity permitting. Maximum O.D. about 1½", with 1/16" face width; wider faces for smaller diameters. • Unusual shapes, extra precise requirements, available on special order.
WRITE TODAY for new stock sheet and samples. SEND SPECIFICATIONS FOR PROMPT QUOTATION — 100,000 TO MILLIONS.
GRIES
GRIES REPRODUCER CORP.
World's Foremost Producer of Small Diecastings
151 Beechwood Ave., New Rochelle, N. Y. • Phone NEw Rochelle 3-8600

WHEN QUESTIONS ARISE — REMEMBER...
The SURE WAY is to CHOOSE and USE the transformers of proven performance and quality
MAGNETIC COMPONENTS FOR THE ELECTRONICS INDUSTRY
SPECIFICATIONS
MAGNATRAN LEADS THE WAY
UNITIZED RECTIFIERS®
RECTIFIER PLATE TRANSFORMERS
FILTER REACTORS
MODULATION TRANSFORMERS- REACTORS
FILAMENT TRANSFORMERS- AMPLIFIER RECTIFIER
Magnatran transformers have become "Standard" for many of America's largest Electronic Manufacturers.
Whether you require conventional equipment or specially engineered products, choose and use Magnatran. Be modern and secure.
All Magnatran components meet or exceed the standards of AIEE, ASA, NEMA and RETMA.
Write for BULLETINS
MAGNATRAN incorporated
P.O. Box 211 KEARNY, NEW JERSEY, U.S.A.

Want more information? Use post card on last page.

WIRE CLOTH
SAVE on Quality Cloth
IMMEDIATE DELIVERY
Wide range of meshes from large Pittsburgh stock
SPECIALIZING IN
Extra fine precision-woven meshes used in electronics industry.
VARIOUS MESHES
Brass, copper, monel and pure nickel etc. Available in a variety of weaves, with stainless steel and phosphor-bronze regularly woven up to 400 X 400 mesh.
FOR FAST SERVICE CALL OR WRITE . . .
FACTORY ENTERPRISES, INC.
3431 BUTLER STREET, PITTSBURGH 1, PA.
TELEPHONE MU. 1 1199

GREEN
Model D-2
Pantograph Engraver

Unique design of the two-dimensional Model D-2 features — Single micrometer adjustment controls vertical depth of cut, and adjusts height of copy table and pantograph.

Range of ratios from 2 to 1 to infinity!

Accessibility on three sides permitting panels up to 30" diameter to be engraved, milled or profiled. Vertical range over 10" allowing operations on complete chassis, cabinets or other bulky objects. Ruggedness, stability and precise accuracy inherent in construction.

Mounted on the ruggedly constructed heavy duty steel Green Engraver Bench. All functional parts are conveniently within reach of the operator while seated. Accessibility of master type sets stored in lower cabinet trays, tools and accessories contribute to productive capacity.

A brochure with full details is yours upon request.

Literature also available on the smaller Model 106 three-dimensional engraver.

GREEN INSTRUMENT COMPANY
363 Putnam Ave., Cambridge, Mass.

Bell in 1951, he was research assistant at the research laboratory of electronics at MIT.

Canadian RETMA Elects President

JOHN D. CAMPBELL was elected president of RETMA of Canada.

He is general manager of the consumer products group of the Canadian Westinghouse Co. in Hamilton, Ont. He joined the company in 1934, working on time study and methods engineering. In 1937 he moved into the consumer products sales department, first in Hamilton and, in 1939, in Toronto.

He was appointed manager of the appliance and electronic division in 1951 and later was made general manager of the consumer products group.

Canadian RETMA has 118 member-companies.

Fisher Plans To Build In California

PLAN for a new firm in Sunnyvale, Calif., that will manufacture electronic aviation equipment was revealed when a 21 acre plant site was purchased by Gerhard R. Fisher.

Dr. Fisher, president of Fisher Research Laboratory, of Palo Alto, Calif., said he is organizing a new company, unnamed as yet, to manufacture direction finders, radio equipment and other navigational aids and test gear.

Construction of a $1 million plant will get under way by end of this year, and it is to be in operation by February.

Prospective customers for Fisher will be the Lockheed missile facility and the General Motors assembly plant to be built in Sunnyvale.

Fisher's Palo Alto firm manufactures electronic equipment in the geophysical field.

Weston Laboratories Moves To New Plant

WESTON LABORATORIES has moved its operations from Harvard, Mass., to Bolton, Mass. The new plant comprises a 10,000 sq ft

building on a forty-seven acre tract. The former building in Harvard, Mass., has now been leased to the Civil Defense Administration.

Westinghouse Elects Four Vice-Presidents

FOUR executives of Westinghouse have been elected vice-presidents of the company.

They are:

Frank W. Godsey, Jr., 16 years with the firm and the manager since 1951 of the electronics x-ray and air arm divisions, all in Baltimore, Md. He will continue to direct these divisions.

A. M. Kennedy, Jr., 15 years with the company. He will continue to administer the purchases and traffic department from the company's headquarters.

F. M. Sloan, 24 years with the firm, and the general manager of the lamp division since 1953. He will continue to direct the lamp division.

W. Waits Smith, for three years the manager of the company's aviation gas turbine division at Kansas City, Mo., which he will continue to direct.

Godsey joined the Westinghouse new products department in 1940 and was named manager of that department in 1945. In 1951 he was placed in charge of the electronics and x-ray divisions at Baltimore and soon after the air arm division.

Alto Scientific Names Engineers

STANLEY J. FRONT has been appointed mechanical engineer for Alto Scientific Co. Palo Alto, Calif. electronic design and manufacturing firm.

He has served as aircraft and automobile engine designer for Vickers, Ltd., and heavy equipment designer with Northwest Engineering Co. and Skagit Steel & Iron Works. Most recently he was chief development engineer for the Willamette Iron & Steel Co. in Portland, Oregon.

The company also announced that two new engineers, David A. Geddes

Federal's Type FT-HUZ

(Manufactured by Rohde and Schwarz)

VHF Interference and Field Strength MEASUREMENTS

47 Mc. to 225 Mc.

"Certified by a World of Research"

Features:

- Sensitivity 1 μv to 100 mv—self-calibrating.
- Single band covers entire frequency range.
- Built-in dipole telescopes into set when not in use.
- Balanced or coaxial input for use as a tuned voltmeter.
- Operation from self-contained batteries or AC.
- Weighs only 9 lbs., including batteries.

Specifications:
Range: 47 to 225 mc.
Demodulation: FM/AM
Accuracy: ±6 db.

Applications: Radio interference measurements • Plotting antenna radiation patterns • Studying propagation phenomena • Location of TV receiving sites • Covers FM, TV, Aircraft and Mobile Radio bands.

Price—$499. For technical bulletin, write to Instrument Division, Dept. S-313.

Federal
A DIVISION OF IT&T

Federal Telephone and Radio Company
A Division of
International Telephone and Telegraph Corporation
100 KINGSLAND ROAD • CLIFTON, N. J. • NUtley 2-3600

where does COTO-COIL SQUEEZE into this picture?

In many of today's high speed elevators Coto-Coils control the sensitive circuits which make absolute smoothness and safety possible.

If you have a coil problem in production or design, let Coto-Coil provide the right coil for the job in the volume you need.

Send details of your problem to

COTO-COIL CO., Inc.

65 Pavilion Ave., Providence 5, R. I.
New York Office:
10 East 43rd Street
New York 17, New York

PRECISION Coto Coils WOUND

Want more information? Use post card on last page.

TYPE 120-D

NEMS-CLARKE

FIELD INTENSITY METER

LIGHT WEIGHT
DIRECT READING
SELF-CONTAINED

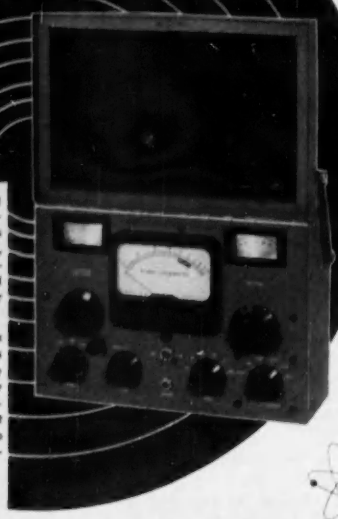

A portable instrument for measuring the wide range of radio signal intensities from 540 to 1600 kc. Its range is from 10 microvolts to 10 volts per meter, making it equally effective for interference studies at low signal strengths and close-in measurements on high-power directional arrays.

Accuracy is assured by a calibration method that compensates for variations in tube characteristics and for voltage variations in the self-contained battery power supply. Operation is simple—measurements made rapidly—direct reading on all ranges—requires no charts or multiplication factors—no warm-up period necessary.

NEMS-CLARKE
Incorporated
919 JESUP-BLAIR DRIVE
SILVER SPRING, MARYLAND

For further information write Dept. K-2

lacing tapes for every purpose

Gudebrod Lacing Tapes are easy to tie, easy on the hands. Knots tie securely—stay put!

GUDELACE* . . . the original braided nylon wax-coated lacing tape.

GUDELACE-H* . . . rubber-coated, easier to handle, no slipping, fungus and flame resistant.

NEW TEFLACE . . . the latest advance in tapes, coated with DuPont Teflon, to withstand extreme temperature conditions.

*T.M.

WRITE FOR INFORMATION AND TRIAL SUPPLY TODAY!

GUDEBROD BROS. SILK CO., INC.

Electronics Division
225 W. 34th St.
New York 1, N.Y.

Executive Offices
12 S. 12th St.
Philadelphia 7, Pa.

and John W. Witcosky, have joined the engineering staff.

Geddes was formerly associated with the Washington Institute of Technology and a West Coast electronics instrument firm. For the past 5 years he has been engaged in developing carrier frequency and low frequency equipment.

Witcosky was formerly with Beckman Instruments, Stanford Research Institute and Lynch Carrier Systems.

Melpar Appoints Chief Engineer

Robert S. Butts

ROBERT S. BUTTS has been appointed chief engineer of Melpar, of Falls Church, Va. He joined the firm in 1947 as a senior engineer. In prior assignments, he was engaged in the design and development of subminiaturized equipment for piloted aircraft and guided missiles.

Emerson Reorganizes Operating Structure

OPERATING structure of Emerson Radio and Phonograph Corp. has been changed from a horizontal to a vertical basis, with the establishment of autonomous divisions, the radio-television-phonograph division and the government contracts division.

Dorman D. Israel, executive vice-president and a member of the board of directors, will head the radio-television-phonograph division. Morton P. Rome, vice-president in charge of government contracts, will head the government

contracts division. The management of existing subsidiaries, Quiet Heet Manufacturing Corp., manufacturer of air conditioners and oil burners, Jefferson-Travis, manufacturer of cabinets, and Plastimold Corp., custom moulder of plastics, will remain unchanged.

Perfection Mica Opens Indiana Plant

A NEW PLANT was opened in Rochester, Indiana by magnetic shield division of Perfection Mica Co. of Chicago. The 15,000 sq ft plant has new modern equipment for manufacturing magnetic shielding material designed to attenuate both high and low magnetic fields. The firm's Chicago plant will continue to produce shielding as well as "K" gauged mica.

Transistor Applications Formed In Boston

A NEW COMPANY, Transistor Applications Co., has been formed in Boston, Mass. for the research, development and production of transistorized products only.

Seymour Schwartz, formerly staff member of Lincoln Laboratory and transistor engineering consultant, is president and general manager.

Operations of the new company include research, development and pre-production on miniaturization and transistorization of both military and commercial equipment. The company also conducts evaluations of transistor circuits and devices.

Mack Steps Further Into Electronics

MACK ELECTRONICS, a new division of Mack Trucks, Inc., has been formed and will be located in Boston, Mass. It will supplement the facilities of the present electronics operation located at the Mack plant in Plainfield, N. J.

All phases of engineering will be under the direction of Paul Travers, formerly chief engineer at Ultrasonic Corp. and, before that, with the Servomechanisms Laboratory of MIT. Glenn H. Roundy, also form-

For more than 40 years North has pioneered in engineering and manufacturing "brains" for switching, supervising and recording, in communications and in systems or components for:

- Computation
- Remote supervision and control of unmanned equipment.
- Data input and output sequencing.
- Memory and reporting functions.
- Missile guidance.
- Other airborne automatic controls.
- Many other "automations."

When you must meet critical industrial or military specs which go beyond the usual meaning of "dependability" call on North to collaborate in or take over your problems.

Our field engineers are strategically located in the important industrial areas.

NORTH ELECTRIC COMPANY

INDUSTRIAL DIVISION 559 South Market St., Galion, Ohio

Want more information? Use post card on last page.

YOU CAN ALWAYS
RELY ON WHITSO
FOR
INSULATED
TERMINALS
AND OTHER
ELECTRONIC
COMPONENTS



HERE'S WHY:

We are specially equipped to furnish standoff and feed through terminals in a full range of materials and sizes . . . in economical quantity runs . . . from either our standard line or custom fabricated to your specifications . . . and *deliver them promptly.*

Whitso Standoff Terminals are available in over 100 varieties . . . fork, single and double turret, post and miniature types . . . male, female or rivet mountings . . . molded or metal base. They are molded from melamine thermosetting materials for best electrical properties.

Whitso Feed Through Terminals can be furnished as standard or to your individual specifications.

Whitso Melamine Jacks are electrically and mechanically designed for long, reliable service. A wide range of colors are available for color coding. Special colors can be supplied.

Whitso Pointer Knobs, widely popular in military use, are readily suited to countless communications and industrial applications. They are supplied in attractive black phenolic with satin finish.

Whitso Custom Molded Parts for electro-mechanical use include general purpose, mica filled and high impact phenolics, ureas, melamines, alkyds, glass reinforced alkyds and nylons.

■

Get full facts on Whitso terminals and other electronic components. Ask for our new catalog.

WHITSO, INC.

9328 Byron Street, Schiller Park, Illinois
(Chicago Suburb)

Want more information? Use post card on last page.

erly connected with Ultrasonic Corp. as vice-president, will direct sales.

Mack acquired, in 1955, two electronic companies, White Industries and Radio Sonic Corp., now known as Mack electronics division.

Production of military and commercial electronic equipment will be continued at the Mack plant in Plainfield, N. J., under the directon of Robert Edwards, recently appointed manager.

Electro Engineering Names Halloran

JAMES J. HALLORAN has been elected secretary-treasurer of Electro Engineering Works in San Leandro, Calif. He is also vice-president in charge of engineering for the firm. He replaces Alex W. Fry, who has moved to New York and a new field.

Halloran has been a member of the executive staff of the company for the past six years.

Sell Heads AMF Electronics

WENDELL B. SELL has been appointed general manager of the electronics division of American Machine & Foundry Co.

He formerly was project engineer with the pilotless aircraft division of Boeing Aircraft for two years. Prior to joining Boeing, he was a member of the anti-aircraft and guided missile board, Fort Bliss, Texas from 1950 to 1954.

Wendell B. Sell

In 1947 he worked in the Applied

TO
RESEARCH-MINDED
ENGINEERS
AND
SCIENTISTS

You can make the most of your creative and imaginative ability at North American's Columbus Division—home of the famous Navy FURY JETS.

Exciting, advanced research programs are now underway in six promising fields;

MICROWAVE
ANTENNAS
RADOMES
FLIGHT
CONTROL
FIRE CONTROL
SERVO-
MECHANISMS

To find out more about a highly profitable research engineering career in Columbus,

CONTACT:
Mr. J. H. Papin
Dept. 56 EL

NORTH
AMERICAN
AVIATION, INC.
Columbus 16, Ohio

Want more information? Use post card on last page.

Physics Laboratory at Johns Hopkins on guided missiles, and in 1948 at the Ballistics Research Laboratory, Aberdeen, Maryland on large-scale digital computers.

Dr. Sell served as chief of the radar branch, G-3 Section, Army Ground Forces, where he established a graduate level training program for military personnel in electronics and radar.

Lockheed Speeds Missile Plant

LOCKHEED AIRCRAFT broke ground for its missile systems division's new Sunnyvale, Calif. plant to be completed by mid-1957.

The division has decided to keep its present Van Nuys, Calif. plant open and to build the additional facilities on the 275-acre Sunnyvale site sooner than it had previously expected.

The building program calls for construction of four separate buildings with a total floor space of more than one quarter of a million sq ft.

This includes a 48,000 sq ft administration building; a 96,000 sq ft manufacturing building; a 96,000 sq ft engineering building and a 20,000 sq ft cafeteria.

The manufacturing building's factory area is designed to incorporate high-speed precision machinery and specialized shops for rapid production line operations. The engineering building will house such functions as general engineering offices and engineering test laboratories.

Utah Radio Buys Electronics Division

THE electronics division of Utah Radio Products Co. has been sold to the Utah Radio Products Corp. of Huntington, Ind., a locally organized company that plans to continue operations without interruption. The division produces radio and tv loudspeakers and other electrical and electronic assemblies.

Frank L. Pyle, vice-president in charge of Utah's electronics division for the past seven years, heads the new company as president.

Work in process has been trans-

the new

Cary

MODEL 31

Vibrating Reed Electrometer

Detects current as small as 1.0×10^{-17} amperes...charges as small as 5×10^{-16} coulombs...voltages as small as 0.02 mv!

Applications of the Cary Model 31 include measurement of radioactivity, determination of C^{14}, H^3 and S^{35} concentrations, amplifications and measurement of ion currents in mass spectrometry, pH determinations, measurements of electrical properties . . . where precise measurement of small charges, currents, or voltages from a high impedance source is required.

Stability—Open circuit input: less than 6×10^{-14} coulombs rms short period noise; less than 5×10^{-17} amperes steady drift. Short circuit input: less than 0.02 mv rms short period noise; less than 0.2 mv per day steady drift.

Accuracy—Measurements reproducible to within 1%. Accuracy limited only by the accuracy of the recorder, potentiometer, or meter used.

Reliability—No grid current, greater freedom from zero drift. Much more rugged than other types with comparable sensitivity.

Easy to set-up and adjust—Requires no leveling or special vibration supports.

10 standard ranges—1, 3, 10, 30, 100, 300, 1,000 mv, and 3, 10, 30 volts.

Accessories—Special adapters, chambers, a multi-range recorder and other accessories are available.

A new catalog on the Cary Model 31 is available. Write for your copy today.

APPLIED PHYSICS CORPORATION
362 W. Colorado St., Pasadena, California

TYPE AN/TRC-1 F-M V-H-F RADIO EQUIPMENT

The type AN/TRC-1 radio system transmits up to 5 frequency-division-multiplex voice channels on any one of 300 radio channels in the band from 70 to 100 mc. The original design was widely used by the U.S. Signal Corps in World War II, and an improved version is currently in production. This system has a frequency deviation of ± 30 kc. It transmits the band of 300 cycles to 20 kc with a maximum variation of 3db and negligible distortion. Power supply is 115 volts 50 to 60 cycles A.C. The units can be supplied for fixed-plant installation, or in tactical-type carrying cases.

The system has a self-contained 3-kc order-wire channel, and frequency space for four 3400-cycle voice circuits, derived from a separate carrier-telephone terminal. Suitable carrier-telephone and carrier-telegraph terminals are available.

Type T-14J/TRC-1 Transmitter: 40 watts output, crystal-controlled, −12 dbm input, 350 watts power requirement, dims. 10½x12¼x17¼ ins., weight 95 lbs.

Type R-19J/TRC-1 Receiver: Double-conversion superheterodyne, crystal-controlled, +20 dbm output, 100 watts power requirement, dimensions 7¾x12¼x17¼ ins., weight 80 lbs.

Type TS-32D/TRC-1 Oscillator: Three-tube test oscillator giving modulated signal for aligning a receiver, from which it obtains its power supply.

Type AS-20B/TRC-1 Antenna: Three-element dipole array, adjustable over band 70-100 mc. Contained in carrying case with spare elements, tools, coaxial cables, and all accessories. Does not include mast.

Type AM-8C/TRA-1 Amplifier: Power amplifier for use with T-14 Transmitter, 200 watts output. Obtains power from PP-13 Power Supply. Dimensions 11½x12¼x17¼ ins., weight 75 lbs.

PP-13D/TRA-1 Power Supply: Supplies power to one AM-8 Amplifier. Power requirement 800 watts. Weight 194 lbs. Dimensions 12x12¼x34 ins.

RADIO ENGINEERING PRODUCTS
1080 UNIVERSITY STREET, MONTREAL 3, CANADA
Telephone: UNiversity 6-6887 Cable Address: Radenpro, Montreal
MANUFACTURERS OF CARRIER-TELEGRAPH, CARRIER-TELEPHONE AND BROAD-BAND RADIO SYSTEMS

ENGINEERS • • •

SPECIFY *Hoyt* FOR— √ Accuracy

√ Appearance √ Economy

You get big advantages—optimum performance at minimum cost—when you specify HOYT Instruments incorporating more than 50 years' Manufacturing experience. HOYT offers you a complete Line of Panel and Portable Meters in a variety of sizes, ranges and cases . . . Milliammeters, Microammeters, Millivoltmeters, Ammeters, Voltmeters and others—Moving-Coil, Repulsion and Rectifier Types—all designed for today's needs.

Take advantage of HOYT'S lower cost! Write today for complete information and prices on the Meters you need.

POLYSTYRENE CASES ANTI-STATIC TREATED

BAKELITE CASES ROUND & SQUARE

METAL CASES FLUSH & SURFACE

Hoyt ELECTRICAL INSTRUMENTS

Sales Div.: BURTON-ROGERS COMPANY

42 Carleton Street, Cambridge 42, Mass., U. S. A.

WIDE-BAND POWER OSCILLATOR

200 to 2500 mc/sec

•

40 watts at 200-400 mc
25 watts at 400-1000 mc
10 watts at 1000-2500 mc

•

Provides exceptionally broad frequency coverage and substantial power output in a single source. Offers smooth tuning and precise resettability, with overlapping coverage of the full range in two bands.

Price, including oscillator and power supply-modulator, $2250.00 net F.O.B. Long Island City, N Y Write for free bulletin.

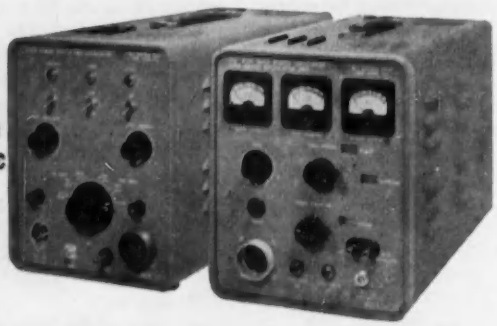

Frequency ranges....200 to 1050 mc, 950 to 2500 mc
Calibration accuracy.....±1% or ±5 megacycles whichever is greater
Resettability.....better than 0.1%
Modulation.....internal square-wave and sine-wave, 400 and 1000 cps; also external
Output impedance.....50 ohms (nominal)

MAXSON INSTRUMENTS

DIVISION OF THE W. L. MAXSON CORPORATION

47-37 Austell Place
Long Island City 1
New York
Tel: RAvenswood 9-1850

See us at Wescon—Booths 333 and 334

ferred to the new corporation and operations are to continue without change.

Northeastern Elects Two Directors

JOHN E. MOSSMAN and O. P. Harwood have been elected members of the board of directors of Northeastern Engineering of Manchester, N. H.

John Mossman is president of Monitor Controller of Rockland, Mass. and Ashdee Products of Homewood, Ill.

Harwood has been identified with the aviation industry for 40 years. He was regional administrator of the Civil Aeronautics Administration from 1929 to 1945.

Sperry Expands, Names Engineers

SPERRY GYROSCOPE CO. plans to build a West Coast research facility, the Sunnyvale Development Center, in Sunnyvale, Calif. Operations are scheduled to begin this summer.

Advanced research and development projects of the western group will be in the specific fields of radar, fire control, servomechanism and guided missile systems. This work will be under the direction of the main engineering division of Sperry Gyroscope Co. and L. L. Wheeler, chief engineer at Lake Success.

E. B. Hammond, former engineering head for Airborne Weapon Systems, will be manager of the new center.

Immediate plans are limited to two 10,000 sq ft buildings.

Under present plans, the Sunnyvale group will initiate development work on new weapons systems and carry these projects to completion of workable production designs based on thoroughly-tested prototypes. Manufacture of equipment will be performed at established Sperry manufacturing facilities.

► **Research**—Sperry also organized a new microwave electronics division.

Manager of the new division is Eugene J. Venaglia who formerly directed Sperry's surface arma-

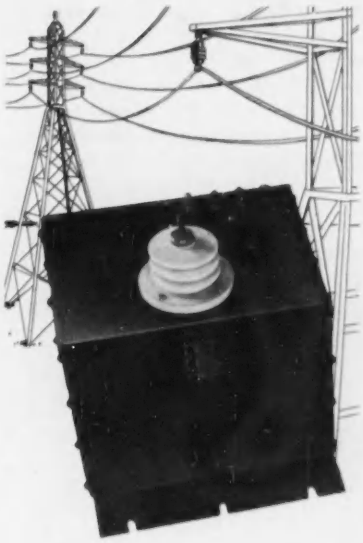

Controlling a transformer's

leakage reactance

Problem: Design and produce a high-voltage potential transformer with unusually high and *uniform* leakage reactance.

The transformer must run dependably for at least 15 years as a vital part of an rf carrier circuit on a high-voltage power line. Operating voltage at the primary of the transformer is 5000 volts.

Solution: Building a transformer for this general purpose and life is no special trick. But **this** leakage reactance requires an adjustable magnetic shunt. With the shunt we designed, we can set each transformer to the exact leakage reactance called for. It's a good way to produce—in quantity—transformers with unvarying performance characteristics.

Since the transformer will be exposed to dust and condensation when mounted outdoors in its housing, we used an extra large high voltage terminal bushing with three drip-type petticoats.

To protect the terminals from rough handling by installation crews, we made the studs extra large—and keyed them to prevent turning.

And you? When *you* need transformers—by hundreds or thousands, straightforward or special design—make use of our production and design experience and facilities.

You can judge the experience and facilities for yourself with a brochure we've prepared. Write for a copy.

CALEDONIA

ELECTRONICS AND TRANSFORMER CORPORATION

Dept. E-7, Caledonia, N. Y.

In Canada: Hackbusch Electronics, Ltd.
23 Primrose Ave., Toronto 4

Want more information? Use post card on last page.

ment engineering department. He joined the firm in 1942 as a research laboratory technician.

Eugene J. Venaglia

The new division will employ more than 800 persons, including 200 engineers. It will supply weapon support systems, test equipment, antennas, and precision components requiring specialized engineering and production techniques. The division will also reorganize and expand operations for additional instrumentation and standards for advanced research laboratories, special radar systems, and target simulators, computers, and evaluators.

▶ **Ford**—The Ford Instrument Co., division of Sperry Rand Corp announced that Charles R. Burrows, director of Cornell University's school of electrical engineering, will join the firm in July. He will become vice-president for engineering, heading all engineering, development and research.

Dr. Burrows has been associate chief scientist of GE's advanced electronics center. During World War II, he was chairman of the radio wave propagation committee of the National Research & Development Council, coordinating all research work in this field affecting the war effort.

Gamewell Selects Chief Engineer

THE GAMEWELL CO. of Newton Upper Falls, Mass. appointed Edward S. Ruth chief engineer, replacing Frank R. Bridges, who has re-

For
PILOT LIGHTS
CONSULT
DIALCO

Your product benefits 3 ways from the use of a DIALCO Pilot Light:

Enhanced appearance: The glow of light and sparkle of a lens add colorful visual attraction.

Greater safety: A timely warning flashed by a pilot light can prevent damage to equipment.

Added service: Discs inserted behind lenses can be used to deliver specific messages, such as "FUEL LOW", "ON", "OFF", etc.

Let the Dialco engineering department assist you in selecting the *right* lamp and the *most suitable* pilot light for your needs.

Dialco offers the *complete* line of pilot lights, from sub-miniature types to giant units with 1½" lenses.

Every assembly is available complete with lamp.

SAMPLES ON REQUEST AT ONCE — NO CHARGE

Illustrations are approx. 70% actual size . . . *(A)* No. 8-1930-111 sub-miniature pilot light . . . *(B)* No. 521308-991, with multivue cap . . . *(C)* No. 922210-111, dimmer type . . . *(D)* No. 47901 with light shield cap.

Write for latest catalogues and Design Brochure.



Foremost Manufacturer of Pilot Lights

DIALIGHT
CORPORATION

60 STEWART AVE. • BROOKLYN 37, N. Y.
HYACINTH 7-7600

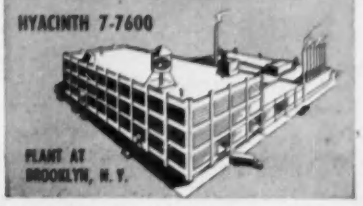

Want more information? Use post card on last page.

CO-AX
4 μμf/ft
ULTRA LOW capacitance & attenuation
WE ARE SPECIALLY ORGANIZED TO HANDLE DIRECT ORDERS OR ENQUIRIES FROM OVERSEAS
SPOT DELIVERIES FOR U.S.
BILLED IN DOLLARS— SETTLEMENT BY YOUR CHECK
CABLE OR AIRMAIL TODAY
TYPE | μμF/ft | IMPED.Ω | O.D.
C 1 | 7.3 | 150 | .36"
C 11 | 6.3 | 173 | .36"
C 2 | 6.3 | 171 | .44"
C 22 | 5.5 | 184 | .44"
C 3 | 5.4 | 197 | .64"
C 33 | 4.8 | 220 | .64"
C 4 | 4.6 | 229 | 1.03"
C 44 | 4.1 | 252 | 1.03"
TRANS T RADIO
NEW 'MX and SM' SUBMINIATURE CONNECTORS
Constant 50Ω-63Ω-70Ω impedances
TRANSRADIO LTD. 138A Cromwell Rd. London SW7 ENGLAND
CABLES: TRANSRAD, LONDON

IF IT'S NEW . . . IF IT'S NEWS . . . IT'S FROM ELCO

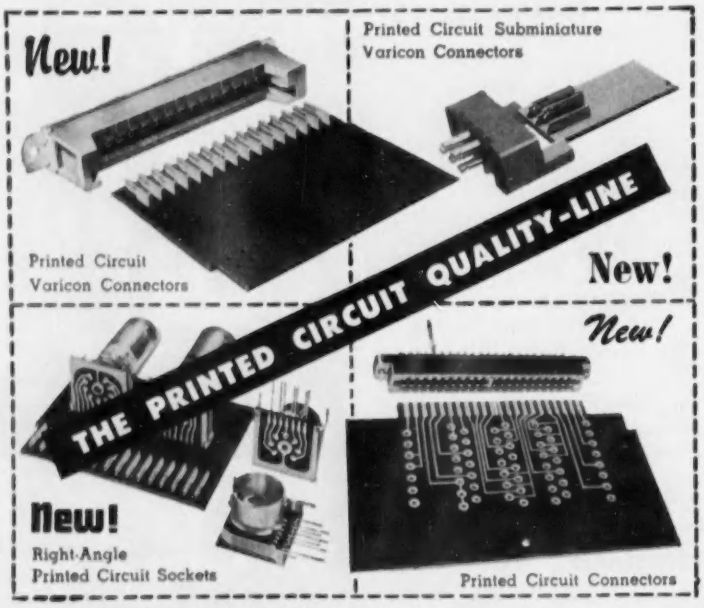

For Complete Details . . . Write! Phone! Wire!

ELCO SALES COMPANY, M ST. BELOW ERIE AVE., PHILA. 24, PA., CU 9-5500

signed from the firm.

Ruth joined Gamewell in 1954. For many years he was director of research, engineering and development for Edwards Co. in Norwalk, Conn.

Electromation Buys Cado Manufacturing

ELECTROMATION Co. of Burbank, Calif. purchased the patents, tooling inventory, corporate structure and name of the Cado Manufacturing Co. of Santa Monica, microwave manufacturers.

Donald H. Lanctot, vice-president and chief engineer of Cado, will continue in the same capacity under the new ownership. Formerly with RCA Victor as a project engineer in the radar development field, he later was affiliated with Transco Products Corp., as project engineer in development of microwave and associated products.

Raytheon Adds Space For Military Output

RAYTHEON exercised its option to lease with a further option to buy, the Shawsheen Mill properties in Andover, Mass. from Textron.

By the move, the firm acquired more than a million sq ft of manufacturing, office and warehouse space.

Raytheon will use its new facilities to produce military equipment it is now developing for the Army Ordnance Corps.

Textron is to vacate the mill, built in 1923, in June. Conversion of the mill for electronics production will be started as soon as possible after that.

The firm contemplates a buildup during the first year of occupancy, to about 1,000 employees. During the next five years, employment at Shawsheen could rise to as much as 6,000 provided necessary government contracts, presently planned for, are secured.

Feedback Controls Appoints Heuchling

FEEDBACK CONTROLS appointed T. P. Heuchling as chief engineer.

He was formerly section head for

analog computers and controls at Ultrasonic Corp. and a project engineer at the M.I.T. servomechanisms laboratory.

Clifton Precision Promotes Hayes

Arnold E. Hayes

ARNOLD E. HAYES has been elected secretary and appointed general manager of Clifton Precision Products. Hayes has been with the Clifton Heights, Pa. firm for the past four years in the position of chief applications and service engineer.

Previously he was a technical advisor, aeronautical division of Minneapolis-Honeywell and with the National Bureau of Standards in Washington, D. C. as a gyro engineer. During World War II, he was with Bendix Aviation engaged in the design and manufacture of aircraft instruments.

Burr-Brown Research Company Formed

A NEW ELECTRONICS FIRM, the Burr-Brown Research Corp., has been formed by R. Page Burr and Thomas R. Brown, Jr.

Burr was formerly a supervising engineer in the research department of the Hazeltine Corp. where he was responsible for development work in television transmitting and receiving apparatus. He has made contributions to the development of color television.

Brown has been an instructor in electronics and treasurer and board member of a residential devel-

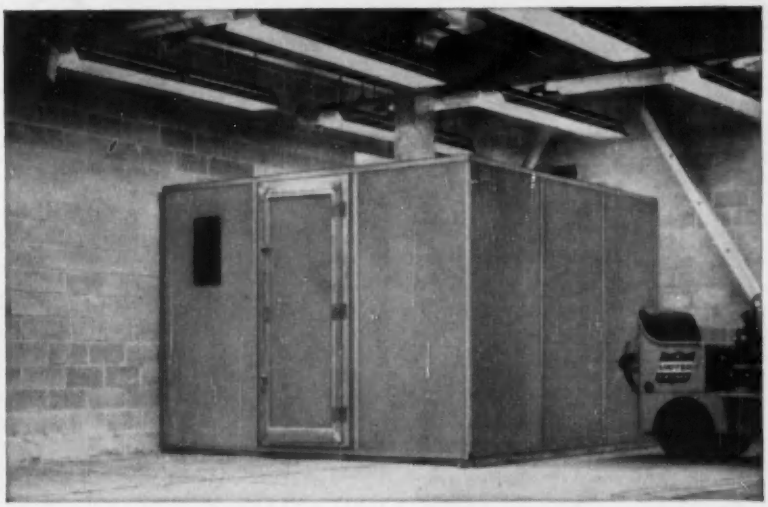

Armorply makes shielded rooms easy to assemble

Shielded rooms constructed of Armorply panels are a snap to put up, take down or move—*with ordinary labor.* And the room size can be expanded or altered easily, since special compression joints eliminate the need for soldering. Armorply—the metal-clad plywood—comes with faces of copper, lead, aluminum or other metal. (Zinc-bond steel faces are used in the United Air Lines room, shown above, which was built by Shielding, Inc., of Riverside, New Jersey.) For full information, and a free sample of Armorply, write today.

Weldwood® Armorply®

UNITED STATES PLYWOOD CORPORATION, Dept. E7-56, 55 W. 44th St., New York 36, N. Y.

PHAZOR PAT. PEND **NULL METER**

A PHASE SENSITIVE NULL METER WHEREIN NOISE AND HARMONIC VOLTAGES ARE EFFECTIVELY ELIMINATED

MODEL 100A

PRICE $259.00 F.O.B. NEW YORK

- Allows separate balance of in-phase or quadrature in null circuits.
- Eliminates the necessity for filters.
- High sensitivity.
- Direction of null clearly shown on zero centered meter.
- Synchro zeroing without recourse to coarse and fine switching.

For further information contact your nearest representative or write for brochure

INDUSTRIAL TEST EQUIPMENT CO.
55 E. 11th ST. · NEW YORK 3 · GR. 3-4684

Manufacturers of:

PHASE METERS • NULL DETECTORS • IMPEDANCE COMPARATORS • POWER OSCILLATORS • FREQUENCY STANDARDS • AUTOMATIC HI-POT •

Other Electronic Test Equipment

Simplifying **HF** *Power Measurement*

Model 67 **TERMALINE**

DIRECT-READING R-F WATTMETER

30 mc to 500 mc
(to 1000 mc if specified)

50 ohms

Triple Range 0-25 watts
0-100 "
0-500 "

Type N Input Connector
(Adaptor for PL-259 supplied)

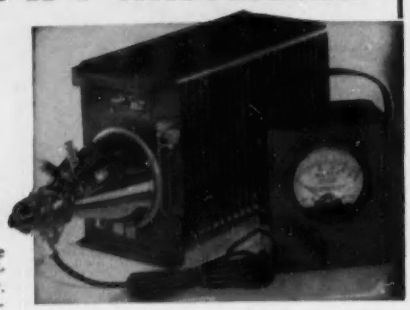

● Model 67 is a larger type Wattmeter than the well-known AN-ME-11/U (our Model 611) R-F Wattmeter. Specifically designed for fixed station transmitters to 500 watts output, it may be used nicely on low range for mobile gear. Provided with an aluminum cased, shock-mounted meter, Model 67 is as simple to use as a DC voltmeter. Now in general use throughout the industry, TERMALINE Wattmeters may be depended upon for fast, accurate and repeatable power readings

NON-RADIATING
... Accuracy — 5%

RUGGED CONSTRUCTION
... Size — 17" x 9" x 6"
Wght. — 30 pounds

BIRD
ELECTRONIC CORP.
1800 EAST 38TH ST., CLEVELAND 14, OHIO
TERMALINE Coaxial Line Instruments

VAN GROOS COMPANY
Sherman Oaks, Cal.

for service and lab. work

Heathkit
PRINTED CIRCUIT
OSCILLOSCOPE KIT
FOR COLOR TV!

① Check the outstanding engineering design of this modern *printed circuit* Scope. Designed for color TV work, ideal for critical Laboratory applications. Frequency response essentially flat from 5 cycles to 5 Mc down only 1½ db at 3.58 Mc (TV color burst sync frequency). Down only 5 db at 5 Mc. New sweep generator 20-500,000 cycles, *5 times* the range usually offered. Will sync wave form display up to 5 Mc and better. Printed circuit boards stabilize performance specifications and cut assembly time in half. Formerly available only in costly Lab type Scope. Features horizontal trace expansion for observation of pulse detail — retrace blanking amplifier — voltage regulated power supply — 3 step frequency compensated vertical input — low capacity nylon bushings on panel terminals — plus a host of other fine features. Combines peak performance and fine engineering features with low kit cost!

① MODEL O-10 **$69.50*** Shpg. Wt. 27 lbs.

Heathkit TV
SWEEP GENERATOR KIT
ELECTRONIC SWEEP SYSTEM

② A new Heathkit sweep generator covering all frequencies encountered in TV service work (color or monochrome). FM frequencies too! 4 Mc — 220 Mc on fundamentals, harmonics up to 880 Mc. Smoothly controllable all-electronic sweep system. Nothing mechanical to vibrate or wear out. Crystal controlled 4.5 Mc fixed marker and separate variable marker 19-60 Mc on fundamentals and 57-180 Mc on calibrated harmonics. Plug-in crystal included. Blanking and phasing controls — automatic constant amplitude output circuit — efficient attenuation — maximum RF output well over .1 volt — vastly improved linearity. Easily your best buy in sweep generators.



② MODEL TS-4 **$49.50*** Shpg. Wt. 16 lbs.

Heath
COMPANY
A SUBSIDIARY OF DAYSTROM, INC.
BENTON HARBOR 14, MICH.
WRITE FOR FREE CATALOG
...COMPLETE INFORMATION

opment corporation in Tucson, Arizona.

The new firm will specialize in the design, development and manufacture of transistorized electronic circuits and equipment. It will be active in the New York area near Cold Spring Harbor, Long Island,

R. Page Burr

and in the Southwest at Tucson. Burr will be responsible for the technical operations and Brown will supervise the business activities of the organization.

Mueller Joins Packard-Bell

GEORGE J. MUELLER has been appointed chief engineer for the technical products division of the Packard-Bell Co. He will have a major role in guiding the firm in its national defense work and more specifically in the projected expansion of its guided missile program.

Dr. Mueller most recently headed

George J. Mueller

FOR PRECISION LABORATORY OR PRODUCTION TESTING

1110-AB INCREMENTAL INDUCTANCE BRIDGE

AND ACCESSORIES

Accurate inductance measurement with or without superimposed D.C., for all types of iron core components.

- INDUCTANCE — 1 Millihenry to 1000 Henry
- FREQUENCY — 20 to 10,000 Cycles
- ACCURACY — 1% to 1000 Cycle, 2% to 10KC
- CONDUCTANCE — 1 Micromho to 1 MHO
- "Q" — 0.5 to 100
- SUPERIMPOSED D.C. — Up to 1 Ampere
- DIRECT READING — For use by unskilled operators.

ACCESSORIES AVAILABLE: 1140-A Null Detector, 1210-A Null Detector — V.T.V.M., 1170 D.C. Supply and 1180 A.C. Supply.

INSTRUMENT DIVISION

FREED TRANSFORMER CO., INC.

1722 Weirfield St., Brooklyn (Ridgewood) 27, N.Y.

memo:

McGRAW-HILL TECHNICAL WRITING SERVICE

WRITES · EDITS
ILLUSTRATES
PRINTS

YOUR publications ... to YOUR specifications

TWS relieves you of all or any of the many problems encountered in the production of your . . .

EQUIPMENT MANUALS - HANDBOOKS
PRODUCT CATALOGS-TRAINING AIDS
PAMPHLETS — REPORTS — BROCHURES
COMPANY HISTORIES — PARTS LISTS

150

WRITERS — EDITORS — ARTISTS ARE AT YOUR SERVICE

WRITE:
Project Consultant
TWS—McGraw-Hill
330 W. 42 St. NYC 36
Phone: LOngacre 4-3000

Want more information? Use post card on last page.

the test support department of the guided missile research division of the Ramo-Wooldridge Corp.

For 15 years he worked in various capacities at the Army's Picatinny Arsenal in Dover, N. J.

In 1950, he left the Arsenal to become supervisory physicist at the Air Force Missile Test Center in Florida.

In 1952 he began work on the development of operational test equipment for the Navy Bureau of Aeronautics' guided missile program as technical director of the Allen B. DuMont Laboratories' project.

Completing the project in 1953, he became an engineering and physics consultant for two years.

Concord Control Starts Operations

A NEW COMPANY, Concord Control, of Cambridge, Mass. has been formed to develop and manufacture numerical control equipment for machine tools and industrial processes. The firm's staff includes engineers who played a part in the development of numerically controlled machine tools at the M.I.T. servomechanisms laboratory. Newly-elected officers of the company are James O. McDonough, president; Herbert P. Grossimon, vice-president in charge of engineering and Richard W. Lawrie, vice-president in charge of sales. Other officers are Robert H. Gregory, comptroller and treasurer and

Left to right, H. P. Grossimon, J. O. McDonough, R. W. Lawrie

NEW!

AUTOMATIC'S TYPE BSM COAXIAL CONNECTORS FOR SUB-MINIATURE CABLES

For the first time . . . A new series of precision connectors unit-engineered to fit all specifications of sub-miniature cables.

NEW because . . .
No special tools required for assembly.

NEW because . . .
Foolproof clamping insures accurate alignment . . . positive contact . . . extra strong grip.

NEW because . . .
Unique bayonet lock for sturdier mating . . . quick and easy disconnect . . . good contact . . . accurate alignment.

NEW because . . .
Exclusive internal-parts design allows outside dimensions of connectors to remain constant regardless of cable dimensions.

Remember Automatic's Type BSM Coaxial Connectors the next time you have a design that calls for Sub-miniature cables and components. Our engineers are always ready to discuss your special requirements.

WRITE FOR FREE TECHNICAL BULLETIN AND SPECIFICATION CHARTS.

Automatic
METAL PRODUCTS CORP.

321 BERRY ST., BROOKLYN 11, N. Y. • EVergreen 8-0364

Want more information? Use post card on last page.

MARKEM® MACHINES

Solve "IN-PLANT" PRINTING PROBLEMS
- FASTER - NEATER - AT LOWER COST

COLOR BANDING WIRE LEAD COMPONENTS

The Markem 69A Machine semi-automatically applies up to six color bands to wire lead components such as resistors and condensers. Band width and color changes are easily made. Automatically feeds and ejects; bands about 50 objects per minute. The 69A will also mark cylindrical objects with complete label detail, in one or two colors.

Other Markem machines available for marking electrical parts and products of all sizes and shapes. Write for detailed information.

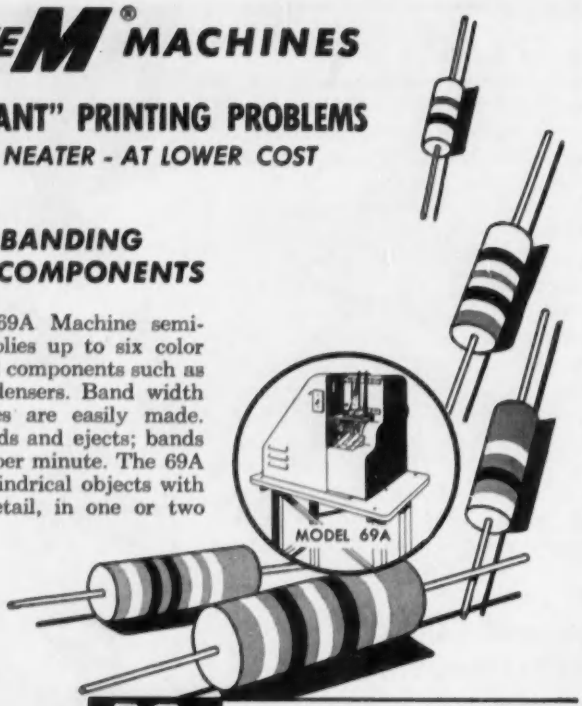

MARKEM MACHINE CO.
KEENE 8, NEW HAMPSHIRE

NOW! a ONE MEGACYCLE PULSE GENERATOR with CONTINUOUS CONTROL of REPETITION RATE, PULSE WIDTH, and DELAY

MODEL B-3 PULSE GENERATOR

Featuring:

- Excellent RF shielding to prevent the radiation of spurious signals
- Pulses of either Positive or Negative polarity
- External triggering and push button single pulse operation
- Modular construction

The Rutherford Model B-3 Pulse Generator is a highly versatile, general-purpose instrument designed for applications involving repetition rates through one megacycle, delays from 0 to 10,000 μs, and fast rise time pulse output of positive or negative polarity and widths to 10,000 μs.

Write for complete data: our Bulletin E-B-3

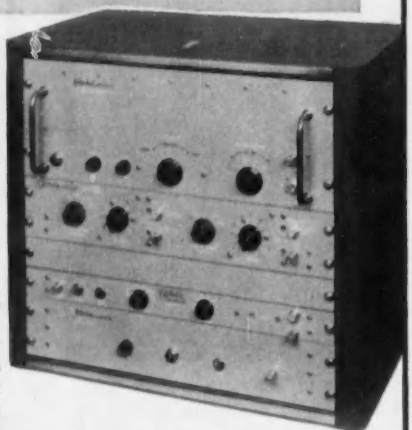

OTHER PRECISION PULSE INSTRUMENTS: WIDE RANGE PULSE GENERATORS, DIGITAL AND ANALOG TIME DELAY GENERATORS, TIME MEASURING SYSTEMS

Rutherford ELECTRONICS CO.
Telephone: TExas 0-4362
3707 S. ROBERTSON BLVD.
CULVER CITY, CALIFORNIA

Charles M. Ganson, clerk of the corporation.

McDonough had been project engineer for the numerical control projects at M.I.T. since 1951.

Marchant Research Promotes Martin

WILLIAM L. MARTIN, for the past ten months director of engineering of Marchant Research in Oakland, Calif., has been appointed vice-president of the firm.

The firm authorized a broadening of the Marchant Research program

William L. Martin

to include development of most of the major types of equipment required in a complete electronic data processing system for business applications. Martin will direct and supervise all of the research and engineering development work.

Underwood Names Top Engineers

JOHN H. HOWARD has been named director of research and engineering for Underwood Corp. and Albert A. Auerbach was appointed chief engineer of the electronic computer division.

Howard will also direct the business machine company's development activities. He will have complete responsibility for research and development of typewriters and other business machines as well as integrated data processing equipment and electronic computers.

Before joining Underwood, Howard was manager of engineering

John H. Howard

services for the Burroughs Corp.

He was director of development for Engineering Research Associates, project engineer for the Sperry Gyroscope Co. and later spent a year in private engineering practice as a consultant.

Auerbach has been associated with the company as a project engineer since Underwood acquired the Electronic Computer Corp., of Brooklyn, in 1952.

Previously he had been with the advanced development section of RCA at Camden, N. J., and with the Eckert Mauchly Computer Corp. of Philadelphia, as project engineer.

Hycon Plans New Plant

HYCON MFG. CO. of Pasadena, Calif., will move into new plant facilities in La Verne, Calif., before the end of the year.

Trevor Gardner was elected president following the resignation of Alden E. Acker as president and a member of the board. Gardner, former Assistant Secretary of the Air Force, will continue to serve as chairman of the board and chief executive officer of Hycon. Robert G. Taylor, secretary of the company, was elected to the board post vacated by Acker.

Hycon will start construction of the building within six weeks. The company is investing more than $1,250,000 in buildings and facilities. The 136,000-sq ft facilities will house the main manufacturing operations and executive offices. Some subsidiary and division operations will continue in Pasadena.

TELREX LABORATORIES

Antenna Specialists
Consultants, Designers & Manufacturers

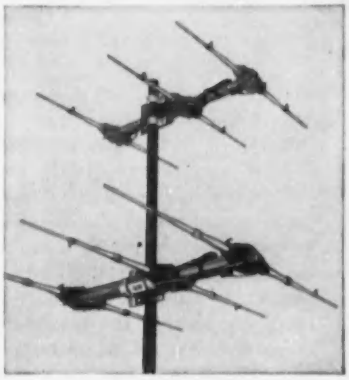

Standard Telrex structures upon which we design antennas to your specific requirements.

- Broad-band or single-frequency arrays for communication, fixed or rotary, point-to-point, FM, TV-relaying, scatter-propagation, etc.
- Antenna accessories: Broad-band baluns, monopoles, antenna rotators and indicators, etc.
- Consultants and suppliers to communication firms, universities, propagation laboratories, and the Armed Forces.
- Prompt delivery on standard Telrex designs or units built to your specifications.

WRITE FOR FREE TECHNICAL BOOK

Telrex LABS TV & COMMUNICATION ANTENNAS

ASBURY PARK NEW JERSEY
•
Tel. PRospect 5-7252

ORIGINATORS & MANUFACTURERS OF THE WORLD'S FINEST TV & COMMUNICATION ANTENNAS

EXTENDED FREQUENCY RANGE

with these STANDARD SIGNAL GENERATORS

MODEL 80
2 Mc to 400 Mc
MODEL 80-R
5 Mc to 475 Mc

FEATURES

- Direct-Reading scales and dials; individually calibrated.
- Convenient microvolt and DBM output scales.
- Accurate indication of output voltages at all levels.
- Low residual FM due to hum and noise.
- Provision for external pulse modulation.

SPECIFICATIONS

FREQUENCY RANGE: (Model 80) 2 to 400 Mc in 6 bands. (Model 80-R) 5 to 475 Mc in 6 bands.
FREQUENCY ACCURACY: ± 0.5%
FREQUENCY DRIFT: Less than .1% after warm-up.
OUTPUT VOLTAGE: Continuously variable from 0.1 to 100,000 microvolts (−7 to −127 DBM).
OUTPUT ACCURACY: ±10% at 0.1 volt from 5 to 200 Mc. ±15% at 0.1 volt from 200 to 475 Mc.
MODULATION: AM is continuously variable from 0 to 30%. Internal modulation, 400 and 1000 cycles. External modulation, 50 to 10,000 cycles.
RESIDUAL FM: Less than 500 cps at 450 Mc for Model 80-R, and correspondingly lower for both models at lower frequencies.
POWER SUPPLY: 117v, 50-60 cycles, 70 watts.

Laboratory Standards — MEASUREMENTS CORPORATION — BOONTON · NEW JERSEY

PRECISION-EERING

THE DIFFERENCE IN ATLAS DIFFERENTIALS

● Every tooth a masterpiece in finish, fit and motion. Atlas differentials are "precisioneered" to provide Nth degree accuracy in addition, subtraction and other electro - mechanical applications. The high sensitivity and minimal lost motion of precision Zerol gears ... plus corrosion and wear resistance assure long life in every assembly. Atlas gears and assemblies are made to meet your design and specifications. Have proved themselves by their acceptance and constant reorders from the world's largest users of electro-mechanical equipment. From drawing board to production line Atlas design, production and methods engineers and skilled toolmakers work with you on a job basis. Let them help you. Write for your copy of "Precision-eering Electro-mechanical Equipment" to Atlas Precision Products, Philadelphia 24, Pa.

FROM DRAWING BOARD

TO PRODUCTION LINE

ATLAS

QUALITY

ATLAS

Precision Products

Want more information? Use post card on last page.

New Books

Electronic Engineering

By SAMUEL SEELY
McGraw-Hill Book Co., New York, 1956, 525 p, $8.00

THIS BOOK deals with the application of electron tubes and transistors in nonradio circuits. "Electronic Engineering" and a companion volume "Radio Electronics" (now in press) constitute a revision and extension of the material in Professor Seely's book "Electron-Tube Circuits" published in 1950. By leaving the treatment of radio circuitry to a separate volume, the author has been able to enlarge his treatment of such subjects as feedback in amplifiers and electronic computing circuits, and to add a short section on cathode-ray tubes and two chapters on solid-state theory and on transistors as circuit elements. As much as a third of this book is new material; the rest is unchanged from the earlier text, although there is some rearrangement in presentation.

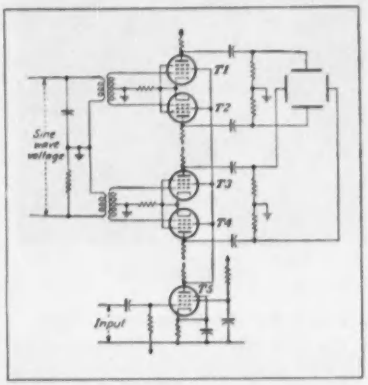

A circular—sweep generation circuit

▶ **Circuits**—The book is apparently intended for use as a text in a college course covering electronic circuits not classified as radio circuits. The analysis of various types of circuits is carefully developed, and there are numerous problems designed to supplement and emphasize the text. The material covered includes characteristics of electron tubes, basic amplifier principles, untuned amplifiers, oscillators, relaxation circuits, sweep generators, rectifiers, regulated power supplies, electronic instruments and transistor circuitry.

The new material on solid-state physics and transistors is covered in fifty pages. The electron theory of metals and the rectification and amplification effects in semiconductors are discussed by energy-level diagrams. The small-signal theory of transistors is treated in terms of four-terminal-network theory and various types of transistor circuitry are shown. A brief discussion of the duality of the electron-tube and the transistor is included. The treatment is as comprehensive as can be expected in the space allotted and should afford a useful introduction to this branch of electron devices.

▶ **Errors**—There were few errors noted in examining this work, but two misstatements have been carried over from the previous book that the reviewer as a tube engineer dislikes to see perpetuated. On p 25, a variable-mu tube is not so called because the mutual conductance changes with bias, as the text states, but because the mu-factor varies markedly with control-grid bias. On p 387, vacuum diodes used as rectifiers in capacitor-input filters are not insensitive to excess peak currents as the text states; but may readily be damaged by arcing when peak-current ratings are exceeded, particularly when oxide-coated cathodes are used.

The choice of the title for this work is a little confusing. Is the object to set up "electronic engineering" as a term applicable only to nonradio electronics? One notes the same implication in the title of Professor Terman's new book "Electronic and Radio Engineering". Although it is unfortunate that there is no generally accepted name for nonradio electronics, any move to restrict the meaning of "electronic engineering" to only part of its present general meaning

is surely to be deplored. If such a limited meaning were adopted, we should then be faced with the problem of devising an appropriate name to cover both radio and nonradio electronics.

This textbook should prove to be useful in a college curriculum that allows sufficient time for a course on the circuits of nonradio electronics and for a companion course in radio electronics. The division of the subject matter is of necessity somewhat arbitrary and a balanced training will require both courses. The book is primarily for undergraduate study, and is not suitable as a reference book for the practicing engineer.—T. J. HENRY, *Radio Corporation of America, Tube Division, Harrison, N. J.*

Color TV Servicing

BY WALTER H. BUCHSBAUM
Prentice-Hall, Inc., New York, 258 *p*, $6.35

THIS book is of little interest to the engineer since it is directed at the tv serviceman. The most significant contribution of this book is a series of color plates illustrating the effect of maladjustments and internal troubles as they appear on the color picture-tube face. Other than this it is doubtful if the typical serviceman will find it as useful as some other recent texts on this subject.

The book begins with a brief comparison of monochrome and color tv. The second chapter sets forth the principles of colorimentry, including color plates of a color diagram and color triangle. The makeup of color tv signals is described in Chapter 3 which also attempts to explain the principles of vectors.

A color-tv transmitting-receiving system is explained, using block diagrams, in Chapter 4; Chapter 5 describes the construction and operation of three-gun tv color picture tubes, but omits any mention of the single-gun Lawrence tube which in some ways is substantially superior and may become a competitor.

Deflection circuits unique to color

DEFLECTION YOKES

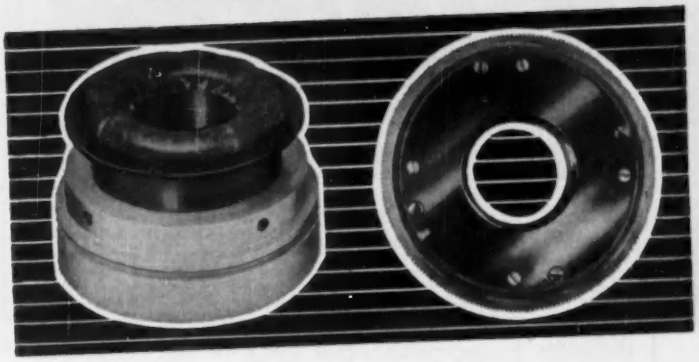

We specialize in the design and manufacture of precision deflection yokes for military and commercial applications. Phone or write for immediate engineering evaluation of your critical display problems.

Celco

Phone: RAmsey 9-1123

Constantine Engineering Laboratories Co.

Island Avenue Mahwah, N. J.

HEAVY DUTY

Multiple Arm

RELAYS by SIGNAL

- Versatile — Rugged
- Cast Aluminum Base
- High Shock and Vibration Resistant
- Available AC — DC
- Contact Capacities Available 10; 35; 50 amp.
- Contact Combinations on Same Base
- Designed to Meet Many MIL Spec's

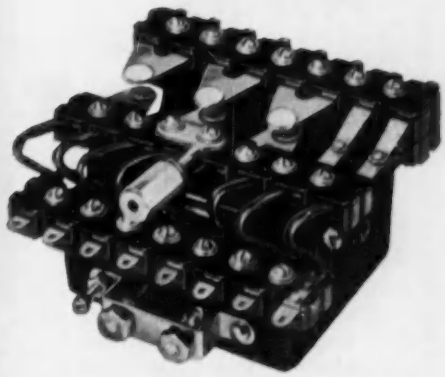

A superior relay that has endured the test of time . . . Specified for many years by America's largest manufacturer of electrical controls and communications equipment.

For complete data, write for Bulletin No. 30-6

Engineering representatives in principal cities

Signal Engineering & Mfg. Co., has changed its name to Wheelock SIGNALS, Inc. RELAYS LONG BRANCH, N. J.

Want more information? Use post card on last page.

HIGH PRODUCTION, PRECISION,

GENERAL SILK SCREEN PRINTING

*Electronic Circuits
*Nameplates *Dials...

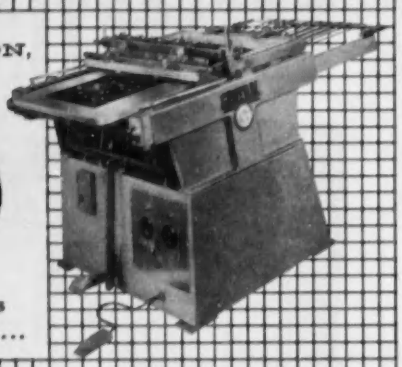

GENERAL DECORATOR PRESSES—SERIES "B"

A new General precision built screen process press, especially adapted to the high volume production of printed circuits, nameplates and dials. Incorporates a new and completely different approach to the handling of many difficult materials. Precision register assures proper placement of print on panel and accurate backing-up of two-sided circuits. Heavy deposits of plating and acid resists can be laid down assuring quality printed circuit results. Fine lines print clean and sharp and the enamel effect required in the manufacture of nameplates and dials is effectively reproduced. Work can be both fed and delivered at front of press, or delivered at rear for in-line operation with the General Thermo-Jet Dryer, or other drying equipment.

Model	Sheet Size	Speeds Up To
B1224	13"x25"	1000 iph
B2230	22"x30"	800 iph
B2236	22"x36"	800 iph

Write for complete information!

GENERAL RESEARCH & SUPPLY CO.
572 S. Division Avenue
Grand Rapids 3, Michigan

NEY'S SMALL PARTS PLAY A BIG PART IN PRECISION INSTRUMENTS • NEY'S SMALL PARTS

SLIP RING PICKOFF

developed by

NEY

A new concept of slip ring brush design has shown life better than 100 million revolutions at low electrical noise level. A self-contained spring and wire contacts slip ring over a sector of approximately 180°. Size of wire used in tests, .004-.006 diam., with wear at end of 100 million revolution test less than one-half diameter. Write for information.

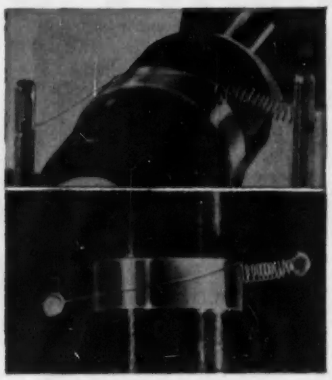

Ney Type 1194 is stocked in the following sizes



	A dia.	B	C	D
1194-1	.004	1.5	.024	.040
1194-2	.006	2.0	.036	.060
1194-3	.008	3.0	.048	.080
1194-4	.010	3.0	.060	.100

THE J. M. NEY COMPANY P.O. BOX 990 DEPT. E
HARTFORD 1, CONNECTICUT

Specialists in Precious Metal Metallurgy since 1812

NEY'S SMALL PARTS PLAY A BIG PART IN PRECISION INSTRUMENTS • NEY'S SMALL PARTS

NEY'S SMALL PARTS PLAY A BIG PART IN PRECISION INSTRUMENTS • NEY'S SMALL PARTS

NEY'S SMALL PARTS PLAY A BIG PART IN PRECISION INSTRUMENTS • NEY'S SMALL PARTS

picture tubes are covered in Chapter 6, and again in Chapter 11. A detailed block diagram and description of color tv receiver circuits are presented in Chapter 7 and expanded in the following four chapters.



Color a/c adjustment

Installation is covered briefly in Chapter 12 while alignment and back-of-the-set color adjustments are described in the next three chapters. The final four chapters are concerned with troubleshooting, and it is in this section that the color pictures of the tube face are included. Some different troubles illustrated by color pictures contained in recent other texts do not appear here.—J. R. McDermott, *Product Engineering, N. Y.*

Electronique Industrielle

By G. Goudet
Eyrolles, Paris, 1955, 635 *p*

This text book has been written primarily to provide students in electrical engineering with a modern and basic knowledge of that part of electronics which is progressively invading all fields of industry. This book is, however, well adapted to a wider class of readers.

In the theoretical part, the accent has been placed on the development of sound and modern concepts that will lead to a better understanding of modern electronic theories: electronic structure of the solid state, ionization of gas, application of quantum mechanics to the theory of conductors, semiconductors and dielectrics, circuit theory, electron optics etc. The mathematics used in the book are at the level of

DANO COILS

LIFELINE
TO PRODUCTION

From design engineer to the purchasing agent to Dano—a perfect "lifeline" to production.

CALL or WRITE TODAY and DANO'S quote will be on the way.

- Bobbin Coils
- Form Wound Coils
- Paper Section Coils
- Acetate Bobbin Coils
- Cotton Interweave Coils
- Coils for High Temperature Applications
- Encapsulated Coils—in either Polyester or Epoxy Resins

Also, TRANSFORMERS MADE-TO-ORDER

THE DANO ELECTRIC CO.
MAIN ST., WINSTED, CONN.

CABLE CLIPS

★
of all Nylon
for severe conditions
★
of Ethyl Cellulose
for maximum economy

WECKESSER

molded Black Nylon
SCREWS and NUTS

★ Acid resistant
★ Need no insulation
★ Can't rust
★ Can't corrode

WECKESSER COMPANY
5701 Northwest Highway • Chicago 30, Ill.

Want more information? Use post card on last page.

graduate work in any kind of engineering. The Fourier series, Fourier transform and Laplace transform are briefly but clearly presented.

▶ **Tube Applications**—The theoretical part occupies two thirds of the book and the other third is devoted to applications: cathode-ray tubes, electron microscope, mass spectrometer, induction heating, photoelectric cells, ultrasonic waves, and servomechanisms.

In those applications there is no emphasis on components or equipments. In each case, the author is primarily concerned with the necessary relations between theory and engineering practice. The possibilities and limitations of each technique are thoroughly investigated.

As a result of this approach, the engineers can become acquainted with the determining factors which should help him to make his own decisions concerning the choice of available tools for particular applications.

▶ **Format**—The book is divided into six sections, each section containing from 3 to 6 chapters according to the importance of the subject.

In the first chapter of the first section, the advantages of the rationalized MKS system of units, which is exclusively used in the book, are clearly presented in relation to the other systems of units. The other chapters of the first section are devoted entirely to the theory of circuits and transmission lines.

The second section deals with electron tubes, electronic theory of the solid state and the ionization of gas.

The third section serves to acquaint the reader with the theory and technique of amplification, including the amplifier stability and noise theory.

The fourth section pertains to production and detection of oscillations.

The fifth section includes the principles of electron optics and their application to cathode-ray tubes, the electron microscope, elec-

LOW FREQUENCY FILTER NETWORKS

Twin



TWIN-T NULL NETWORKS
• for a variety of filter and feedback problems • Any null frequency from 1 to 50,000 cps. • Hermetically sealed and stable • Ask for Bulletin 500

SINGLE TUNED AMPLIFIERS



SINGLE-TUNED AMPLIFIERS
• 211 or 212 plug-in amplifier units plus twin-T feedback net • Center frequency 2 to 500 cps. • Q up to 40 • voltage gain up to 80 • Ask for Bulletin 212



DOUBLE TUNED AMPLIFIERS

DOUBLE-TUNED AMPLIFIERS
• 212 plug-in amplifier plus special feedback net Type 572 • Center frequencies from 2 to 500 cps. • Bandwidth ±25% and ±35% • Ask for Bulletin 572

As designers and manufacturers of special LC and RC networks and filters, we invite a statement of your problem. Inquiries will be answered promptly, and quick delivery is offered on engineering quantities or production runs.

White
INSTRUMENT LABS
300 EAST RIVERSIDE DRIVE
AUSTIN 4, TEXAS

Want more information? Use post card on last page.

New!
COLOR
& BLACK & WHITE
LAB & TV SERVICE
5" SCOPE

5 MC BANDWIDTH
& DC AMPLIFIERS

- Flat from DC to 4.5 mc to reproduce 3.58 mc sync burst and oscillator signals in color TV sets.
- 4-step freq-compensated attenuator in both AC and DC positions.
- Built-in calibrator permits peak-to-peak voltage measurement.
- Automatically syncs anything visible on the screen.
- Pre-set TV V & H sweep positions (30 cps & 7875 cps).
- Edge-lit lucite engraved graph screen with dimmer control; filter; standard bezel fits standard photographic equipment.
- 5UP1 CRT

#460
Factory Wired $129.50
KIT $79.95

- V amplifier direct-coupled and push-pull thruout; gradual roll-off beyond 4.5 mc; useful at 10 mc.
- High V sensitivity: 25 mv/in.
- Choice of direct coupling (DC) or capacitive coupling (AC).

EICO
Write for FREE New 1956 Catalog E-7 and Name of Distributor
84 Withers Street • Brooklyn 11, N. Y.
©56 Prices 5% Higher on West Coast
NOW IN STOCK AT YOUR NEIGHBORHOOD DISTRIBUTOR . . . ORDER NOW!

Everything
in
PRECIOUS METAL
CONTACTS and MATERIALS
. . . in any specified dimension
. . . for assembly or attachment
by standard methods
Platinum, palladium, gold and silver—both pure and in their many alloys—are available to provide the required metal for your electrical contact application.
TYPES AVAILABLE: rivets, studs, screws, steel-backed and solder-back buttons, washers, discs, rods, rings and special shapes and stampings.
BAKER
A COMPANY INC
PRECIOUS METALS
ENGELHARD INDUSTRIES
Write for data and technical assistance.
113 ASTOR STREET
NEWARK 5, NEW JERSEY
NEW YORK • SAN FRANCISCO
LOS ANGELES • CHICAGO

tron diffractor and mass spectrometer.

The last section presents in six chapters the industrial applications mentioned above: induction heating, photocells, ultrasonics and servomechanisms.

The author's pertinent commentaries concerning each subject make interesting reading and serve to stimulate the reader to further investigation among the 185 references listed in the bibliography—J. B. LAIR, *Federal Telecommunication Labs., Nutley, New Jersey*

Thumbnail Reviews

Hi-Fi Loudspeakers and Enclosures. Abraham B. Cohen. John F. Rider Publisher, New York, 1956, 368 p, $4.60. Written for the hi-fi enthusiast and audio technician, this book explains basic loudspeaker principles, multispeaker design and cross-over networks. Baffles and enclosures of all types are discussed with build-it-yourself data given.

Introduction to Color Television. Milton Kaufman and Harry E. Thomas. John F. Rider Publisher, New York, 1956, 160 p, $2.70 (paper). Presents fundamentals of color for television and the NTSC color television system. Tricolor picture tubes described include the CBS aperture-mask color tube, the RCA three-gun shadow mask tube and the single-gun Chromatron or Lawrence tube. General design for color television receivers is discussed. Important circuits are illustrated schematically.

An Active Filter. G. K. Jenssen and J. E. McGeogh. Office of Technical Services, Washington, D. C., 1955, 10 p, $0.50 (paper). Discusses filter with 0.01-cps passband. Filter consists of phase detector, low-pass filter, reactance tube, local oscillator and polylock feedback loop.

The Transosonde — A New Meteorological Data-Gathering System. Albert D. Anderson, Henry J. Mastenbrook and Henry D. Cubbage. Office of Technical Services, Washington, D. C., 1955, 21 p, $0.75 (paper). Describes transoceanic sondes used to gather weather data. Concept is based on use of controlled altitude balloons by the Japanese during World War II.

Thermal Power From Nuclear Reactors. A. Stanley Thompson and Oliver E. Rodgers. John Wiley & Sons, New York, 1956, 229 p, $7.25. Discusses the use of nuclear reactors in the production of thermal power. Subjects treated include nuclear consider-

ations, reactor equations and kinetics, shielding problems, and thermal power cycles.

Radio Philatelia. Herbert Rosen. Audio-Master Corp., New York, 1956, $2. Information for the collector on postage stamps dealing with radio and electronics.

Peaceful Uses of Atomic Energy, Vol. II. Columbia University Press, New York, 1956, 471 p, $8. Second volume of the proceedings of the International Conference held in Geneva in August 1955 discusses research reactors. Some of the United States papers describe instrumentation used in control reactor operations. The paper on the Brookhaven reactor gives a detailed description of electronic instrumentation.

Spheroidal Wave Functions. J. A. Stratton, P. M. Morse, L. J. Chew, J. D. C. Little and F. J. Corbato. John Wiley & Sons, New York, 1956, 613 p, $12.50. Mathematical tables prepared on Whirlwind I at MIT make it possible for the electrical engineer and physicist to handle wave problems in spheroidal coordinates.

Alternating-Current Circuit Theory. Myril Reed. Harper & Brothers, New York, 1956, 587 p, $6.50. Undergraduate textbook on alternating-current theory deals with sine waves, circuit elements, parallel and series circuit, Fourier series, transients, mesh and node systems and transmission lines and filters. The material in this edition includes elementary topology, matrix algebra and the *m*-derived approach to filter design.

Germanium Diodes. S. D. Boon. Elsevier Press, Inc., Houston, Texas, 92 p, $1.95 (paper). Covers characteristics and behavior and circuit applications of germanium diodes of the signal rectifier type. The specific diodes described are manufactured by Phillips.

The Economic Almanac, 1956. Prepared by the research staff of the National Industrial Conference Board, Thomas Y. Crowell Co., New York, 1956, 688 p, $3.95. Brings together data often needed on current economic problems. The 1956 revision contains new information on saving and liquid assets of individuals, federal, state and local finance, stock ownership and additional information about Canada. It covers statistics on electronic engineering salaries, operating ratios of communications equipment firms, production, sales, employment, earnings, output per man hour, tax payments, installment credit, stock ownership, of radio, tv and broadcasting segments of the electronics industry.

Legal Problems in Engineering. Melvin Nord. John Wiley & Sons, New York, 1956, 391 p, $7.50. Elementary textbook on civil law aimed specifically at the professional engineer, covering basic legal concepts, also specific subjects such as engineering ethics, professional registration, controls and specifications, government regulations, patents, copyrights and trademarks, and air and stream pollution.

Null Detector Relay

SOLVES MANY TEMPERATURE CONTROL PROBLEMS



An Edison Sensitive D. C. Relay and an ordinary bridge circuit are versatile tools in solving temperature control problems.

In the bridge shown assume the dotted resistor to be a resistance temperature detector and the other resistors adjusted so that the bridge will reverse current flow through the relay at a given temperature. The polarized relay will sense the reverse current flow to close (or open) its contacts at the null point.

This circuit is useful in temperature warning systems since the relay automatically reopens when the current reverses again—to actuate an "all clear" signal.

The Edison Relay is reliable at values from 30 microamperes to 12 milliamperes. Overloads to 10,000 X coil input power are absorbed without damage. Contacts are rated at ⅓ ampere at 28 volts d.c. in SPST or SPDT arrangement.

For full information send for free bulletin, No. 3037.

Thomas A. Edison

A GREAT NAME CONTINUES GREAT NEW ACHIEVEMENTS

Thomas A. Edison

INCORPORATED

INSTRUMENT DIVISION • 54 LAKESIDE AVENUE • WEST ORANGE, NEW JERSEY

MOLYBDENUM

•

PURE and THORIATED TUNGSTEN

For ELECTRONIC APPLICATION

RIBBONS

STRIPS

FORMED PIECES

Your special metals rolled to thin sizes - close tolerances

H. CROSS CO.

15 BEEKMAN ST., N. Y. 38, N. Y.

WOrth 2-2044 and COrtlandt 7-0470

"LIMPANDER"

THE NEW AUDIO

LIMITER or EXPANDER

WITH NOISE SQUELCH



35db High Speed Volume Limiting
30db Volume Expansion
200 microsecond Limiter Attack
Non-Feedback
No Overshoot
Low Distortion

APPLICATION:

- Telephone Line Termination
- Transmitter Modulation Control
- Receiver Output Control
- Tape Recording
- Public Address Systems

Models for Amateur, Commercial and Military applications.

Write for Descriptive Literature

ELECTRONIC SYSTEMS ENGINEERING CO.

903 Cravens Bldg.
Oklahoma City, Okla.

marion
advancement in instrument design

SOLDERING PROBLEMS ?

PORTABLE BENCH-TYPE INDUCTION SOLDERING UNIT CUTS ASSEMBLY COSTS...

Model PM1

Simplifies, improves and speeds up component production. Provides local heat to otherwise inaccessible spots. Safe and simple. Max. power input 775 watts, 100 watts standby; 115 volts, 60 cycles. Measures 15¼" x 21½" x 15", weighs 150 lbs. Price $414.00, foot treadle extra. Complete data on request.

marion meters
marion electrical instrument company
GRENIER FIELD—Manchester, N. H., U.S.A.
Copyright ©1956 Marion
Visit Marion at Booth 738 at Wescon Show Los Angeles, August 21-24

Earn Extra Income in MOBILE-RADIO MAINTENANCE!

It's now a big business (650,000 installations) . . . fast-growing (70% increase just last year) . . . specialized . . . and high-paying!

Learn how to turn this opportunity into cash—write today for free booklet "HOW TO MAKE MONEY IN MOBILE-RADIO MAINTENANCE!" It's published as a service to radio engineers by Lampkin Laboratories, Inc., manufacturers of the well-known 105-B Micrometer Frequency Meter and 205-A FM Modulation Meter.



105-B 205-A

LAMPKIN LABORATORIES, INC.
Instruments Div., Bradenton, Fla.

At no obligation to me please send "HOW TO MAKE MONEY IN MOBILE-RADIO MAINTENANCE."
Name
Address
City State

Want more information? Use post card on last page.

Backtalk

Gravity Hypothesis

DEAR SIRS:

As another curbstone physicist I was prompted by Mr. Littell's letter and your footnote (ELECTRONICS, p 500, March 1956) to consider again the nature of gravity.

Mr. Littell's extension of the expanding universe to the subatomic is to me a new concept. Macroscopically, an expanding universe or at least galactic system is ponderable: an expanding photon, neutron or void? Void forsooth! Still, why not an expanding photon, for it is just as much a source of our packet of electromagnetic wave energy as it is a corpuscle.

We shall have to wrestle again and again with Mr. Littell's hypotheses, as apparently he has.

Anent your own conjecture it seems to me that there would be wide variations in the gravitational constant, g, particularly at antipodal loci. How test it?

If at long intervals standard gravity were measured simultaneously at the McGraw-Hill Building, at a few hundred miles off the coast of Western Australia and at other analogous points, should there not be indications of the "combination—of forces from outer space"? Parenthetically, all three measurements can be made conveniently by overseas telephone calls.

Presently my view is that g may be the resultant of all forces within neutron, atom, molecule, planet or nebula.

Anyway, curbstone Manhattan Project might get to the bottom or perhaps center of the matter.

C. H. TEWKSBURY
N. J. Bell Telephone Company
Bridgeton, N. J.

More Shoddy Gear

DEAR SIRS:

YOU recently ran editorials supplicating more engineers with a conscience! One can only hope that the industry throughout the U.S.A. will take these pleas seriously.

We have purchased three medium-power broadcast transmitters from the U.S.A. over the past ten years, two of them quite recently. It is discouraging to note the degradation of quality, especially in the little details. These are all of a first-line manufacturer from whom one could, years back, order a new model sight unseen.

Now one gets equipment which has never been set up on test and actually run under load on frequency. A prototype has apparently been built and checked on a single frequency for a short time. Then production takes over and the subchasses are shipped to the field.

In overseas territories, at least, station personnel with notable exceptions are not as skilled nor as well paid as in the States. Nor are they always fitted to cope with subtleties of design errors such as parasitic oscillations, harmonic filter deficiencies that let through spurious radiations to the detriment of other services, quasiparasitics in class B stages, developing only after audio components begin to deteriorate. These things the factory designers should have cleaned up.

Nor is it any less disconcerting to find cold soldered joints, omission of lockwashers or two of same to every nut, rusty steel washers on 100-ampere circuit breakers, transformers design of which has been farmed out to subcontractors of dubious reputation.

Nor is the trouble confined to standard broadcasting equipment. Many airlines in these countries have turned to building their own ground communications equipments as the only solution. They are tired of high-priced factory-built transmitters having failed due to the use of a ½-watt resistor in a circuit where a 10-watt oversized unit would have eliminated the trouble forever. So, they build their own, not as pretty construction perhaps, but more reliable.

One's inevitable reaction to this trend of U.S.A. engineers content to ride the present boom of high salaries and dollars of easy morality and dubious permanent value, is, in

ON OUR STAFF

If you need effective, highly readable, smartly illustrated company literature (booklets, pamphlets, manuals) to display your products, inform the public of your operations, attract key personnel to your plant, and perform any of the other communicative functions vital to your business, let TECHNICAL WRITING SERVICE do the job for you.

WRITING • EDITING

ILLUSTRATING

PRINTING

We produce your publications, to your specifications. We give complete service—from research and planning through writing, design, and printing. Let our staff be your staff. It will save you time and money.

— We Prepare —

EQUIPMENT MANUALS • HANDBOOKS • PRODUCT BULLETINS • TRAINING AIDS • PAMPHLETS • REPORTS • BROCHURES • COMPANY HISTORIES • PARTS LISTS and other such special material.

Write • Phone

TECHNICAL WRITING SERVICE

McGraw-Hill Book Co., Inc.
330 W. 42nd St., N. Y. 36, N. Y.
LOngacre 4-3000

TRANSFORMERS FOR ELECTRONICALLY REGULATED POWER SUPPLIES

Now . . . over the counter

Avoid delay in making your breadboards, no waiting for a special when a

STERLING 2K SERIES

transformer will meet your requirements exactly. Stock STERLING 2K units are available for supplies

from 100 milliamperes at 100 volts
to 400 milliamperes at 300 volts

Technical specifications on a typical unit of this family of transformers for use in a 300 volt 200 milliampere dc regulated power supply with 90 to 130 V AC input:

ST2010

Primary:
115 Volts AC, 50 to 1000 cps

Secondaries:

Each 2K transformer provides:

• PLATE VOLTAGE ALLOWANCE FOR PASS TUBE VOLTAGE DROP	570-0-570V	240 madc*
• RECTIFIER FILAMENT POWER	5.0V	3 A
• PASS TUBE FILAMENT POWER	6.3V	3 A
• REGULATOR CIRCUIT FILAMENT POWER	6.3V	1.2A
• AUXILIARY FILAMENT POWER FOR OTHER CIRCUIT REQUIREMENTS	6.3VCT	6 A

• REGULATOR CIRCUIT PLATE POWER *Note 40 ma provided

• APPLICATION BULLETIN WITH EACH UNIT

Military versions of each of these units is also available. Technical data on the complete line is available on request.

Size: 5⅛ x 4⅝ x 5½ H
Mtg. Centers: 3½ x 3½
Weight 15 lbs.
Associated Choke: ST2009
4 Henries at 240 mads.

SAMPLES? SPECIALS? SHORT RUNS?

The 2K series is only one of the many types we make. We specialize in custom-built transformers to your specifications. Let our engineering staff help solve all your transformer problems.

Samples delivered in 1 to 3 weeks.

STERLING
TRANSFORMER
CORPORATION

299 North 7th St., Brooklyn 11, N. Y.
STagg 2-4200

Engineers who know
-SPECIFY

Q-max*

A-27 SUPERFINE

LOW-LOSS RF LACQUER

*Registered Trademark

THE IDEAL COIL IMPREGNANT

• Q-Max, an extremely low loss dielectric impregnating and coating composition, is formulated specifically for application to VHF and UHF components. It penetrates deeply, seals out moisture, provides a surface finish, imparts rigidity and promotes stability of the electrical constants of high frequency circuits. Its effect upon the "Q" of RF windings is practically negligible.

• Q-Max applies easily by dipping or brushing, dries quickly, adheres well; meets most temperature requirements. Q-Max is industry's standard RF lacquer. Engineers **who know** specify Q-Max! Write for new illustrated catalog.

COMMUNICATION PRODUCTS COMPANY • INC
MARLBORO, NEW JERSEY — Telephone: FReehold 8-1880

KAY LAB
CALIFORNIA

AMPLIFY
MICROVOLTS
with STABILITY

KAY LAB MODEL 110
CHOPPER STABILIZED WIDE BAND
AMPLIFIER FEATURES

- ± 2 μv DRIFT
- 1000 x GAIN
- 10 GAIN RANGES
- 5 μv NOISE
- ± 25 V OUTPUT
- 30 KC BANDWIDTH
- 100 K INPUT

USE FOR LOW LEVEL DC
INSTRUMENTATION . . .
STRAIN GAGE AMPLIFIER . . .
RECORDER DRIVER . . .
THERMOCOUPLE AMPLIFIER

Representatives in all major cities

KAY LAB

Want more information? Use post card on last page.

self defense, to look towards Europe for merchandise. We are now buying there at 25-percent higher prices. The equipment is not so laden with latest gadgetry but they do take time to solder the joints and use heavier gage metal. Back home we *still* need engineers with a conscience!

R. H. AXTELL
Chief Engineer
Radio Continente
Caracas, Venezuela

Another Rental Plan

DEAR SIRS:
UPON glancing through the March 1956 issue of ELECTRONICS, I noticed an article regarding the rental of equipment in the *Backtalk* section, p 500.

Polarad has had an equipment rental plan for sometime, and it is satisfactory both to us (the manufacturer), and to the customer.

ALFRED A. GOLDBERG
Polarad Electronics Corp.
Long Island City, New York

Editor's Note: We are glad to pass the word along, hope that others who rent equipment will advise us.

Human Resistance

DEAR SIRS:
I RESPECTFULLY call your attention to a statement on page 153 of the March issue of ELECTRONICS, under your "Reminder" paragraph, which can conceivably be misinterpreted in a dangerous fashion.

You state, "On the average, man is a 0.25-megohm, one-watt resistor". You then continue to give data relevant to current values that are perceptible, "freezing", and fatal. The values of currents stated are those generally accepted, and are conservative.

However, the statement concerning the average resistance of man is quite misleading, in that this value holds true *only* at *low voltage*, with measurements taken on an ordinary "ohm-meter".

If one were to use the average figure of 0.25 megohm, and the 1-milliampere figure, one would conclude that, using Ohm's Law, the voltage necessary for shock perception is 250 volts. We know from experience that such a voltage is extremely hazardous, and most conditions can be fatal if the power-carrying leads are firmly seized.

Further, if one were to employ the same formula with the 10-ma-ampere "let go" figure that you give, one would conclude that at 2,500 volts one would merely "freeze" to the power lines. You may be well aware of the fact that electric chairs employed at Sing Sing and other prisons operate from 2,200 volts so that the 10-ma figure in conjunction with the 0.25-megohm data is dangerously misleading.

The error is your use of the phrase "on the average". What average is being referred to? The average to be found when employing an ordinary ohm-meter? I should imagine that your phrase "the average" should refer to the condition that would exist if a person should get across an "average" type of power source, namely, household lines, stepped-up voltage sources in electronic equipment, etc. Under these circumstances, the skin resistance, which, when dry, (an average condition) constitutes the main component of the 0.25-megohm value quoted, breaks down under the voltage applied, and becomes very low.

In an excellent article by Prof. Dalziel of the University of California, it is shown that the "average" resistance that should be used for "average" computation of hazards is closer to 500 ohms. Under these circumstances, the empirically established value of 50 volts as being conceivably fatal is more accurately determined. . .

We agree that "engineers are already in short supply" and we therefore recommend that statistics concerning safety be issued and interpreted only by experts in the field, who specialize in high voltage, and who devoted time to the analysis of high-voltage problems and the minimizing of high-voltage hazards.

VICTOR WOUK
Engineering Director
Beta Electric Corp.
New York City, N. Y.

Punched Tape, Not Magnetic

DEAR SIRS:
WE enjoyed the article by Mr. Findlay on page 122 of the February 1956 issue of ELECTRONICS concern-

PROFESSIONAL SERVICES

Consulting—Patents—Design—Development—Measurement

in

Radio, Audio, Industrial Electronic Appliances

ATLANTIC ELECTRONICS LABORATORIES

Design Development Prototypes

Specialists in

Electronic Timing and Switching Devices

606 Bond St. Asbury Park, New Jersey

BRIGGS ASSOCIATES, INC.

Engineering Services

ELECTRONICS MECHANICAL

Development — Manufacturing — Consulting
Special Machines — Instrumentation — Automation
Electron Tube Design, Materials, Reliability

10 DeKalb St. Broadway 9-2120 Norristown, Pa.

BART LABORATORIES

Division of BART MANUFACTURING CORP.

Consultation and Manufacturing Services on precision electro-forming and precious metal plating since 1916.

227 Main Street Belleville 9, N. J.
PLymouth 9-0200

CROSBY LABORATORIES, INC.

Murray G. Crosby & Staff

Radio - Electronics
Research Development & Manufacturing
Communication, FM & TV

Robbins Lane, Hicksville, N. Y.
WEllis 1-2191

DELAWARE PRODUCTS CO.

Analog Voltage to Digital Conversion
Digital Voltage Recording Systems

Design-Development-Manufacturing

300 Broadway Camden 3, N. J.

Eldico of New York, Inc.

Pioneers of Television Interference Elimination from Transmitters, Induction Heaters, Diathermy and etc.

Donald J. S. Merten & Engineering Staff

12 E. Second St. Mineola, L. I., N. Y.
Pioneer 6-5213

ELECTRONIC RESEARCH ASSOCIATES, INC.

"TRANSISTORIZE" YOUR PRODUCT!
Complete Service in consulting, research, development, and production on Transistor circuitry, products and instrumentation.

67 East Centre Street Nutley, N. J.
NUtley 2-5410

ERCO RADIO LABORATORIES, INC.

Radio Communications Equipment

Engineering - Design - Development - Production
Our 27th Year in Air to Ground
Communications and Radio Beacons

Garden City • Long Island • New York

WHEN TIME IS SHORT . . .

put the solution of your problems up to a specialized Consultant whose professional card appears on this page. His broad experience may save you months of costly experimentation.

ELECTRONICS
330 West 42nd St., New York 36, N. Y.

GENERAL ATRONICS CORPORATION

David E. Sunstein, George J. Laurent
Dr. Robert W. Berg, Bernard D. Steinberg

Consulting Services—Electronics, Acoustics, Technical Planning, Operations Research for Industrial, Consumer and Government Products.

125 City Line Av. Bala-Cynwyd, Pa. (Phila. suburb)
MOhawk 4-8090

HANSON-GORRILL-BRIAN INC.

Product & Mfg. Development

ELECTRICAL - ELECTRONIC
HYDRAULIC - MECHANICAL

One Continental Hill Glen Cove, N. Y.
Glen Cove 4-7300

THE KULJIAN CORPORATION

ELECTRONICS DIVISION

Consulting Electronic Engineers

Research Development, Production of Automatic Controls — Special Instrumentation

1200 No. Broad St., Philadelphia 21, Pa.
Stenmen 2-9000

McDOWELL ELECTRONICS, INC.

Soft soldering of
metallized ceramics by
induction heating.

Consulting—Development—Manufacturing
P. O. Box 342, Metuchen, N. J.
Liberty 8-9109

Measurements Corporation

Research & Manufacturing Engineers

HARRY W. HOUCK MARTIAL A. HONNELL
JOHN M. VAN HEUKEN

Specialists in the Design and
Development of Electronic Test Instruments
Boonton, New Jersey

MINOT INFORMATIC DEVICES

AUTOMATIC RECOGNITION OF
SHAPES, PATTERNS & INFORMATION
RESEARCH - INVENTION - CONSULTING
on detection and interpretation of
complicated forms, characteristics of
materials, printed characters, etc.

Otis N. Minot, 22 Eliot Rd., Lexington 73, Mass.
Tel. VOlunteer 2-9465 or -3974

DR. HAROLD NARCUS

Consultant

METALLIZING NON-CONDUCTORS

Pioneer in the field of metalizing non-conductors such as plastics, ceramics, glass, etc. for both industrial and decorative applications. Techniques and processes developed during 20 years specialization in the field. Recognized authority with well-known record of achievement.

Tel. PLeasant 3-5918
15 Vesper Street Worcester 2, Mass.

NIAGARA ELECTRON LABORATORIES

CONSULTATION - DESIGN - CONSTRUCTION
MFG. THE THERMOCAP RELAY

Specializing in solution of problems of eelctronic and electro-physical instrumentation for the research or analytical laboratory. Industrial plant problems also invited.

Andover, New York Cable Address:' NITRONLAB

NUCLEAR-ELECTRONICS CORPORATION

From Engineering Design to the Finished Product

Specialists in

Nuclear Instrumentation—Communications
Test and Measuring Equipment
Industrial Electronics—Audio Equipment

2632-36 W. Cumberland St. Philadelphia, Pa.

PICKARD & BURNS, INC.

Consulting Electronic Engineers

Analysis and Evaluation
of Radio Systems
Research Development and Production
of Special Electronic Equipment

240 Highland Ave. Needham 94, Mass.

ALBERT PREISMAN

Consulting Engineer

Television, Pulse Technique, Video
Amplifiers, Phasing Networks
Industrial Appliances
Affiliated with
MANAGEMENT-TRAINING ASSOCIATES

3224 - 16th St., N. Y. Washington 10, D. C.

TELECHROME, INC.

Electronic Design Specialists

COLOR TELEVISION EQUIPMENT

Flying Spot Scanners, Color Synthesizers, Keyers, Monitors, Oscilloscopes and Related Apparatus
J. B. Popkin-Clurman, *Pres. & Ch. Engr.*

88 Merrick Rd. Amityville, L. I., N. Y.

WHEELER LABORATORIES, INC.

Radio and Electronics
Consulting — Research — Development
R-F Circuits — Lines — Antennas
Microwave Components — Test Equipment
Harold A. Wheeler and Engineering Staff

Great Neck, N. Y. HUnter 2-7876

YARDNEY LABORATORIES

Research-Design-Development

Electro-Chemical Generators of Energy

40-46 Leonard Street Worth 6-3100
New York 13, N. Y.

CONTACTS

FOR THE FIELD OF ELECTRONICS

THE RIGHT LOCATION
for your operation

OVER 350 COMMUNITIES TO CHOOSE FROM

Address
S. P. Vecker, Vice President
Area Development Dept

CAROLINA POWER & LIGHT COMPANY

RALEIGH / NORTH CAROLINA

SEAMLESS LATEX TISSUE COTS

For Electronic Part Assembly

- GOSSAMER THIN
- TOUGH AND DURABLE
- MINIMUM DUSTING
- SIZE OF EVERY SEED
- WRITE FOR SAMPLES

THE SEAMLESS RUBBER COMPANY
NEW HAVEN 3, CONN., U.S.A.

MICA
India • Brazil
BLOCKS • FILMS • SPLITTINGS
All Grades & Qualities—Warehouse Stocks
New York—Prompt Forward Shipments
Phone: WOrth 4-4192 or write
ASSOCIATED COMMODITY CORPORATION
Woolworth Bldg., New York 7, N. Y.

MANUFACTURERS' REPRESENTATIVES

IN THE ELECTRONIC INDUSTRY

As a service to readers, ELECTRONICS presents the advertisements for some of the leading manufacturers' representatives in the electronic industry. These firms are qualified to help the *Manufacturer* with his distribution problems; the *Buyer* with his product needs.

—MARYLAND—

MACLEN CORPORATION
Manufacturers Representative
8616 Georgia Ave, Silver Spring, Md
Components & Equipment

Territory:	
Pennsylvania New Jersey Delaware Maryland Virginia W. Virginia District of Columbia	Government and Industry

One inexpensive modern device . . .

can frequently help speed up operation and maintenance or production.

One product advertised in the "Contacts" Section may be the answer to your problem . . . a real money-saver.

To be informed — and reminded — on modern aids to economical operation, maintenance and production, check "Contacts" advertising regularly . . . every issue.

ing electronic controls for machine tools.

This article gave an excellent summary of the automatic control problem and a good outline of the methods currently available for application to machine tool control.

One item mentioned in this article has caused some confusion and embarrassment with Bendix customers.

In Table 1 on page 124, you indicate that Bendix has under development for Martin Aviation Corporation a magnetic tape, phase modulation, machine control unit.

The system we are developing for The Martin Company uses a punched plastic tape and works in a manner similar to the procedure outlined for the Bendix Cam Milling Machine as described in Mr. Findlay's article.

The Martin Company is procuring from Bendix a Numerically Controlled Milling Machine System under an Air Force prime contract. Bendix has spent considerable time and effort in selling this punched tape system and the indication in the article has created confusion both with the Air Force and with The Martin Company.

W. A. MARA
Director
Bendix Aviation Corp.
Detroit, Michigan

Editor's Note: We regret the error in the table, but hope that the description of the punched tape equipment in the text helped.

Electronic Printing

DEAR SIRS:

WITH reference to your comments on electronic printing, on page 20 of the April 1956 issue of ELECTRONICS, I thought that you might be interested in basic patents No. 2, 409, 454 and 2,549, 546.

You will notice that these patents contemplate direct printing as a result of electronic or particle bombardment. I have done some experimental work and believe that this method of making reproductions is definitely possible but much development work needs to be done.

A. G. THOMAS
Industrial Controls Corp.
Chattanooga, Tennessee

EMPLOYMENT OPPORTUNITIES

The Advertisements in this section include all employment opportunities—executive, management, technical, selling, office, skilled, manual, etc.

Positions Vacant
Positions Wanted
Part Time Work

Civil Service Opportunities
Selling Opportunities Wanted
Selling Opportunities Offered

Employment Agencies
Employment Services
Labor Bureaus

DISPLAYED ——RATES—— **UNDISPLAYED**

The advertising rate is $21.50 per inch for all advertising appearing on other than a contract basis. Contract rates quoted on request.

An advertising inch is measured ⅞" vertically on a column—3 columns—30 inches to a page.

Subject to Agency Commission.

$2.10 per line, minimum 3 lines. To figure advance payment count 5 average words as a line.
Box Numbers—counts as 1 line.
Position Wanted ads are ½ of above rate.
Discount of 10% if full payment is made in advance for 4 consecutive insertions.
Not subject to Agency Commission.

Send NEW ADS or inquiries to Classified Advertising Division of ELECTRONICS, P. O. Box 12, N. Y. 36, N. Y., for August issue closing July 2nd

A CONFIDENTIAL SERVICE *for...*

ENGINEERS
SCIENTISTS

800 Client Companies
Many Fee-Paid Opportunities in
New York, New Jersey, Connecticut

SUBURBAN
EMPLOYMENT AGENCY, INC.
102 Main St., White Plains 8-4800

Offices in
Stamford, Conn. and N. Y. C.



PROJECT COORDINATOR

Multiple plant firm designs and manufactures relays, controls, switches and electro-mechanical devices. You will report directly to chief engineer and have varied and challenging assignments from your first day. Starting salary $9,000-$11,000. Company pays agency fee adn relocation costs.

MONARCH PERSONNEL
28 E. Jackson Blvd. Chicago 4, Ill.

ELECTRONICS ENGINEER

Research division of large mining company requires ELECTRONICS ENGINEER, E.E., M.A., D.Sc. or equivalent to carry on geophysical experimental developments. Good salary, pension plan, work freedom and responsibility. Location, Connecticut.

Apply Box 366, Jerome, Arizona

SYSTEMS DEVELOPMENT, INC.

Requires one graduate electronic engineer with experience in circuit design, debugging in the Fields of Servo mechanisms and Pulse Techniques. Salary open - Stock Purchase Plan-Insurance Benefits. Send resume to:

JAMES HICKEN, President
307 Water St. Binghamton, N. Y.

Practical Physicists or Electrical Engineers

to sell and service electronic, non-destructive metal testing instruments in Northeastern Section of the United States. Small company, established over 25 years, located in New York City, and not engaged in government contract work. Our employees are informed of this opening. Reply fully.

P-1961, Electronics
330 W. 42 St., New York 36, N. Y.

Unusual Tabulating Opportunity

Progressive New York City Bank has opening for young man with practical business experience preferably in Banking who also has interest, curiosity and feeling for machines and electronic equipment. Will have important assignment in our tabulating installation after training. Do not apply unless you can show evidence of electronic skills such as tabulating wiring or familiarity with wiring diagrams. Reply stating qualifications. P-2109, Electronics, Class. Adv. Div. P. O. Box 12, N. Y. 36, N. Y.

Don't forget the

BOX NUMBER

When answering the classified advertisements in this magazine don't forget to put the box number on your envelope. It's our only means of identifying the advertisement you are answering.

SENIOR PROJECT ELECTRONICS ENGINEER
$650.00 to $950.00 Mo.

with overall experience in Research, Design & Development. To supervise Multi-Project Group. Need men in Audio, Transistor, Servos, Synchros, Systems.—General Electronics. Openings due to expansion.

J. J. COOPER
64 E. Jackson Blvd. Suite 940
Chicago, Ill. WAbash 2-1918
Prompt and confidential service

REPLIES (Box No.): Address to office nearest you
c/o This publication Classified Adv. Div.
NEW YORK: P. O. Box 12 (36)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)
LOS ANGELES: 1125 W. 6th St. (17)

POSITIONS VACANT

California State Polytechnic College plans additions to its staff in the Electronic Engineering Department to teach (1) courses in fields, waves and antennas, and (2) intermediate level courses in circuits. Starting salary depends upon qualifications of applicant. For information, write to Harold P. Hayes, Dean of Engineering, San Luis Obispo, California.

Qualified designers and engineers to work in the design and development of electrical automotive components. Excellent salary and liberal fringe benefits as well as stock participation plan. Write or apply at: Ford Motor Company #2 Stewart Street, Ypsilanti, Mich.

POSITION WANTED

Swiss Instrument Maker with 10 years experience in repair, maintenance and development work on measuring instruments and electronic industry controls, is looking for another field of activity. Prefers place located near an Engineering School. Please address: Otto Zimmermann Paysandu 1600, Montevideo, Uruguay.

Personnel Managers—Need experienced Engineers and Technicians? We offer a booklet especially prepared to help you solve this problem. Write for your "free" copy of "Reservoir of Engineers and Technical Men." —Electronics, P. O. Box 12, New York 36, N. Y.

LOOKING FOR A REPRESENTATIVE?

California organization of engineers established 1947, specializing in components, desires additional line. Must be a quality product for MIL applications. Company should have capacity for major production. We are particularly interested in a product from one of the following fields: transistors, capacitors, motors, relays, miniature guidance components. Time and money is available for immediate sales missionary work.

WEIGHTMAN & ASSOCIATES
4101 Burbank Boulevard
Burbank, Calif. Phone: Victoria 9-2435

ELECTRONIC ENGINEER

Development and Research Department

An electronic research group has a challenging position available for an experienced electrical engineer interested in the following:

- Development of improvements in an electronic digital computer designed and constructed by company personnel.
- Development of "Automation" equipment applicable to process control.
- Development of specialized instrumentation applicable to the petroleum industry.
- Opportunity to serve as consultant on wide variety of technical problems.
- A home in a progressive company providing liberal stock plan, retirement plan, group hospitalization, and several other attractive benefits.

Send resume of education, experience and salary requirements to Personnel Division,

Continental Oil Company
Ponca City, Oklahoma

ELECTRONIC ENGINEERS

SENIORS-JUNIORS

PULSE TECHNIQUES
DIGITAL COMPUTERS
TRANSISTOR CIRCUITS

Permanent positions with one of America's fast growing consulting firms.

EARNINGS TO $17,000
YEARS OF WORK AHEAD

Phone Collect—Walter Middleton

PRODUCTION TOOL & METHODS CO.
120 Liberty St., N. Y., N. Y. BA 7-2063

ELECTRONIC ENGINEERS
TECHNICAL WRITERS

For Development Work on the Nation's Foremost Radar & Missile Programs

Experience required in Digital Computers, Circuitry, Systems Analysis, Data Processing, Transistorizing, DC Amplifiers, IF and RF Techniques, and Components Evaluation.

Excellent opportunities in field assignments; living expenses; liberal benefits. Send Resume Atta:

ADAM BECKER, Executive Vice President
ALBANY DESIGNING, INC.
927 Broadway, Albany, New York

You can SELECT at RCA!

...New Opportunities...17 + Locations...One Best For You And Your Family

Can anyone but RCA offer you a choice of locations like this?
At Camden, Moorestown or Cherry Hill, you enjoy cultural advantages of Greater Philadelphia, live at moderate cost in pleasant suburban communities. Waltham offers at-home opportunities for New England engineers. Four ideal West Coast locations. Harrison borders on Greater New York. Lancaster, Marion and Findlay have small-town advantages. There's pleasant year-round outdoor living in Cocoa Beach, on Florida's central east coast. RCA Service Company and International Division assignments include ideal locations in the United States, and wherever RCA electronic equipments are installed and serviced throughout the world.

Individual Recognition—
RCA organizes engineering activities into groups small enough to allow broadest scope for your individual accomplishment. The average group has just 11 engineers. Yet, in all activities, you are supported by the entire facilities and engineering resources of RCA.

Salaries—
RCA engineering salaries average measurably higher than other companies' in the field. Intermediate engineers, $5000-$8500; senior engineers, $8500-$15,000; staff and supervisory salaries open.

Advancement—
Scheduled, objective appraisal of your work speeds promotion. Professional and financial progress is just as sure as your achievements make it.

Professional Status—
RCA bases world leadership in electronics on the abilities of exceptional men at every organizational level. Many have notable engineering and scientific reputations. You work in day-by-day association with men of this caliber.

Benefits—
There's a complete program at RCA. A very liberal Tuition Refund Plan. Company-paid life, sickness and accident, hospital-surgical insurance for you and your family. Modern retirement plan. Relocation expenses paid. Suggestion and patent awards.

Now, Pinpoint Your Future

...Here are the Opportunities!
...Here are the Locations!

FIELDS OF ENGINEERING ACTIVITY		MANAGERS	TYPE OF DEGREE AND YEARS OF EXPERIENCE PREFERRED											
			Electrical Engineers			Mechanical Engineers			Physical Science			Chemistry Ceramics Glass Technology Metallurgy		
			0-2	2-3	4-15	0-2	2-3	4-15	1-2	2-3	4-15	1-2	2-3	4-15
• ***SYSTEMS*** *(Integration of theory, equipments and environment to create and optimize major electronic concepts.)*	AVIATION ELECTRONICS • CONTROLS			W	W M			M		W	W M			
	DIGITAL DATA HANDLING DEVICES	M C		M C	M C		C	C		C	C			
	MISSILE ELECTRONICS • RADAR	M W		M W X	M W X		M W	M W		M W	M W			
	INERTIAL NAVIGATION	W			W			W			W			
	COMMUNICATIONS				C						C			
• ***DESIGN • DEVELOPMENT*** **KINESCOPES (B & W and COLOR), OSCILLOSCOPES—Electron Optics—Instrumental Analysis—Solid States (Phosphors, High Temperature Phenomena, Photosensitive Materials and Glass to Metal Sealing)**			L	L Y	L Y	L	L Y	L Y	L	L	L	L	L Y	L Y
RECEIVING TUBES—Tube Design—Test and Application Engineering—Chemical and Physical Development—Methods and Process Engineering—Advanced Development			H	H	H		H	H		H	H		H	H
SEMI-CONDUCTORS—Transistors—Semi-Conductor Devices—Materials			H	H	H	H	H	H	H	H	H	H	H	H
MICROWAVE TUBES—Tube Development and Manufacture (Traveling Wave—Backward Wave—Magnetron)		H		H	H		H	H		H	H		H	H
GAS, POWER AND PHOTO TUBES—Photosensitive Devices—Glass to Metal Sealing—UHF and VHF—Power			L	L	L	L	L	L	L	L	L	L	L	
AVIATION ELECTRONICS—Radar—Computers—Servo Mechanisms—Shock and Vibration—Circuitry—Remote Control—Heat Transfer—Sub-Miniaturization—Automatic Flight—Automation—Transistorization		W C	W C X	W C X	W C X	W C	W C X	W C X	W C X	W C X	W C X			
COMPUTERS—Systems—Advanced Development—Circuitry—Assembly Design—Mechanisms—Programming			C	C X	M C X	C	C X	M C X	C	C	M C			
RADAR—Circuitry—Antenna Design—Servo Systems—Gear Trains—Intricate Mechanisms—Fire Control—Information Handling—Displays		M C	M C X	M C X	M C X	M C X	M C X	M C X	M C X	M C X	M C X			
COMMUNICATIONS—Specialized Military Systems—Microwave—Aviation—Audio—Propagation Studies			C	C	C		C	C	C	C	C			
MISSILE ELECTRONICS—Systems Planning and Design—Radar—Fire Control—Shock Problems—Servo Mechanisms		M	M X	M X	M X	M	M	M X	M	M X	M X			
COMPONENTS—Transformers—Coils—TV Deflection Yokes (Color or Monochrome)—Resistors—Ferrites (Material and Parts)			C	Z C	Z C	C	Z C	Z C	C	C	C		Z C	Z C
• ***SYSTEMS APPLICATION*** *(Evaluation and Planning—Design and Development—Modification—Specification)*														
MISSILE TEST INSTRUMENTATION (Data Acquisition and Processing) —Radar—Telemetry—Timing—Communications—Optics—Computers		F	F S,	F S	F S	F S	F S	F S	F S	F S	F S			
RADAR—Airborne—Surface—Shipboard—Sonar—Fire Control		F	F S	F S	F S	F S	F S	F S	F S	F S	F S			
COMMUNICATIONS—Radio—HF—VHF—UHF—Microwave—Telephone—Teletype—Telegraph Terminal Equipment—Wave Propagation		F	F S I	F S I	F S I	F S	F S	F S	F S	F S	F S			
• ***MACHINE DESIGN*** **Mechanical and Electrical—Automatic or Semi-Automatic Machines**			L	L		L	L H Y	C H Y		L	L			

Locations: C—Camden, N.J. F—Cocoa Beach, Fla. H—Harrison, N.J. I—International Div. L—Lancaster, Pa. M—Moorestown, N.J. S—RCA Service Co. (Cherry Hill, N.J.; Alexandria, Va.; Tucson, Ariz.; San Diego, Sacramento, San Francisco, Calif.; Foreign Assignments). W—Waltham, Mass. X—Los Angeles, Calif. Y—Marion, Ind. Z—Findlay, Ohio

Please send resume of education and experience, with location preferred, to:

Mr. John R. Weld, Employment Manager
Dept. A-15G, Radio Corporation of America
30 Rockefeller Plaza, New York 20, N.Y.

RADIO CORPORATION of AMERICA

Copyright 1956 Radio Corporation of America

Bendix needs ELECTRONIC and MECHANICAL ENGINEERS

FOR AIRBORNE TELEMETERING SYSTEMS

in SOUTHERN CALIFORNIA

Unusual engineering positions in electrical and mechanical design of Telemetering Systems are available. These positions, which are directly associated with our long-range projects for industry and for defense, are available at all levels.

There also are important positions open for Electronic Test Equipment Designers, Circuit Designers and Microwave and Transistor Engineers.

You are invited to consider becoming a member of this vital engineering group — with a forward looking company in Southern California.

Please fill in the coupon or write us for complete information.

W. C. Walker, Engineering Employment Manager
Pacific Division, Bendix Aviation Corp.
11600 Sherman Way, North Hollywood, Calif.

I am interested in Telemetering Engineering.
I am a graduate engineer with _____ degree.
I am not a graduate engineer but have _____ years experience.

Name _____

Address _____

City _____ Zone _____ State _____

TO $15,000 ENGINEERS SCIENTISTS

Engineering research in equipment development, general circuitry, and systems planning is a major activity of our client. It will pay you to investigate these openings on their professional staff.

PROJECT ENGINEER—COMPUTER ADVANCED DEVELOPMENT—5 to 10 years' progressive experience in digital computer circuitry, logic, and systems development. U. S. citizenship not required.

PROJECT ENGINEER—COMMUNICATIONS ADVANCED DEVELOPMENT—5 to 10 years' experience in development of UHF and microwave circuitry. Interest in general circuitry. U. S. citizenship not required.

PROJECT LEADER—PULSE RADAR TRANSMITTERS—8 to 12 years' experience in radar development, including microwave oscillators, automatic frequency control, plumbing.

PROJECT ENGINEER—INDUSTRIAL TV—4 to 6 years' experience in camera chains and closed circuit TV systems. Industrial applications. U. S. citizenship not required.

PROJECT LEADER—RADAR MICROWAVE TECHNIQUES—8 to 12 years' experience in development of radar equipment, including X-band microwave techniques, gyrators, mixers, ATR tubes, high power oscillators.

PROJECT ENGINEER—MEASUREMENT TECHNIQUES—Physicist with 6 to 10 years' experience in the development of UHF and microwave measurement techniques.

SYSTEMS ENGINEER—ADVANCED DEVELOPMENT—2 to 4 years' experience in research on commercial or military equipment systems, plus minimum of 5 years' experience equipment development.

PLEASE PHONE or WRITE FOR APPOINTMENT

Mr. A. Wilson — Dept. 0-000 — BRyant 9-5570

SUBURBAN EMPLOYMENT

100 W. 42nd Street, New York, N. Y.

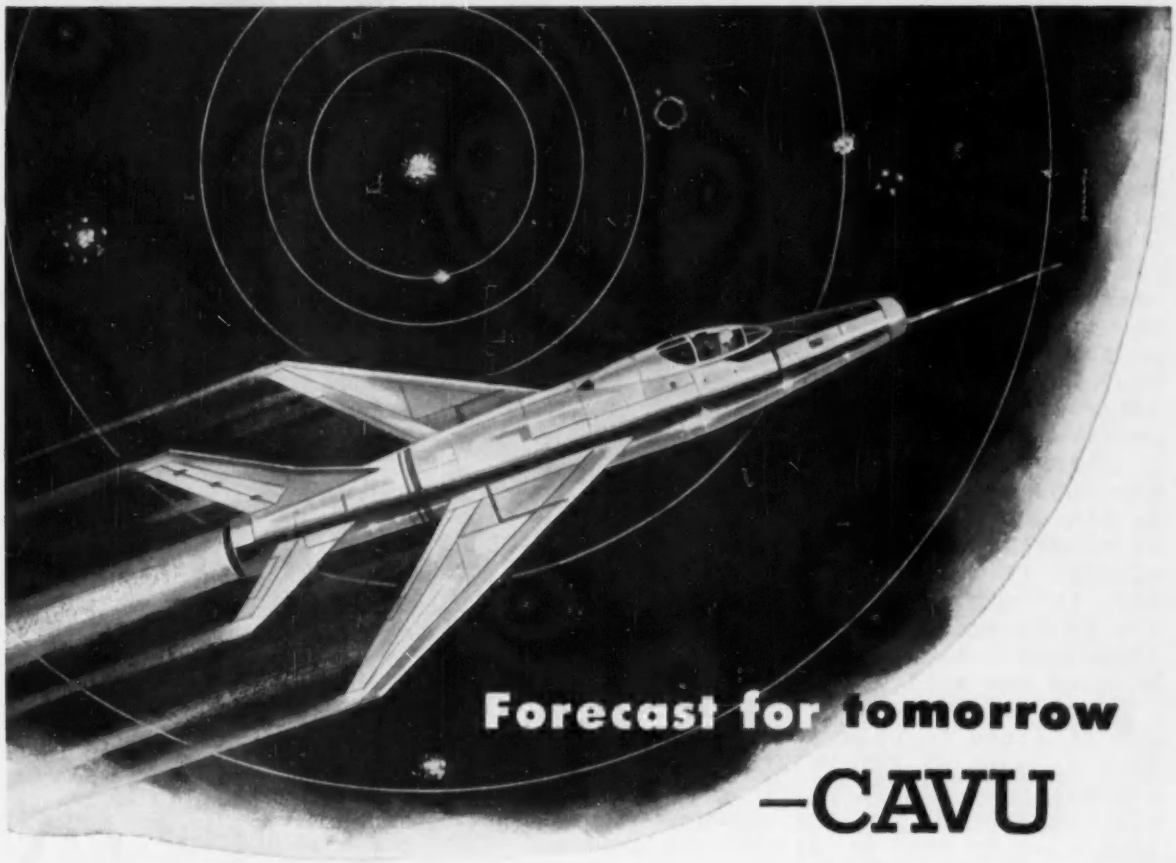

Ceiling and Visibility Unlimited—the most encouraging forecast for pilots. And, in another sense, the same forecast—unlimited—applies to *your* career opportunities at Goodyear Aircraft.

For here is a place where you can grow. Here, your imagination and ingenuity will provide the raw materials for transforming your ideas into realities that pay off. And to help put your ideas to work, we have the most modern facilities available, including one of the largest computer laboratories in the world. At Goodyear Aircraft, every idea is a prime commodity and is given a chance to mature.

The proof is in the record. Both in peace and in war, our engineers have transformed their ideas into realities that benefit nearly every aircraft in our skies. Airships, plastics, electronic guidance and computing equipment, structures, missiles—the list is long and broad. And it's still growing.

Because of our continued growth and diversification, we find it necessary to expand our engineering staffs at both Akron, Ohio, and Litchfield Park, Arizona. Opportunities are unlimited for creative engineers in all specialties. If you have faith in your ideas and confidence in your ability to make them work, you will find at Goodyear Aircraft the stimulation of creative challenge and the satisfaction of realistic accomplishment.

Salaries and benefits are, of course, liberal. And if you wish to continue your academic studies, company-paid tuition courses leading to advanced degrees are available at nearby colleges.

For further information on *your* career opportunities at Goodyear Aircraft, write:
Mr. C. G. Jones, Personnel Department, Goodyear Aircraft Corporation, Akron 15, Ohio.

They're doing big things at

GOODYEAR AIRCRAFT

THE TEAM TO TEAM WITH in AERONAUTICS

I know from my own experience all of the details involved in making a decision about changing jobs. You wonder what kind of work you will be doing...the calibre ... you will be associated with, ... living conditions,...is ... is there an ... In a short no ... few of the ... reasons you ... should get ... in the mail ... so that an ... interview can ... be arranged.

I am attach ... snapshot of ou ... in the country ... close to schools, chu ... only eight minutes from the ... offices. This is only one ... reasons why most of the folks who come here for an interview just stay...wire the wife to start packing... knowing she will love the living part of it.

Now about the work and the people.... The attached clipping will give you a brief idea of some of Farnsworth's activities for the military and industry in the fields of electronics and nuclear energy. Your associates will be eminent scientists and engineers with many "firsts" to their credit in electronics. (Like Philo Farnsworth, our Technical Director and the inventor of electronic television.)

And don't worry about permanency or stability. Being a member of the world-wide International Telephone and Telegraph Corporation makes Farnsworth big enough to assure that yet it is ... small enough for flexibility ... recognition of the individual. Here you will be heard...not just one of the herd. Of course, all the other advantages are included: liberal relocation expense, advanced education at no cost to you. To get the whole fascinating Farnsworth story...

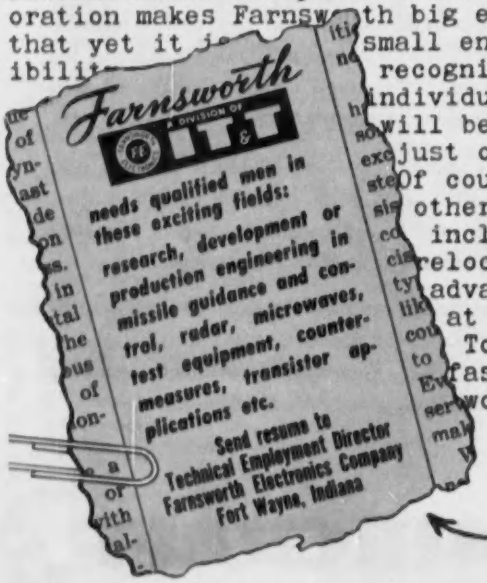
Farnsworth
A DIVISION OF
IT&T
needs qualified men in these exciting fields:
research, development or production engineering in missile guidance and control, radar, microwaves, test equipment, countermeasures, transistor applications etc.
Send resume to
Technical Employment Director
Farnsworth Electronics Company
Fort Wayne, Indiana
Write

Electronics engineers

do you see...
the over-all picture...

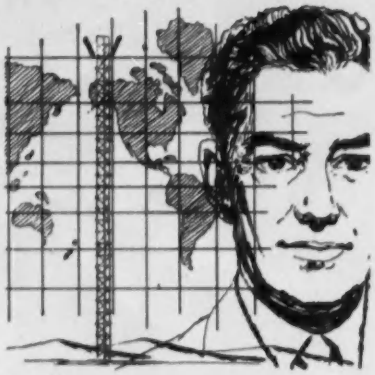

or just the details?



As a Publications Engineer at COLLINS you will...

1. work with the creative leader in the electronics field,
2. write engineering reports on over-all projects, including some of the most advanced electronic work in the industry.
3. write on complete systems, their operation, installation, theory and test.

COLLINS offers outstanding opportunities for electronics engineers in the field of technical writing on:

MICROWAVE RELAY	FLIGHT CONTROL
NAVIGATION SYSTEMS	RADAR SYSTEMS
COMMUNICATIONS SYSTEMS	GUIDED MISSILES
SSB SYSTEMS	COMPUTERS
RADIO ASTRONOMY	AMATEUR EQUIPMENT

...plus top salaries, opportunity for advancement, company sponsored life, accident, sickness and hospitalization insurance, retirement plan and liberal moving expense allowance.

Electrical Engineers or Physics Majors with good electronic background and an aptitude for writing are desired. Actual writing experience is not necessary.

OPENINGS IN CEDAR RAPIDS, IOWA, BURBANK, CALIF. AND DALLAS, TEXAS

Send Resume to: MR. L. R. HUSS

COLLINS RADIO COMPANY
CEDAR RAPIDS, IOWA

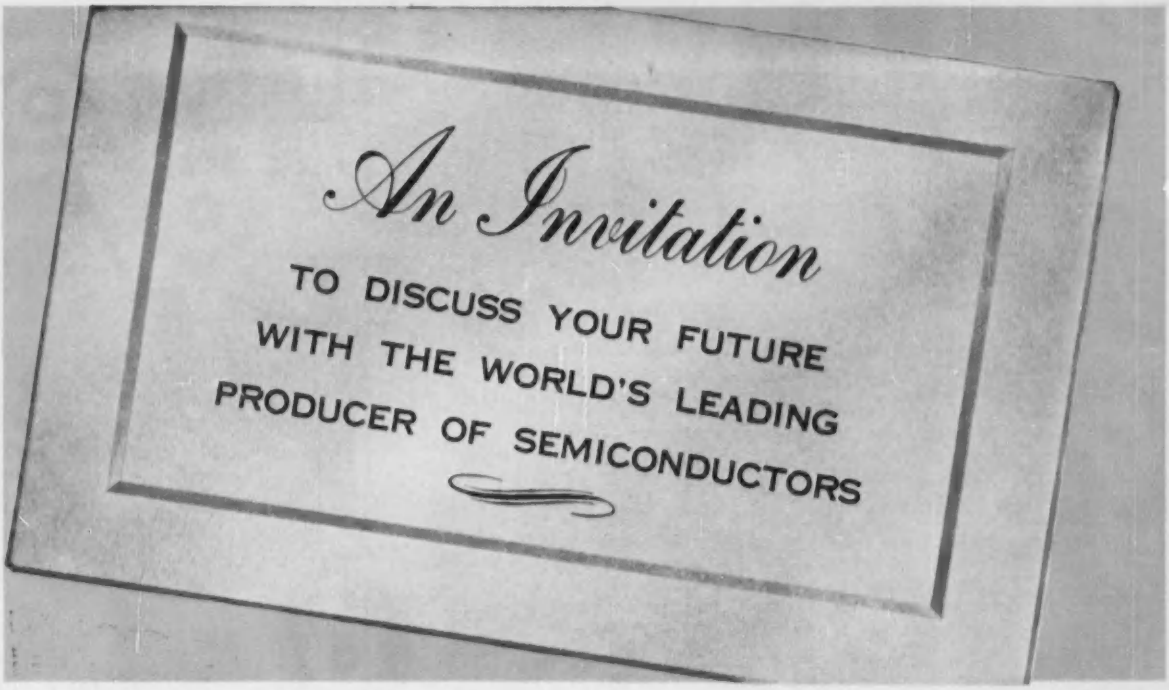

LOOK AT THIS RECORD OF GROWTH

A few short years ago, a handful of people pioneered advanced semi-conductor development at Transitron.

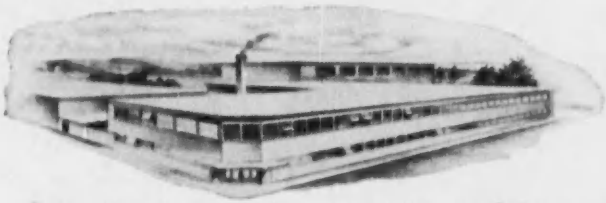

Today Transitron employs over 750 people in a modern plant of 65,000 square feet at Melrose, Massachusetts.

AND NOW... FURTHER EXPANSION

A newly modernized second plant of 250,000 square feet is being equipped at Wakefield, Massachusetts.

If you're in search of real opportunity, you'll find your professional horizons unlimited at Transitron. In a few short years this young company has carved out a leading position in the field of semiconductors. It is now undergoing further expansion into a second plant of 250,000 square feet.

Here is your chance to work with stimulating, congenial associates in an atmosphere of progress — informal and *free of red tape*. You'll be located in pleasant, suburban Boston, in the heart of one of America's technical centers — where cultural and educational advantages are found for you and your family. And you're only an hour's drive from New England's vacationland!

So, if your experience is any of these fields:

SEMICONDUCTOR RESEARCH
COMPONENTS ENGINEERING
APPLICATIONS ENGINEERING
PRODUCTION ENGINEERING
SALES ENGINEERING

. . . there is an unparalleled opportunity for you *right now* with Transitron. Salaries are attractive; vacation, insurance and retirement benefits are liberal and your opportunities for professional growth are unlimited.

A letter to Transitron with your resume will receive our prompt attention, and will be held in strictest confidence. Transitron Electronic Corporation, Telephone: MElrose 4-9600.

Transitron electronic corporation melrose 76, massachusetts

Leadership in Semiconductors

ELECTRONIC SYSTEMS SPECIALISTS

Here are some typical problems Sylvania engineers and physicists meet and solve at our Buffalo, N. Y. and Waltham, Mass. plants.

AT BUFFALO:

1. How do you design 10 similar microsecond timing circuits whose delay times can be varied over a range of 100 times by analog control voltage maintaining a tracking accuracy of ±0.1% in an environment of −65°C to +125°C at sea level to 100,000 feet?

2. If you know which bits of a code group are in error, can you modify the hamming code to use this data to provide maximum information capacity in a noisy channel?

3. Can you design a crystal mixer to operate with latest production type crystals and having a noise figure less than 12db above KTB operating in the "S"-band?

AT WALTHAM:

4. Under what conditions can signal fluctuations improve radar performance?

5. What are the limitations on allowable smoothing time for target tracking radars?

6. Under what conditions can random noise introduce systematic errors in radar measurements?

Continuing product diversification means long-range security and advancement... and both locations offer good housing and ample leisure-time activities, as well as unusual opportunities for advanced studies.

If you believe that you can assist us in the solving of these problems, please write:

WALTHAM LABORATORIES
Erling Mostue
100 First Ave.
Waltham, Mass.

BUFFALO LABORATORY
E. F. Culverhouse
175 Great Arrow Ave.
Buffalo 7, New York

SYLVANIA
SYLVANIA ELECTRIC PRODUCTS INC.

Your inquiries will be answered within 2 weeks.

ELECTRONIC ENGINEERS!

ARE YOU ENGINEERS . . . OR TIME CARD NUMBERS?

If you are tied up in red tape . . . if the scope of your work is limited . . . if you can't use your creative engineering abilities . . . then MEMCO offers you a sound escape from stagnation and monotony.

AT

MEMCO:

every electronic engineer . . .

- is encouraged to use his creative talents.
- works on all phases of his projects.
- is appreciated as an engineer, not as a replaceable cog in a big machine.
- gets top pay and many benefits.
- can build a sound, worthwhile future.

For full details please write to:

MARYLAND ELECTRONIC
MANUFACTURING CORPORATION
5009 Calvert Road
College Park, Maryland
(A suburb of Washington, D. C.)

We have been able to tell you about *these* radars—

but are forbidden by security regulations to publicize the many other advanced radar and weapons systems we are developing. Raytheon's reputation for "Excellence in Electronics" has been greatly enhanced by the contributions it has made to the radar equipment field.

The recent expansion of our engineering facilities makes it possible to offer unusual opportunities to experienced creative engineers for the design and development of these radar and weapons systems. Your inquiries will be welcomed and a postcard is supplied below for your convenience.

RAYTHEON MANUFACTURING COMPANY
Radar Department
WAYLAND LABORATORY
WAYLAND, MASSACHUSETTS

RAYTHEON
RAYTHEON MANUFACTURING COMPANY
WAYLAND LABORATORY
WAYLAND, MASS.

Please send me a copy of your new brochure describing the Wayland Laboratory. I understand you will also send a brief resume form which I will be able to complete in a few minutes. • • •

Name_____

Address_____

City_____ Zone____ State_____

Raytheon's new Wayland Laboratory is devoted exclusively to the design and development of advanced electronic equipment. Under one roof an engineer can see his program carried through completely . . . from idea to reality.

A delightful location — only 17 miles from the heart of Boston — offers a choice of rural or urban living, and access to the entire New England area is convenient via a network of modern highways.

Postage Will Be Paid by Addressee

No Postage Stamp Necessary If Mailed in the United States

BUSINESS REPLY CARD

First Class Permit No. 25529 Boston, Mass.

RAYTHEON MANUFACTURING COMPANY
Wayland Laboratory
Wayland, Mass.

Attn: R. E. Doherty, Radar Dept.

RAYTHEON

RAYTHEON MANUFACTURING COMPANY

WAYLAND LABORATORY

WAYLAND, MASSACHUSETTS

Bendix Aviation Corporation
YORK DIVISION

YORK, PENNSYLVANIA
TELEPHONE YORK 47-2611

Dear Engineer,

If you are a fortune-hunter, turn the page; this is not for you. But if you are one of the great majority of professional men who is primarily interested in a satisfying job and attractive working and living conditions with reasonable security and good promise for the future, read on!

Sure, this is a sales pitch - but different, since it aims to be honest! We need Engineers, just like every other leading company. You've seen the screaming ads promising Utopia, or Nirvana, to anybody with any semblance of engineering qualifications. We're different! At York, we cling to the belief that you will be more impressed with a frank statement of the pros and cons.

First, we are in the electronics business. Most of our work is military. Since we are working with five or six government agencies, our activities are diverse. We are a small, but full-fledged division of the Bendix Aviation Corporation, which conveys the security and stability of a large company. On the other hand, Bendix operates its divisions on a practically autonomous basis, so that we also have the flexibility and healthy atmosphere of a small, independent company. Nobody gets buried!

The plant is 100,000 sq. ft. big - about 3 years new and excellently equipped with machinery and test equipment. The plant is located about five miles east of York, Pa., on the Lincoln Highway, in what the real estate dealers describe as a "beautiful suburban area". (And it is.) You can live (as I do) within three minutes drive of the plant. For $10,000 you can have a 2-bedroom house (cheaper if you buy a run-down farm house).

The town (of about 75,000) has at least one of everything you could find in a bigger city, including a symphony orchestra of some note. (Sorry, the pun was unintentional.)

Here in our plant, we believe that engineers are people, individuals yet, and not hired hands. We exercise some care in hiring, because we want them to stick; and, in fact, our turn-over rate is negligible. The work and status of each individual is reviewed every six months. This doesn't mean that he gets a raise every time, but 10% a year isn't far from the average. As an engineer, it's possible to make over $10,000 a year, but you have to be good.

We operate basically by a project system, with a great deal of responsibility vested in each Project Engineer. The supporting departments - Drafting, Mechanical Engineering, Model Shop (you should see our Model Shop), technical publications and the like - furnish service to the project groups. We do about $1,000,000 a year engineering business alone, and seem to have no difficulty in acquiring more. We're growing fast!

We don't offer you the moon, but we do offer you a fair shake!

Sincerely yours,

K. F. Umpleby

K. F. Umpleby
Chief Engineer

P.S. If what I've said interests you, get in touch with me!

K.F.U.

ENGINEERS,
Electronic & Mechanical
PHYSICISTS:

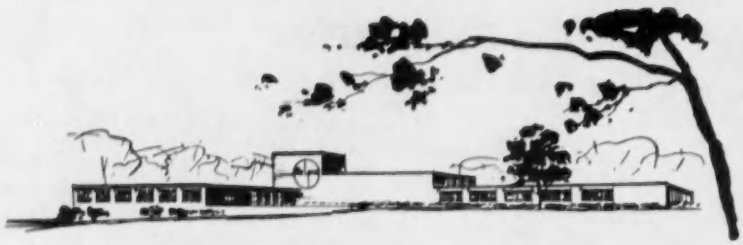

Top Grade Openings At Melpar *Leader in Electronic Research & Development*

Due to our continuing expansion program, a number of top grade openings exist in our new laboratories suburban to Washington, D. C. We urge you to consider the following:

1. At Melpar the engineer is not tied to a pre-arranged schedule of advancement. Instead, promotion and advancement are based on *individual recognition*, where skill and ability are the paramount factors of determination.

2. Melpar has doubled in size every 18 months for the past 10 years. New openings occur constantly. This enables the engineer to advance to positions of increased responsibility *as soon as he is ready*.

3. Our unique "project team" basis of organization gives the engineer an opportunity to participate in *entire* problems from conception to completion of prototype, and thus experience the "over-all" approach to engineering problems necessary to eventual directorship responsibility.

4. Our new air-conditioned laboratories encompass over 285,000 square feet and offer *complete* facilities for creative research and design. In addition to our central Model Shop, supplementary facilities, personnel and test equipment are available for *immediate* use within each project group.

5. The Northern Virginia Area, suburban to Washington, D. C., in which Melpar is located, offers excellent living conditions, enjoys the Nation's highest per capita income, fine homes and schools. Recreational, cultural and educational facilities abound. Fully-accredited graduate courses are offered at the Melpar laboratories and at 5 universities in the Area.

Top Grade Openings Exist in These Fields: Network Theory • Systems Evaluation • Microwave Technique • UHF, VHF, or SHF Receivers • Analog Computers • Magnetic Tape Handling • Digital Computers • Radar and Countermeasures • Packaging Electronic Equipment • Pulse Circuitry • Microwave Filters • Flight Simulators • Servomechanisms • Subminiaturization • Electro-Mechanical Design • Small Mechanisms • Quality Control and Test Engineering

Write for fuller information. Qualified engineers and physicists will be invited to visit Melpar at Company expense.

Write: Technical Personnel Representative

MELPAR *Incorporated*

A Subsidiary of Westinghouse Air Brake Company

3127 Arlington Boulevard, Falls Church, Virginia

Positions also available at our laboratories in: Cambridge, Mass., 89 First St. Watertown, Mass., 11 Galen St.

ENGINEERS

PARTS APPLICATION

(Reliability)

ME or EE degree with design experience and/or application experience. Job will be to recommend types of parts to be used and how these parts shall be used.

Qualified men will become a vital part of a Reliability Group.

GM INERTIAL GUIDANCE SYSTEM PROGRAM

• ELECTRONICS DIV.,

Milwaukee 2, Wis.

Enjoy Challenging Opportunities in the most versatile Laboratories in the country. Work with the top men in the field and with the finest test, research and development facilities. We are in the process of a Major, Permanent, Expansion Program. New Plant facilities being added in suburban Milwaukee area.

To aid you in your professional advancement AC will provide financial assistance toward your Master's degree. A Graduate Program is available evenings at the University of Wisconsin, Milwaukee.

GM's Electronics Division aggressive position in the field of manufacture and GM's long-standing policy of decentralization creates individual opportunity and recognition for each Engineer hired.

Recent EE,ME Graduate Inquiries Also Invited

Milwaukee offers ideal family living in a progressive neighborly community in cool, southern Wisconsin where swimming, boating, big league baseball and every shopping and cultural advantage is yours for the taking.

To arrange personal, confidential interview in your locality send full facts about yourself today to

Mr. John F. Heffinger
Supervisor of Salaried Personnel

AC

Electronics Div.
General Motors Corp.
Milwaukee 2, Wis.

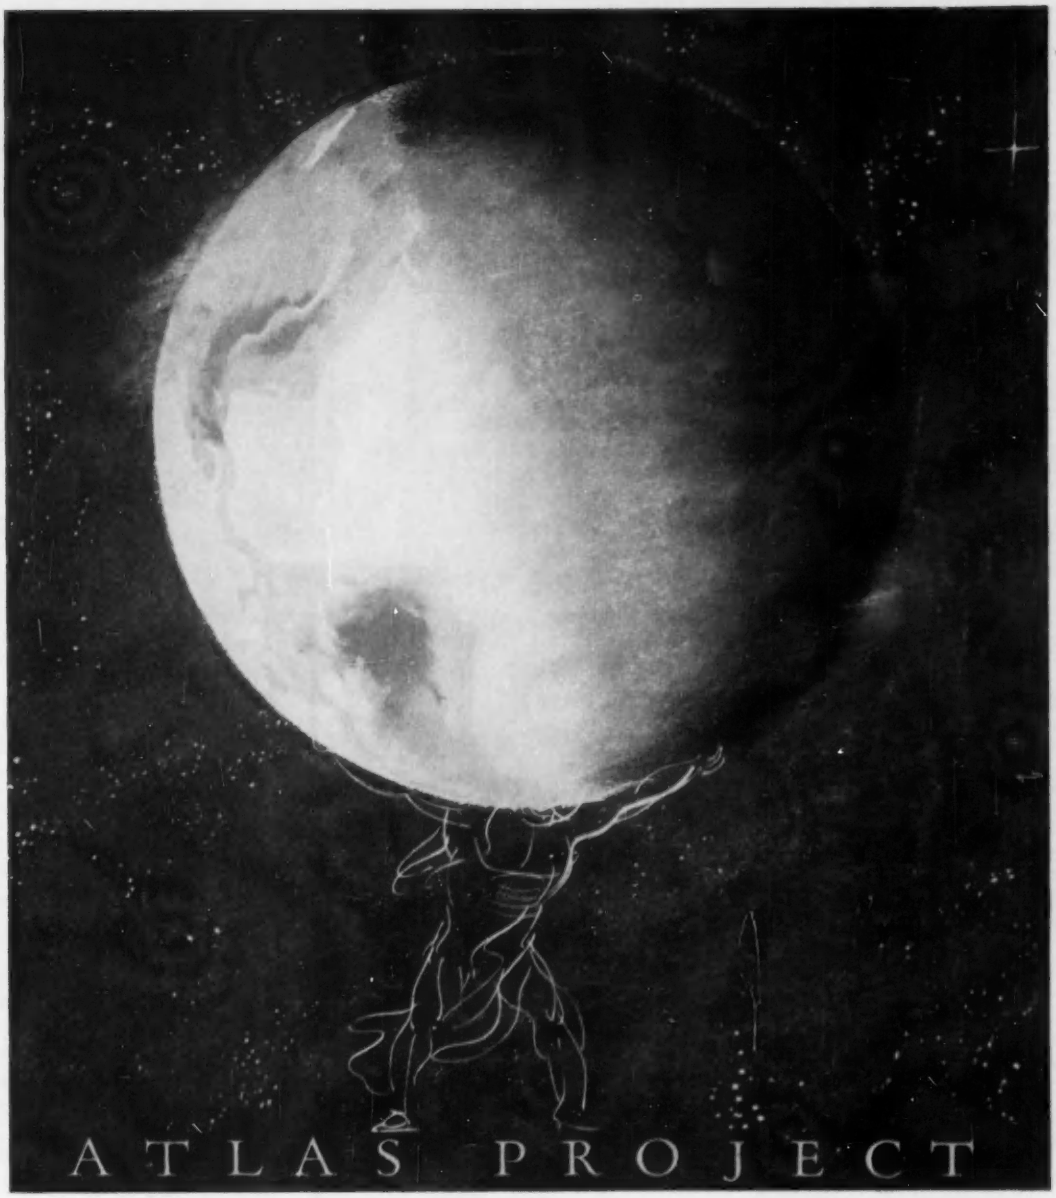

Convair announces very special and immediate opportunities for experienced

ELECTRONICS ENGINEERS **DYNAMICS ENGINEERS**
AERODYNAMICS ENGINEERS **STRUCTURERS ENGINEERS**
FLIGHT TEST ENGINEERS

within a new division currently being formed for the design, development and construction of the intercontinental ballistics missile – THE ATLAS! For information concerning new engineering positions related to this tremendous project, please write at once. Address correspondence, including resume to:
Mr. H. T. Brooks, Engineering Personnel, Department 919

CONVAIR
GD *A Division of General Dynamics Corporation* C-V
3302 Pacific Highway • San Diego, California

JOIN amf IN BOSTON

Boston, and New England, is in the middle of a gigantic electronic boom . . . in fact, this is the NEW electronic center of America.

A leader in this movement is the Electronics Division of American Machine & Foundry Company in Boston . . . surrounded by the nation's leading universities, outstanding historical sites, and gateway to all New England's 4-season resorts and sports . . . easily accessible on new super highways. And our smart, modestly priced suburban home communities are models for today and tomorrow.

Work with outstanding colleagues in creative engineering where assignments are diversified and the programs long-range.

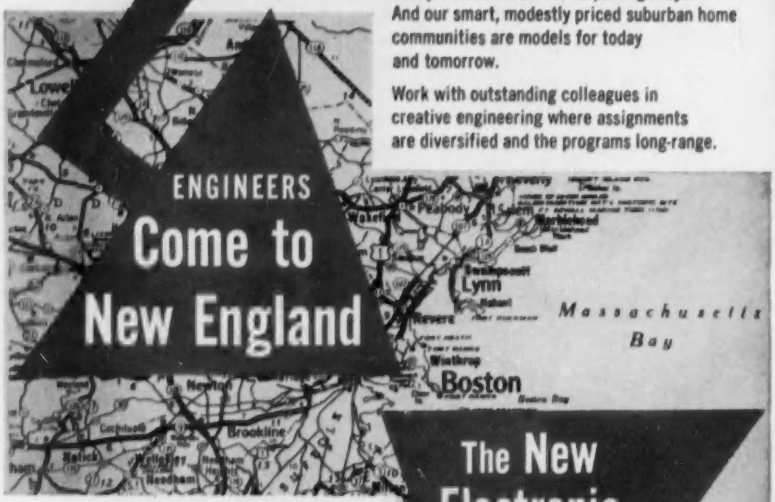

ENGINEERS
Come to New England

The New Electronic Center of America

We have important openings in development, study and manufacturing for:

Electronic Counter Measures — Electronic Reconnaissance
Special Electronic Displays
Radar Instrumentation
Servo Mechanisms — Electrical & Hydraulic
Field Services Representatives
Digital Data Processing Equipment
Magnetics
Circuit Design Engineers
Microwave Components
Navigation Systems
Radio Communications UHF & VHF

Relocation Expenses & housing assistance. Comprehensive benefits program including tuition reimbursement plan for advanced studies.

Please send complete resume to **Mr. John Lowe**

ELECTRONICS DIVISION

American Machine & Foundry Company

1085 Commonwealth Avenue Boston, Massachusetts

it's **YOUR** move

as an ELECTRONICS ENGINEER or PHYSICIST

What do you look for when you think of moving to a better position?

- Full and immediate use of your training and experience
- Simple, sensible salary policies offering rapid and continued recognition of your contributions
- An organization small enough to insure individual recognition and growth and large enough to offer long range security
- A research and development organization managed by engineers and scientists
- An opportunity to develop your professional competence through fundamental engineering in a variety of fields

All of these, plus the usual benefits, are reasons given by engineers themselves for joining TECHNICAL OPERATIONS, INCORPORATED.

Positions are available for electronics engineers and physicists in such fields as Transistor Circuitry, Operations Research and Nuclear Instrumentation.

It's *your* move. Be *sure* it's a *good* move. Call or write us *before* you make it. (Ask for our *short*, preliminary application card)

Robert L. Koller

TECHNICAL OPERATIONS
INCORPORATED

6 SCHOULER COURT
ARLINGTON 74, MASSACHUSETTS
MI 3-4500

**Dr. F. C. Henriques, President and Technical Director; Dr. Marvin G. Schorr and Dr. Eric T. Clarke, Vice Presidents*

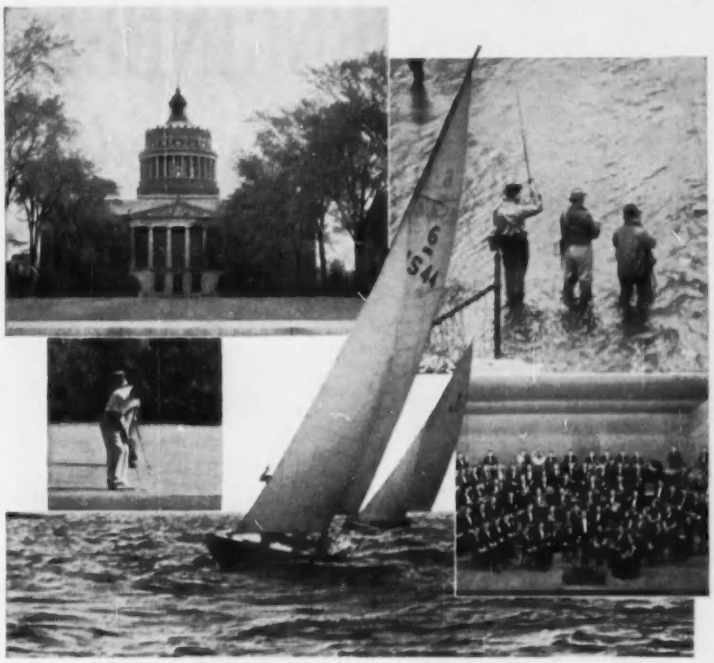

A land with a climate where your *ideas* can *grow*

You begin to hunt for such a climate when you see your ideas stagnating in the airless confines of a company too small—or lost in the bog of one that's too big.

You promise yourself it's climate you'll look at, *this* time when you pick a job. *Management* climate—because that's where ideas find sunshine—not the big freeze.

So you look for a company where Management recognizes a hot idea when it comes up from the lab. You look for a company where Sales knows how to take hold of a good idea and move. You search for a department without pigeon holes; you want to work, not roost.

That's why Stromberg-Carlson's story should appeal to you. Since World War II our volume has increased 16 times, thanks to good ideas accepted and promptly applied. Recently we joined the headline-making General Dynamics Corporation, making the ionosphere the limit on your future here.

As two or three generations of Stromberg-Carlson engineers can tell you, the climate in this scientific-industrial city of Rochester seems to stimulate live minds. You meet next-door neighbors who know what you're talking about. You enjoy winter sports, summer boating, good music, fresh theater—and a salary-bonus plan that lets the good way of living be yours. It should be, when you choose a *lifetime* job.

The list at right shows where there's room for you and your ideas to grow. Dig in now—with a detailed letter to Mr. Arthur N. Paul, at the address below. We think you'll like what he has to say to you.

S-C

STROMBERG-CARLSON COMPANY

A DIVISION OF GENERAL DYNAMICS CORPORATION

104 CARLSON ROAD, ROCHESTER 3, N. Y.

You'll find your future in one of these specialized areas

RESEARCH

Communication and Data Systems • Information Theory • Semi-Conductor • Digital Techniques • Servo Mechanisms • Electronic Switching • Acoustic Transducers • Magnetic Amplifiers • Nucleonics • Microwave and Wireline Carrier

ELECTRONICS

Radio Communications • Mechanical Design Engineering • Infrared • Automatic Test Systems • Countermeasures • Navigational Systems • Radar • Computer Techniques • Military Transistor Applications • Missile Guidance Systems • Microwave Development • Electronic Communications

AUTOMATION

Systems Engineering • Automatic Assembly • Transistors • Amplifiers & Filters • Automatic Test Equipment • Numerical Control • Computers • Counters • Instrument and Power Servos • Production Engineers

WIRE COMMUNICATION

Dial Central Office Equipment • Telephone Instruments • Wireline Carrier • Frequency Multiplex • Toll Ticketing • Transistor Circuitry • Microwave Links • Electro-mechanical Design • Electronic Switching Systems

AUDIO-ACOUSTICAL

Transformers • Tape Recorders • Audio Amplifiers • Loudspeakers • Electronic Carillons • Intercommunication Systems • Auto Radio • Home Radio • High Fidelity Music Reproduction • Sonar

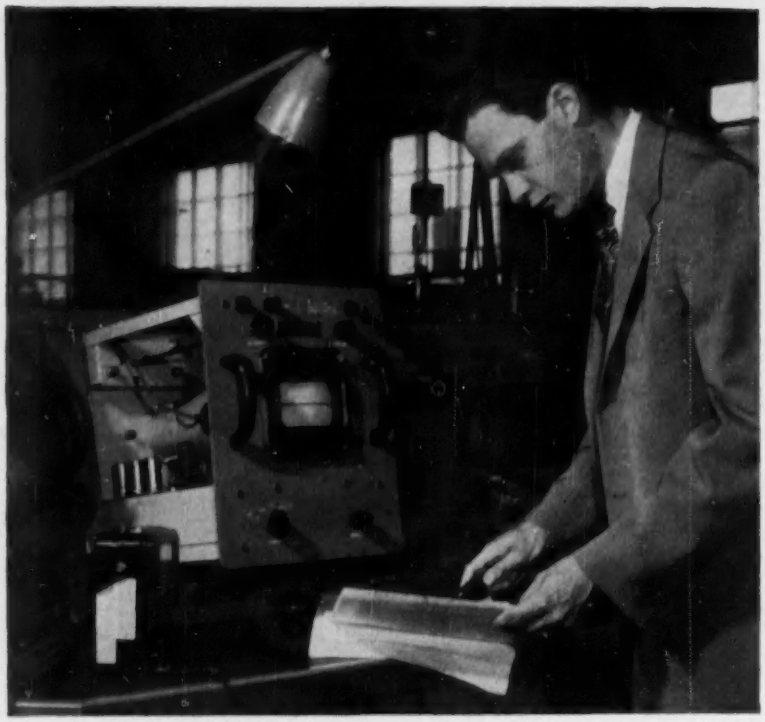

Console of Raytheon AN/CPS-9 Storm Detector Radar. Unit locates storms up to 300 miles away; measures their distance, direction, height; indicates presence of rain or snow.

FIELD ENGINEERING
WITH A FUTURE—at Raytheon

PLAN YOUR CAREER HERE — Raytheon needs men like you who are qualified for field engineering and have the ability to build a future in electronics. Experience in the field has enabled many of our engineers to become executives at Raytheon. Unlimited opportunity is open to you now in the following programs:

MISSILES . . . . . **Air-to-Air—Ground-to-Air**

RADAR . . . . . **Search—Fire Control**
Bombing—Countermeasures

Other Equipment . . . **Ship and Airborne Sonar—Microwave Relay Links—UHF & Microwave Communications**

Raytheon has designed and built complicated electronic equipment for the past 30 years. One of its present equipment projects is the world's most publicized radar—the Arctic DEW LINE radar.

If you have a college degree, you'll rate preference. However, if you have an extensive electronic background, send in your application. Special training will be provided by our Training Facility to prepare you for your assignments.

Attractive salaries, benefits, allowances. Interesting domestic and overseas assignments. Please address your inquiry to E. K. Doherr.

RAYTHEON

RAYTHEON MANUFACTURING COMPANY
GOVERNMENT SERVICE DEPARTMENT
100 River St., Waltham 54, Mass.

ENGINEERS

AC needs

SERVO ENGINEERS
. . . Electrical
. . . Mechanical

GM
INERTIAL GUIDANCE SYSTEM PROGRAM
ELECTRONICS DIV.,
Milwaukee 2, Wis.

●

Seeks experienced engineers for the further development and systems testing of Inertial Guidance Systems and their Servo Loops.

Enjoy Challenging Opportunities in the most versatile Laboratories in the country. Work with the top men in the field and with the finest test, research and development facilities. We are in the process of a Major, Permanent, Expansion Program. New Plant facilities being added in suburban Milwaukee area.

To aid you in your professional advancement AC will provide financial assistance toward your Master's degree. A Graduate Program is available evenings at the University of Wisconsin, Milwaukee.

GM's Electronics Division aggressive position in the field of manufacture and GM's long-standing policy of decentralization creates individual opportunity and recognition for each Engineer hired.

Recent EE,ME Graduate Inquiries Also Invited

Milwaukee offers ideal family living in a progressive neighborly community in cool, southern Wisconsin where swimming, boating, big league baseball and every shopping and cultural advantage is yours for the taking.

To arrange personal, confidential interview in your locality send full facts about yourself today to

Mr. John F. Heffinger
Supervisor of Salaried Personnel

AC
Electronics Div.
General Motors Corp.
Milwaukee 2, Wis.



ERMA

electronic recording machine accounting



Brilliant career opportunities for . . .

- EXPERIENCED COMPUTER ENGINEERS
- LOGICAL DESIGNERS
- TRANSISTER APPLICATIONS ENGINEERS
- COMPUTER CIRCUIT ENGINEERS
- DESIGNERS ELECTRO MECHANICAL DEVICES
- ELECTRONIC PACKAGING ENGINEERS

YOU are URGENTLY NEEDED at once to work on the General Electric Team for the ERMA Program.

Technical Assignments available in Palo Alto, California and Syracuse, New York.

FIRST *industrial data processing system designed to solve entire checking account bookkeeping.*

FIRST *such system ordered into quantity production. (The Bank of America to convert to ERMA.)*

FIRST *production computer designed with modern solid state components.*

FIRST *of a line of tailored data processing for business, industry and Government.*



ERMA IS REVOLUTIONARY IN CONCEPT AND EXECUTION

. . . solves entire bookkeeping problem from time check is entered until monthly statement is issued.

. . . originally conceived by Bank of America and developed to the bank's specifications by Stanford Research Institute.

. . . refinement to continue through joint effort of General Electric and Stanford Research Institute.

Please send your resume to

Engineering Administration
Industrial Computer Section

GENERAL ELECTRIC

3001 James Street • Syracuse, New York

Engineers... Physicists

PLOT YOUR FUTURE

at Admiral®

The chief requirement of development and advanced design work, such as that now being conducted at Admiral, is a staff of engineers with a keen desire to investigate, evaluate and solve a wide variety of assignments.

Continued and steady growth of established research and development projects presents a number of unusual opportunities for men at all levels of experience.

UHF—VHF Communication Systems
Advanced development and design of military apparatus at all power levels—airborne and ground equipment.

Television—Military and Civilian
Airborne and ground systems for the military, including receivers, transmitters, camera, antennas, sync generating systems and displays. Civilian TV includes monochrome and color receivers as well as printed circuit and transistor application.

I.F.F. and Other Forms of Radar
Includes circuit design, equipment modification and original research, air traffic control, beacons and delay line work.

Nuclear Radiation Damage Control
To conduct post-irradiation analysis of electronic components, evaluate reactor levels, analyze results and proprietory research into radiation resistant materials.

Radio Receiver Design
Design and development of broadcast receivers, hi-fi phonographs, transistorized and vacuum tube types.

If your talent and skill are not being used in a way for which your education and experience has equipped you, investigate these and other assignments at Admiral.

Current openings offer excellent income and employee benefits including retirement plan, paid group insurance and college tuition refund plan plus ideal working conditions.

Send a letter outlining your education and experience to Mr. W. A. Wecker, Personnel Division.

Admiral Corporation
3800 W. Cortland St. • Chicago 47, Illinois

OPPORTUNITIES IN ELECTRONICS

Varo Manufacturing Co., a young and vigorously expanding organization located just outside Dallas, Texas, has a number of position openings which offer exceptional opportunities to engineers and scientists who are interested in research and development work of unusual scope and diversity.

RESEARCH ASSOCIATE
Eng. or Physics graduate with experience in high vacuum technique, metal vaporization, electron optics. Several positions open for personnel with five years or more experience.

ELECTRO-MECHANICAL ENGINEERS
E.E., M.E., or Physicist with experience in magnetics, audio oscillators or audio filters for design and production engineering of Tuning Forks.

ELECTRONIC ENGINEERS
Several positions for E.E.'s or Physicists with three years or more experience in (1) UHF or VHF communication (2) audio telemetering circuits (3) D.C. amplifiers and controls (4) Transistor audio circuits.

TRANSFORMER ENGINEERS
Excellent opportunity for man with both Design and Production experience in Mil-T-27 type transformers.

MECHANICAL ENGINEERS
E.E. or M.E. with three years or more experience in airborne electronic packaging.

Please send your resume to:

Jim Eidson, Personnel Director

Varo Mfg. Co.
2201 Walnut Street Garland, Texas

An employment advertisement in this EMPLOYMENT OPPORTUNITIES section will help you find the engineers you need. It's an inexpensive, time saving method of selecting competent personnel for every engineering job in the electronic field.

SENIOR ENGINEERS
write to W. L. Webb
Bendix Guided Missiles

SYSTEMS ANALYSIS

A fundamental problem in the development of guided missiles is analytical dynamics. For this work, we need Senior Engineers who have extensive backgrounds in the over-all dynamic behavior of missiles and weapons systems, as well as airframe systems of a missile. They will work with analogue computers, digital differential analyzers, breadboards, prototypes of missiles and missile equipment, and special mechanical and electronic simulators.

MISSILE GUIDANCE

Senior Engineers, here is your opportunity to design and develop sub-systems, plan packaging components and supervise tests of prototype models for an extremely complex system of missile guidance, wherein experience in microwave, electronics, mechanics, and servo systems is essential. Particular emphasis is placed in solving vital problems relative to the performance of a missile under a variety of conditions and environments.

TEST EQUIP. SR. ENG.

Test equipment is important to us in that it measures our product. If you feel that you have better than average engineering imagination, if you have 8-10 years of experience backed by a solid grounding in fundamentals, and if you can effectively put this to work in directing the design of new improved test equipment — such as automatically programmed testers to go-no-go comparators suitable for factory use—contact us.

Also— Job Opportunities for Assistant Engineers Junior Engineers Technicians

A thirty-six-page book, "Your Future in Guided Missiles", describing in detail every phase of guided missile operation, will be sent to you on request. Write for your copy today.

At Bendix Products Division—Missiles Section, qualified engineers have the advantages of a compact, hard-hitting organization backed by all the resources of the nation-wide Bendix Aviation Corporation. If you can accept a challenge, want an opportunity to grow with a rapidly expanding technical business, and can accept the responsibilities that go with opportunity, I would like to hear from you personally—W. L. Webb, General Manager, BENDIX PRODUCTS DIVISION—MISSILES, 403A, Bendix Drive, South Bend, Indiana.

Your ENGINEERING career can begin when you move to MOTOROLA!

Maybe you've been an engineer for 2 or 20 years, but feel you've got just a job, not a career. If you yearn for a larger, more important challenge and all the benefits that go with it—security, good pay, professional respect and accomplishment—you can start carving a career for yourself at Motorola TODAY. Your future is insured at the company with a future . . . so join the move to Motorola. If you are an ELECTRICAL ENGINEER, MECHANICAL ENGINEER, PHYSICIST, PHYSICAL CHEMIST or METALLURGIST (Senior or Junior level) contact Motorola today.

CHICAGO, ILL. *Write to: L. B. Wrenn, 4501 Augusta Blvd.*, for challenging positions in Two-Way Communications, Microwave, Radar and Military equipment, Television (Color), Radio Engineering, and Sales Engineering.

PHOENIX, ARIZ. *Research Laboratory. Write to: R. Coulter, 3102 N. 56th St.* for outstanding opportunities in the development and production of Military equipment and Transistor products.

PHOENIX, ARIZ. *Transistor Laboratory. Write to: V. Sorenson, 5005 E. McDowell Road* for excellent opportunities for Transistor Application Engineers, Physical Chemists, Metallurgists, Physicists and Transistor Device Development Engineers.

RIVERSIDE, CAL. *Write to: C. Koziol, 8330 Indiana Ave.* This new modern research laboratory, located 65 miles from Los Angeles, needs men in Missile and Military equipment systems analysis and design.

write today for personal interview

MOTOROLA

TEST ENGINEERS

DO YOU LIKE YOUR ENVIRONMENT?

Investigate the Environment created at AC for its Advanced Development Programs on Missile Guidance and Aircraft Fire Control Systems.

OUR ENVIRONMENTAL LABORATORY

is one of the most Versatile Laboratories in the country and is in hte process of a Major, Permanent Expansion. Men hired will enjoy working with the finest of test equipment and facilities, together with top men of the field.

We are currently engaged in the following Types of Test Activities:

VIBRATION TESTING
COMPLEX WAVE ANALYSIS
LOW TEMPERATURE—ALTITUDE
HIGH TEMPERATURE
RELIABILITY EVALUATION
INSTRUMENTATION

Write MR. J. HEFFINGER,
Supervisor of Salaried Personnel

AC
The Electronics Div.
General Motors Corp.
Milwaukee 2, Wis.

advanced systems studies at ARMA

Continuing expansion of systems engineering requirements at Arma is creating several challenging openings at SUPERVISORY, STAFF and SENIOR ENGINEERING levels for airborne systems work in:

- Operational Requirements
- General Control and Instrument Studies
- Digital Computation
- Inertial Navigation
- Radar, I.R. and E.C.M.

Applicants with extensive technical background, sound administrative ability and skill in customer relations can qualify for these responsible positions.

Send resume in confidence to:
Manager of Technical Personnel
Dept. 674

ARMA
Division of
American Bosch Arma Corporation
Roosevelt Field, Garden City
Long Island, N. Y.

Engineers • Physicists

Both Defense and Industry Demand Specialists...

And, — here in BURROUGHS three ultra-modern Research Laboratories, such men who are truly dedicated to their profession are pursuing extensive basic and applied research programs . . . developing new Computing, Information Handling and Data Processing equipment to keep pace with our ever-expanding economy . . . providing BOTH business and government with the most efficient and effective electronic machinery ever devised by man.

Included in the many areas of research and development now under way are such well known governmental projects as —

IRBM • ICBM • SAGE

We have proved our abilities to handle such tasks as well as many other far reaching assignments. Today's demands for Engineers and Physicists are, therefore, based on a need to further supplement our efforts in these and allied fields.

LOOKING TO FUTURE EXPANSION

Burroughs invites inquiries from those qualified as:

ELECTRICAL ENGINEERS • MECHANICAL ENGINEERS
ELECTROMECHANICAL ENGINEERS • PHYSICISTS
MECHANICAL DESIGN ENGINEERS • MATHEMATICIANS

. . . in the following fields — Control Computers, Pulse Circuitry, Digital Computers, Optical Devices, High Speed Mechanisms, Guided Missiles, Solid State Circuitry, Electronic Packaging, Electrographic Recording Devices.

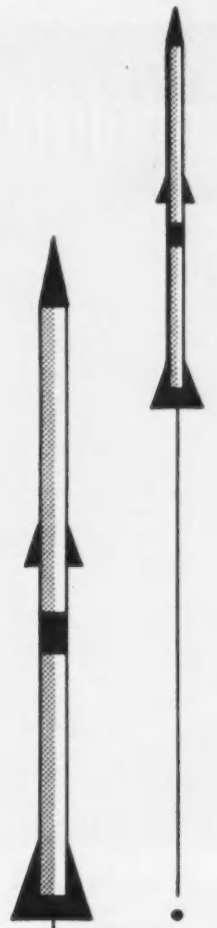

Pictured at right is the Burroughs E101, a desk-size computer that's as simple to operate as a conventional desk calculator — yet performs the automatic operations of a large-scale computer.

Send Complete Resume to
M. E. JENKINS
Placement Manager
For Interview
at Your Convenience

The FOREMOST NAME In Computation

Burroughs
CORPORATION
RESEARCH CENTER
PAOLI, PA., NEAR HISTORIC VALLEY FORGE

BURROUGHS MEANS BUSINESS

ELECTRICAL NAVIGATION COMMUNICATION FIRE CONTROL RADAR INSTRUMENT SYSTEMS INSTRUMENTATION SYSTEM ANALYSIS SYSTEM INTEGRATION ANTENNAS

electrical design

With 16 years leadership in the vital field of missile research and development, Northrop Aircraft offers unusual opportunities for advancement in the categories listed below. Here you can apply your skill and ability on the pilotless Snark SM-62 A-bomb carrier; on Northrop's new long-range interceptor project; and on numerous other weapon system assignments. Where better could you be, and grow, than with a pioneer? There's an interesting position for you in one of the following groups:

Electrical Group, which is responsible for the design of such things as power generation and distribution systems, rectifiers and power converters, and auxiliary systems as applied to manned aircraft, guided missiles and ground support equipment.

Communications and Navigation Group, which is responsible for the design of C/N systems in manned aircraft and installation of guidance systems in missiles. Considerable research effort is devoted to air-borne antennas and the elimination of radio interference in C/N systems.

Fire Control Radar Group, which is responsible for the installation and application of the most advanced type of fire control systems in fighter-interceptor aircraft. The work covers the installation of the equipment and associated wiring; continuing liaison with equipment manufacturers; preparation of system analysis and reports; and follow-up of system performance in the field as aircraft become operational.

Instrument Group, which is responsible for the design of instrument systems for manned aircraft and the installation of flight test instrumentation for guided missiles. Typical systems for which the group is responsible include: Flight Instruments; Engine Instruments; Instrument Panel Design; Automatic Pilots and Augmenters; Fuel Flow and Quantity Systems; and Integrated Electronic Instrument Systems.

All four basic groups originate their basic design and layouts, prepare production design releases and originate all types of tests to support flight, design and production requirements.

There are now a number of openings available for engineers in each of these groups at all experience levels. Too, there are opportunities for draftsmen with either electrical or mechanical experience.

If you qualify for any of these challenging opportunities, we invite you to contact Manager of Engineering Industrial Relations, Northrop Aircraft, Inc., Hawthorne, California, or call ORegon 8-9111, Extension 1893.

NORTHROP AIRCRAFT, INC.

PIONEERS IN ALL WEATHER AND PILOTLESS FLIGHT

8-A-47-A

Pinpoint!

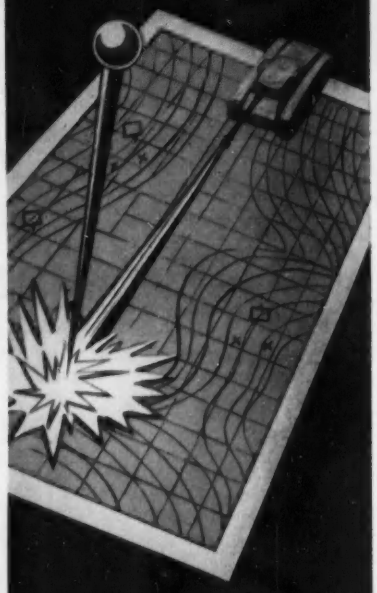

This field experiment by the Combat Operations Research Group involved time required for armor to locate and bring under fire anti-tank gun emplacements before being themselves hit . . . a typical example of vital problems challenging Technical Operations scientists at CORG.

PHYSICISTS
MATHEMATICIANS
and other SCIENTISTS

will find in CORG a small, growing research group, where freedom to think and unlimited creative opportunities are paramount. Contact with widely varied scientific disciplines, excellent living conditions, plus all usual benefits, are among CORG's advantages.

For information, write to

Dr. F. C. Brooks, Director
COMBAT OPERATIONS RESEARCH GROUP
Fort Monroe, Virginia

TECHNICAL OPERATIONS, Inc.

ENGINEERS

for immediate placement

ELECTRICAL ENGINEERS
MECHANICAL ENGINEERS
ELECTRONIC ENGINEERS
COMPUTER ENGINEERS
SOLID-STATE PHYSICISTS

Engineering at NCR:

1. Immediate, permanent positions in Mechanical Engineering, Electrical Engineering and Physics Research Divisions.

2. Engineering project work in Adding Machines, Cash Registers, Accounting Machines, Computers and related Data Processing Equipment in Dayton, Los Angeles, and Ithaca, New York.

3. Opportunities in design, development, production-engineering and packaging of mechanical, electronic, and electromechanical devices.

4. Some experience in development, design, and application of high-speed, light-weight mechanisms of the intermittent-motion type; or, experience in digital devices and components, is desirable, but not essential.

5. Ample training and indoctrination is available to all employees.

As an NCR engineer you, with your family, will enjoy:

1. UNLIMITED OPPORTUNITY in the broad, ever-expanding field of Business Machine Engineering and Research.

2. AN EXCELLENT SALARY, plus exceptional benefits of lifetime value for you and your family.

3. A RECREATIONAL PROGRAM for year-round enjoyment of the entire family, including a new NCR Country Club with 36 holes of golf, and a 166-acre employees' park for outings with swimming, boating, and supervised play for the children.

4. LIVING IN DAYTON . . . considered a clean, attractive, progressive city with outstanding school facilities.

5. YOUR WORK AT NCR with its friendly, family atmosphere, with its employee morale at a very high level, and with people who, like yourself, have decided to build their professional future with NCR.

National*

ACT AT ONCE — Send résumé of your education, experience and geographic preference to:

EMPLOYMENT DEPARTMENT, TECHNICAL PROCUREMENT SECTION 4

THE NATIONAL CASH REGISTER COMPANY
Dayton 9, Ohio

* Trade-Mark—Reg. U. S. Pat. Off.

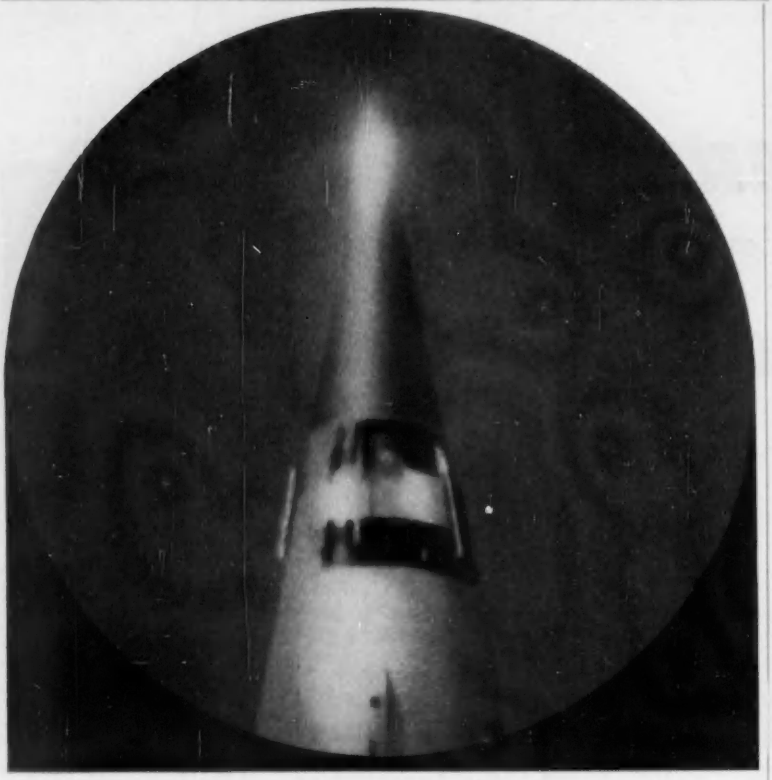

HOT TIP

(For Electronicists)

The big count-down has begun! In a matter of months, the tip of a Martin rocket will travel through space at a speed of 5 miles per second—and moments later the first man-made satellite will reach its orbit.

This event, the first of a series of 12 in the Martin-Navy VANGUARD program, will commence a new chapter in the short but exciting story of electronics.

Today, no other engineering organization in the world is more concerned with the outer-space electronics problems of tomorrow.

If you are interested, contact J. M. Hollyday, Dept. E-07, The Martin Company, Baltimore, Maryland.

MARTIN

opportunities in

OPERATIONS RESEARCH

The Operations Research Office of The Johns Hopkins University offers exceptional opportunities for scientists who prefer the challenge of operational problems of unusual scope and diversity to routine design and development work.

Our current research program has openings for men qualified in electronics and physics who are particularly interested in:

- Mathematical Analysis
- Determining applications of known photographic, accoustic, infrared and radar techniques to military problems
- Military communications systems planning, analysis and evaluation
- Electronic Countermeasures Analysis

Please send your resume to Research Personnel Officer

THE OPERATIONS RESEARCH OFFICE

THE JOHNS HOPKINS UNIVERSITY
7100 Connecticut Avenue
Chevy Chase, Md.

CAPACITOR ENGINEER

Experienced, paper and plastic dielectric capacitors, JAN specs, all replies confidential.

P-1921, Electronics
330 W. 42 St., New York 36, N. Y.

HRB

tangible benefits

To the electronic engineer and physicist with demonstrated creativity and sound technical background, HRB offers an abundance of benefits. You will share in such company policies as paid vacations, company-paid group life insurance, retirement plan and individual hospitalization and medical programs. Of course, salaries are excellent and location is ideal.

For application form, write:
Technical Personnel Officer
Haller, Raymond & Brown, Inc.
State College, Pennsylvania

DESIGN ENGINEERS • ELECTRICAL AND ELECTRONIC ENGINEERS

GENERAL ELECTRIC'S AIRCRAFT GAS TURBINE DIVISION

announces

NEW CONTROLS DEVELOPMENT PROGRAM

offers high calibre men opportunities in today's most challenging controls field

Controls systems for the advanced jet and rocket engines and nuclear installations developed at the Aircraft Gas Turbine Division of GE must meet the fantastic new requirements of supersonic and hypersonic speeds and terrific temperature and pressure extremes.

Now the AGT Division is centralizing and expanding all development projects for engine controls systems and accessories from preliminary design right through the prototype stage. In a short time production control and manufacturing responsibility will also be assumed by this new component.

This extensive new operation creates a ground floor opportunity for men with sharp, perceptive engineering minds and the necessary technical and scientific qualifications. Here you'll work under optimum conditions, in closely-knit Design Teams of 7 men or less. High-level specialists will assist in over-all strategy, but every engineer is responsible for *his* phase of a project. His contributions stand out clearly. As a result, *he can rise to the top fast.*

LOOK INTO THESE IMMEDIATE OPENINGS

Advanced System Development • Project Design and Development • Components Development (sensors, computers, actuators, etc.) • **Engineering Analysis** (parametric analysis, analogue computation, stability studies, engine simulation analysis, mathematical design analyses, dynamic specifications for controls requirements) • **System Studies • Equipment Facilities Development** (instrumentation, test engineering and evaluation) **Prototype Development and Test • Advanced Development of the Art of Control Mechanization** (hydro-mechanical, electro-mechanical and magnetic amplifier)

Please send resume in confidence to: **Mr. Mark Peters**
Technical Recruiting Building 100

AIRCRAFT GAS TURBINE DIVISION

GENERAL ELECTRIC

Cincinnati 15, Ohio

MEMO from the desk of W. FREDERICK GOODYEAR
Chief Engineer, Instrument Division

Tracerlab KELEKET

Dear Ken:

It was good to hear from you and learn that you might be interested in changing jobs.

You mentioned that you had a few offers and were "sort of shopping around". If that's what you're doing Ken, very frankly, we're not interested.

Let's not kid ourselves. Although there are plenty of jobs around, good ones are still hard to find. The really important factors that make for job satisfaction, can't be found everywhere. Sure, the "ads" all talk about opportunity, challenge, frontiers to conquer, special benefits, etc., etc., but...

If you're sincere about a career opportunity, we want you to consider the possibility of joining Tracerlab. Ours is one company (I'm sure there are others) where the atmosphere is right. We're a first-name, shirt-sleeve company. We're not chained by tradition or by static thinkers. If you have an idea, and it's a good one, you'll see it as a finished product.

Tracerlab is young, only ten years old. We were the first firm to enter this field (nucleonics, basically electronic devices), and we're still leading the pack. We're used to moving fast. We have to, to stay ahead. We continue to expand (our new Waltham plant opens soon), but we're small enough to recognize, encourage and reward individual effort. Here you not only get a slap on the back for a good job, but also an increased pay check and a desk load of additional responsibilities.

Just a word about openings, Ken. We have only a few (not hundreds), and they're important ones. Most critical is our need for a Senior Electronic Engineer to supervise a small development group, working on some pretty complex electronic systems. To back him up, we'd like to find a couple of top-flight Engineers with some background in pulse techniques. A Mechanical Engineer to work as a consultant on all mechanical problems will round out the team.

That's it! Let me know what you think, and pass the word along to any good men you might know.

Best Regards,

Fred

P.S. Naturally we'll take care of any interview expenses and help on relocation.

Tracerlab inc.

Write:

130 HIGH STREET
BOSTON 10, MASS.

FOR RATES OR INFORMATION

About Classified Advertising,

Contact The McGraw-Hill Office Nearest You.

ATLANTA, 3
1321 Rhodes-Haverty Bldg.
WAlnut 5778
W. LANIER

BOSTON, 16
350 Park Square
HUbbard 2-7160
H. J. SWEGER

CHICAGO, 11
530 No. Michigan Ave.
MOhawk 4-5800
W. HIGGENS

CINCINNATI, 37
1915 Rockingham Ave.
REdwood 1-4537
W. GARDNER

CLEVELAND, 15
1510 Hanna Bldg.
SUperior 1-7000
W. SULLIVAN

DALLAS, 2
Adolphus Tower Bldg., Main & Akard Sts.
PRospect 5064
G. JONES

DETROIT, 26
856 Penobscot Bldg.
WOodward 2-1793

LOS ANGELES, 17
1125 W. 6th St.
MAdison 6-9351
C. W. DYSINGER

NEW YORK, 36
330 West 42 St.
LOngacre 4-3000
S. HENRY
D. COSTER
R. LAWLESS
R. HATHAWAY

PHILADELPHIA, 3
17th & Sansom St.
RIttenhouse 6-0670
E. MINGLE
H. BOZARTH

ST. LOUIS, 8
3615 Olive St.
JEfferson 5-4867
W. HIGGENS

SAN FRANCISCO, 4
68 Post St.
DOuglas 2-4600
R. C. ALCORN

5:00 p.m.

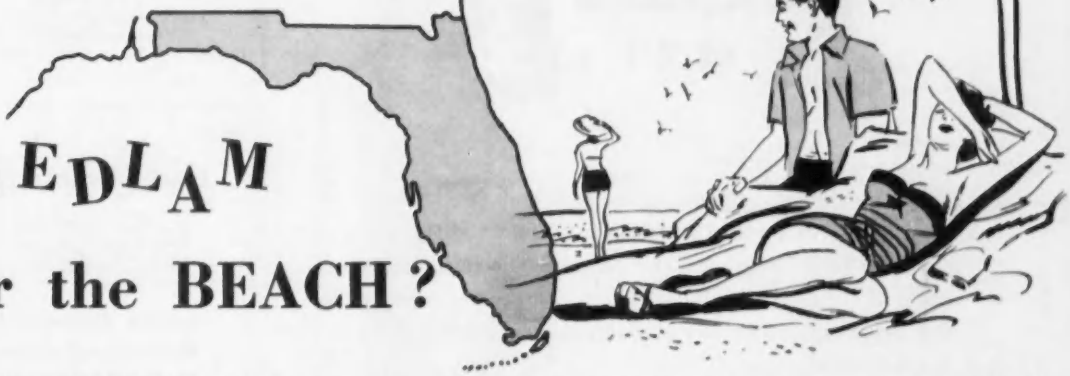

BEDLAM or the BEACH?

Here at RADIATION we don't have to spend hours fighting traffic to get from work to home or from home to beach or golf course or fishing spot. We live and work in the center of a year-round outdoor recreation area with everything within a very few minutes drive. This convenience, plus the other advantages of Florida living, can mean a lot to you and your family.

Location is only one of the advantages of working for RADIATION, however. The opportunity is here for professional growth and recognition in a dynamic, expanding organization which offers excellent living and working conditions and extensive employee benefits. Engaged in research and development in electronics, avionics, and instrumentation, we have had a leading part in many of today's outstanding advancements . . .

- CORE-MEMORY CIRCUIT DEVELOPMENT
- ANTENNA DESIGN AND DEVELOPMENT
- SPECIAL WEAPON INSTRUMENTATION
- TRANSISTOR CIRCUIT DEVELOPMENT
- ANALOG-TO-DIGITAL CONVERSION
- MISSILE CHECKOUT EQUIPMENT
- DIGITAL DATA RECORDING
- PULSE CODE TELEMETRY
- LOW-LEVEL SWITCHING
- MAGNETIC RECORDING
- FM-FM TELEMETRY

Openings presently exist in these fields for electronics engineers ranging from juniors to section heads. Salaries and assignments are fairly based on experience and background. You are invited to submit your qualifications with the assurance of prompt and careful consideration.

Inquiries and resumes should be addressed to:

Ralph L. Bickford, Director of Personnel
P.O. Box 37
Melbourne, Fla.

RADIATION Inc. Melbourne, Fla. Orlando, Fla.

Electronics • Avionics • Instrumentation

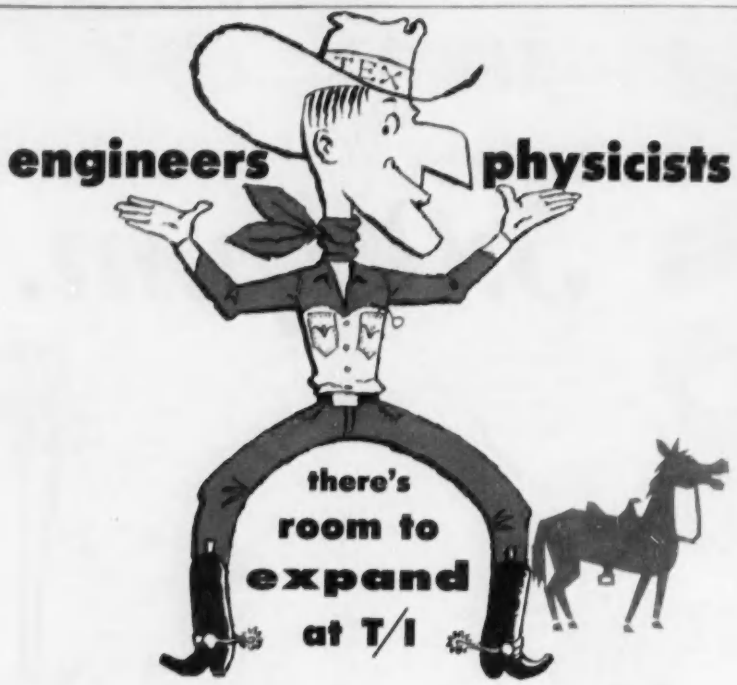

Texas Instruments expanding research and development programs have opened outstanding opportunities for physicists (solid state) and electronics engineers. TI offers you real chances for advancement in a rapidly-growing industry. Positions are now available in the following fields of engineering:

Transistor device development
Transistor circuit applications
Automation and test equipment design
Microwave component development
Infrared radiation development
Transformer design
Resistor engineering
Electrical meter design
Production planning and control

At Texas Instruments you will have the long-range stability of a 25-year-old firm with many notable "firsts" in the fields of semiconductors, geophysics, radar, infrared radiation, and others. You will enjoy the many living, cultural, and recreational rewards of the sunny Southwest. We would be glad to discuss these career opportunities with you . . . our profit-sharing plan and other personnel advantages at Texas Instruments.

TEXAS INSTRUMENTS
INCORPORATED
6000 LEMMON AVENUE DALLAS 9, TEXAS

ELECTRONIC ELECTRICAL ENGINEERS

Permanent positions are available at all levels of experience at both the Chicago and Arizona locations of an internationally known research and development organization. We need qualified personnel to work in:

Electronic Countermeasures
Microwaves
Radar
Antennas and Propagation
Radio Interference
Communications Systems

Here is an excellent opportunity to join the staff of a progressive organization, work on challenging and diversified research programs, receive liberal educational benefits, and enjoy optimum professional associations. New air-conditioned facilities are under construction, and will be available shortly.

Write to

J. A. Metzger
ARMOUR RESEARCH FOUNDATION
of Illinois Institute of Technology
10 West 35th St. Chicago 16, Illinois

AERIAL

Electronic Mapping

is a Field which offers challenging opportunities to engineers and technicians with airborne pulse circuit experience. Vacancies for:

RADAR ENGINEERS
Evaluation Engineers
Shoran Maintenance

Attractive starting salaries with advancement potential. Bonus for Foreign projects. Write today describing your experience and salary requirements to:

Aero Service Corp.
210 E. Courtland St. Phila. 20, Pa.

RELIABILITY SUPERVISOR

to $12,000

New reliability program to be organized by major electronics company. Man with experience in reliability field is needed to take complete charge of organizing group and directing its work.

Reply in confidence to:

P-2035, Electronics
330 W. 42 St., New York 36, N. Y.

Openings in Florida . . . Instrumentation Engineers . . . up to $11,000

Electrical Engineers with experience in Radar, Telemetry, Timing or Communications.

•

Challenging problems associated with the precision instrumentation for tracking of high velocity missiles being tested over a course that extends thousands of miles.

•

Pleasant family living on Florida's Central East Coast. Unprecedented opportunities with world leader in electronics.

•

To arrange confidential interview, send resume to Mr. H. C. Laur, Dept. N-19G Missile Test Project P. O. Box 1226 Melbourne, Florida

ENGINEERING UNLIMITED

. . . an established concept at Convair-Pomona where your opportunities in the career of your choice are virtually unlimited. Work in the finest engineering facility in the country at America's first exclusive Guided Missile plant. Ultra-modern surroundings, completely air-conditioned, in beautiful Pomona only minutes from Los Angeles, the mountains, the seashore or desert recreation. Here is country living near the city at its best:

Excellent opportunities available now in:

ELECTRONICS
DYNAMICS
AERODYNAMICS
THERMODYNAMICS
OPERATIONS RESEARCH
HYDRAULICS
MECHANICAL DESIGN
LABORATORY TEST ENGINEERING

Generous travel allowance to Engineers who are accepted. Write now enclosing a complete resume to:

Employment Dept. 3-G

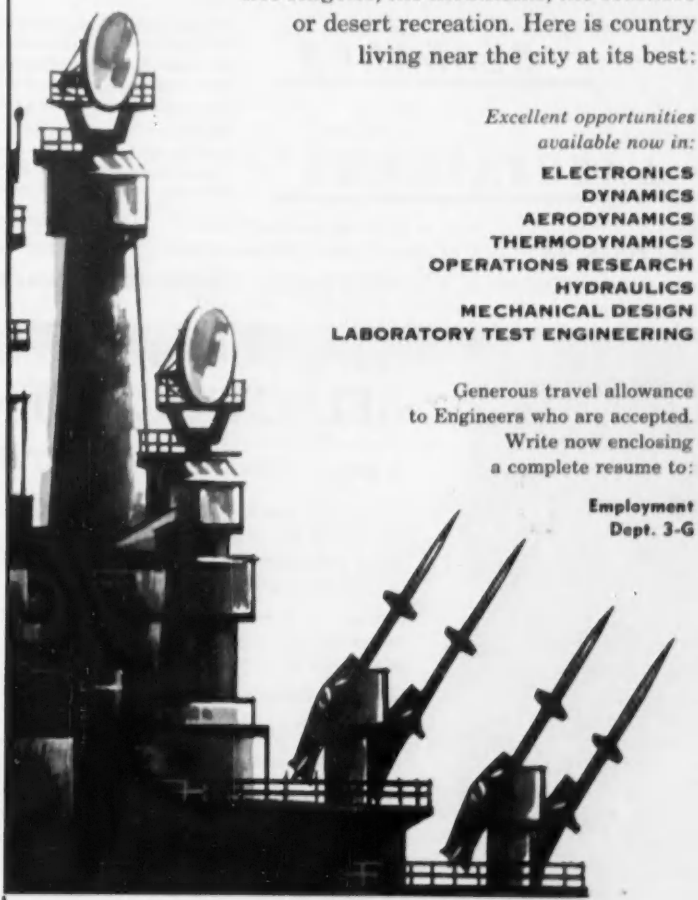

CONVAIR
A DIVISION OF
GENERAL DYNAMICS
CORPORATION
POMONA
CALIFORNIA

COOK RESEARCH LABORATORIES

THE FIELD OF RESEARCH OFFERS Satisfying CAREERS

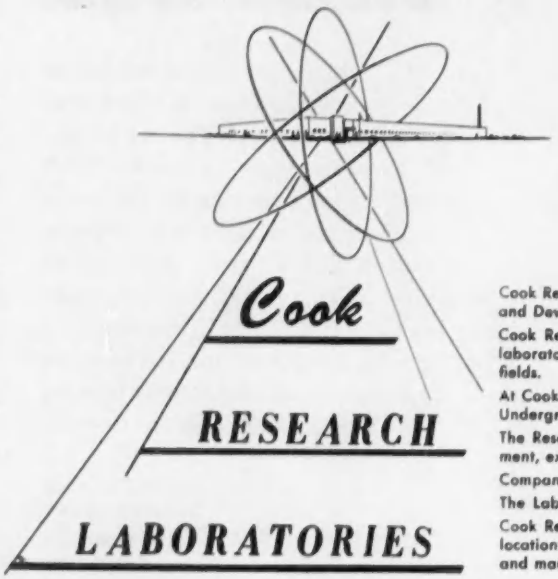

Immediate Openings In—

RADAR — COMMUNICATIONS — MICROWAVE TECHNIQUES — INFORMATION THEORY — CIRCUIT DESIGN — TELEMETERING — PULSE TECHNIQUES — SERVO — FIRE CONTROL — WEAPONS SYSTEMS — MATHEMATICAL ANALYSIS FOR NUMERICAL COMPUTATION — THERMODYNAMICS — AERODYNAMICS — AIRCRAFT INSTRUMENTATION — NUCLEAR PHYSICS — MECHANICAL DESIGN — TEST ENGINEERS, COMPONENT & EVALUATION.

Cook Research Laboratories offers outstanding opportunities in the field of Research and Development for Engineers and Physicists at both the Senior and Junior levels.

Cook Research maintains one of the nation's foremost research and development laboratories and has on its staff men who are nationally known in their respective fields.

At Cook Research, employees are encouraged in the publishing of technical papers. Undergraduate and graduate work is fully subsidized by the company.

The Research division offers highly diversified work in both research and development, excellent salaries and working conditions.

Company products are to be found on all commercial and military aircraft.

The Laboratory activities ARE WORLD WIDE IN SCOPE.

Cook Research Laboratories are located in the northwest suburbs of Chicago. This location is conveniently located to many fine universities, civic and shopping centers and many excellent resort areas.

Contact
D. M. HALLIDAY

• 8100 N. Monticello Ave.
Skokie, Illinois KEystone 9-2060

• A DIVISION OF COOK ELECTRIC COMPANY
2700 N. Southport Ave., Chicago, Illinois

ELECTRICAL AND MECHANICAL ENGINEERING AND MANUFACTURING SINCE 1897

ELECTRICAL ENGINEERS:

A Career at Electric Boat... Is An ADVENTURE in Engineering

In the past several years, Electric Boat has been making one headline after another as the nation's first adaptor of nuclear power for propulsion. The Electric Boat-designed and built atom submarines, Nautilus and Seawolf, are already accomplished fact.

Behind the headlines, the work of designing even more advanced atomic submarines goes on. Every day, Electric Boat engineers are coming to grips with problems in nucleonics that pave the way for applications in other fields.

There is room — and opportunity — for more engineers able to cope with these problems. Current openings are for Electrical Engineers versed in servomechanisms, circuitry, motors and generators, radar and sonar, or electromechanical systems.

These jobs offer more than engineering adventure. There's common-sense practicality involved, too. Electric Boat's backlog of orders and years-ahead plans; its record stable engineering employment; its sponsorship of advanced study at leading universities and within the plant are some of the practical features. New England living on the shores of Long Island Sound is another.

To find out more details about these opportunities, write us details of your background and experience including initial salary requirements. Interviews will be arranged promptly for qualified applicants. Please address **Peter Carpenter.**



ELECTRIC BOAT
DIVISION OF GENERAL DYNAMICS CORPORATION
GROTON, CONNECTICUT

ELECTRICAL ELECTRONIC and MECHANICAL ENGINEERS

Excellent opportunities in the field of

AUDIO AMPLIFIER DESIGN
SERVO AMPLIFIER DESIGN
COMPONENT DEVELOPMENT
EQUIPMENT DESIGN

Senior and Junior Engineers

Write, giving full details to:
Personnel Director, Dept. B

GIBBS MANUFACTURING AND RESEARCH CORPORATION
Janesville, Wisconsin

COMMUNICATIONS ENGINEER

Engineer with degree in communications and 1-3 years experience in telephone industry for interesting position. Will consider 2 or 3 years college with several years experience. Diversified and independent work covering all types of commercial communication systems and apparatus. Location New York. Submit complete application. SEND REPLY TO:
P-1927, Electronics
330 W. 42 St., New York 36, N. Y.

FREE FOR ENGINEERS

ELECTRONIC—MECHANICAL—ELECTRICAL—FIELD—METALLURGICAL

Let Harper Associates' Personnel Specialists market your ability.

Our nationally known clients range coast to coast, pay top salaries and all agency fees for engineers.

Regardless of the extent of your experience, let us analyze your needs and introduce you to some of the best job opportunities in the country.

We have many openings listed with us paying from: $5000. to $25,000.

Let us get started for you! Mail two resumes to:

B. D. LORDE
HARPER ASSOCIATES
180 BROADWAY
N. Y. 38, N. Y.

CHEMICAL — MATH — RADAR — DESIGN — INDUSTRIAL — SALES

FOR ENGINEERS FREE

WE'RE GOING PLACES

HOW ABOUT YOU?

Raytheon, a leader in anti-aircraft missile and airborne radar design, announces a broad expansion program creating excellent opportunities for engineers at all levels. As prime contractor to the Navy, Army, and Air Force on weapons systems programs, Raytheon has overall responsibilty for system development encompassing the following fields:

MISSILES

SPARROW III SYSTEM (Navy)
HAWK I SYSTEM (Army)

NAVIGATION

DOPPLER NAVIGATORS (Air Force and Navy)
ALTIMETERS (Air Force and Navy)
AIRCRAFT CONTROL SYSTEMS

RADAR

COHERENT AI RADARS (Air Force and Navy)
SEARCH AND TRACKING RADARS (Army)
COUNTERMEASURES (Air Force)

The Missile Systems Division of Raytheon has plants at Bedford, Mass., Maynard, Mass., Lowell, Mass. with flight test facilities at Oxnard, Calif. and White Sands, New Mexico. The plants are located in areas offering a choice of urban or country living with excellent housing at a reasonable cost. Top-flight engineers at all levels are needed for the direction and implementation of advanced development work in the following fields:

COHERENT RADAR SYSTEMS
SYSTEMS ANALYSIS
AERODYNAMICS
STRUCTURES
OPERATIONS ANALYSIS
HEAT TRANSFER
CIRCUIT DESIGN
AIRBORNE COMPUTER DESIGN
MICROWAVE
MECHANICAL DESIGN
ELECTRONIC PACKAGING
PRECISION SERVO SYSTEMS

RAYTHEON MANUFACTURING COMPANY

RAYTHEON MISSILE SYSTEMS DIVISION

BEDFORD, MASS.

ELECTRICAL ENGINEERS
PHYSICISTS

Immediate openings in fast-growing field of

SEMICONDUCTORS

Permanent career positions with General Electric in Syracuse, New York . . . for development, instrumentation, design and processing of transistors and rectifiers.

Unusual opportunity for electrical engineers and physicists with B.S., M.S. or Ph.D. degrees.

Chance to work with the industry's leading engineers and scientists . . . under ideal working conditions in modern laboratories, fully equipped with all facilities.

To learn more about your G-E opportunity to live and work in the heart of New York's vacation land, write today to:

Mr. M. D. Chilcote,
Department 7-56-E

Electronics Park
Syracuse, New York

GENERAL ELECTRIC

HRB

smaller company?

HRB is a small company. It has remained small by choice. Electronic engineers and physicists will find country quiet and metropolitan opportunity at HRB. Individual recognition for creative initiative is only one of the many advantages offered. A sincere interest in the progress of each engineer is standard policy in this internationally recognized "small" research company.

For application form, write:
Technical Personnel Officer
Haller, Raymond & Brown, Inc.
State College, Pennsylvania

MANUFACTURER'S REPRESENTATIVE

For line of paper and plastic dielectric condensers. Mid-West area. Must be able to sell the T.V. industry.

RW-2117, Electronics
Class. Adv. Div., P.O. Box 12, N.Y. 36, N.Y.

ELECTRONIC AND RADIO ENGINEERING

Fourth Edition

Completely revised edition of Terman's RADIO ENGINEERING. Basic guidance covers all phases of electronic and radio engineering, including vacuum tubes, transistors, electronic circuits, and radio systems. Provides essential data on circuit theory, electronic devices, antennas, wave propagation, transmitters, receivers, television, radar, and radio navigation aids. Includes new material on pulse techniques, microwave tubes, semi conductors and transistors, FM, color television, and others. Organized for quick reference. **By Frederick E. Terman, Dean, School of Engrg., Stamford Univ. 1078 pp., 688 illus., $12.50**

FUNDAMENTALS OF TELEVISION ENGINEERING

Up-to-date, theoretical treatment of the entire field of television. Analytical in approach, it covers in detail system concepts as well as circuits and techniques. Treats monochrome and color systems concurrently. Emphasis is on the television system itself, requirements to be met in achieving quality, and the analysis and design of the many component parts which make up the system. **By G. M. Glasford, Assoc. Prof. of Elec. Engrg., Syracuse Univ. 642 pp., 565 illus., $12.50**

LINEAR FEEDBACK ANALYSIS

Presents a systematic treatment for negative feedback circuit research and applications. Focuses on problem of stability of the feedback loop. Discusses causes of instability, using three methods of approach. Contemporary network analysis methods, feedback concepts, and tube amplifying stage characteristics are fully described. Application of the Laplace transform, with examples, is outlined. Includes material not presented in book form before, such as analyses of single- and multi-stage amplifiers. **By J. G. Thomason, Radar Research Estab., Malvern, England. 355 pp., 236 illus., $8.50**

CONTROL OF NUCLEAR REACTORS AND POWER PLANTS

Provides a servo-engineering approach to the physics problem of safety controlling nuclear reactors. Describes responses of reactors in engineering terminology and treats reactors as control elements in larger systems. Several systems are presented for research reactors and for power producing types. Gives special attention to operating control problems during startup, power level operation, and shutdown. Shows how simulators are designed, whereby control devices may be checked in laboratory without using reactor. **By M. A. Schultz, Atomic Power Div., Westinghouse Elec. Corp. 313 pp., 232 illus., $7.50**

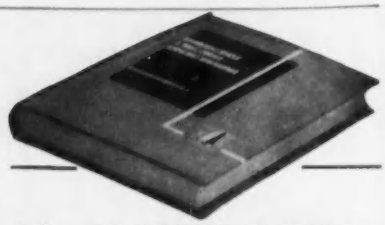

RELIABILITY FACTORS FOR GROUND ELECTRONIC EQUIPMENT

JUST PUBLISHED! Methods and working data to help designers build greater reliability into military electronic equipment. Pinpoints causes of poor reliability. Discusses electrical and mechanical factors, human engineering, and components. Gives results of failed-parts studies. **Edited by Keith Henney, 280 pp., 196 illus., $7.50**

ELECTRONIC ENGINEERING

JUST PUBLISHED! Techniques of circuit analysis for radar, television, electronic control, instrumentation, and computers. Gives alternate methods for many circuits, and provides means for combining circuits of different types. Examples relate techniques to practice. Discusses solid state theory, and transistors as circuit elements. **By Samuel Seely, Prof. & Chrmn., Dept. of Elec. Engrg., Syracuse U. 525 pp., 782 illus., $8.00**

RANDOM PROCESSES IN AUTOMATIC CONTROL

JUST PUBLISHED! Presents theory and practical techniques for analyzing linear control systems subjected to random inputs. Treats concepts of probability and random time functions in detail. Develops techniques for designing systems containing constant and time-varying components. Provides computational methods for use on computers. **By J. H. Laning, Jr., and R. H. Battin, Instrument. Lab., Mass. Inst. of Tech. 429 pp., illus., $10.00**

AN INTRODUCTION TO REACTOR PHYSICS

Covers elementary nuclear physics and theory of thermal reactors, giving background for reactor design. Calculations, shielding, instrumentation, and radiation are treated. Evaluates a gas-cooled, graphite moderated, natural uranium reactor. Sufficient theory developed for understanding problems in designing all types of thermal reactors. **By D. J. Littler and J. F. Raffle, British Atomic Energy Res. Estab. 196 pp., illus., $4.50**

THE MIGHTY FORCE OF RESEARCH

JUST PUBLISHED! FORTUNE Magazine editors tell how 4 billion dollars for research is opening new business opportunities. Reveals who does research, who pays, how it is carried out, what is accomplished, and *what it means to you.* **By Editors of FORTUNE. 308 pp., 21 illus., $4.00**

10 DAYS' FREE TRIAL

McGraw-Hill Book Co., Industrial and Business Book Dept., 327 W. 41st St., N. Y. C. 36

Send me book(s) checked below for 10 days' examination on approval. In 10 days I will remit for book(s) I keep, plus few cents for delivery cost, and return unwanted book(s) postpaid. (We pay delivery costs if you remit with this coupon—same return privilege.)

- ☐ Terman—**Electronic and Radio Engineering**—$12.50
- ☐ Glasford—**Fundamentals of Television Engineering**—$12.50
- ☐ Thomason—**Linear Feedback Analysis**—$8.50
- ☐ Schultz—**Control of Nuclear Reactors and Power Plants**—$7.50
- ☐ Henney—**Reliability Factors for Ground Electronic Equipment**—$7.50
- ☐ Seely—**Electronic Engineering**—$8.00
- ☐ Laning & Battin—**Random Processes in Automatic Control**—$10.00
- ☐ Littler & Raffle—**An Introduction to Reactor Physics**—$4.50
- ☐ FORTUNE—**The Mighty Force of Research**—$4.00

(Print)
Name .....
Address .....
City .....Zone....State.....
Company .....
Position .....

For price and terms outside U. S. write McGraw-Hill Int'l., NYC FL-7

WRITE FOR YOUR

FREE COPY

This comprehensive report outlines the fascinating story of the people, projects, facilities, and working climate that compose the Cornell Aeronautical Laboratory. It tells of the professional challenges met by C.A.L.'s engineers and scientists, and it shows why C.A.L. is one of the nation's respected research centers.

WRITE J. L. KANE
CORNELL AERONAUTICAL LABORATORY
OF CORNELL UNIVERSITY
BUFFALO 21, NEW YORK

APPLIED RESEARCH

ENGINEER for R & D program with broad background of experience in communications systems development, ranging from audio to 500 megacycles. Must have ability in mathematical analysis and modern laboratory techniques. Science degree from recognized university essential.

Prefer man over 35 with several years experience with large commercial organization.

HALLAMORE ELECTRONICS COMPANY
8352 Brookhurst Avenue
Anaheim, California

ENGINEER—E E

Product development for a leading printed Circuit Co. Salary commensurate with exp. Call or send resume.

PHOTOCIRCUITS CORP.
Glen Cove, L. I., N. Y. (Mr. Pierce) FL 7-8100

TOP careers for TOP ENGINEERS at "FTL"

One of the world's great centers of electronic research and development

Top opportunities for achievement and recognition are available at Federal Telecommunication Laboratories, a division of the world-wide International Telephone and Telegraph Corporation.

Here, a man works with the finest facilities . . . with recognized leaders in his field. As a part of FTL's long-range development program he has a dependable road into the future . . . a future of stability, achievement, and commensurate rewards.

Why not write today for your copy of the booklet that tells the fascinating story of FTL . . . the broad and generous employee benefits . . . the many opportunities for permanence and satisfying progress.

Interesting Assignments in:

Radio Communication Systems • Electron Tubes
Microwave Components • Electronic Countermeasures
Air Navigation Systems • Missile Guidance
Transistors and other Semiconductor Devices • Computers
Antennas • Telephone and Wire Transmission Systems

FTL's famed Microwave Tower —28 minutes from N. Y. C.

MAIL THIS COUPON TODAY

Federal Telecommunication Laboratories
500 Washington Avenue, Nutley, N. J.

Please send a copy of your booklet describing opportunities at FTL.

Name_____

Address_____

City_____ Zone____ State_____

FTL
A DIVISION OF IT&T

Federal Telecommunication Laboratories
A Division of INTERNATIONAL TELEPHONE AND TELEGRAPH CORPORATION

Design and Engineering Opportunities for

Electronic Engineers — **Design Engineers**
Electrical Engineers — **Field Engineers**
Project or Systems Engineers

Kollsman's expansion in the airborne equipment field has created a need for additional engineers and electro-mechanical designers, and offers unusual scope to alert, capable and enthusiastic professional men. For engineers, a degree in Mechanical Engineering, Electronic Engineering or Physics is necessary, plus experience or a strong interest in airborne instrumentation or allied fields.

America's finest aircraft instruments are designed at Kollsman, where the congenial atmosphere and modern facilities contribute to an environment in which a man can do his best work.

Please submit resumes to T. A. DeLuca

kollsman INSTRUMENT CORPORATION

80-60 45th AVENUE, ELMHURST, NEW YORK • SUBSIDIARY OF *Standard* COIL PRODUCTS CO., INC.

YOU'LL LIKE MASSACHUSETTS...

Just as you'll like the challenging engineering jobs with a future available at CBS-HYTRON's Massachusetts plants and laboratories. You can live near the ocean and also enjoy winter sports at their best in a state renowned for its scenic beauty. All of our plants are within easy reach of the educational and cultural centers in Boston.

We need engineers in these rapidly expanding areas:

- Research and Development
- Commercial Engineering
- Factory Engineering
- Semiconductor Applications
- Quality Control

Send your resume or request for additional information to:
ALBERT NELSON
Director of Personnel

ELECTRON TUBES
CBS
SEMICONDUCTORS

CBS-HYTRON, Danvers, Mass
A Division of Columbia Broadcasting System, Inc.

PERSONNEL MANAGERS

Looking for Engineers . . . Technicians?

Write for free copy of

"RESERVOIR of ENGINEERS and TECHNICAL MEN"

The engineers and technicians you want to reach are gathered in convenient, compact groups—as this 16-page booklet points out.

It keys the job titles these men hold to the McGraw-Hill publications they read for on-the-job information. It explains how you can make contact . . . channel, concentrate your employment advertising to just the men with the job qualifications you want . . . without wasting advertising money for higher-priced space in publications with general circulation, in which you pay for perhaps 999 unqualified readers for every 1 who may meet your job requirements.

Write for your free copy to
Classified Advertising Division
McGraw-Hill Publishing Co., Inc.
330 W 42nd St., N. Y. 36, N. Y.

ENVIRONMENTAL ENGINEERS

Challenging opportunities in environmental research and development. Interesting assignments in the field of inertial navigation including:

Shock and Vibration studies
High and Low Temperature Investigation
Component evaluation

Salary—up to $12000
(Commensurate with experience)

Please send resume in confidence to:

Manager of Technical Personnel, Dept. 674

ARMA

Division American Bosch Arma Corp.
Roosevelt Field, Garden City, L. I., N. Y.

COMMUNICATIONS ENGINEERS and TECHNICIANS

EXCELLENT SALARIES
MINIMUM PREREQUISITES

ENGINEER — EE Graduates with 3 years experience

TECHNICIAN — 2 years technical school in communications and 3 years experience.

Require installation adjustment and maintenance experience with communication receivers and associated terminal equipment. Also, men with similar experience with high-powered transmitters, antennas, transmission lines.

Must be willing to travel in United States and Overseas.

Page Communication Engineers, Inc.
710 Fourteenth St., N.W., Washington 5, D.C.

HRB e.e.'s and physicists

A rewarding future is waiting for you at HRB. You will live in State College, a few minutes walk from the Pennsylvania State University. Located among the scenic Nittany mountains of central Pennsylvania, State College offers the congenial atmosphere for young family growth. Some of the finest hunting and fishing areas in the United States are located in the area. HRB, one of the country's fastest growing research companies offers excellent salaries and generous company benefits.

For application form, write:
Technical Personnel Officer
Haller, Raymond & Brown, Inc.
State College, Pennsylvania

LAND-AIR, INC.

SUBSIDIARY OF CALIFORNIA EASTERN AVIATION, INC.

OFFERS EMPLOYMENT

IN

NEW MEXICO

Interesting positions open on U. S. Army-Air Force integrated missile-test range working for private contractor.

Work located near cities of Alamogordo and Socorro, New Mexico. Dry climate, pleasant communities, good schools, outdoor and indoor duties. Congenial working groups:

ENGINEERS—

We have several excellent opportunities for Electronic Engineers, with some experience, to work with various instrumentation systems used in guided missile testing. Graduate engineers will find this work both challenging and interesting. Lab positions open in development of instrumentation systems. Pertinent experience desired. Opportunity exists for gaining experience in advanced electronic techniques including, pulse, digital, computer, C-W, microwave, telemetry, analog, controls, etc.

TECHNICIANS—

Electronic Technicians needed for operation, maintenance, and improvement of electronic, electro-optical-mechanical instrumentation devices used in obtaining data from guided missile tests. Very interesting, mainly outdoor work—some lab work, requires good physical condition, good vision, driving ability, plus technical background. Radio-T.V. experience or industrial electronics experience helpful. Some positions require mechanical background for precision instrument work.

NOTE OUR EMPLOYEE BENEFITS:

1. Excellent pay
2. Paid vacation (2 weeks per year)
3. Paid accident & health (income) insurance
4. Paid hospital, surgical, polio & life insurance
5. Excellent contributory insurance plan for dependents
6. Merit system of pay raises
7. Travel and moving expense
8. Paid holidays
9. Bonus—contingent upon company profits

YOUR CONTACT IS:

Mr. W. J. McClarin, Personnel Director, Land-Air, Inc.,
P. O. Box 394, Holloman, New Mexico.

ELECTRONIC DESIGNER

Development and design of industrial measurement and control equipment for the continual process industries. Unusual opportunities in a rapidly expanding firm and industry for personal growth through technical "know how" and hard work. BSEE or MSEE required. 1 to 10 years experience. Servo and feedback experience helpful. Send resume to: 1205 Chesapeake Ave., Columbus 5, Ohio.

Industrial Nucleonics Corporation

Electronic Engineers

To those interested in extending the "State of the Art" at VHF and UHF—I. F. I. offers challenging opportunities on long range programs. Wide band experience particularly useful, but not necessary. Expanding electronics firm. Exceptional fringe benefits.

Send resume or phone

Instruments for Industry, Inc.
150 Glen Cove Rd., Mineola, N. Y.
Mr. T. C. Villa — Pioneer 2-5300

ELECTRONIC ENGINEERS

RESEARCH DEVELOPMENT

Expansion of our engineering department requires electronic engineers with radar, servo, sonar or transistor circuit experience. Excellent opportunity for advancement with top-calibre associates. New modern plant in the suburbs with ideal laboratory facilities and well-trained technical assistants.

Other Opportunities in the following areas:

- **TECHNICAL WRITERS**
- **DRAFTING** Electrical Layout
- **DETAILING** Electrical - Mechanical

DESIGN ENGINEERS

Must have EE degree or equivalent, with 3-5 years experience in one of the following:

— Flight Simulators
— Analog Computers
— Radar & Sonar Trainers
— Radar Guidance & Fire Control Systems
— Redesign, Modification & Testing of Radar & Electronic Systems
— Electronic Installation & Maintenance
— Coil & Transformer Design
— Packaged Power Supplies

Other Openings For:

COMMUNICATIONS EQUIPMENT DESIGNERS

COMPUTER DESIGNERS

FIELD ENGINEERS

(*) Must have E.E. degree or equivalent with 5-10 yrs. experience.
Positions located throughout USA

LOCATION:
On U. S. Highway 22, thirty miles (45 minutes) from New York City.

ENVIRONMENT:
One of the finest plants of its kind . . . spacious, modern, air-conditioned. Conducive to bringing out the best of your abilities!

ABOUT THE COMPANY:
Organized in 1945. Engaged in research, design and development for the Armed Services.

ITS BENEFITS:

- Pension Plan
- Group Life Insurance
- Paid Holidays
- Paid Sick Leave
- Paid Vacations
- Education & Tuition Assistance
- Other Group Insurances

Interviews in Your Community by Appointment

Send resume, write or call for additional information.

STAVID
ENGINEERING
Incorporated
U. S. Highway 22
Watchung, P. O.
Plainfield, N. J.
Plainfield 7-1600

LITCHFIELD PARK, PHOENIX, ARIZONA

NEW ELECTRONIC LABORATORY NOW BEING STAFFED

This modern laboratory is being organized as the Western Division of the well-established Aerophysics Departments of the Goodyear Aircraft Corporation of Akron, Ohio

KEY PERSONNEL BEING SELECTED FOR FUTURE EXPANSION

Openings are available for experienced personnel and recent college graduates

COMPLETE MISSILE AND ELECTRONIC SYSTEMS MICROWAVES, SERVOMECHANISMS, AIRCRAFT INSTRUMENTATION, RADARS AND STABILIZED ANTENNAS.

Long range research and development projects

WESTERN LIVING AT ITS BEST "IN THE VALLEY OF THE SUN"

Modern Inexpensive Housing

GOODYEAR AIRCRAFT

A subsidiary of the GOODYEAR TIRE & RUBBER CO.

Send resume to:
A. E. Manning
Engineering and Scientific Personnel
Goodyear Aircraft Corporation
Litchfield Park, Arizona

Similar opportunities available in our Akron, Ohio Laboratory.

ADVERTISING MAN WANTED FOR TECHNICAL PRODUCTS

- Previous advertising experience not necessary but helpful. Must have at least two or three years of college with courses in engineering and technical subjects and like to write
- If you have the qualifications we have an opportunity open for you. Man selected will be trained in all phases of industrial advertising. In your letter of application state age, education, positions held, and give statement of why you want a career in advertising. Location: well-known Connecticut company.

P 1212 Electronics
330 W. 42 St, New York 36, N. Y.

HRB **graduate work?**

HRB offers the young engineer and physicist a sound beginning in the electronic field. The company offices are located just a few minutes walk from the campus of the Pennsylvania State University where you may join many others of the HRB staff in doing graduate work in your specialized field. The University, ranking in the top ten of engineering training, boasts a swimming-pool-type Nuclear Reactor, one of the few in the country. Along with the proximity of the University, HRB offers excellent salaries and generous benefits.

For application form, write:
Technical Personnel Officer
Haller, Raymond & Brown, Inc.
State College, Pennsylvania

PROJECT LEADER
$15,000

Planning and directing conceptual design studies of the electronics of tomorrow. Broad analytical and experimental background required.

Send Resumé to:
JOHN BALKANY
Room 708 6 N. Michigan Ave., Chicago 2, Ill.

SALES MANAGER WANTED

Fast-moving radio-electronic parts manufacturer in New York metropolitan area, seeks experienced, aggressive, result-producing, willing-to-travel sales executive. Closely-knit organization. Unlimited opportunity. Company the leader in field. Nation-wide sales setup to be supervised, guided and helped locally. Send resumé, salary (plus override), recommendations, to

P-1974, Electronics
330 W. 42 St., New York 36, N. Y.

A BEARING ON YOUR FUTURE

ENGINEERS

Mechanical Electrical Aeronautical | *Physicists Mathematicians*

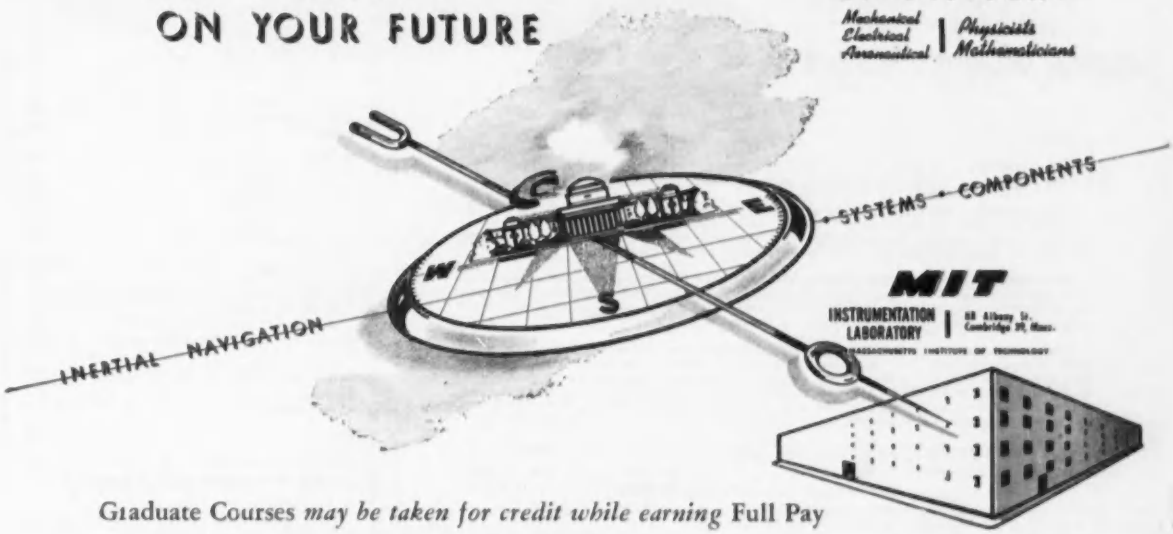

Graduate Courses *may be taken for credit while earning* Full Pay

TO ARRANGE FOR INTERVIEW

Write: **Martin Phillips,** Director of Personnel

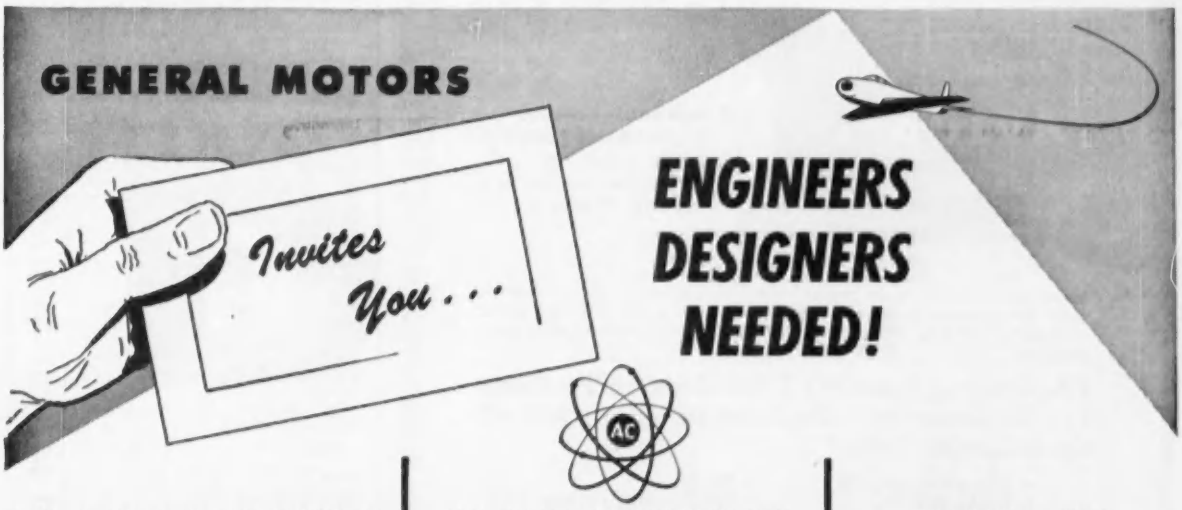

G.M. ELECTRONICS DIVISION
offers challenging, pioneering opportunities to ambitious men. We extend a cordial invitation to every deserving Engineer and Designer to write us their wants. We may be able to supply the square hole for the square peg!

CREATIVE OPPORTUNITIES
in the following fields: Missile Guidance Systems; Jet and Turbo Prop Engine Controls; Bombing and Navigational Computer Systems; Airborne Fire Control; U.H.F. Communications, MICROWAVE EQUIPMENT, etc.

YOUR FUTURE
depends on your making the right connection with the right firm as quickly as possible. Why not send full facts about your education, work background, etc. We will do all we can for you and treat it with the fullest confidence.

AC SPARK PLUG • THE ELECTRONICS DIVISION
GENERAL MOTORS CORPORATION
MILWAUKEE 2, WISCONSIN FLINT 2, MICHIGAN

ENGINEERS **today** the choice is yours –

choose wisely... choose GPL

GPL—with its widely diversified operations in today's most active fields—offers you a lifetime of achievement, satisfaction and advancement.

Here you'll be working with men who have repeatedly broken ground on the frontiers of science, made GPL one of the country's outstanding technological leaders. You'll be part of the nationwide General Precision Equipment organization whose many companies operate in highly advanced areas.

We offer you work on challenging new projects in various stages of research and development. We offer you stimulating professional problems, top pay levels and working conditions, and ideal family living in semi-rural Westchester —just an hour from New York City.

GPL's engineers are men of skill and imagination—and we are seeking more men of their caliber. If you have the inherent capabilities and skills we need and if you are seeking a stable and rewarding career, send resume to Richard E. Hoffman, Employment Mgr. Interviews can be arranged in advance at any time, including weekends. Security limits us to considering applications of U. S. citizens only. We will pay the expenses of qualified applicants to come for an interview.

RADAR NAVIGATION AND BOMBING SYSTEMS (DOPPLER AND INERTIAL)

Research . . . Development . . . Applications . . . System Analysis . . . Project Management . . . Field Engineering . . . Technical Writing

Computers . . . Servos . . . Microwave Techniques . . . Pulse Circuitry

GPL GENERAL PRECISION LABORATORY INCORPORATED

63 Bedford Road, Pleasantville, N. Y.

A SUBSIDIARY OF GENERAL PRECISION EQUIPMENT CORPORATION

Another Step In

AVION's

Planned Expansion Program

OUR LATEST EXPANSION, DOUBLING OUR PRESENT SPACE, IS OUR 4TH PLANNED EXPANSION IN THE LAST 5 YEARS

These are the challenging research and development positions that require true creative thinking . . . and offer rapid promotions and faster recognition for men capable of pacing our own *planned expansion* program!

Challenging Research & Development Positions For Engineers with background in any one of the following fields:

- ANALOG COMPUTERS
- RADAR BEACONS
- MAGNETIC AMPLIFIERS
- ELECTRO-OPTICS
- MISSILE SYSTEMS
- SERVOS
- FIRE CONTROL SYSTEMS
- TORQUEMETERS
- INFRA-RED
- MICROWAVE

FIELD ENGINEERS

Experienced in analog computers, fire control systems, servos, etc. Work will consist of design, maintenance & liaison with the customer.

EVERY INQUIRY WILL BE ANSWERED

Call or write:

MR. AUSTIN PECK

Tech. Employment Supervisor

AVION DIVISION

OF ACF INDUSTRIES, INCORPORATED

Route 17, Paramus, N. J. COlfax 1-4100

Employment Opportunities ADVERTISERS INDEX

Admiral Corp. 394
Aero Service Corp. 404
Albany Designing, Inc. 377
American Machine & Foundry Co. 390
Arma Div., American Bosch Arma Corp. 396, 411, 416
Armour Research Foundation of Illinois Institute of Technology 404, 417
Avion Div., of ACF Industries, Inc. 414

Balkany, John 412
Bendix Aviation Corp.
Pacific Division 380
Products Division 395
York Division 387
Burroughs Corp. 397

CBS-Hytron 410
Collins Radio Co. 382
Continental Oil Co. 377
Convair, A. Div., of General Dynamics Corp.
Pomona, Calif. 405
San Diego, Calif. 389
Cook Research Laboratories 406
Cooper, J. J. 377, 418
Cornell Aeronautical Lab., Inc. 409

Decision, Inc. 415
Dyna-Empire, Inc. 417

Electric Boat Div., Gen Dynamics Corp. .. 406

Farnsworth Electronics Co. 382
Federal Telecommunication Laboratory .. 409

General Electric Co.
Cincinnati, Ohio 401
Syracuse, N. Y. 393, 408, 415
General Motors Corp.
AC Electronics Div. 388, 392, 396, 413
General Precision Laboratory 414
Gibbs Manufacturing & Research Corp. 407
Goodyear Aircraft Corp.
Akron, Ohio 381
Litchfield Park, Arizona 412

Haller, Raymond & Brown, Inc. 400, 408, 411, 412, 418
Hallamore Electronics Co. 409
Harper Associates 407

Industrial Nucleonics Corp. 411
Instruments for Industry, Inc. 411

Johns Hopkins University 400

Kollsman Instrument Corp. 410

Land-Air, Inc. 411

Martin Co., Glenn L. 400
Maryland Electronic Mfg. Corp. 384
Massachusetts Institute of Technology ... 413
Melpar, Inc. 388
Missile Test Project 405
Monarch Personnel 377
Motorola, Inc. 396, 417

National Cash Register Co. 399
Northrop Aircraft, Inc. 398

Page Communications Engineers, Inc. 411
Photocircuits Corp. 409
Production Tool & Methods Co. 377

Radiation, Inc. 403
Radio Corp. of America 378, 379
Raytheon Mfg. Co.
Bedford, Mass. 407
Newton, Mass. 416
Waltham, Mass. 392
Wayland, Mass. ..... 385, 386, (insert)

Stavid Engineering, Inc. 412
Stromberg-Carlson Co., Div., of General Dynamics Corp. 391
Suburban Employment 380
Suburban Employ. Agy., Inc. 377
Sylvania Electric
Buffalo, N. Y. 384
Waltham, Mass. 384
Systems Development, Inc. 377

Technical Operations, Inc. 390, 398
Texas Instruments, Inc. 404
Tracerlab, Inc. 402
Transitron Electronic Corp. 383

Varo Mfg. Co. 394
Vitro Laboratories 415

Weightman & Assoc. 377

This index is published as a service to the readers. Care is taken to make it accurate but CLASSIFIED assumes no responsibility for errors or omissions.

AT GENERAL ELECTRIC, **PLANNED** RESEARCH-CENTERED EXPANSION MAKES ALL THE DIFFERENCE

Another proof that General Electric research creates careers is seen in the recent establishment of an Industrial Computer Department.

More than 200 engineers throughout the entire company, engaged in electronics computer research and development, are being brought together to form the nucleus of this new Department. Many more engineers will be needed to research, design and produce all types of computers, from pocketbook to 3-room size.

This is the kind of *planned* research-centered expansion that has given the GE engineer one of the fastest-growing professional environments in America today.

ADD:

"Individual-oriented" Project System of Work • Stimulating Widely-known Associates • Management-grooming Programs • Individual Merit Evaluations Rotating Assignments • Overall Project Follow-through • In-plant Technical Seminars • Reimbursed Graduate Study • Firm Policy of Promotion-from-within

AND *you can see why career-conscious electronics engineers prefer General Electric*

ENGINEERS—PHYSICISTS

Positions available in the following fields:

Advanced Development, Design, Field Service and Technical Writing in connection with:

MILITARY RADIO & RADAR
MULTIFLEX MICROWAVE
MOBILE COMMUNICATIONS • SEMICONDUCTORS • ELECTRONIC COMPONENTS • COMPUTERS
TELEVISION, TUBES & ANTENNAS
TELEVISION RECEIVERS

Bachelor's or advanced degree in Electrical or Mechanical Engineering. Physics and experience in electronics industry necessary.

Please send resume in confidence to:

Dept. 7-6-E
Technical Personnel

GENERAL ELECTRIC
Electronics Park
Syracuse, N. Y.

ENGINEERS
SCIENTISTS
Make More Money
—Improve Your Position

DECISION/INC is retained by leading manufacturers and research firms in all sections of the country. *Our clients pay us to find you!* No obligation to you—no cost whatsoever. Completely confidential.

All you have to do is send us your name, type of work, company and home address. We will forward brief forms to your *home*. We will then present to you various openings in diversified companies from which you can choose the one you like best.

If you would like to know what you're *really* worth, write, phone or wire us *now!*

DECISION/INC
Management and Recruitment Consultants
Oliver P. Berdes, President

1448 FIRST NATIONAL BANK BUILDING
CINCINNATI 2, OHIO

electronic engineers

Immediate openings for men at all levels of experience, in the expansion of diverse programs in systems engineering and specialized development.

You will have an opportunity to work on basic concepts of new systems, using all your skills toward the solution of new problems. Programs include the development and evaluation of complete military weapons systems, novel aircraft navigational systems and flight dynamics.

Equally fine opportunities exist in our development groups. Here you will engage in the design of specialized electronic test equipment, circuit analysis and the fascinating and expanding new field of data processing.

Within the close-knit Vitro Laboratory are the small-company advantages for personal recognition and progress, as well as the facilities and benefits a medium-size corporation can provide . . . a corporation engaged in a variety of operations including physical and chemical research in ceramics, uranium and rare metals processing and refining, and intricate processing installations.

Please send resume, including salary desired, to Personnel Manager.

Vitro LABORATORIES
Division of Vitro Corp. of America
200 Pleasant Valley Way, West Orange, N.J.

RAYTHEON

Career Opportunities for

TRANSISTOR and DIODE ENGINEERS and SCIENTISTS

BS, MS and PhD levels required in Electrical and Mechanical Engineering, Physics, Chemistry, and Metallurgy. Positions available in development, evaluation, application, and product engineering of diodes and transistors and mechanization of production equipment.

Please send resume to
S. V. Andrews, Technical Placement Office
or call Bigelow 4-7500, Extension 253 for appointment

SEMICONDUCTOR DIVISION
150 California St., Newton 58, Mass.

Mr. Promotable Engineer

to $10,000

We need a couple of junior engineers ready for heavy responsibilities. We are expanding in electronics, need top talent and will pay top prices.

Write in confidence, to:

P-2036, Electronics
330 W. 42 St., New York 36, N. Y.

development engineers

ELECTRO-MAGNETIC DEVICES

Challenging opportunities at all levels for engineers to contribute to the development of advanced precision electro-magnetic components for application in

INERTIAL GUIDANCE SYSTEMS
ANALOG COMPUTERS
DIGITAL COMPUTERS

Salary—up to $12,000
(Commensurate with experience)

Send resume in confidence to:
Manager of Technical Personnel
Dept. 674

ARMA

Division American Bosch Arma Corp.
Roosevelt Field, Garden City, L. I., N. Y.

HI-FI ENGINEERS

(1 Sr. and 1 Jr.)

Both with E.E. or M.E. degrees from recognized institutions.

FOR an expanding research organization which, as an essential part of its activities, tests, evaluates and reports on Hi-Fi components.

The Sr. Engr. (to $9,000)—will assist the Division Head in all phases of testing, including development of criteria and evaluation of results. He should have several years of both theoretical and practical Hi-Fi experience, as well as some acoustical background.

The Jr. Engr. (to $6,500)—will assist in the construction of test equipment and participate in testing work. His background should indicate some aptitude for development and advancement in the Hi-Fi and acoustical fields.

These positions offer 1) a congenial working atmosphere in the suburbs of New York City, liberal vacations, holidays (14), and other benefits; 2) an opportunity and challenge for serious-minded engineers who can measure up to the heavy responsibilities implicit in performance testing and evaluating. We require engineers who have the capacity for growing with the organization.

Submit full details in confidence to:

P-1989, Electronics
Classified Adv. Div., Box 12,
New York 36, N. Y.

INDEX SEARCHLIGHT SECTION ADVERTISERS

Alltronics 422
Algeradio Electronics Co. 422
Allen Industrial Sales 417
Arrow Sales Inc. 420

Barry Electronics Corp. 422
Blan 426

C & H Sales Co. 419
Columbia Electronics 417
Communications Devices Co., Inc. 427
Communications Equipment Co. 423

Engineering Associates 426

Fair Radio Sales 424
Fay-Bill Distributing Co. 424
Finnegan, H. 418

Harjo Sales Co. 422
Herder, Milton 418

Instrument Service Co. 425

JSH Sales Co. 421

Klein & Schwab 417

Liberty Electronics Inc. 427

M.R. Co., The 422
Monmouth Radio Labs 424

Radalab Inc. 420
Radio and Electronic Surplus 426
Radio Research Instrument Co. 425
Relay Sales Inc. 420

Semler-Industries Inc. 418, 422
State Labs Inc. 426

"TAB" 428

Universal General Corp. 426

V & H Radio & Electronics 418

Western Engineers 425

This index is published as a service to the reader. Care is taken to make it accurate but Classified assumes no responsibility for errors or omissions.

COMPUTER ENGINEER

To head active, expanding computer project

- **High degree of freedom in the program.**
- **Academic atmosphere.**
- **Working in cooperation with strong mathematics group and excellent electronics facilities.**
- **Midwest location.**

Salary open.

P-1942, Electronics
520 N. Michigan Ave., Chicago 11, Ill.

ACOUSTICAL ENGINEER

Established manufacturer in Southern New England has position available for an acoustical engineer. Must have substantial experience both practical and theoretical in noise suppression. M. E. degree or equivalent required. In reply state background, experience and salary requirements. Send all resume to

P-1935, Electronics
330 W. 42 St., New York 36, N. Y.

COMPUTER

APPLICATIONS AND DEVELOPMENT

ENGINEERS

COMPUTING SERVICES

Engineering & Scientific Computation
Analog
Digital

COMPUTERS SYSTEMS DEVELOPMENT

DEVELOPMENT

Analog and Digital
Systems analysis and synthesis
Logical organization
Circuit design

These are full time positions offering fascinating and varied work and educational benefits for graduate study. Contact:

J. A. Metzger

ARMOUR RESEARCH FOUNDATION

of Illinois Institute of Technology
10 West 35th St. Chicago 16, Illinois

PROJECT ENGINEERS

Electrical or Mechanical

$8400 to $12,000 Yr.

Progressive company seeks experienced research, design or development men, Juniors or Seniors—with or without degrees.

Experience in timers, relays, solenoids, systems, controls, synchros, transformers, power equipment, magnetic amplifiers, or electronics equipment. Should have initiative and desire to progress. Capable of directing groups of engineers.

Send complete resumes to:

J. J. COOPER
64 E. Jackson Blvd., Chicago, Ill.
Suite 940 — Phone: Wabash 2-1918

Prompt and confidential service.

HRB

more responsibility!

HRB is offering a challenge to electronic engineers and physicists who are able to accept mature responsibility on research and development projects. The creative mind will find academic freedom, complete management encouragement and full responsibility on a task. Excellent salary and generous company benefits.

For application form, write:
Technical Personnel Officer
Haller, Raymond & Brown, Inc.
State College, Pennsylvania

ELECTRICAL AND MECHANICAL ENGINEERS

MOTOROLA RESEARCH LABORATORIES, located in the healthful climate of Arizona's Valley of the Sun, has several openings for engineers experienced in the following:

Electronic circuit design and development for missile guidance, radar and VHF communications.

Mechanical design of missile-borne and vehicular electronic equipment.

Microwave antenna and wave guide design.

Transistor circuit development.

Engineers desired who have B.S. degrees or above and at least two years direct experience. Free health, life and accident insurance. Free hospitalization plan. Profit sharing. Paid holidays. Sick leave, vacations. Ideal working conditions. Plenty of housing, reasonably priced. Excellent schools. Exceptionally mild and dry winter climate.

Write:
DR. ROBERT E. SAMUELSON, Chief Engineer
MOTOROLA RESEARCH LABORATORY
3102 North 56th Street
Phoenix, Arizona

ELECTRONIC ENGINEER

for work on Civilian and Military Products

in the fields of ACOUSTICS, SONAR and ELECTROMECHANICS

Salary commensurate with background

DYNA-EMPIRE INC.

1075 Stewart Avenue
Garden City, L.I., N.Y.

SEARCHLIGHT SECTION

(Continued on pages 418-428)

5687

Twin Triode Tube

Brand New—Purchased from Original Manufacturer.
Laboratory Checked—Fully Guaranteed by us. Production Quantities available. Immediate Delivery.

Priced much lower than your present equipment cost. We will also trade these 5687 tubes for any other tubes or electronic components that you may have.

KLEIN & SCHWAB

74 Cortlandt St. N. Y. 7 N. Y.
Beekman 3-5690

A ....Always
B ....Buy
C ....Columbia

WHAT DO YOU NEED?

Communication Equipment?
Dynamotors? Inverters?
Automatic Direction Finders?
Radar? Spare Parts?
Equipment Accessories?

GET OUR PRICES FIRST

Columbia **ELECTRONICS**
2251 W. WASHINGTON BLVD.
LOS ANGELES 18, CALIFORNIA

COMMUNICATIONS EQUIPMENT

Your inquiries for ground and aircraft radio equiment will receive our immediate attention. We stock complete installations and spare parts of the following: AN/ART-13, AN/ARC-1, AN/ARC-3, AN/ARN-6, AN/ARN-7, BC-375, BC-348, BC-312, BC-342, Microphones, Headsets, Cables, Test equipment, etc. Complete export facilities. Please send us your catalogs and offerings.

ALLEN INDUSTRIAL SALES

224 S. Wabash Ave. Chicago 4, Ill.

CLASSIFIED SEARCHLIGHT SECTION ADVERTISING

BUSINESS OPPORTUNITIES — EQUIPMENT - USED or RESALE

UNDISPLAYED RATE

$2.10 a line, minimum 3 lines. To figure advance payment count 5 average words as a line.

PROPOSALS $2.10 a line an insertion.

BOX NUMBERS count as one line additional in undisplayed ads.

DISCOUNT of 10% if full payment is made in advance for four consecutive insertions of undisplayed ads (not including proposals).

DISPLAYED RATE

The advertising rate is $18.50 per inch for all advertising appearing on other than a contract basis. Contract rates quoted on request.

AN ADVERTISING INCH is measured ⅞ inch vertically on one column, 3 columns—30 inches—to a page.

EQUIPMENT WANTED or FOR SALE ADVERTISEMENTS acceptable only in Displayed Style.

Send NEW Ads or Inquiries to Classified Adv., Div. of Electronics. P. O. Box 12, N. Y. 36, N. Y. for Aug. issue closing July 2nd

The publisher cannot accept advertising in the Searchlight Section, which lists the names of the manufacturers of resistors, capacitors, rheostats, and potentiometers or other names designed to describe such products.

ELECTRONIC TUBES — All types — one dependable source!

NEW! GUARANTEED! AND NOW IN STOCK!

5B	$2.00	1AB1	2.50	6C4W	4.50	710A	2.00	757	.35	1783	6.00
6C	1.50	1BP1	2.50	6A7	FOR	715B	2.45	K1617P2	90.00	5784WA	7.50
6J7	14.00	1CP1	6.00	6C21	10.50	715C	12.00	K1617P11	90.00	5787	4.85
0A2/VR75	.75	1DP1	6.00	6C8	1.50	717A	1.00	K1177		5794	5.00
0B2	.75	1DP1	6.00	6J4WA	1.50	719A	11.00	Phot. Mul	30.00	5795A	FOR
0B2/VR-90	.85	1DP1S2	9.00	6J6W	1.50	721A	1.00	K1198		5814	1.10
0C2/VR105	.75	1JP1	6.00	6K4	1.50	721A/B	1.00	Phot. Mul	30.00	5840	4.25
0D2/VR150	.75	1JP1	7.50	6L6GA	1.10	723A/B	9.00	1615	2.50	5844	2.00
1C	1.00	1WP1	50.00	6L6Y	1.50	724B		1616	.50	5851	4.00
1B3	1.00	1X2	1.50	7BP7A	1.50	726A	6.00	1618	.15	5854	1.10
1B27	10.00	NR1A	1.50	7CP1	4.50	726B	20.00	1624	1.00	5876	11.00
1B32	1.00	1B22	1.50	7F8W	2.00	726C	20.00	1625	.10	5898	2.00
1B35	1.00	1B23	1.50	7GP7	1.50	726TL	20.00	1626	.10	5899	2.00
1B35A	7.50	1B24W	6.00	7YP2	150.00	800	1.00	1631	1.75	5902	4.75
1B40	2.00	1B25	6.00	8LP7	10.00	801A		1632	1.25	5932	6.00
1B40A	20.00	1B26	6.00	10AP7	25.00	803	2.50	1633	1.00	5946/1754	200.00
1B58	42.00	1C22	60.00	10KP17	10.00	805	2.00	2050	1.00	5949/1907	65.00
1B58/1B1N	1.00	1C21	6.00	12AJ7WA	1.75	807W	5.00	2525WGT	1.50	5957	15.00
1N5C	1.00	1C21	6.00	12DP7	1.75	808	2.25	KT1000P11	100.00	5965	10.00
1N21	.60	1C24	1.50	12E	1.50	810	10.00	5517	.60	5977	1.75
1N23B	1.00	1D21	6.00	5RX-16		811	2.25	5528/C6L	10.00	6005	1.75
1N25	1.00	1D22	6.00	Kits	100.00	811A	3.00	5586	125.00	6021	4.50
1N26	1.00	1F22	10.00	HK-21	2.50	814	2.50	5588	FOR	6032	FOR
1N31	1.00	1F23	10.00	V-45 Kits	FOR	815	1.50	5610	1.60	6042	30.00
1N32	1.00	1F24	100.00	VT-90 Kits	FOR	826	1.50	5611	75.00	6045	1.75
1N33	1.75	GA-4	1.50	6LUCP11	100.00	826	.60	5613	6.00	6060	4.75
1N34	1.00	NS-4	1.50	6LUCP12	100.00	826	1.00	5614	12.50	6080CT	1.50
1N41	1.00	4B31	4.75	6LN8P1	90.00	828	9.00	5615	1.00	6080CT	2.25
1N42	1.00	4B32	4.75	6MAP1		829	6.50	5616	1.50	6110	7.50
1N43	1.00	4B32	4.75	Dual gun	12.00	829B	8.50	5617	1.50	6111	6.00
1N44	1.00	4C31	5.00	6SWP11	110.00	830B		5643	6.00	6131	6.00
1N45	PDR	4C35	25.00	6T8	1.50	832	4.25	5644	6.00	6132	4.75
1N73		4C36	25.00	6X4/2I	25.00	832A	6.00	5648	6.00	6136 Klys	250.00
1N74		4J31	60.00	6Y6G	1.50	833		5651	15.00		FOR
1N75		4J32	60.00	RK-37	1.50	833A	1.25	5654	125.00	6152	FOR
1P28		4J33	35.00	RK-39	2.50	834	1.00	5670	1.10	6161	60.00
1V		4J35	80.00	7CPAP11	90.00	845	1.00	5675	.60	6200	1.50
2AZ1		4J36	80.00	7DG	1.50	849	115.00	5691	4.75	6201	1.10
2AP1		4J50	350.00	FG-67	12.00	860	17.50	5693	4.75	6236	250.00
NR2A		4J51	45.00	7JPAP11	90.00	861	15.00	5697	6.00	6293	FOR
NS2A		4J52	45.00	8BP7	FOR	861	15.00	5719	4.75	6295	FOR
2C22		4-1000A	120.00	FG-95	17.50	864	275.00	5725	1.65	6326	FOR
2C26		4X150A	21.50	10BR/8020	7.50	866	1.00	5726WA	6.00	6346 Phot.	
2C26A	12.50	4X150D	21.50	10DP7	1.50	866A	1.45	5751	6.00	Mult.	40.00
2C34	9.00	4X1000F	60.00	10E10	12.50	866B	1.45	5763WA	6.00	6356	5.50
2C43	9.00	N61	1.00	FG10/8038	10.00	869B	38.00	5771	1.00	6357 Phot.	
2C51	1.50	C1B	1.00	12J1AWC	1.50	872A	1.50	5772	1.00	Mult.	30.00
2C61	1.50	EL5B	1.00	T-125	12.50	875	.75	5726	.60	6395	5.00
2D21		5CP1A	6.00	12P7A	1.50	876	1.00	5727	.60	6550/1608	7.50
2D21W		5DP1A	6.00	12Q7GT	1.00	878	1.00	5749	1.10	6907	.65
2D29		5FP1	6.00	FG29B	150.00	885HA	100.00	5751WA	1.60	6908	1.35
2E22		5JP1	6.00	FG-104	15.00	892A	125.00	5762	125.00	6950	1.50
2E24		5JP1	6.00	FG-105	15.00	892A-H	125.00	5763	1.10	AX5903	15.00
2E25		5FP1A	12.50	HF200	10.00	902P1	2.50	5770WE	MAG	390.00	01644686	FOR
2E26		5FP14A	12.50	7100	10.00	921A	2.50				
2E30		5HP1	6.00	7BTL	15.00						
2E31		5HP1	12.00	7BTL	15.00						
2E35		5JP1	10.00	7E5A	10.00						
2G21		5NP1	6.00	7E6A	1.50						
2J21		5NP1	6.00	FG-171	17.50						
2J22		5RP1	6.00	QK-284	15.00						
2J23		5RP1A	60.00	HF300	17.50						
2J27		5XP1	60.00	814A	60.00						
2J31	54.00	6BP11	21.00	304TH	12.00	101D	$2.25	305A	3.00	407A	4.00
2J32	54.00	6BP11	60.00	307A	1.50	101F	3.10	316A	.40	408A	1.50
2J33	15.00	6JP1	30.00	ML-322	10.00	102F	2.00	321A	7.50	412A	4.50
2J34	15.00	6JP1	30.00	327A	1.50	203A	2.00	323A	1.50	413A	4.50
2J37	100.00	6C22	25.00	327A	1.50	204B	2.00	372A	60.00	421A/5998	12.00
2J42	60.00	6J22	140.00	351A	7.00	205F	2.45	378A	10.00	422A	8.50
2J48	131.00	6J23	4.00	450TH	40.00	221A	2.00	380A	2.75	421A/6140	6.00
2J49	54.00	6J24	4.00	450TH	40.00	240A	1.00	701A	1.00	704A	200.00
2J50	46.00	6MGY	4.00	464A	2.15	245B	3.50	387A	2.00	438A	55.00
2J51	12.00	C6L/5528	10.00	471A	2.00	245C	3.50	388A	2.75	700A	2.00
2J52	12.00	C6L	7.00	481	275.00	249B	1.00	701B	1.00	704A	.65
2K22	14.00	ANC	2.25	526AX	1.70	254A	4.75	771A	5.00	705A	.75
2K25	14.00	6AN5WA	1.75	527	2.50	255A	14.00	774A	1.75	707A	.65
2K26	14.00	6AN8WA	1.75	527	2.50	262B	1.00	781A	1.00	709A	.65
2K27	46.00	6AR6	1.75	571A	10.00	267B	10.00	394A	1.00	711A	.65
2K28	46.00	6AS6W	1.75	572B	10.00	274B	2.00	396A	POR	715B-WE	7.00
2K29	46.00	6AU6WA	1.75	6JG2T	10.00	274D (Relay)	9.75	400A	4.00	717A	1.00
2K41	46.00	6BA7	10.00	HK-654	17.50	282A	7.00	403A/6AK6	1.25	719A	9.50
2K42	46.00	6BE6	1.75	577	30.00	282B	7.00	403B/5691	2.75	720A	2.00
2K55	15.00	6BF11	1.75	578	10.00	274D	12.25	404A	10.00	725A	4.00
2K56	15.00	6BK5	12.50	706CV	15.00	300B	8.00	404A	10.00	6042/417A	10.00
2K	.50	6BM8A	2.25	708A	.25						
				709A	.25						

WESTERN ELECTRIC TUBES

Write or call for quantity discounts. All items F.O.B. Los Angeles, subject to being unsold and change of price without notice. We also buy tubes. Top prices paid

V & H RADIO AND ELECTRONICS SUPPLY

2029-2047 W. VENICE BLVD. LOS ANGELES 6, CALIF. REpublic 0215

ART-13/T47A Transmitters	$175.00	BC-348 Rec'r Modified	$ 25.00
ART-13/T47 Transmitters	$125.00	BC-348 Rec'r Unmodified	$ 50.00
BC-788 C Altimeters	$175.00	A R C - 1 Transceiver	$300.00
A R C - 3 Transceiver Complete	$325.00	BC-342 Rec'r.	$ 50.00
RS/ARN-7 Radio Compass	$175.00	BC-312 Rec'r.	$ 40.00
		I-152-C Indicator	$ 50.00

Ship via Express C.O.D. Subject to Inspection, to H. FINNEGAN, 40 Washington Ave. Little Ferry, N.J.

MUST HAVE FOR CURRENT ORDERS

PHONE COLLECT

BC-312	BC-314	BC-610
BC-342	BC-344	T-47/ART-13
R-5/ARN-7	ARC-3	ATC/ART-13

SEMLER INDUSTRIES INC.
STanley 7-1554
6863 Lankershim Blvd., North Hollywood, Calif.

REPLIES (Box No.): Address to office nearest you c/o This publication Classified Adv. Div.
NEW YORK: P. O. Box 12 (36)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

SPECIAL SERVICE

Washington, D.C. legman available for special private assignments. Research, legislative analysis, interviews, reports on government directives, procurement, specifications. SS-1915, Electronics.

NEW PRODUCTS FOR U.K.

British Public Company with wide production facilities in light engineering, electrical, electronic fields interested in contacting an American Company with view to manufacturing new products for United Kingdom market.

CW-1759, Electronics
330 W. 42 St., New York 36, N. Y.

CAPITAL AVAILABLE

For investment in existing or new electronics manufacturing operation with growth potential. Equipment and/or components. Will also consider ventures with competent engineers to do military R & D or manufacture products already designed.

BO-2007, Electronics
P. O. Box 12, Classified Adv. Div.,
New York 36, N. Y.

PRIVATE CAPITAL AND/OR STOCK ISSUES ARRANGED

Interested in financing companies that are doing at least ½ million a year or more, running in the black, but could do a lot better with more capital. Amounts from $100,000 up available. Prefer companies in fields of electronics, engineering or research and development companies ready to go into production with backlog of orders. Will treat all inquiries confidentially.

BO-1889, Electronics
330 W. 42 St., New York 36, N. Y.

CATALOG PREPARATION SERVICE

Give us the raw data. We'll organize it according to your criteria, prepare dummy, produce finished art and supervise printing—or do any part of the job. Our catalogs are among the best-looking and easiest-to-use. Estimate in advance. Service area: New England, N. Y., N. J., Penna. & Delaware.

MILTON HERDER, Industrial Advertising
53 W. 42nd St., New York 19 BRyant 9-1963

WANTED

Scrap Tungsten, Molybdenum, Tantalum, Zirconium.

Highest prices paid.

W-1851, Electronics
330 W. 42 St., New York 36, N. Y.

ADDITIONAL
Wanted Advertisements
on page 426

ELECTRONIC

WAR TERMINATION INVENTORIES

WRITE OR WIRE FOR INFORMATION ON OUR COMPLETE LINE OF SURPLUS ELECTRONIC COMPONENTS. ALL PRICES NET F.O.B. PASADENA, CALIFORNIA

C&H SALES CO.

2176-E East Colorado St.
Pasadena 8, California
RYan 1-7393

INVERTERS



10042-1-A Bendix
DC Input 14 volts; output: 115 volts; 400 cycles. 1-phase; 50 watt **$35.00**

12116-2-A Bendix
Output: 115 VAC; 400 cyc; single phase; 45 amp. Input: 24 VDC, 5 amps. **$35.00**

12117 Bendix
Output: 26 volts; 400 cycles, 6 volt amperes, 1 phase. Input: 24 VDC; 1 amp. **$15.00**

12121 Bendix
Input: 24 volt D.C. 18 amp. 12000 r.p.m. Output: 115 volts, 400 cycle, 3-phase, 250 volt amp, 7 pf. **$49.50**

12123 Bendix
Output: 115 V; 3-phase; 400 cycle; amps .5 Input: 24 VDC; 12 amp. **$49.50**

12126-2-A Bendix
Output: 26 volts; 3 phase; 400 cycle; 10 VA; .6 PF. Input: 27.5 volts DC; 1.25 amps. **$24.50**

12130-3-B Bendix
Output: 125.5 VAC; 1.5 amps. 400 cycles single phase, 141 Va. Input: 20-30 VDC. 18-12 amps. Voltage and frequency regulated **$49.50**

12133 Bendix
Input: 26/29 volt D.C., 28 amps. Output: 115 volt, 3 phase, 400 cycle, 250 volt amp., .8 pf. **$59.00**

12147-1 Pioneer
Output: 115 VAC 400 cycles; single phase. Input: 24-30 VDC; 8 amps **Price $39.50 each**

778 Bendix
Output: 115 volt 400 cycle; 190 VA; single phase and 26 volt, 400 cycle, 60 VA, single phase. Input: 24 VDC. **$37.50**

10285 Leland
Output: 115 volts AC; 750 VA, 3 phase, 400 cycle, .90 pf and 26 volts. 50 VA single phase, 400 cycle, .40 pf. Input: 27.5 VDC 60 amps. cont. duty, 6000 rpm. Voltage and frequency regulated. **$59.50**

10339 Leland
Output: 115 volts; 190 VA; single phase; 400 cycle; .90 pf. and 26 volts; 60 VA; 400 cycle, .40 pf, Input: 27.5 volts DC, 18 amps cont. duty, voltage and freq. regulated. **$49.50**

10486 Leland
Output: 115 VAC; 400 cycles; 3-phase; 175 VA; .80 pf. Input: 27.5 DC; 12.5 amps; cont. duty. **$70.00**

10563 Leland
Output: 115 VAC; 400 cycle; 3-phase; 115 VA; 75 pf. Input: 28.5 VDC; 12 amps. **$35.00**

PE109 Leland
Output: 115 VAC, 400 cyc; single phase; 1.53 amp; 8000 rpm. Input: 13.5 VDC; 29 amp. **$50.00**

PE218 Leland
Output: 115 VAC; single phase pf 90; 380/500 cycle; 1500 VA. Input: 25-28 VDC; 92 amps; 8000 rpm; Exc. Volts 27.5 BRAND NEW. **$30.00**

MG149F Holtzer-Cabot
Output: 26 VAC @ 250 VA; 115 V. @ 500 VA; single phase; 400 cycle; Input: 24 VDC @ 36 amps. **$40.00**

MG153 Holtzer-Cabot
Input: 24 VDC; 52 amps. Output: 115 volts —400 cycles, 3-phase, 750 VA. Voltage and frequency regulated. **$95.00**

DMF2506M Continental Electric
24-30 volts input; 5.5-45 amps; cont. duty. Output: 115 volts; .44 amps; 400 cyc; 1 phase; pf 1.0; 50 watts. **$39.50**

940702-1 Eicor, Class "A"
Input: 27.5 volts at 9.2 amps AC Output: 115 volts 400 cycles; 3 phase 100 voltamp; continuous duty **Price $39.50 each**

POTTER & BRUMFIELD RELAY #SM5LS

SPDT 8,000 ohm $\frac{11}{16}$" dia. x $1\frac{11}{16}$" long. Approx. weight 1 oz. Hermetically sealed Standard 7-pin miniature base

Price $3.00 each

SELSYNS-SYNCHROS



1CT Cont. Trans. 90/55V 60 cy.	$37.50
1DG Diff. Gen. 90/90V 60 cy.	37.50
1F Syn. Mtr. 115/90V 60 cy.	37.50
1G Gen. 115V 60 cy.	37.50
1SF Syn. Mtr. 115/90V 400 cy.	12.50
2J1F1 Gen. 115/57.5V 400 cy.	7.50
2J1F3 Gen. 115/57 5V 400 cy.	10.00
2J1FA1 Gen. 115/57.5V 400 cy. 57.5/57.5V 400 cy.	7.50 5.00
2J1H1 Diff. Gen. 57 5V 400 cy.	7.50
2J5D1 Cont. Trans. 105/55V 60 cy.	17.50
2J5F1 Cont. Trans. 105/55V 60 cy.	17.50
2J5H1 Gen. 115/105V 60 cy.	17.50
2J15M1 Gen. 115/57.5V 400 cy.	17.50
5CT Cont. Trans. 90/55V 60 cy.	34.50
5D Diff. Mtr. 90/90V 60 cy.	34.50
5DG Diff. Gen. 90/90V 60 cy.	34.50
5F Syn. Mtr. 115/90VAC 60 cy.	34.50
5G Syn. Gen. 115/90VAC 60 cy.	34.50
5HCT Cont. Trans. 90/55V 60 cy.	42.50
5SDG Diff. Gen. 90/90V 400 cy.	12.50
6DG Diff. Gen. 90/90V 60 cy.	25.00
6G Syn. Gen. 115/90VAC 60 cy.	34.50
7G Syn. Gen. 115/90VAC 60 cy.	42.50
R110-2A Kearfott Cont. Mtr. 115V 400 cy.	17.50
R200-1-A Kearfott Cont. Trans. 26/11.8V 400 cy.	15.00
R210-1-A Kearfott Trans. 26/11 8V 400 cy.	15.00
R235-1A Kearfott Resolver 26/11 8V 400 cy.	22.50
C56701 Type 11-4 Rep. 115V 60 cy.	20.00
C69405-2 Type 1-1 Transm. 115V 60 cy.	20.00
C69406 Syn. Transm. 115V 60 cy.	20.00
C69406-1 Type 11-2 Rep. 115V 60 cy.	20.00
C76166 Volt. Rec. 115V 60 cy.	10.00
C78248 Syn. Transm. 115V 60 cy.	12.50
C78249 Syn. Diff. 115V 60 cy.	5.00
C78863 Repeater 115V 60 cy.	7.50
C79331 Transm. Type 1-4 115V 60 cy.	20.00
851 Bendix Autosyn Mtr. 32V 60 cy.	7.50
403 Kollsman Autosyn Mtr. 32V 60 cy.	7.50
CK5 Bendix Mtr. 2 phase 26V 400 cy.	17.50
FPE-25-11 Diehl Servo Mtr. 75/115V 60 cy.	22.50
FPE-43-1 Resolver 400 cy.	25.00
FJE-43-9 Resolver 115V 400 cy.	25.00
999-0411 Kollsman 26V 400 cy.	15.00
1377-0410 Kollsman 26 V 400 cy.	10.00
1515B-0410 Kollsman 26V 400 cy.	20.00
10047-2-A Bendix 26V 400 cy.	12.50
2900 Transicoil 115 V 400 cy.	15.00

ESTERINE ANGUS RECORDERS



Model AWO-1MA

DC Milliameter permanent magnet moving coil type. Spring clock dual speed drive (hour and minute). Instructions including connection diagrams and instrument data sheet with each instrument.

Portable case $200.00



MODEL AW 20-PEN RECORDER

Operates on 24 volt DC. Chart speeds ranging from ¾" per hour to 8" per minute. Pens are electrically actuated. Instrument may have from 5 to 20 pens recording simultaneously. Each pen has separate electromagnet.

Price $300.00 each

DC4 COMPOUND— Dow Corning

Non-melting, waterproofing and insulating Silicone compound for ignition systems and electronic equipment. Stable at temperatures from —70° to +400° F. 8-oz. tubes.

Price $2.00 each

$20.00 per dozen

SMALL DC MOTORS

(approx. size overall 3¾" x 1¼" dia.)

5069600 Delco PM 27.5 VDC 250 rpm	$12.50
5069230 Delco PM 27.5 VDC 145 rpm	15.00
5068750 Delco 27.5 VDC 160 rpm w/brake	6.50
5068571 Delco PM 27.5 VDC 10,000 rpm (1x1x2")	5.00
5069625 Delco 27.5 VDC 120 rpm w/governor	15.00
MM A-11 Globe PM 24 VDC	7.50
5BA10AJ18 GE 24 VDC 110 rpm	10.00
5BA10AJ37 GE 27 VDC 290 rpm reversible	10.00
5BA10AJ52 27 VDC 145 rpm reversible	12.50
806069 Oster series reversible 1/50 h.p. 10,000 rpm 27.5 VDC 1⅝" x 3½"	5.00
C-28P-1A 27 VDC 1/100 h.p. 7,000 rpm	3.00
7100-B-PM Hansen 24 VDC 160 rpm	7.50
SSFD-6-1 Diehl PM 27.5 VDC 10,000 rpm	4.00
6-volt PM Mtr. mfgd. by Hansen 5,000 rpm 1¼" in dia. 2" long overall	4.00

WANTED
RT-66, 67, 68, 69, 70 GRC
AN/PRC-8, 10 AN/PRC-6
R-109-110 GRC PARTS AND COMPONENTS OF AN/GRC EQUIPMENT

Radalab Inc.

87-17 124TH ST. RICHMOND HILL 18, NEW YORK, N. Y.

Phone Virginia 9-8181-2-3
TWX-NY-4-4361

SCR-508

10 Channel FM Receiver and Transmitter. Frequency Range 20-27.9 mc. Receiver is manually tuned, transmitter is crystal controlled. Consists of 2 BC-603 Receivers, CC-604 Transmitter, FT-237 mount, Box 89 xtals BC-696 Control, A-62 Phantom Ant., Headsets, mike, and antenna. Input 12v. D.C. SCR-608 also available.

SCR-291A GROUND AUTOMATIC DIRECTION FINDER

1.5-30 mc. automatic direction finder. This equipment used to take bearings on transmitters. Complete equipment available comprising the following: BC-1147A Rec., PN 31, Power Panel, BC-1159, automatic bearing goniometer, RC-223 antenna system consisting of 5 masts with legs, MC-412, MC-413 phase inverters calibrating transmitter. 110 v 60 cyc.

SCR—536 HANDI-TALKIE

Freq. range 3.7-5.5mc crystal controlled battery operated handitalkie. The range of this equipment is approximately 2 miles. We can supply these sets to your specified freq. Completely reconditioned and guaranteed. Large quantity available.

REMOTE P.P.I. REPEATER INDICATORS

VD-7" P.P.I. Upright Mount.
VE-7" P.P.I. Table Mount.
VF-9" B Scope 9" P.P.I. Upright.
VG-24" Plotting Table P.P.I. Repeater. This unit just installed in new air control center at Idlewild Airport, N. Y. Very Elaborate System.
VJ-12" P.P.I. Upright Mount.
VK-12" P.P.I. Upright Mount.
VL-12" P.P.I. Upright Mount.

RADIO TELETYPE TERMINALS

AN/SGC-1 Very Compact. Late Model.
AN/CV-60/URR All Miniaturized. Late Model.
FRA, FRR, FRF.
AN/FGC-1.

SCR-682-A SEARCH AND WEATHER RADAR

Technical Specifications:
1—Operating freq.—3000 mc.-10CM.
2—Power output—225kw.
3—Pulse width—1 micro second.
4—ranges—500-240,000 yds. in four ranges. 10,000 yds, 40,000 yds, 160,000 yds, and 240,000 yds.
5—360 scan.
6—azimuth accuracy 1°.
7—7" P.P.I. indicator
8—Antenna beam width 1°, Parabolic.
9—110v 60 cyc power input.

AN/ASQ-1 AIRBORNE MAGNETOMETER

This is an airborne chart recording magnetometer. The set consists of an amplifier, oscillator, detector head, chart profile recorder, power supply. The equipment has a sensitivity of 2 gamma. The AN/ASQ-1 records on an Esterline ANgus recorder disturbance in the earth's magnetic field caused by an ore deposit or a sunken boat or submarine. An indicator is provided that gives a bearing on a magnetic disturbance. Input is 28v DC. Weight about 130 lbs.

AN/APN-3-AN/CPN-2 SHORAN

The AN/APN-3 and AN-CPN-2 are airborne and ground. Precision distance measuring installations. This equipment operates on 225 mc. The range is 250 miles with an accuracy of 25 feet. This is the most accurate distance measuring equipment built to date. The AN-APN-3 used with the K-1 computer (also available) will permit taking a photograph up to 250 miles from the CPN-2 beacons completely automatically. The AN-APN-3 can be fed into the aircraft auto pilot to fly it to the drop point. This equipment is very widely used by geological survey companies for oil prospecting and mapping. Power input is 110v 400cyc and 28v DC. COMPLETE SETS AND SPARES ARE AVAIL.

AN/APR-4

38-4000 mc precision receiver consists of receiver and five tuning units to cover the full range. Each tuning unit is calibrated directly in mc. Input 115v-60 cyc.

AN/APG-3 AIRBORNE GUN LAYING AND AIR SEARCH RADAR

This is a late X-band airborne search and gun laying automatic tracking radar. The set uses an antenna mounted to scan forward to search for aircraft and to provide gun fire presentation. The set consists of an indicator with a 5" B and C scope for radar operator, and a 3" indicator for the pilot for gun firing, a control stick firing grip, antenna, RF unit modulator, servos amplifier, radar central, etc. A modification of this set is the AN/APG-33 which is used in the F-89 and F-94 jet interceptors. Complete sets available. POR

RC-120 FACSIMILE TRANSCEIVERS



This is a page printing facsimile set using either direct or photographic recording paper. The set will send and receive a 7" x 7½" page of printed matter or a picture in 7 minutes on a radio or wire circuit. This equip. is completely portable. The set will operate from 6v DC or 110v 60 cyc. POR

SCR-399-499

Mobile and fixed station high power radio sets: the SCR-39 is mounted in a HO-17 shelter. The SCR-499 is transported in carrying cases to be set up for operation. Freq. of the sets is 2-18mc. pwr output is 350w. Phone and C.W. 2 communication receivers are provided. Input is 110v 60 cyc. POR

RELAYS

world's largest stock

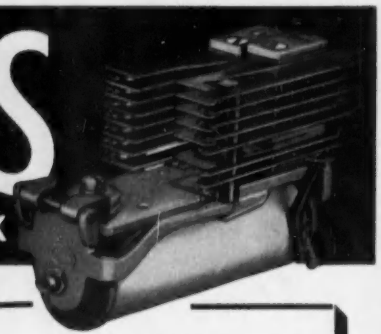

★ Immediate Delivery
★ Hundreds of Types
★ All Standard Makes
★ New-Inspected-Guaranteed

Multiple Contact
Standard Telephone Type Relay
CODE 4 TWIN CONTACTS
11-Form A 1-Form B 1-Form C 1-Form D
Heavy duty armature bearing. Available in all standard coil resistances from 12 ohms to 12,000 ohms. Single or quantity prices on request. In stock.

24 HOUR DELIVERY OF THESE TYPES

Standard Telephone Relays
Short Telephone Relays
Midget Relays
Timers
Aircraft Contactors
Rotary Relays
Western Electric Type "E" Relays
Keying Relays
Hermetically Sealed Relays
Voltage Regulators and Cutouts
Differential and Polarized Relays
Special Relays
BK Series
Antenna and Ceramic Relays
Motor and Control Relays
Relay Assemblies
Latching and Interlocking Relays
Mechanical Action Relays
Ratchet and Stepping Relays
Time Delay Relays

Write for New Relay Sales Catalog, C-7

Relay Sales
P. O. Box 186-AA, West Chicago, Ill. Phone West Chicago 1100

WRITE-WIRE or PHONE for:

★ POWER SUPPLIES ★ RADAR
★ PARTS — METERS — TUBES
★ TEST SETS ★ TELETYPE
★ AIRBORNE ELECTRONICS
★ NAVIGATION AIDS

TN-1/APR-1 TUNING UNIT
Receives and converts 38-80 MC RF to 30 MC IF. Requires only 250 V, B+ and 6.3 VAC for heaters. Hand calibrated tuning chart. Originally used for radar countermeasures, receiver, but also ideal for noise and spectrum analyses. Brand new in storage case, with carton of spare tubes and other parts. A terrific value at only..... **$24.50**

FREQUENCY METER AND TEST OSCILLATOR!
115 V., 50-800 cy. power supply. In freq. meter section, crystal oscillator beats VFO. Osc. section puts out sine or pulse modulated RF. With tubes, headset, cords, adapters, radiators, etc. and INSTRUCTION BOOK.
LU-3, 465-498.5 MC. Brand new. **$19.95**
LU-1, 470-493.5 MC. Brand new..... **17.95**

VARIABLE VOLTAGE
AMERTRAM TRANSTAT. 11.5 KVA. Input 115 V., 60 cycles. Output continuously variable 0 to 115 V. up to 100 amperes. Easily re-connected for input of 230 V. with output of 0-230 V, 50 amperes. Brand new. Special..... **$99.50**

ARROW SALES, Inc.
OFFICE AND MAIN WAREHOUSE
7460 VARNA AVE., NORTH HOLLYWOOD, CAL.
Mail to: BOX 3007-E, NORTH HOLLYWOOD, CAL.
Phones: STanley 7-0406 POplar 5-1810
Telegraph: WUX, NO. HOLLYWOOD
Cable: ARROWSALES, NO. HOLLYWOOD
CENTRAL WAREHOUSE & SALES SHOWROOM
2441 S. MICHIGAN AVE., CHICAGO 16, ILL.
OTHER WAREHOUSES IN
Atlanta, Ga., San Antonio, Tex., Pasco, Wash., Sacramento, Cal., Burbank, Cal., Los Angeles, Cal.

SAVE ON TUBES BRAND NEW TUBES GUARANTEED TUBES

OA2	$0.90	2J42	50.00	5JP5	6.50	WE-274B	1.00	WL-456	59.50	811	2.90	5647	5.00
OA2WA	3.00	2J48	35.00	5JP11A	9.50	WE-282-A	5.00	464A	1.95	812A	3.50	5651	1.40
OA3/VR75	.90	2J49	40.00	5MP1	3.95	WE-282B	6.00	RH-507	25.00	813	10.00	5654	1.00
OA5	3.75	2J50	35.00	5NP1	3.95	WE-285A	5.00	527	22.50	814	1.35	5656	7.00
OB2	.65	2J54	25.00	5R4GY	1.25	287-A	2.20	ML-531	4.00	815	1.50	5657	125.00
OB2WA	3.00	2J55	35.00	5R4WGY	2.75	HF-300	22.50	KU-610	3.50	828	8.50	5663	1.50
OB3/VR90	.85	2J56	50.00	6AK5W	1.00	WE-300B	5.00	KU-627	10.00	829	5.00	5667	125.00
OC3/VR105	.65	2J61	15.00	6AN5	2.00	GB-302	5.00	KU-628	10.00	829B	8.50	5670	1.50
OD3/VR150	.65	2J62	6.50	6AR6	1.25	304TH	8.00	648P1	5.00	830B	.50	5675	10.00
ELC1B	1.50	2K22	14.50	6AS6	1.25	304TL	8.95	WL-652	20.00	832A	4.75	5687	3.00
1B22	1.00	2K23	14.50	6F4	3.25	WE-305A	2.65	HK-654	25.00	834	7.00	5692	5.00
1B23	2.75	2K25	11.00	6J4	1.95	307A/RK75	1.00	WE-701A	2.50	836	1.50	5693	4.50
1B24A	12.50	2K26	45.00	6J4WA	3.50	WE-308B	12.50	702A	.50	838	.70	5702	1.50
1B26	1.25	2K28	25.00	6K4	2.25	WE-310B	3.00	WE-703A	1.25	842	1.50	5703	1.10
1B27	10.00	2K33	120.00	6J6W	1.50	WE-312A	2.00	WE-704A	1.50	845	4.00	5718	3.00
1B32	1.00	2K33A	60.00	6SK7W	2.00	WE-315A	20.00	WE-705A	.75	849	17.50	5719	2.50
1B35	4.50	2K33B	110.00	6SU7GTY	2.75	WE-316A	.50	706AY-GY	10.00	851	8.00	RK-5721	150.00
1B36	4.00	2K34	85.00	6X4W	1.00	327A	3.50	707B	4.00	852	4.00	5725/6AS6W	2.25
1B40	2.00	2K35	175.00	12DP7	15.00	WE-336A	5.00	WE-708A	.75	861	15.00	5726/6AL5W	.60
1B42	4.00	2K39	100.00	12GP7	15.00	WE-338A	5.00	WE-709A	1.50	865	.90	5727/2D21W	1.30
1B45	7.50	2K41	100.00	FG-17	3.95	WE-349A	6.00	714A	10.00	872A	1.35	5744	1.90
1B47	5.00	2K42	110.00	RX-21	4.00	WE-350A	2.50	714AY	20.00	884	1.00	5750	2.50
1B51	6.75	2K43	110.00	7C24	90.00	350B	2.50	715A	1.75	GL-889	35.00	5763	1.30
1B62	4.00	2K45	30.00	HK24	3.00	354C	5.00	715B	4.00	GL-889A	50.00	5768	30.00
1B63A	20.00	2K46	200.00	RK-28A	2.50					889RA	75.00	CK-5787	4.95
1D21/SN4	5.00	2K47	90.00	D-42	40.00					902A	2.00	5814	.80
1N23B	1.50	2K48	75.00	HK-54	2.00					902P1	2.00	5819	29.50
1N23BM	3.00	2K50	200.00	QK-59	25.00					905	2.00	5825	7.95
1N23C	2.50	2K54	7.00	QK-60	25.00					917	2.00	5829	1.00
1N25	2.50	2K56	50.00	RK-60/1641	1.35					919	2.00	5837	60.00
1N26	3.75	2X2	.35	RK-61	2.50					927	1.00	5840	4.50
1N28	6.00	2X2A	1.00	QK-62	20.00					931A	2.50	5844	1.50
1N31	2.50	3AP1	2.95	HY-65	1.00					935	4.00	5851	4.00
1N38A	.65	3B24	1.00	RK-65/5D23	7.50					957	.35	5852	Q
1N42	8.00	3B24W	5.00	FG-67	12.00					958A	.35	5854	Q
1N46	.40	3B26	3.50	HY-69	2.50					959	1.25	5876	11.50
1N52	.65	3B29	5.50	RKR-72	.50					991	.35	5879	1.25
1N63	1.75	3C22	60.00	RKR-73	.50					CK-1005	.35	5893	10.00
1N69	.40	3C23	4.00	ML-100	50.00					CK-1007	.45	5896	5.00
1P22	6.50	3C27	1.00	100TH	6.50					1603	3.50	5899	5.00
1P28	9.00	3C31	1.50	FG-105	15.00					1620	3.25	5902	6.00
1W5	1.00	3C33	8.00	F-123A	2.95					1623	1.75	5932	4.00
1Z2	2.00	3C45	7.00	F-128A	12.50					1624	1.00	5933/807W	4.00
2AP1	4.00	3DP11A	6.00	FG-154	10.00					1625	.30	6005	1.75
2AS15	5.00	3D21A	3.00	VT158	9.75					1626	.25	6021	4.50
2B24	.80	3E29	8.50	FG-166	8.75					1631	1.40	6037	55.00
2C33	.75	3FP7A	2.50	FG-172	20.00					1636	.75	6044	30.00
2C35	2.50	3J30	35.00	HF-200	10.00					1641	1.35	6046	.75
2C39	4.00	3K22	150.00	QK-181	15.00					1945	.65.00	CK-6050	2.00
2C39A	10.00	3K30	100.00	WL-200	75.00					2000T	150.00	6096	1.50
2C42	10.00	4B23	5.00	204A	25.00					2050	1.00	6100/6C4WA	2.25
2C43	9.00	4B31	20.00	207	25.00					2051	.65	6111	6.50
2C44	.50	4C27	5.00	211/VT4C	.50					R-4330	9.00	6116	125.00
2C46	6.00	4C28	25.00	212E	15.00					R-4340	Q	6130	7.50
2C51	3.00	4C35	17.50	WL-218	15.00					5517	1.50	6147	3.00
2C52	3.00	4E27	8.75	RX-233A	.75					5551/FG271	25.00	6177	49.50
2C53	10.00	4J22	35.00	EG-235A	25.00					5553/FG258A	90.00	6211	1.50
2D21	.75	4J29	35.00	QK-243	55.00					5559/FG57	10.00	8002R	15.00
2D21W	1.25	4J34	50.00	QK-249	150.00					5586	125.00	8005	4.95
2E24	2.00	4J42	25.00	WE-249B	2.50					5591/4038	2.75	8012	1.00
2E25	1.75	4J50	99.50	WE-249C	3.00					5611	65.00	8025A	2.00
2E26	3.25	4J52	50.00	250-TL	12.50					5634	6.50	9001	.85
2E27	.60	4X150A	20.00	WE-251A	39.50					5636	4.00	9002	.55
2E32	1.00	5BP2A	5.00	WE-252A	7.95					5639	8.00	9003	1.10
2H21	85.00	5CP1	2.00	WE-254A	3.75							9005	1.50
2J31	15.00	5CP1A	7.50	FG-258A	90.00								
2J32	12.50	5CP7A	8.00	FP-265	20.00								
2J33	14.50	5CP11A	9.50	FG-271	25.00								
2J34	14.50	5CP22	27.50	271A	10.00								
2J36	12.50	5JP1A	19.50	WE-355A	12.00	717A	.50						
		5JP2	6.00	WE-356B	4.00	720AY-EY	35.00						
		5JP4	6.00	WE-359A	2.00	721A	.75						
				368A5	1.50	721B	7.00						
				WE-388A	1.20	722A	.75						
				WE-393A	4.50	723A/B	8.50						
				WE-396A	3.00	725A	3.50						
				403/5591	2.75	726A	7.00						
				WE-403A	1.50	726B	15.00						
				WE-404A	12.00	726C	15.00						
				407A	5.50	730A	7.50						
				408A	2.75	750TL	40.00						
				GL-414	99.50	800	1.50						
				WE-416B	40.00	801A	.35						
				417A	1.75	802	2.00						
				WE-417A	12.00	803	2.00						
				WE-421A	7.00	804	9.00						
				WE-422A	10.00	805	6.00						
				WE-423A	8.50	806	6.00						
				WE-428A	40.00	807	1.20						
				GL-434A	10.00	807W	2.00						
				WE-438A	40.00	808	1.25						
				446B	1.00	809	2.25						

SPECIAL!

5" DUAL GUN TUBE

Long persistency face, P7 screen. Value at $200.00. This tube has been rejected for military use.

Fully Guaranteed **$17.95**

VACUUM CAPACITORS

6 mmfd. 32 KV 8.00
50 mmfd. 32 KV 8.00
75 mmfd. 20 KV 10.00
Also Other Values!

THIS IS ONLY A PARTIAL INVENTORY.

CHECK WITH US FOR YOUR REQUIREMENTS

Thousands of other types in stock. Send us your requirements. RECEIVING TUBES! We Carry a complete line in stock. Standard brands only.

jsh SALES CO.

ELECTRONICS
Dept. 15
1108 Venice Blvd
Los Angeles 15
California

All prices F.O.B. Los Angeles, subject to change without notice. Minimum order $5.00. Check with us for items not listed.

CONSISTENTLY . . .

HIGH QUALITY ELECTRON TUBES

AT SENSIBLE PRICES

GUARANTEED • UNUSED • BOXED • 1st QUALITY • WRITE FOR COMPLETE LIST

0G3/VR90	$ .85	2J51	45.00	6D21	7.95	QK60	25.00	10A	10.00	KU610	3.50	916	1.65	5663	1.25	5864	11.57
0G3/VR105	.75	2J61A	15.00	6F7	1.25	QK61	25.00	10A/A	1.25	WL651/5552	50.00	927	1.50	5672	1.00	5875	8.50
0G3/VR150	.75	2J62	11.00	6J4	11.00	QK62	25.00	10A/B	1.50	WL653B	110.00	931A	1.00	5675	1.00	5875	1.40
VG-1A	20.00	2K30/418GR	95.00	6J5	6.00	RK61	7.75	160A	1.00	GL673	11.00	932	1.75	5676	8.00	5881/6L6WGB	2.25
1B24	6.50	2K32	125.00	6L5	10.00	RK65/5D23	7.50	160B	2.75	705A	2.75	954	1.00	5677	6.00	5881	6.00
1B24A	10.00	2K33	95.00	6MP1	5.00	RKR-72	.50	205A	15.00	706A	.85	955	1.00	5687	2.75	5890	10.00
1B27	1.25	2K41	95.00	6R7A	9.95	RKR-73	.50	357A	10.00	CK707	1.15	CK-1007	.75	5691	4.75	5894/AX9903	19.00
1B32	10.00	2K42	95.00	E-42-P	2.75			359A	1.75	707A	2.50	CK1025	2.00	5692	4.00	5896	4.50
1B37	2.00	2K47	110.00	6AQ5W/6005	1.95	90-MB	12.00	371B/VT166	.90	707B	4.00	CK-1301	1.75	5693	4.75	5895	4.00
1B38	1.50	2K55	15.00			FG-95	21.00	371A	1.00	708A	2.00			5696	.90	5902	4.75
1B40	1.50	2K56	15.00	★★★★★★★★		FG-105	21.00	371B	1.00	715A	1.00	★★★★★★★★		5702	1.00	5908	18.00
1B41	1.25	2P21/RK22	1.50	4PR60A		100B (Surp)	2.00	387A	4.00	715B	1.00			5703	1.00	5915	.50
1B41A	20.00	2P24	1.50	(Surp)		100TL(Surp)	14.00	391A	1.50	717A	.35	750-TL		5704	1.00	5915	.50
NU10/868	1.50	2P24W	1.50	$50.00		FG105	21.00	394A	1.50	721A	11.00	(Surp)		5716 (Long tab)	2.00	5932/6L6WGA	5.00
1N21B	1.25	2P25	5.00			126-NB	40.00	396A/2C51	1.00	721A	.75	$50.00		5716A	5.00	5945	1.00
1N21C	1.25	2P28	5.00	★★★★★★★★		F-123-A	5.00	403A/WE-6AK5	1.25	722A/B	7.85			5716 (Long tab)	2.00	5977A	4.50
1N23A	.50	2P37	1.50			VX-R130	1.75	418B/5551	2.75	726C	20.00	★★★★★★★★			2.00	5998	10.00
1N23B	.50	2P39	1.50	QK135	265.00	FG172	15.00	404A/5847	12.50	800	.90			5721	150.00	5998/421A	6.00
1N25	.75	EL3C/4B24	4.50	FG172	15.00	QK181	2.00			801	2.00	1654	2.95	5722	1.95	6005/6AQ5W	1.95
1N26	.60	2C22	4.00	HF-201A	27.50	QK202	265.00	450-TH		802	2.25	1658	2.50	5725/6AS6W	2.75	6021	5.00
1N32	.60	2C26/24G	1.75	5C4 (Jan Rated)	.20			(Surp)		805	5.00	1680	2.50	5726/6AL5W	1.00	6030	4.00
1N34	.65	2C31/C1B	1.40			QK212	2.00	$47.50		806	7.50	1684	2.28	5727/2D21W	1.40	6040	1.00
1N35	.65	2C34	2.00	5CP1A	2.00	211/VT4C	2.00			807	1.00	1685	2.28	5751	1.00	6045	1.50
1N38	.70	2D21A	1.50	EL5C/F/6B25	5.00	227A	2.00	★★★★★★★★		807W/5933	2.85	5851/FG271	37.50	5741	1.25	6080	4.75
1N40	.65	2D21W	1.50	6D21	7.75	242A	1.50			809	2.25	WL-5851/6B5	90.00	5749	1.25	6095	.75
1N41	.65	2E24	2.00	6F4	1.50	243A	15.00			811	1.00	5896/4B1A	2.75	5751	1.00	6096	1.40
1N60	.65	2K25	200.00	6K4	2.25	246A	10.00			815	1.00	5895/403B	2.75	5763	1.20	6097	1.40
1N70	1.00	4-65A (Surp)	15.50	6L6WGA/5932	5.00	249A	1.50			816	1.00	5810	1.00	5780	185.00	6098	1.50
1P21	1.50	4E27/41C	4.00	6L6WGB/5881	2.25	249B	45.00			833	1.00	5833	1.00	5786	1.00	6100	1.00
1P22	1.50	4E28/EL6C	4.00	HK254	6.50	416R/2K30	95.00			829B	8.50	5834/5D21SE	1.00	5787	6.50	6100	2.00
1P23	1.50	4E29/EL6CP	4.00			416A	36.70			832A	6.00	5836A	4.75	5794	5.00	6113	1.25
1P24	1.50	4E27	5.00	6SA7/Y	1.00	416B/6280	50.00			837	1.00	5837	5.00	5795	185.00	6113 (RCA)	70.00
1P24A	2.00	4E27A (Surp)	11.00	ESN7W	1.50	417A (Klystron)	2.75			838	.70	5838/5D21SA	1.10	5802	4.75	6186	2.50
1P27	1.50	4J21	77.00	7G10	65.00	417A/6442	12.50			845	6.00	5839	1.50	5812	1.00	6189/12AU7W	2.50
1P28	1.50	4J22	75.00	7G12	200.00	418A	16.00			860	1.00	5839/5N947	1.50	5813	1.00	6197	1.40
1P29	1.50	4J50	140.50	12C8	.20	429A/5755	5.25			866A	1.25	5841	6.00	5814A	1.50	6261	12.00
2C15A	5.00	4X150A		PG17	2.00	431A/5998	7.00			872A	1.25	5842	1.00	5814WA	4.00	6266	12.00
GL-2C50B	27.50	4X500A (Surp)	22.50	PJ31/5655	15.00	446A/PJ23	1.25			873	1.25	5843 (Sen)	6.00	5829 (Sen)	185.00	6336	10.00
2C40	7.50	4X150D		24G/1C24	1.75	722A	10.00			872A (GE)	2.75	5843 (San)	6.00	5823	7.95	6902M	10.15
2C51/396A	1.25	(Surp)	32.50	NK258	7.70	450TL	47.50			874	.60	5844	8.50	5829	1.00	6905/872A	3.95
2D21	.50	4X500F	50.00	307A	.60	GL451/8020	7.00			876	.65	5845	6.00	5829WA	4.50	6914A	3.95
2D21W	1.40	4X1000F (Surp)	65.00	311A	4.50	CK503AX	1.00			876	.85	5846	6.00	5840	4.50	6929 (Surp)	1.25
2E30	1.95			311CC	2.45					885RA	125.00	5851	1.40	5842/417A	10.00	9002	.65
2E35	1.95	V-45	700.00	WE316A	1.70	589	.50			891	80.00	5854/6AK5W	1.25	5843	10.00	9003	1.15
2J40	40.00	VC60/32	6.00	(575A)	15.00	GL575A	10.00			892	2.75	5656	4.50	5847/404A	10.00	9006	.20
2J49	40.00	5BP1	1.25	337A	6.00	UX577	22.00			902	2.75						

AND MANY OTHERS! OVER 1000 TYPES IN STOCK . . . WRITE!

We stock complete line of:
BARRY—DIRECTRON
SELENIUM RECTIFIERS
Write for free catalog.

Terms: FOB—NYC—25% Deposit with order—send full remittance to save COD charges—to Rated Firms (F2% or Better) Net 10 days. CABLE: BARRYLECT, N. Y. TELEGRAPH: BARRY ELECTRONICS, FAX, N.Y.C.

TUBE CARTONS • STACKERS

Super gloss red & black or plain glossy white. Both types with new partitions that meet U. S. Government specifications. Specify white or colored when ordering.

FOR PRICES AND FREE SAMPLES—WRITE ON YOUR LETTERHEAD

BARRY ELECTRONICS CORP. Dept. 75-E

512 Broadway, N. Y. 12, N. Y.

"Call day or nite—24 hour phone service"

Phone: WAlker 5-7000

A BARGAIN FOR YOU in a ....

SOLA Constant Voltage TRANSFORMER

End Fluctuating Line Voltage

OVER 60% OFF . . .

the factory price of a 1-input 2,000 VA unit! And here's another bonus! This Air Forces 2,000 VA overstock, Sola Cat. No. 30768, has 4 inputs! 90-125 V., 190-250 V., 60 cy. or 50 cy. Isolated secondary is constant 115.0 V. ± 1% from no-load to full-load of 17.4 amp. So, if you choose, use it as a 220:115 V. step-down. And slash $147.50 off the factory 1-input price!



Brand new in original wood box. 4 cu. ft. Ship. wt. 254 lbs. F.O.B. Pasco, Wash. Only..... **$97.50**

(EXPORTERS: Note choice of 50 cycles.)

THE M. R. COMPANY

P. O. Box 1220-B Beverly Hills, Calif.

LOOK HERE!

Model LAD UHF signal generator used with SP or SP-1M radar equipment	$95.00
I-208 FM Gen. 1.9-4.5 & 19-45 Mc	75.00
Model 78B 15-25 & 190-230 Mc	65.00
Type OAN Sig. Generator 200-2000 KC.	45.00
TS-127/U Frequency meter 375-725 Mc.	75.00
G.R. 400 cy. variac type 60 AUS-1	19.00
Model 58 Hickok, 400 cycle meter 350-450 cy. 90-140 volts	29.00
B.C. 221 AA & AH Frequency meter	95.00
L.M. frequency meter	75.00
Weston Model 796 megohmmeter	45.00
G.R. model 726-A VTVM	65.00
L&N Hoops Conductivity Bridge	150.00
G.E. Const. volt Transf. 115V-500 VA	59.00
G.E. Const. volt Transf. 115V-250 VA	39.00
TBW-4 motor Gen. motor 3 HP; 115/230V 1 Ph. 60 cy. Generator 120V. 1 Ph. 800 cy. 9.8 amp.—14V DC at 20 amp	75.00
TBW-RBM gas Gen. 120 V. 1 Ph. 800 cy. 9.9 amp. & 14V. DC 20 amp	125.00
B. C. 375 with 5 Tu's & Ant. tuner	75.00
B. C. 923—A F.M. Receiver 27-38.9 Mc	45.00
B. C. 924—A F.M. Transmitter 27-38.9 Mc.	45.00
Motorola FM Trans. 30-40 Mc 110V	45.00

ALGERADIO ELECTRONICS CO.

236 N. Franklin St. Hempstead, N. Y.

RCA TV CAMERA

NEW Surplus for Labs! Export! Industrials! Medicine! Close Circuit TV!

Ideal for labs, industry, prisons, TV technicians, swim pools, medics—"mechanical eye" for closed circuit TV. 1840 Iconoscope, 6-stage video amplifier and clipper. THE REAL THING! Send for free copy, complete technical data. SOLD AT FRACTION OF REAL VALUE!

Harjo Sales Co.

Office-Warehouse: Dept. E-7, 503 N. Victory Blvd., BURBANK, CALIFORNIA

IF THERE IS

Anything you want

that other readers of this paper can supply

OR—

Something you don't want

that other readers can use, advertise it in the

Searchlight Section

MICROWAVE EQUIPMENT

X BAND – 1" x ½" WAVEGUIDE

AT-68/UP 3 Cm Horn with type N. feed for receiver measurements, etc. New $7.45

ROTARY JOINT (AIS-6) Sperry PT #658275, 180 deg. rotation, choke-to-choke. Has "Built-in" Di-Coupler, 20 DB, with "N" Takeoff $22.50

PARABOLOID DISH, 18" diam. Spun Aluminum, 8" Focus. For AN/APS-6 ..... $4.95

3 CM. DIPOLE and Feed Assembly. (May be used with above dish.) 8 inches long $5.00

FLEXIBLE SECTION 9 in. long, Cover-to-Cover ..$5.50

ROTARY JOINT (APS-6) Sperry PT #658275, 180 deg. rotation, choke to choke. Has "Built-in" Di-Coupler 20 DB., with "N" Takeoff $22.50

3 CM. DIPOLE FEED, 15" L. for APS-15 ..... $14.50

MITRED ELBOW, Cast aluminum, 1¼" x ⅝" W.G. W.E. Flanges. "E" Plane $3.50

3 CM. ANTENNA ASSEMBLY: Uses 17" paraboloid dish, operating from 24 vdc motor. Beam pattern: 5 deg. in both Azimuth and elevation. Sector Scan.: over 160 deg. at 35 scans per minute. Elevation Scan over 2 deg. Tilt. Over 24 deg. $35.00

RG52/U Waveguide in 5' lengths, fitted with UG 39 flanges to UG40. Silver plated ..... per length $5.00

Rotating-Joints supplied either with or without deck mountings. With UG40 flanges ..... each $17.50

Bulkhead Feed-thru Assembly $15.00

Pressure Gauge Section with 15 lb. gauge $10.00

Directional Coupler. UG-40/U Take off 20db $17.50

MAGNET AND STABILIZER CAVITY For 2J41 Magnetron $24.50

90 degree elbows. "E" Plane 2½" radius $8.50

CROSS GUIDE directional coupler UG40 output flange. Main guide is 6" long with 90° "E" plane bend at one end, and is fitted with std. UG39/UG40 flanges. Coupling figure 20DB $22.50

10 CM.—RG48/U Waveguide

10CM ECHO BOX: Tunable from 3200-3333 Mc. For checking out radar transmitters, for spectrum analysis, etc. Complete with pickup antenna and coupling devices $17.50

POWER SPLITTER for use with type 726 or any 10 CM Shepherd Klystron. Energy is fed from Klystron antenna through dual pick-up system to 2 type "N" connectors $12.50

LHTR, LIGHTHOUSE ASSEMBLY. Parts of RT-39 APG 5 & APG 15, Receiver and Trans. Cavities w/ assoc. Tr. Cavity and Type N CPLG. To Recvr. Uses 2C40, 2C43, 1B27, Tunable APX 2400-2700 MCS. Silver Plated $45.00

BEACON LIGHTHOUSE cavity p/o UPN-2 Beacon 10 cm. Mfg. Bernard Rice, each $27.50

MAGNETRON WAVEGUIDE Coupler with 2 A Duplexer Cavity, gold plated $31.50

721A TR BOX complete with tube and tuning plunger $12.50

McNALLY KLYSTRON CAVITIES for 707B or 2K28. 2700-2900 Mc. $4.00

AS14A AP-10 CM Pick up Dipole with "N" Cables $4.50

HOLMDELL-TO-TYPE "N" Male Adapters, W. E. #D167284 ..... $2.75

I.F. AMP. STRIP: 30 MC, 30 d.b. gain, 4 MC Bandwidth, uses 6AC7's—with video detector. A.F.C. less tubes $17.50

BEACON ANTENNA, AS31/APN-7 in Lucite Ball. Type "N" feed $22.50

ANTENNA, AT49A/APR: Broadband Conical, 300-3300 MC Type "N" Feed $12.50

"E" PLANE BENDS, 90 deg. less flanges $7.50

COAXIAL R.F. FILTERS

F-29/SPR-2. Hi-Pass, with 1000 mc. Cut-off. Type "N" input and output. 50 Ohms Z $9.50

F-4I/SPR-I. Hi-Pass, with 300 MC cut-off. Type "N" input and output. 50 Ohms Z $10.50

F-3/AR 400 MC, lowpass 50 Ohms impedance, type "N" Connectors 20¼" l. x 1¼" dia. $27.50

MICROWAVE ANTENNAS

3 CM ANTENNA ASSEMBLY: Uses 17" paraboloid dish, operating from 24 vdc motor. Beam pattern: 5 deg. in both Azimuth and elevation. Sector Scan: over 160 deg. at 35 scans per minute. Elevation Scan, over 2 deg. Tilt. Over 24 deg. $35.00

3 cm. Horn, 1" x ½", with twist and 180 deg. bend. With dielectric window $22.50

AT49/APR—Broadband Conical, 300-3300 MC. Type N Feed $8.95

Discone Antenna, AS 125 APR, 1000-3200 mc. Supported with type "N" Connector $14.50

AS14A/AP, 10 CM pick up dipole assy, complete w/ length of coax and "N" connectors $4.50

AS46A/APG-4 Yagi Antenna, 5 element array ..$22.50

30" Parabolic Reflector Spun Aluminum dish 10¼" Focus $4.85

AN/APA-12—Sector Scan Adaptor for APS-2 radar. Complete Kit $37.50

LP-24 Alford loop, for use with glide-path transmitters (MRN-1), etc. 100-108 mc $32.50

18" PARABOLIC DISHES, spun aluminum. Focus approx. 8 inches $4.95

10 CM. ANTENNA ASSY. (Airborne). 20" dish with coax. dipole feed. Focal length is 10⅛" Horiz. polarization, 350 deg. azimuth. Tilt: plus and minus 20 deg. 28 vdc drive motor, seslyn takeoff $65.00

VACUUM TUBES

1AB5	$1.20	5HP4	3.50	700D	8.75
1P5GT	.45	5J23	19.75	703A	1.50
1P39	1.10	5J30	5.00	704A	.95
2C21	.35	C5B/5C30	1.10	705A	.75
2C22/7193	.07	7C4/1203A	.18	706A	9.75
2C26A	.25	9GP7	3.45	708D	14.75
2J21A	2.90	10Y	.10	708EY	9.75
2J22	2.50	15R	.45	709CY	9.75
2J26	2.50	39/44	.15	708A	.65
2J27	3.00	QK59	25.00	709A	1.00
2J37	10.00	QK60	25.00	713A	.65
2J39	18.50	QK61	25.00	C-722A	.90
2J31	12.50	QK62	25.00	730A	6.50
2J32	12.50	ML-100	47.50	800	.65
2J38	9.00	HY114B	.25	801	.25
2J39	8.25	227A	2.50	843	.19
2J48	22.50	268A	6.75	860	3.00
2J62	5.00	316A	.50	861	15.00
3CP1/51	1.75	355A	12.50	864	.19
3EP1	1.75	356B	5.00	876	.75
3FP7	1.10	WL417A	3.00	884	1.10
4J34	23.50	GL471A	2.10	CK1005	.35
4J38	85.00	WL531	2.75	1625	.20
4J42	35.00	832/1B32	1.25	1619	.15
5FP7	1.10	GL559	.75	9012	.75
5GP1	4.50	700B	8.75	9004	.65

TEST EQUIPMENT

TEST OSCILLATOR TS-47/APR, 40-2000+ Mc. Fundamental coverage 40-500Mc in two ranges. Harmonics above 2000 Mc. Provides a calibrated (dial accuracy ±0.7 per cent) R.F. source for testing receiving equipment. Output 5MW or more up to 400 Mc, less on harmonics. C.W., mod. pulse or sine wave output. Operates on 115/230 60 Cy. or batteries. Part of APR countermeasures equipment. New $120

TS 13/AP. Signal source 9303-9445 mc, 50 microwatts. Comes with a wavemeter, thermistor-bridge power meter, and calibrated attenuator. Oscillator is a klystron type 723/a-b which may be internally (self-synch) or externally pulsed. Controls are provided for FM operation, variable pulse delay, pulse width and phasing. Operates from 115 v, 60-800 cps. New $375

TS 235 DUMMY LOAD; Provides excellent impedance match for peak powers of up to 750 kw. at .001 duty ratio. Frequency range 400-4,000 mc. Complete with blower $150

R34/APR-2. Scan and search receiver; automatically scans the spectrum 90-1,000 mc and records signals on paper strip. Can also be used for single-frequency reception. Operates from 115 v, 400-1600 cps. ..$295

TS-56A/AP TEST EQUIPMENT. Slotted line test equipment designed for operation over a frequency of 500-675 MC. Has impedance of 51 ohms. Ideal test set for matching antennas, measurement of characteristics of transmission line. With instructions manual. New. Shipping wt.: 41 lbs. $95.50

POWER TRANSFORMERS

PLATE—115/60~INPUT

PT-766	15KV/30MA	$47.50
PT-034	12½V/5MA (For Preamp)	1.15
PT-133	3140/1570V, 2.36KVA	85.00
PT-521	7500V/.06A. Half Wave	59.50
PT-913	2500V/2 MA H'SLD	4.95
PT-38-2	37.5/40V AT 750 MA	2.15
PT-87P	660VCT/230MA DC	4.75
PT-876	1500-0-1500V./400MA	12.75
PT-151	2060VCT/0.175A	18.50
PT-403	Autotrans.—70V/2A	1.75
PT-078	300V/.05MA	1.85
PT-599	40V/10A.CT	6.15
PT-823	220VCT/75 WATT	2.95
PT-973	160V/100MA	2.15

COMBINATION—115V/60~INPUT

CT-518	160-0-160V/70MA, 6.3V/2A, 2.5V/1.75A	$2.15
CT-575	1600V/25MA., 6.3V/.6A, 2.5V/1.75A	4.95
CT-127	900V/25MA PK, 5V/2A, 2V/7.5A	2.79
CT-006	350-0-350V/120MA, 5VCT/3A, 2.5VCT/12.5A, 2.5VCT/3.5A	4.59
CT-065	78V/0.6A, 6.3V/2A	1.95
CT-004	350-0-350V/190MA, 5VCT/3A, 2.5VCT/12.5A	4.50
CT-002	350-0350V/50MA, 5VCT/2A, 2.5VCT/7.5A	3.65
CT-479	7000V/.018V, 2.5V/5A/17,500V. T	22.50
CT-403	350VCT .026A 5V/3A	2.75
CT-931	585VCT .086A 5V/3A, 6.3V/6A	4.25
CT-349	24VCT/1A, 175VCT/50MA, 600VCT/90MA	3.25
CT-159	2-2.5VCT/3A, 2-22.5V/100MA, 27V/50MA, 45V/50MA	2.35
CT-913A	4.5V/5A, 5.5V/3A, 650VCT/75MA	2.65
CT-607	2.3V/2A, 85V/.1ACT, 400VCT/1A	3.95
CT-616	3V/10A, 10.5V/.1A, 45V/.1A, 60V/.1A, 140V/100MA	$3.75

PULSE TRANSFORMERS

MAGNETRON PULSE TRANS. #964; Prim. imp. 30 ohms. 1600 v. pulse. Secondary imp. is 1250 ohms, 12 KV pulse. Turns ratio sec: pri. is 7.5:1. Duty ratio is 0.001 at 1.2 usec. Bifilar winding 1.2A. $8.50

4P37: Primary, 50 Ohms 750V, .001 Duty. Sec. 15KV, 1000 Ohms Impedance Bifilar 12.6V/2.5A. $32.50

RAYTHEON WX 4298E: Primary 4KV., 1.0 USEC. SEC. 16KV-16 AMP DUTY RATIO: 001 400 CYCLE FIL. TRANS. "BUILT-IN" $22.50

WECO: D-163247 For Modulator of SCR 720 ..... $22.50

GE #K-2449A

Primary: 9.33 KV, 50 ohms Imp.
Secondary: 28 KV, 450 ohms.
Pulse length: 1.05/5 usec @ 635/120 PPS. PK Power Out: 1,740 KW.
Bifilar: 1.5 amps. $62.50

GE #K-2748-A, 0.5 usec @ 2000 Pps. Pk. Pwr. out is 32 KW impedance 40:100 ohm output. Pri. volts 2.3 KV. Pk. Sec. volts 11.5 KV Pk. Bifilar rated at 1.3 Amp. Fitted with magnetron well. $24.50

K-2745 Primary: 3.1/2.8 KV, 50 ohms Z. Secondary: 14/12.6 KV 1025 ohms Z. Pulse length: 0.25/1.0 usec @ 600/600 PPS. Pk. Power 200/150 KW. Bifilar: 1.3 Amp. Has "built-in" magnetron well. $32.50

K-2461-A. Primary: 3.1/2.6 KV—50 ohms (line). Secondary 14/11.5 KV—1000 ohms Z. Pulse Length: 1 usec @ 600 PPS. Pk. Power Out: 200/130 KW. Bifilar 1.3 Amp. Fitted with magnetron well. $29.50

K35J45—Pulse Inversion: PRI: 5 KV PK. Pulse Negative. Sec: Pos. Pulse, 4 KV; 1 usec. and .001 DUTY RATIO $6.50

541J18-1—3 wdgs. Ratio: 1:1:1, 1.10 uh. /wdg.. 2.5 ohms DCR $3.50

UTAH X-151T 1: Dual Transformer, 2 Wdgs. per section 1:1 Ratio per sec 13 MH inductance 30 ohms DCR $5.00

UTAH X-150T-1: Two sections, 3 Wdgs. per section 1:1:1 Ratio, 3 MH, 6 ohms DCR per Wdg. $5.00

66G711: Ratio 4:1 Pri 200V, Sec. 53V, 1.0 usec Pulse @ 2000 PPS, 0.016 KVA $4.50

TR1049 Ratio 21 Pri. 220 MH, 50 ohms, sec. 0.75 H. DCR 100 Ohms $6.75

K-904895-501: Ratio 1:1, Pri. Imp. 40 Ohm. Sec. Imp. 40 Ohms. Passes pulse 0.6 usec with 0.05 usec rise $6.95

PULSE NETWORKS

H-616 10KV, 2.2 usec., 375 PPS, 50 ohms Imp. ..$27.50
H-615 10KV, 0.85 usec., 750 PPS, 50 ohms Imp. ..$27.50
KS9623 CHARGING CHOKE: 16H @ 75 MA, 360 Ohms DCR, 9000 Vac Test $14.95
H-605: 25 KV, "E" CKT. 1.5 usec. 400 PPS. 50 Ohms Impedance, 5 sections $62.50
7-5E3-1-200-67P, 7.5 KV "E" Circuit, 1 microsec. 200 PPS, 67 ohms impedance 3 sections $7.50
7-5E4-16-60. 67P, 7.5 KV "E" Circuit, 4 sections 16 microsec. 60 PPS. 67 ohms impedance $15.00
7-5E3-3-200-67P, 7.5 KV. "E" Circuit, 3 microsec. 200 PPS, ohms imp. 3 sections $12.50
H-616 10KV, 2.2 usec., 375 PPS, 50 ohms Imp. ..$27.50
H-615 10KV, 0.85 usec., 750 PPS, 50 ohms Imp. ..$27.50

DYNAMOTORS

TYPE	INPUT VOLTS	INPUT AMPS	OUTPUT VOLTS	OUTPUT AMPS	PRICE
BDAR3	14		375	.150	$6.50
35X-050	19	3.8	405	.095	4.35
DM33A	26	7	540	.250	3.95
B-19	12	9.4	275	.119	6.95
			500	.050	
DA-3A*	26	10	300	.250	3.95
			150	.010	
			14.5	5.	
PE 73 CM	26	19	1000	.350	17.50
BD 69	14	2.8	220	.06	8.95
DAG-33A	18	3.2	450	.06	2.50
BDAR 93	26	3.25	375	.150	5.75

‡ Less Filter. * Replacement for PE 94.
† Used, Excellent.
PE 94, Brand New $5.95

INVERTERS

800-1B Input 24 vdc, 62 A. **Output:** 115 V, 800 cy. 7A. 1 phase. Used, excellent $16.75

PE-218H; Input: 25/38 vdc, 92 amp. **Output** 115V 300/ 900 cy. 1368 Volt-ampere. NEW $32.50

PE206; Input: 28 vdc, 36 amps. **Output:** 80 V 800 cy. 500 volt-amp. Dim. 13 x 5½ x 10½. New $22.50

EICOR—ML 3011-5, Input: 13.75 V; 18.4A. **Output:** 115 V/400—, 3ϕ, 0.95 PF 100 VA. New $50

PU 7/AP, Input: 28 vdc/160A. **Output:** 115 VAC, 400—, 1ϕ, 300 VA., 21.6 Amp. Volt. and Freq. Reg. Used, Exc. $75

I. F. AMPLIFIER STRIPS

Model 15: 30 Mc Center frequency. Bandwidth 2.5 Mc. gain figure: 65 db. Uses 5 stages of 6AC7's. Has D. C. Restorer and Video Detector A.F.C. Strip included. Input impedance: 50 Ohms. Less tubes. $17.50

60 MC. Miniature IF strip, using 6AK5's 60 Mc center Freq. Gain: 95 db at Bandwidth of 2.7 Mc. New. Complete with tubes $15.00

THERMISTORS

D-164699 Bead Type DCR, 1525-2550 Ohms @ 75 Deg. F. Coefficient: 2% Per. Deg. Fahr. Max. Current 25 MA AC/DC $1.00

D-167332 Bead Type DCR is 2525-2550 Ohms. Rated 25 MA at 825-1,175 VDC $1.00

D-167613 Disk Type DCR: 355 Ohms @ 75 Deg. F P.M. 2.5% Watt $1.00

D-166228 Disk Type 7120 Ohms @ 60°F. 4220 Ohms @ 80°F. 2500 Ohms @ 100°F., 1640 Ohms @ 120°F $1.00

COMMUNICATIONS EQUIPMENT CO.

MAIL ORDERS PROMPTLY FILLED. ALL PRICES F.O.B. NEW YORK CITY. M.O. OR CHECK. ONLY SHIPPING SENT C.O.D. RATED CONCERNS SEND P. O. PARCELS IN EXCESS OF 20 POUNDS WILL BE SHIPPED VIA CHEAPEST TRUCK OR RAILEX.

343 Canal St., New York 13, N.Y. Dept. E-7 Chas. Rosen Phone: CAnal 6-4882

TUBES • ALL FAMOUS ADVERTISED BRANDS ONLY • TUBES

RMA GUARANTEE — From 10% to 95% Below Manufacturers Price — Look and Compare

Special Prices to Quantity Buyers. Most of Our Tubes are Jan.—65% are Original boxed — Brands such as R.C.A., G.E., Ken-Rad., Sylvania, Tung-Sol and Raytheon.

Type	Price	Type	Price	Type	Price	Type	Price	Type	Price	Type	Price	Type	Price	Type	Price
AR/150	51.00	1B22	1.69	2K33A	59.95	5C22	25.00	12SP7	12.95	27GA	7.25	70GDY	35.00	829B	8.99	1630	.79
C21	6.25	1B24	5.99	2K41	72.50	5CP1	5.99	15E	1.25	28ZA	6.45	707A	1.15	829B	2.99	1631	1.89
C30	6.25	1B29	6.95	2K45	32.50	5CP1A	12.50	15R	1.25	28Z	7.25	707B	3.95	830B	2.99	1632	1.35
C42	7.99	1B35	1.95			5CP7	5.99	26A7/GY	2.99	38HA	7.50	709A	2.99	832A	7.49	1642	.39
CRP RK-72	.49	1B40	1.10	2K54	8.95	5CP11A	14.99	26C6	1.10	304TH	10.00	709A	1.69	833A	31.50	1644	1.48
EC1	1.95	2AF4	1.10	2K55	9.50	5FP7	5.99	26D6	13.95	304TL	13.95	713A	.95	837	1.99	1805MP1	4.99
EF-50	.14	2AP1A	6.44	2V3/G	1.19	5HP4	2.49	27MP7	6.25	307A	1.85	713AY	24.95	838	1.50	2050	.95
EL34B	.79	2B22	1.49	2X2	.14	5LP1	12.50	35LP7	6.50	310A	3.99	715A	2.65	841	.49	2050W	2.49
EW-16A	39.50	2BP11	7.99	2X2A	.85	5JP4	14.99	12K5	1.59	311A	.49	715B	6.45	843	.49	2051	.75
F123A	5.99	2C21	.49	3A4	.49	5JP7	14.99	12R5	1.59	313A	4.49	715C	14.50	845	6.49	2053	1.39
FG27	4.50	2C26A	.49	3AP1	5.95	5JP11	69.00	14R7	1.69	347A	3.68	717A	.49	845	6.49	5654	1.25
FG-105	12.99	2C31	.49			5JP16	8.99	15A6	2.99	354C	2.99	718AY/CY/EY/DY	29.75	860	3.49	5656	1.25
FG-154	14.99	2C39	4.99	3B22	1.49	5LP1	12.50	31T6	7.25	368AS	14.95	719A	14.65	861	19.00	5670	1.75
HF-100	7.49	2C39A	11.50	3B23	1.25	5NP4WGY	8.50	61A	2.99	388A	1.49	720CY/DY/EY	29.75	864	.49	5687	2.49
HK-24	1.49	2C40	10.99	3B24	2.99	6C21	19.95	65Y	.15	394A	2.99	721A	1.49	865	.49	5702	1.49
HK-54	1.99	2C42	9.75	3B27	1.49	6AC7	.64	100TH	6.95	WL-417A	2.74	721B	8.45	866A	1.15	5702WA	1.49
HY-114B	.49	2C43	10.99	3B28	4.69							721C	8.45	866B	30.00	5703	1.10
KU-610	1.49	2C44	1.15	3BP1	1.99							722	1.49	GL-872A	2.49	5725	1.99
MT-55	1.70	2C46	7.49	3BP1A	6.15							722A/B	8.99	872A	1.25	5726	1.00
REL-21	1.00	2C51	1.20	3C21	1.20							724A	1.15	874	1.25	5744	.95
RK-34	9.00	2C52	6.95	3C22	6.95							724B	1.49	876	.99	5751	2.50
RK-59	1.50	2D21	.69	3C23	5.99									878	.99	5763	1.49
														879	1.00	5814	1.39
														885	1.10	5851	3.28

CRYSTAL DIODES					
1N21	.10	1N21B	1.10		
1N21A	1.50	1N23	3.50		
1N21B	.99	1N23	.49		
1N22	.49	1N34	.41		
1N22A	.49	1N34A	.64		

LARGEST SURPLUS DEALER IN USA

RK-60	1.99	1E24	2.49	3C24	1.50	6AC7W	1.50	20DA	6.99	GL-434A	6.66	725B	25.00	5-3	.60	5879	1.10
RK-61	2.50	1G21W	1.15	3C45	6.95	6AG5	1.49	20HA	6.99	446A	1.49	726C	24.50	902P1	2.99	5933	2.95
RK-65/5D21	14.99	1G22	2.29	3C33	8.99	6AJ5	1.19	20SD	1.99	446B	1.79	728AY/BY/CY/DY/FY/GY	35.00	918	1.99	5963	1.19
RK-73	.69	1J21A	4.95	3CP1	2.25	6AK5	.54	207	45.50	WL-460	8.99	933A	1.45	927	1.45	5965	.74
RK-233A	.49	2D21	4.95	3D21	4.99	6AK5W	1.50	211A	1.25	WL-464A	4.25	934	.19	928	.19	6077	1.89
VT-25/10	.49	2J26	2.00	3DP1	1.89	6AN5	2.12	215A	1.25	471A	1.25	955	.25	957	.33	6080	2.99
VT-25A/10Y	.39	2J27	2.00	3E29	30.25	6AR6	1.49	217A	2.99	479A	1.25	956	.25	958A	.49	6080W	3.50
VT-57/10 Spec.	.39	2J30	14.50	3EP1	1.98	6AS6	1.49	217C	2.99	CK-502AX	1.10	957	.33	959	.49	6082W	10.50
VT-116	17.50	2J31	14.50	3FP7	1.98	6AS7/G	2.49	221A	5.99	CK-521AX	1.10	958A	.49	960	.49	6085	4.50
VU-111	.19	2J32	11.50	3GP1	3.98	6BM6	39.50	223A	3.10	527	14.50	959	.49	1613	1.50	6087	2.50
1B22/832A	1.75	2J33	11.50	3HP1	2.98	6C4	1.00	224A	3.10	WL-530	19.50	1613	1.50	1614	1.50	6112	1.49
QK-59	29.50	2J34	11.50	3JP1	49.50	6D4	2.99	249B	2.50	WL-531	6.75	1616	.49	1619	.92	6113A	1.49
QK-61	32.00	2J38	14.00	4A-11	.49	6F4	2.99	249C	2.99	532A	.49	1625	.49	1620	.29	6134	2.99
QK-105	99.00	2J39	10.50	4B32	4.99	6F5	2.99	250TH	24.75	708A/B/C/D/E	18.99	1626	.29	1625	.29	6625	1.99
VR-75	.85	2J61	16.40	4C27	5.95	6J4W	3.75	250TL	13.95	708B	94.50	1629	.29	1629	.29	9001	.79
VR-90	.85	2J62	9.60	4C28	36.50	6J6W	1.99	250R	4.99	701A	4.99	1630	.79			9002	.49
VR-105	.79	2K22	14.50	4C37	9.95	6K4	3.99	253A	5.99	701B	2.25	1631	1.89			9003	.19
VR-150	.79	2K31	16.50	4BP1	2.49	6X4W	1.49	259A	5.99	701C	2.25	1632	1.35			9006	.19
OA2	.74	2K35	16.95	4BP1A	8.99	7BP1	9.95	266C	5.99	704A	1.95	1642	.39				
OB2	.89	2K38	29.50	5BP1	2.49	12AT7	.65	268A	13.50	705A	1.25	1644	1.48				
				5BP1A	8.99	12AU7	.76	271A	12.00	706A	1.25	1805MP1	4.99				
				5BP4	2.99			274A	5.95	706AY	14.50	2050	.95				
								274B	1.79	706C	17.50	2050W	2.49				

FAY-BILL DISTRIBUTING CO. DEPT. E1
418 Broome St., N. Y. 13, N. Y.
Telephone CAnal 6-8404

All boxed and fully guaranteed. Special quantity discount—10% on 100 or more of same type. Minimum order $10.00. Thousands of other types in stock . . . Send us your requirements. F.O.B. New York 25% deposit with order or if paid in advance save C.O.D. charges. Rated firms net 10 days. Prices subject to change without notice. For fast service ask for By.

COAX CONNECTORS

SO239 24¢ 831R | M359A 15¢ 831AD

115 V. 60 CYCLE BLOWERS:

At left: 115 VAC 60 Cycle SINGLE TYPE — 100 CFM — 2-¼" intake; 2" outlet. Complete size: 5" x 6" — No. 1C939 ..... **$8.95**

115 VAC 60 Cycle DUAL TYPE —100 CFM—4" intake; 2" Dia. Each Side. Complete size: 8" x 6" — No. 1C880 ..... **$13.95**

115 VAC 60 cycle COMPACT TYPE—108 CFM; Motor built inside squirrel cage; 4-½" intake; 3-⅝" x 3" Dia. Complete size 4-½" W x 8-⅝" H x 8-½" D—No. 2C067 ..... **$14.95**

115 VAC 60 cycle FLANGE TYPE—140 CFM; 3-⅛" intake; 2-½" Dia. Complete size: 7-⅛" W x 7-¼" H x 6-⅝" D—No. 1C807 ..... **$13.95**

115 VAC 60 cycle FLANGE TWIN—275 CFM; 4-½" intake; 3-¼" x 3" Dia. Complete size: 11-⅝" W x 2-⅝" H x 8-1/16" D— No. 2C069 ..... **$21.95**

115 VAC 60 Cycle BLOWER—200 CFM; 4" intake; 3" x 5" outlet. Overall size: 8" x 7" x 6". Bodine Motor NSI-33. Removed from New Equipment #BOD-200 ..... **$14.95**

115—VAC 60 Cycle BLOWER—100 CFM; 3-⅝" intake; 3" outlet; Rd. Flange with Flap Director. Overall size with bracket: 8" L x 6-½" W x 7" H. Removed from New Equipment. Diehl Motor FB-2106-6 No. FDBL-2106 ..... **$6.95**

Same as above, but with 12-Curved Director. No. CDBL-2106 ..... **$7.95**

OTHER BLOWERS:

12/24 VDC—AC CAST ALUMINUM BLOWER—100 CFM—3" intake; 2" outlet. Shunt Motor 4" x 2" 3000 RPM or 24 VDC **$5.95**

6 VDC SINGLE—100 CFM—No. 6100—USED: **$4.95**

24 VDC DUAL—20 CFM—Min—No. 2620 ..... **$7.95**

10 CFM BLOWER—27.5 VDC; 1/100 HP; 7000 RPM: Oster Motor C2BP-1A; L-R Mfg. Co. Bakelite Blower #2—Overall Size: 3½" x 4½". Price **$5.95**

Same as Above, 12 VDC operation — Price **$5.95**

115 V. 400 CYCLE—10 CFM—Eastern Air Devices Motor J31A—7200 RPM, 1/100 HP. L-R #2 Blower Assy. Overall Size: 4-½" x 3-½". No. 3110 ... **$5.95**

10 CFM BLOWER—28 VDC. 6 A; 5000 RPM. Pioneer Motor 88-2345. Aluminum Blower Housing—Overall Size: 4-⅝" x 3-¼". Price **$5.95**

NEW LIST: Write today for FREE New Listing of many, many items!

TELEPHONE EQUIPMENT

EE-8 Field Telephone—Ideal for private telephone system for two or more phones, up to 17 miles, hand ringer generator with handset, carrying case, uses two flashlight batteries.....Used, Checked: $14.95
New Equipment, Used Cases: $18.95

RM-13 Remote Control Unit for telephone & radio equipment. Telephone unit same as EE-8; Radio remote, pre-amplifier, 115 V 60 cycle with input & output jacks, D/S Meter, one tube amplifier with TS-9 handset.....Used: $19.95 — NEW: $24.95

SOUND POWERED HEAD & CHEST SETS
Used, Checked: $3.95

TS-9 HANDSETS.....NEW: $6.95 — USED: $3.95

TS-13 HANDSETS w/PL-55 & PL-68..USED: $5.95

INVERTERS & GENERATORS:

GENERATOR—115 V. 400 Cycle, 1400 Watt, Single Phase, 28.5 VDC 400 Watt.....USED: $69.50

GENERATOR: Motor 3 HP, 115/230 60 cycle single phase Generator 115 Volt, 400 cycle single Phase 1400 Watt & 28.5 VDC 400 Watt, Belt Drive, Reconditioned $195.00

RECEIVER—TRANSMITTER
FM 20 — 28 MC

BC-603 RECEIVER: 20-28 MC variable tuning, 10 Pre-Set push button channels, squelch circuit, 4" speaker; 10 Tubes: 2/12SG7, 2/6SL7, 1/6V6, 1/6J5, 3/AC7, & 1/6H6. Price.....USED: $29.95

PLUG for rear of Receiver..... $1.00

DYNAMOTOR: 12 V input; Output 220 V 80 MA. #DM-34 .....NEW: $4.95.....ReISSUE: $2.95

BC-604 TRANSMITTER: 20-28 MC, 30 Watt, companion to BC-603 Receiver. Crystal control. 10 Pre-Set channels. Interphone communication; 8 Tubes: 7/1619 & 1/1624.....USED: $18.95

PLUG for rear of Transmitter..... $1.00

DYNAMOTOR: 12 V input; Output 625 VDC 225 MA. #DM-35 .....NEW: $12.95.....ReISSUE: $8.95

FT-237 BASE for mounting Receiver & Transmitter (No plugs required) .....USED: $9.95

BC-500 RECEIVER—TRANSMITTER: FM Crystal Control on 5 channels. 100 KC separation 20-28 MC. Transmitter: 25 Watt output, 7 Tubes: 1/625, 1/12A6, 3/12SJ7, & 2/12SA7. Receiver: 11 Tubes: 1/12SL7, 2/12A6, 3/12SA7, 2/12H6, 2/12K8, & 1/12SJ7, Dynamotor Supply: Receiver 28 VDC 1.2 A input; output 250 VDC 60 MA. Transmitter 28 VDC 4.1 A input; output 550 V 120 MA. Control Panel: For Local Control & outlets for Remote also. Heavy duty 5" speaker. Size: 12" x 25" x 9½". With Schematic and Conversion. Weight: 65 lbs. Price .....NEW: **$59.50**

FAIR RADIO SALES • 132 SOUTH MAIN ST LIMA, OHIO

CONDENSERS

10 mfd—10 KV Dykanol	$75.00
1 mfd—7.5 KV Dykanol	14.50
2 mfd.—7.5 KV Pyranol	21.95
1 mfd—15 KV Pyranol	26.95
1 mfd—10 KV	25.50
10 mfd—600 V Pyranol	1.19

SEE MAY ISSUE

For: Other oil and mica condensers. Also available pots & power resistors.

MONMOUTH RADIO LABS
Box 159 Oakhurst, N. J.
Art Hankins, Owner Capitol 2-2776

FOR SALE

Two Hewlett Packard 400 C-AC VTVM
Two DuMont 304A-DC CRO
Good condition with initial instruction book.

FS-2126, Electronics
Class. Adv. Div., P.O. Box 12, N.Y. 36, N.Y.

NEED METERS?

STANDARD or SPECIALS

ANY QUANTITY — NEW — SURPLUS

FOR ELECTRONIC — MILITARY
AIRCRAFT — HAMS

ALL MAKES — MODELS
RANGES — SIZES

METERS REPAIRED
RESCALED
RECALIBRATED

WRITE - PHONE - WIRE

INSTRUMENT SERVICE

76-14 Woodside Ave.
Elmhurst 73, N. Y.
CAA No. 4264 Ltd. HA 9-2925

GUIDED MISSILE BEACON

FILTER CAVIETY F-28/APN-19

2700-2900mc. 1.5-db max. loss at ctr. freq. over band, 3db at 15 mc band ends. JAN spec. Ideal as standard reference cavity. Brand new. Guaranteed. $37.50.

AN/APN-60 Crystal Mounting, $19.50.

MINIATURIZED IF STRIP 100 db. gain uses 6 AK5 $9.50.

10 CM THERMISTOR MOUNT Coaxial type. N fitting, Western Electric $18.50

COAX MIXER ASSEMBLY 1N21 type crystal detector RF to IF, "N" fittings, matching slug, duplex couplings, mfg. G.E. New, $18.50.

RADIO-RESEARCH INSTRUMENT Co.
550 - 5 Ave., N. Y. 19, N. Y. Tel: JU 6-4691
PAUL J. PLISHNER

An Investment!

Productive advertising is an INVESTMENT rather than an EXPENDITURE.

"Searchlight" advertisers almost invariably report prompt and satisfactory results.

BE CONVINCED—send us your advertisement TO-DAY.

Address Classified Advertising Division

ELECTRONICS

P. O. Box 12, New York 36, N. Y.

SPECIAL PURPOSE TUBES

OA2	$ .75	3X2500A3	100.00	35TG	2.00	446B	.85	SN-976D	8.50
OA4G	1.00	4B22	6.50	VX-41	5.00	464A	1.50	991 NE-16	.30
OA5	4.00	4B23	5.00	RK-49	2.85	CK-510AX	.59	CK-1005	.25
OB2	.60	4B24	5.00	FP-54	35.00	527	20.00	CK-1006	2.50
OB3/VR-90	.75	4B27	2.25	HK-54	2.00	GL-546	2.00	SN-1006	6.50
OC3/VR-105	.60	4B31	20.00	T-55	3.00	559	.45	CK-1007	.45
OD3/VR-150	.60	4C27	5.00	VX-55	6.00	575A	6.00	SN-1007A	6.50
EL-C1B/3C31	1.00	4C35	17.50	RK-60/1641	1.25	631-P1	5.00	SN-1007B	8.50
1AD4	1.15	4E27/8001	7.50	RK-61	2.50	WL-632A	17.50	CK-1009 BA	3.00
1AF4	2.50	4J34	25.00	HY-65	.75	WL-652/57	40.00	SC-1016C	6.50
1AG5	2.00	4J38	100.00	RK-65/5D23	6.50	WL-655/58	80.00	SC-1017C	6.50
1B22	1.25	4J39	100.00	FG-67	9.00	WL-681/86	25.00	CK-1026	2.90
1B24	5.00	4J52	50.00	HY-69	2.25	WE-701A	2.50	SN-1039A	6.50
1B35	4.50	4J61	175.00	RK-72	.50	703A	1.25	SC-1156A	6.50
1B38	25.00	4X100A	15.00	RK-73	.50	WE-705A	.70	1500T	100.00
1B46	1.75	EL-C5B/5C30	1.00	RK-75/307A	.75	706AY-GY	7.50	1603	3.50
1B47	5.00	5AP1	2.00	75TL	7.50	707B	2.50	1614	1.50
1P21	30.00	5B21	1.00	FG-81A	3.50	WE-714A	7.50	1619	.30
1P22	5.50	5BP1	2.00	FG-95	17.50	WE-714AY	25.00	1624	1.00
1P28	7.50	5BP1A	4.00	100R	3.50	715B	3.00	1625	.30
1P29 & 30	1.50	5BP2A	4.00	100TH	5.00	715C	10.00	1846	50.00
1P36 & 37	2.00	5BP4	2.00	WE-122A	1.50	717A	.35	2050	1.00
2-01C	10.00	5C22	25.00	F-123A	5.00	WE-719A	7.50	ZB-3200	100.00
2AP1	4.00	5CP1	2.00	WE-123A	2.50	720AY-EY	35.00	R-4330	7.50
2AP1A	6.00	5CP1A	7.50	F-128A	10.00	721A	.75	5528	3.00
2AS15	5.00	5CP7	6.00	VXR-130	1.65	721B	7.00	5550	25.00
2C38	6.50	5CP7A	8.00	HK-154	4.00	723A/B	7.50	5551	40.00
2C39	4.00	5CP12	10.00	FG-166	7.50	WE-725A	3.00	5553	80.00
2C39A	10.00	5D21	7.50	FG-172	20.00	WE-726A	5.00	5556 PJ-8	6.75
2C40	10.00	5FP7	1.50	QK-181	12.50	WE-726B	15.00	5557	3.50
2C42	10.00	5FP14	7.50	FG-190	7.50	WE-726C	15.00	5558	3.00
2C43	10.00	5GP1	4.00	HF-200	8.50	WE-730A	6.50	5560	17.50
2C44	.45	5HP1	2.00	CE-203	3.50	750TL	40.00	5610	1.00
2C46	6.00	5J29	10.00	203A	3.50	SA-728B	2.00	5632	8.50
WE-2C51	3.00	5J30	10.00	207	25.00	WL-786	12.50	5634	6.50
2D21	.75	5J32	7.50	WE-211C	10.00	801A	.50	5637	3.75
2D21W	1.00	5JP1	10.00	WE-211D	8.00	802	2.00	5638	6.50
2D29	1.00	5JP2	5.00	WL-218	15.00	GL-803	2.00	5640	8.50
2E22	3.00	5JP4	5.00	232CH	100.00	804	8.50	5642	1.00
2E24	2.35	5JP5A	5.00	CE-235A	5.00	805	5.00	5644	6.50
2E26	3.00	5JP11	7.50	WE-242C	7.00	807	1.10	5645	8.50
2E29	.75	5LP1	7.50	WE-244A	7.50	807W	2.00	5650	85.00
2E36	1.25	5NP1	2.00	WE-545A	7.50	808	1.00	5651	1.35
2J21A	2.50	5R4GY	1.25	WE-249B	3.00	809	2.25	5654	1.00
2J26 & 27	2.50	5R4WGY	3.50	WE-249C	2.50	810	10.00	5656	3.50
2J29	10.00	5X3	2.75	250R	3.50	811	2.75	5670	1.45
2J30	35.00	5X3P1	75.00	250TH	17.50	811A	3.50	5672	1.15
2J31-40	10.00	5Z2P7	50.00	250TL	14.00	812	2.75	5676	1.25
2J51	100.00	5Z4P11	100.00	WE-251A	75.00	813 (RCA)	12.00	5678	1.00
2J52	50.00	EL-C6J	7.50	WE-252A	7.50	814	1.25	5687	2.75
2J54	25.00	EL-C6L	5.00	WE-253A	2.50	815	1.00	5691	4.00
2J55	35.00	EL-6C/4B25	8.00	WE-254A	3.50	816	1.00	5692	4.00
2J56	50.00	6AC7W	1.00	WE-257A	3.00	826	.50	5693	3.50
2J61	15.00	6AD4	2.50	FG-258A	80.00	SD-828A	6.50	5696	1.00
2J62	5.00	WE-6AK5	1.00	WE-262B	5.00	SD-828E	6.50	5703	1.00
2K22	15.00	6AK5W	1.00	267B	5.00	828	8.50	5720	15.00
2K25	10.00	6AL5W	.50	WE-268A	5.00	829	4.50	5725	1.50
2K30	100.00	6AN5	2.00	FG-271	40.00	829B	8.50	5726	.50
2K33A	50.00	6AR6	1.25	WE-271A	7.50	830B	.50	5727	1.25
2K34	85.00	6AR6WA	3.75	WE-274B	.90	832	2.75	5728	9.00
2K39	100.00	6AS6	1.15	WE-276A	7.50	832A	4.75	5734	9.00
2K41	85.00	6AS6W	1.50	WE-282A	5.00	833A	35.00	5740	35.00
2K45	30.00	6AS7G	2.75	WE-283A	3.50	SD-834	3.75	5750	2.50
2K47	100.00	6BA5	2.50	WE-285A	5.00	834	5.00	5763	1.25
2K54	5.00	6C21	15.00	WE-286A	6.00	836	1.50	5800	7.50
2K55	5.00	6J4	1.75	287A	2.50	837	1.00	5801	5.00
2P21 (I.O.)	25.00	6J4WA	2.50	WE-300B	5.00	838	1.00	5803	6.00
2V3G	1.25	6J6W	1.50	304TH	7.50	842	1.50	5819	30.00
2X2A	.90	6L6WGB	3.50	304TL	10.00	845	3.50	5827	5.00
3A4	.50	6SK7W	1.00	307A	.75	845W	7.50	CK-5829	1.25
3A5	.60	6SN7W	1.50	WE-310A	4.00	849	17.50	5842	12.50
3AP1	1.50	6SU7GTY	2.00	WE-313C	3.00	851	7.50	5847	12.50
3AP11A	5.00	6X4WA	2.00	316A	.50	860	2.50	5915	.75
3B21	3.50	6X5W	1.25	WE-323A	10.00	866A	1.15	5932	3.75
WE-3B24	1.00	7BP7	3.50	323B	6.00	866 JR	1.00	5933	2.00
3B24W	4.85	7CP1	10.00	WE-328A	3.50	869B	30.00	5948/1754	250.00
3B25	3.00	7EP4	10.00	WE-337A	6.00	872A	1.25	5949/1907	125.00
3B26	2.50	7HP7	10.00	WE-339A	7.50	884	.95	5962 BS-101	6.50
3B27	3.00	10KP7	25.00	WE-347A	3.00	885	.95	5963	1.40
3B28	4.00	12AP7	50.00	WE-350A	2.50	902A/P1	2.00	5979/BS-1	10.00
3BP1	1.50	12DP7	17.50	WE-350B	2.00	913	17.50	5980/BS-2	8.50
EL-3C	5.00	12GP7	17.50	WE-352A	15.00	SD-917A	3.75	5981/5650	85.00
EL-3CJ	8.50	LM-15 (I.O.)	50.00	WE-355A	12.00	917	1.75	5998	7.00
3L23	4.50	FG-17	3.50	WE-356B	3.50	918	1.50	6098	3.75
3C24	2.50	RK-20A	7.50	WE-368A/AS	1.75	922	2.00	6328	12.50
3C33	7.50	TZ-20	1.50	371B	1.50	923	1.40	8002R	15.00
3C45	6.50	RK-23	2.50	WE-388A	1.50	927	.75	8005	4.75
3D22	9.75	HK-24	3.00	WE-393A	4.50	931A	2.35	8012A	3.50
3DP1	3.00	HK-24G	2.50	394A	2.00	SN-947C	6.50	8013	2.50
3DP1A	7.50	RK-25	2.25	WE-396A	3.00	SN-947D	8.50	8013A	3.25
3E29	8.50	25E6WG	3.00	WE-403A	1.00	SN-948B	6.50	8020	1.50
3EP1	2.00	25T	3.00	WE-404A	12.50	SN-948D	6.50	8025	1.25
3FP7	1.50	25TG	2.50	WE-409A	1.10	954	.25	8025A	2.00
3FP7A	2.50	FG-27A	12.00	GL-415	25.00	955	.35	PD8365	50.00
3GP1	2.50	28D7W	1.25	WE-417A	12.50	SN-956B	1.00	9001	.85
3HP7	3.00	FG-32	5.00	WL-417A	2.50	956	.35	9002	.50
3J21	50.00	VX-32B	7.50	WE-418A	15.00	957	.35	9003	1.25
3J31	45.00	FG-33	15.00	WE-421A	7.00	958A	.35	9004	.35
3K27	150.00	VX-33A	5.00	GL-434A	10.00	959	1.25	9005	1.40
3KP1	7.50	35T	3.00	446A	.40	SN-974B	8.50	9006	.95

ALL TUBES ARE NEW, INDIVIDUALLY CARTONED, FULLY GUARANTEED

Prices are F.O.B. shipping point

western engineers

ELK GROVE, CALIFORNIA

GEORGE WHITING, OWNER

Orders for less than ten dollars cannot be processed

WANTED

We will buy the equipment listed below REGARDLESS of CONDITION!

Special Price Paid For R.C. 286 Antenna

JUNCTION BOXES
CBY-62018—CW-22081—CBY-62008A—CBY-23049

RELAYS
5059R—5058—5055—5053SM—5053—Price Bros. Relay #10
A-18259—Antenna Switching Relay Box—BG-AN-198—BC-408

TUBES
35T Eimac—53A—VT-127A—WL-530—100TH—250TH
450TL—750TH—15E

TRANSFORMERS
D 163248—RET. D 163250—D 163254—D 162899—D 183254
D 165964—KS 9273—KS 9012—KS 9536—KS 9336
KS 9608—KS 9602—KS 9605—KS 9117—KS 9607
KS 8984—KS 9153—KS 8983—X 330005—A 14987

AIRCRAFT SPARK PLUGS
RB-19R—RB-485S2—590 S2—613 S2—RB 5/2—RD 5/3—RB 5/4
RB 5/5—RB 23-R—RP-43-S—63-S*—64-S—LE-44—LE-45—LS-48
AC-181—AC-281—RB-212 S2—RB-312 S2—RC-9R—RS-14-1R
RZ-14-R—R-214—RB 27-R—RB 23—RS 19-2R—RN-5/3

Will also purchase new or used magneto points.

RADIO and ELECTRONIC SURPLUS
14000 Brush Street • Detroit 3, Michigan
Phone: TOwnsend 9-3403

AN/APR-4 LABORATORY RECEIVERS

Complete with all five Tuning Units, covering the range 38 to 4,000 Mc; wideband discone and other antennas, wavetraps, mobile accessories, 100 page technical manual, etc. Versatile, accurate, compact—the aristocrat of lab receivers in this range. Write for data sheet and quotations.

We have a large variety of other hard-to-get equipment, including microwave, aircraft, communications, radar; and laboratory electronics of all kinds. Quality standards maintained. New Reduced Prices On:
NEW TS-13/AP X-BAND SIGNAL GENERATORS with manual; T-47A/ART-13 Transmitters; H-P, Boonton, G-R, Measurements, many others in stock.

ENGINEERING ASSOCIATES
434 PATTERSON ROAD — DAYTON 9, OHIO

***NEW* G. R. VARIACS all sizes in stock**
Special sale on removed from equipment 200-B 1Amp $8.95

HAND WOUND 10 Sec. to 24 Min. TIMER SWITCH . . $1.35

6 Watt Most POWERFUL TELECHRON MOTOR 110V 60 CY
1 RPM $6
6 RPM (Rovers.) $10.00

TELECHRON Motors

4 RPM on 50 cy or 4⅘ RPM on 60 cy . . $2.85	3.6 RPM . $3.15
2 RPM . . . 2.90	1 RPM . . . 3.95
3 RPM . . . 3.90	3 R.P. Hr. 2.85
4 RPM . . . 2.50	1 R.P. 2Hr 2.80
	1 R.P.12Hr 3.25
	60 RPM . . 4.85

Laboratory Special 1 of Each Motor $23
please include postage

Cheap Relays for Computers and Experiments . . . . . 6 for $2.00.

G.E. Switchettes All types—75¢ ea 10 for $6.00 100 for $50	115 v. AC RELAY $2.90

KOILED KORDS 3 wires $1.26
22 inches long stretches to 9 ft.

HAYDON TIMING MOTORS

110v 60 cycle 30 RPM . .	$2.60
110v 60 cycle 1 RPM . . .	2.60
230v 11 RPM	1.00
50 cy 2 RPM	1.00

BLAN EST. 1923
64D Dey Street
New York 7, N. Y.

SQUARE D ALLEN BRADLEY KURM STEVE ARNO WESTO PHILLI CONTR DORME WESTER ELECTRI AMPERI POTTER BRUMFIE LEDEX GUARD WARD LEONARD ADVANCE STEPPIN SWITC CONT ROTA RACH TELEPHO TYPE KEYING MINIATURE AIRCRAFT UTLER AMMER ALLIED ENERAL LECTRIC CLARE SIGMA OMATIC ECTRIC LEACH RUTHERS DUNN NORTH ELECTRIC ELECTRIC TICALLY LED ITACT CURY ITROLS OLENOIDS

LARGEST STOCK OF RELAYS IN THE WORLD

Send for our latest bulletins

324 CANAL ST., N.Y.C. 13, N.Y. Walker 5-9642
Universal general corp.

THIS IS NO DAISY CHAIN

WANTED
P.E.103 Power Units

Any quantity.
State quantity available.
Unit price desired and condition.

Reply:
W-1971, Electronics
330 W. 42 St., New York 36, N. Y.

MORE THAN 100,000 SUBMINIATURE TUBES

SENSATIONALLY PRICED

STANDARD BRANDS—JAN APPROVED

5636	5647	5744	5896
5639	5718	5800	5899
5641	5719	5840	5902
5906	5977	6021	

More than 3,000 tube types in stock

Phone—Write—Wire

STATE LABS INC.
649 Broadway, ORegon 7-8400
New York 12, N. Y.

OPERATING

ON EVERY CONTINENT
IN THE ENTIRE WORLD
WE SOLD THEM!

COMPLETE

THE BRAND NEW

T-350XM

RADIOTELEPHONE
RADIOTELEGRAPH

Transmitter

- NO SEPARATE ANTENNA TUNER
- NO PLUG-IN TANK COILS
- NO PLUG-IN TUNING UNITS
- NO INTERNAL VFO ADJUSTING
- ALL ABOVE FRONT PANEL CONTROL

SPECIFICATIONS

• 2,000-20,000 KCS • 350 Watts —A1 Output • 250 Watts—A3 Output • Built in Master Oscillator • 5 Crystal Positions • Multi Range Impedance Antenna Tuning Network • Manual or High Speed Keying • Uses 2—813 P.A. and 2—805 Modulators Hi-Level Class B • Speech Amplifier, Remote, Mfg. by RCA • Technical Manuals (2) with Each Transmitter • Size 59" x 16" x 24" • Wt—690 Lbs. Net • Power input: 210/250 Volts Single Phase 50/60 Cycles • Brand New—Complete—Unused.

This transmitter is similar in characteristics to the RCA Model ET-4336. The T-350XM was manufactured by Technical Radio Corporation, San Francisco, California, for the U. S. Signal Corps. All are new, unused and export cased. Each transmitter carries our guarantee. Spare parts available. Quotations on request.

Communication Devices Co., Inc.

2331 Twelfth Ave.,
New York 27, N. Y.

TWX—NY1—223
Cable—Communidev, N. Y.
Tel. ADirondack 4-6174

NEW YORK'S RADIO TUBE EXCHANGE

NEW TUBES

Standard brands. First grade only. No pull outs. No rejects. No rebrands. At lowest prices.

Type	Price	Type	Price	Type	Price	Type	Price	Type	Price	Type	Price	Type	Price
OA2	$1.00	2J34	35.00	3GP1	5.00	12DP7A	45.00	385A	4.50	801A	.90	1280	.35
OA3	1.10	2J36	90.00	3J21	75.00	LM15	200.00	388A	1.80	802	3.95	1500T	$35.00
OB2	.90	2J38	8.95	4B26	5.40	15E	1.75	393A	7.50	803	5.95	HK1554	75.00
OB3	1.10	2J39	8.50	4C27	7.50	15R	.75	394A	3.95	805	6.95	1603	5.00
OC3	.96	2J40	29.00	4C28	35.00	NE16	.59	MX408U	.50	807	1.25	1612	1.50
OD3	.89	2J42	90.00	4E27	16.70	20-4	.75	417A	15.00	808	1.95	1613	1.25
C1B	2.95	2J49	60.00	4J25	50.00	KY21	8.25	434A	15.00	809	2.95	1616	1.25
1B22	1.50	2J50	55.00	4J26	50.00	RK21	2.50	446A	1.95	810	10.50	1619	.45
1B23	6.95	2J55	150.00	4J27	50.00	RK31	8.00	446B	3.95	811A	3.75	1622	1.50
1B24	12.00	2J56	110.00	4J28	50.00	HK24G	1.95	450TL	40.00	812A	3.95	1624	1.75
1B26	1.75	2J61	20.00	4J29	50.00	25T	2.95	450TH	52.50	813	13.75	1625	.35
1B27	15.00	2J61A	25.00	4J30	30.00	35T	4.95	464A	7.50	814	3.75	1626	.25
1B38	35.00	2J62	15.00	4J31	150.00	35TG	5.95	471A	1.25	815	3.25	1654	2.75
1B50	23.00	2K22	29.00	4J32	150.00	RK39	2.75	527	34.00	816	1.45	1851	1.00
1B51	7.50	2K23	15.00	4J33	150.00	HF5	1.75	WL530	23.00	829	11.00	2000T	150.00
1B56	35.00	2K25	19.50	4J34	100.00	HK54	4.50	WL531	22.50	829A	12.00	2050	1.69
1B60	35.00	2K26	68.00	4J35	150.00	RK72	1.00	WL533	15.00	829B	12.50	2051	1.69
1N21	.55	2K28	35.00	4J36	150.00	RK73	1.00	HK654	35.00	830B	2.00		
1N21A	.95	2K29	35.00	4J37	150.00	FG95	19.95	700A/D	10.00	832A	9.95		
1N21B	1.50	2K35A	75.00	4J38	150.00	100TH	7.95	701A	4.50	833A	40.00		
1N21C	6.00	2K39	140.00	4J39	150.00	FG105	20.00	703A	1.95	834	7.50		
1N22	.66	2K41	135.00	4J40	150.00	122A	1.75	704A	1.95	836	1.95		
1N23	.90	2K42	180.00	4J41	150.00	203A	7.50	705A	2.75	837	2.75		
1N23A	.90	2K43	199.00	4J42	190.00	211	.95	706AY/		838	5.95		
1N23B	1.50	2K44	195.00	4J51	190.00	217C	12.00	FY	25.00	849	15.00		
1N23C	7.50	2K45	85.00	4J52	225.00	242C	10.50	707A	5.57	857B	150.00		
1N25	3.50	2K48	95.00	4J53	225.00	244C	19.50	707B	6.57	860	3.50		
1N26	6.75	2K50	295.00	5BP1	3.95	249C	4.25	714AY	36.00	861	25.00		
1N27	3.50	2K54	35.00	5BP2A	12.00	250TH	19.95	715A	4.50	866A	1.50		
1N34A	.79	2K55	25.00	5BP4	3.95	250TL	19.95	715B	9.00	869B	67.50		
1N38	1.00	2K56	72.00	5CP1	7.50	252A	3.00	715C	15.00	869HX	50.00		
1N43	2.25	3AP1A	10.00	5CP7	9.95	274B	1.00	717A	1.50	872A	3.50		
1P25	75.00	3BP1	7.20	5CP7A	18.00	304TH	10.00	719A	15.00	874	2.25		
2C39A	13.50	3B24	5.50	5CP12	15.00	304TL	12.50	720AY/		878	1.50		
2C40	12.00	3B25	5.50	5D21	10.00	307A	2.50	GY	50.00	879	.59		
2C43	14.50	3B26	5.00	5JP1	20.00	310A	4.50	721A	1.50	884	1.50		
2C44	.60	3B28	8.00	5JP2	19.50	310B	6.75	721B	7.50	885	1.50		
2C46	7.50	EL3C	5.50	5JP4	27.50	311A	6.50	723A/B	18.00	902P1	6.75		
2D29	.99	3C22	75.00	5J23	25.00	312A	3.50	724A	1.95	931A	5.00		
2J21A	12.00	3C24	1.75	5LP11A	25.00	323A	15.00	724B	2.25	954	.35		
2J22	9.00	3C31	2.95	5BP7	90.00	350A	4.50	725A	18.00	955	.50		
2J26	15.00	3DP1	7.50	C6A	15.00	350B	5.95	726A	10.00	956	.71		
2J27	15.00	3DP1A	10.00	C6J	12.50	HK354C	15.00	726B	45.00	957	.25		
2J31	24.00	3DP1A-S	210.00	7BP7	5.00	357A	15.00	726C	45.00	958A	.60		
2J32	29.00	3EP1	5.00	7DP4	9.00	368AS	4.95	730A	22.50	959	2.25		
2J33	32.00	3E29	15.50	12AP4	50.00	371B	1.50	750TL	45.00	E1148	.25		

VARIOUS 5000 AND 6000 SERIES OF NEW PRODUCTION

THOUSANDS OF OTHER TUBES.

Special! TS45 X BAND GENERATOR—$99.00

NEW UNUSED SURPLUS TS 259 K BAND
23400-24500 MEGACYCLES SIGNAL GENERATOR

SPECIAL! 5,000 V. POWER SUPPLY
For IP25 Infrared Image Converter from 3 V. Battery Source. NEW, Complete with RCA 1654 Tube..... **$9.90**

NEW MICROWAVE TEST EQUIPMENT
TS148/UP SPECTRUM ANALYZER

TS147D SIGNAL GENERATOR



Field Type X Band Spectrum Analyzer. Band 8430-9580 Megacycles.

Will Check Frequency and Operation of various X Band equipment such as Radar Magnetrons, Klystrons, TR Boxes. It will also measure pulse width, c-w spectrum width and Q of resonant cavities. Will also check frequency of signal generators in the X band. Can also be used as frequency modulated Signal Generator etc. Available new complete with all accessories, in carrying case.

OTHER TEST EQUIPMENT USED CHECKED OUT SURPLUS

TSKI/SE	T35/AP	TS108	TS228	
TS3A/AP	TS36/AP	TS110/AP	TS239A-TS239C	SURPLUS EQUIP.
RF4/AP	1-95A	TS125/AP	TS251	APA18
TS12/AP	TS-45	TS126/AP	TS258	APA38
TS13/AP	TS47/APR	TS147	TS270	APS3 APS4
TS14/AP	TS69/AP	TS176/AP	TS418	APR4
TS33/AP	TS100	TS175/AP	TP890/1	APR5A
TS34/AP	TS182A/AP	TS182	R34	APT2-APT5

SPECIAL
RESONANCE CHAMBER

TYPE CAQT-14 AAT including sweep motor crystal 1N23 with holder and output plug. New..... **$32.50**

Minimum Order 25 Dollars

Phone: ORegon 4-7070

LIBERTY ELECTRONICS, INC.

119 PRINCE ST.
NEW YORK 12, N. Y.
Cables: TELSERUP

FOR SALE
COMPLETE SET OF TOOLS FOR AN-3057 CABLE CLAMPS
Sizes 3—4—6—8—10—12 and 16.
Will Sell for a fraction of cost.
FS-2091, Electronics
330 W. 42 St., New York 36, N. Y.

ART-13 APR-4 BC-610-E
BC-348, BC-312, BC-342, TCS, BC-221, TS-173, ARC-1, APR-5AX, RTA-1B
FRA Teletype Converters (RCA)
ALLTRONICS,
Box 19, Boston 1, Mass. Richmond 2-0048

"TAB" THAT'S A BUY

PLANETARY DRIVE
5:1 & 7 to 1 RATIO
Spl. 56.79 ..... "TAB" @ $5
SPECIAL ..... 3 For $15

MICRO-POSITIONER. Barber-Colman AYLZ3822-6 polarized DC relay 0ble coil, differential current sens. 50v max for remote control position $3.50
2 For $6

SELSYNS, SYNCHROS
Xmitter, Receiver, Generator, Inverter, Repeater, Motor

NEW Q-5er FILTER
Navy Mfgr. U.T.C. Chop off CW & MCW by turning knob to pass only 1000 cycle with enough width for code or speech, rejects all else. Or turn knob to pass everything. With phone plug & jack, plugs into receiver.
Special ..... $2.98 @ | 4 for $10
FILTER, C.W., Range ... or Voice. Filters 1020 cy audio, excellent for CW ..... Only $3.5: 2/$5

MICA CONDENSERS

MFD	WVDC	Price
.05	600	45c: 100/$40
.01	1200	35c: 100/$30
.001	1200	20c: 100/$15
.002	1300	23c: 100/$20
.015	1500	25c: 100/$20
.002	2300	45c: 100/$40

NEW "TABLITE" ELECTRONIC PHOTOFLASH KITS
Portable Units—AC & Battery Inbuilt In One Camera Case
Uses new lo cost lo voltage super circuit constant bright light output; light duration 1/500 sec'd; color X 6800°; cost per flash less than ¼c. 1000 to 2000 flashes per set of batteries. All kits with inbuilt AC pack. (Kits do not include batteries*)
Model 400B, 60W Sec color 75 ±; B&W 225 ±, Recycles 2 sec'd, less than 4 lbs $29.95
Model 500B, 120W Sec. color 100 ±; B&W 350 ±, Recycles 2 sec'd, less than 5 lbs $44.95
Model 1000B, 240W Sec color 150 ±; B&W 450 ±, Recycles 10 sec'd, less than 6 lbs $54.95
KITS ASSEMBLED, additional ..... @ $10
***Two (2) 246V BATTERIES ..... @ $10**
SOLD WITH "TAB" MONEY BACK GUARANTEE

PHOTOFLASH & STROBE LAMPS

"TAB" No.	Replaces	W-Sec Max	Each
2WL	PA 104/PT 118	150	$5.98
2HL	Ansco 380AX	100	10.98
2357	GE PT 210	200	9.98
2WVA	GYLV, 4330	200	9.98
V4X4	X400	200	10.98
2LX	DX & FA100	150	9.00
2DX	DXT/2250-350	150	10.00
2357G	PT 808	2000	10.98

TRIGGER COIL LO VOLT FLASH $1.67
COND-525MFD/450VDC/5J ..... Watt sec'ds
NEW low leakage famous style ..... 88: 2/$15; 6/$35
Send 50c for "TAB" Photoflash Data

WRITE FOR MONTHLY BONUS CATALOG

CIRCUIT BREAKER
Heinmann Mgcn. Bkrs. Amps: 2, 3, 5, 9, 10, 12, 15, 20, 30 @ $1.95 EACH; 12 FOR $20 ..... 60 FOR $75
Sq. G & CH Toggle Sw. Bkrs. Amps: 5, 10, 15, 20, 30 @ 75c ea; 6/$4! ..... 75c EA
Nilson Therma Push Button Bkrs. Amps: 5, 10, 15, 20, 30 @ 75c ea; 6/$4! ..... 20 FOR $10

STEVENS ARNOLD DC-AC CHOPPER
0-500 cps Type CH205 SPDT Coil DC 26V/800Ω imp 60cy/830 ohm, 400 cy/1100 ohms. Electro-Mech Vibrator used as Chopper, rectifier, demodulator, sq wave generator. Ideal Servo Applications Reg $20 SPECIAL ..... @ $5: 4 for $18

SEND US YOUR REQUIREMENTS

"VECTOR" PLUG-IN STANDARD TURRET
810M Con. Octal Plug & 7 pin top socket. Regular $1.65: "TAB" Special ..... 3/$1: 100/$25

HIGH FIDELITY
Speakers, Amplifiers, Tuners, Changers and Components Parts — GET OUR PRICE 8-4-U-BUY

NEW "TABTRON" SELENIUM RECTIFIERS
ENGINEERED FOR INDUSTRY

"Technical Apparatus Builders" mfgrs. Power Rectifiers to your specs. From one amp up to and above 1000 amps, convection or fan cooled, single or 3 phase. "NEMA" & JAN. Specs.

* FULL WAVE BRIDGE ● DATED & ONE YEAR GTD

Max Amp	18VAC* 14VDC	36VAC* 28VDC	46VAC* 42VDC	72VAC* 56VDC	130VAC* 100VDC	225VAC 217VDC	Ctr Tap 3 Phase AC/DC	3 Phase 120VAC 105VDC	Bridge 240VAC 208VDC
1	$1.40	$2.85	$3.75	$4.45	$7.40	$25.00	$2.40	$17.10	$15.25
2	2.00	3.45	4.30	5.45	10.25	29.00	2.70	18.25	45.00
3	2.60	4.10	5.00	6.45	12.70	37.00	3.00	20.00	49.50
4	3.00	6.45	11.25	14.30	25.00	45.00	3.40	21.70	54.00
5	3.45	7.70	12.70	17.25	29.45	55.00	3.70	24.40	59.90
10	5.95	13.15	19.60	26.75	41.25	85.00	4.45	32.40	82.25
12	7.20	14.25	22.00	29.50	47.85	100.00	6.00	40.15	112.50
20	13.00	25.00	37.00	48.00	78.00	161.00	9.15	58.50	164.75
24	15.00	28.50	41.00	57.00	91.00	185.00	11.00	70.25	195.00
30	17.85	34.25	56.25	70.50	105.00	236.00	14.50	138.65	289.00
40	22.15	42.00	64.75	84.50	133.65	294.00	17.20	185.10	368.00
60	29.40	64.00	106.00	118.00	177.00	390.00	23.00	208.00	490.00

RETURN YOUR OLD DUD RECTIFIER—DEDUCT 5% FROM PRICE

Heavy Duty Battery "Fast" Charger Rectifier
12-0-12V (CT) 100 Amp Fan Cooled & 54 Amp Air Cooled. Rep'mt 6V Booster Charger.
Model CR16 ..... $12.00
16-0-16V (CT) Fan Cooled for 12V/100A and 6V/100A Booster Chargers.
Model CR30 ..... $14.00

New Variable 0 to 6 & 12 Volt 12 Amp DC Power Supply
Battery Eliminator Charger Model RR Pieter Aircraft Marine or any DC Req. Extra Hvy Duty Selenium Rectifier. 3 Meters V. & A. Dsgnd for Cont. Service and up to 20 Amp Intermittent overload. New Model T612V12AC
SPECIAL $32.00

"TABTRAN" Rectifier Chokes
CR6001/1 Amp/0.1 HY/1.4 Ohm $2.95
CR6002/2 Amp/0.1 HY/.87 Ohm 3.95
CR6003/5 Amp/.07 HY/.5 Ohm 7.95
CR6004/12 Amp/.01 HY/.1 Ohm 14.95
CR6005/24 Amp/.001 HY/.025 Ohm 29.95
CR6006/50 Amp/.001 HY/.001 Ohm 52.00

"TABTRAN" Rectifier Xfmrs
Sec'd Volts (DUAL † 0-9-18-18 & 0-9-18-18 Series Sec'ds 0-3-6-9-12-15-18-21-24-27-30-33-36 Volts

TR6007 1 Amp†	55.25
TR6008 2 Amp†	6.25
TR6001 5 Amp†	8.60
TR6002 12 Amp†	16.65
TR6003 24 Amp†‡	35.65
TR6004 50 Amp†‡	59.95
TR6005 100 Amp†‡	109.65

16 Volt 2 Amp ..... $1.98; 2 for $3.50
†Windas in Series at Ratings shown; Parallel 2X Current; Voltage 0-9-18-18.
‡Dual Pri 115 & 230V 60cy.

FILTER CAPACITORS
CE156M 6000MFD 15V ..... 88c; 2/$1.50; 10/$5
CE502M 2000MFD 50V ..... $2.50 | 10 for $20
CE601M 3000MFD 60V ..... $3.98; 2 for $7

DC Power Supply
6 or 12V DC Power Supply 6 Amp Full Wave Rectification 6000MFD Condenser Filter Ready to operate. Input 115V 60cy Output 6 or 12.5V
Model 2DCF (2 amp) $12.98
Model 5DCF (5 amp) 29.95
5DCF ACC/5 amp/1% Ripple 38.95

High Current Power Supplies
ONE YEAR GUARANTEE
Variable 0-28VDC. Completely Built, Ready to go. Full Wave Selenium Rectifier, Transformer Variac, 4" Volt & Amp Meters, Switch, Terminals & Fuse. Hvy Duty Steel Cabinet Rtd 115V/60 cy Input or 220V † (3 phase) to order.

Stock NUMBER	Continuous Rating	With Meters
T28V5A*	0-28 WVDC at 5 Amp	$60
T28V5ACC	5 Amp (1 % Ripple)	$65
T28V5ACCC	5 Amp 0.01 % Ripple	$145
T28V12A	0-28 VDC at 12 Amp	$125
T28V12ACC	12 Amp (1 % Ripple)	$160
T28V12ACC	12 Amp 0.01 % Ripple	$220
T28V24A†	0-28 VDC at 24 Amp	$155
T28V24ACC†	24 Amp (1 % Ripple)	$225
T28V24ACCC†	24 Amp 0.01 % Ripple	$310
T48V50A†	0-28 VDC at 50 Amp	$285
T28V50ACC†	50 Amp (1 % Ripple)	$410
T28V100A†	0-28 VDC at 100 Amp	$560
T48V100ACC†	100 Amp (1 % Ripple)	$700

Variable 75 to 135 VDC Completely Built, Ready to go. Includes F. W. Selenium Bridge Rectifier 4" Rectangular Volt & Ammeter, Specify for 115 or 230 VAC 1 phase, 60 cy Input.

T120V5AC 75 to 135 WVDC at 5 Amp	$190
T120V5ACC 5 Amp (1 % Ripple)	$240
T120V10AC 75 to 135 VDC at 10 Amp	$245
T120V10ACC 10 Amp (1 % Ripple)	$295

"2" Meters; All Others 4" Meters
POWER SUPPLIES TO YOUR SPECS. WRITE US YOUR REQUIREMENTS.

New Variable Voltage X-fmrs
SUPERIOR-GR-STACO-UTC

0-132V-1.25A	$7.23
0-135V/2A	10.63
Cased 0-135V/7.5A	19.55
Uncased/0-135V/7.5A	15.10
Cased/0-270V/5A	22.50
Uncased/0-270V-5A	17.00
Cased/0-135V/15A	30.10
Cased/0-270/5A	39.10
Uncased 0-270V/7.5A	31.64
Cased 0-270V/9A	51.60
Cased 0-270V/12A	107.10
Cased 0-270V/15A	124.55
Cased 0-270V/20A	154.70
GSCR/9-270V/21A/LN	$115.00

BUY AS YOU NEED AT FACTORY DISCOUNTS

230 to 115 V Autoformers
For 220v/50cy Input. To 110-120V or Step up. †With Cord. *Use † Receptacle.

TPA050/50W *	$2.58
TPA075/75W †	3.66
TPA100/100W †	4.25
TPA200/200W †	5.75
TPA250/250W †	6.75
TPA500/500W †	9.25
TPA750/750W †	11.70
Model TPA1000 Watts; 1 to 1 †	16.55
TPA1000/1000W †	$22.80; TPA2000/2KW .. $34

* Less Cord, Plug & Receptacle

TUBES
"TAB" TESTED INSPECTED GUARANTEED!!!

OA2	$ .74	3C45	7.00	394A	3.85	1201	.75	5819	32.00
OA3	.89	3D21A	2.35	434A	2.75	1612	1.25	5820	45.00
OB2	.64	3D22	5.00	446A	.69	1613	1.00	5829	.59
OB3/VR90	.64	3K21	125.00	448	1.50	1614	.49	5842	7.98
OC3/VR105	.74	3X2500A	100.00	450TH	65.00	1619	.49	5847	11.00
OD3/VR150	.65	4-65A	16.50	512AX	1.35	1620	2.00	5864	.85
1A3X	1.24	4-125A	16.50	513DX	1.35	1621	.30	5875	3.50
1AG4	1.35	4B21	6.00	516AX	1.55	1629	.30	5881	3.15
1AX2	1.25	4B27	2.50	616DX	.30	1630	.30	5881	2.70
1B3	.65	4B36	2.50	618DX	2.50	1632	.62	5910	.43
1B32	1.25	4J52	50.00	644DX	2.50	1633	.90	5932	1.95
1B34	1.25	4X150A	22.25	671AX	4.45	1642	.80	5933	1.50
1B42	2.94	5C22	29.45	685CX	.97	1644	.80	5965	1.50
1B46	1.49	5D21	7.45	HY615	.46	1686	2.00	6057	4.50
1B46A	1.49	5D22	7.45	703A	5.20	1840A	65.00	6059	1.35
1B61A	21.95	5AG3	.45	706A	.74	2050	.24	6060	1.35
1D21	1.49	5AN8	2.61	705A	.74	2050W	2.48	6159	45.00
1LN5	.84	5AQ4	1.20	707B	1.50	2051	.68	7151	.25
1Q21	150.00	5AS7G	2.35	710A	1.68	2054	4.65	7475	3.60
1X2A	.60	5B/QQ	.90	715A	3.85	5516	5.51	8008	1.50
2C22	.25	6J6	.45	717A	.29	5517	2.10	8012	1.09
2C26	1.20	6SN7	.85	721A	72.00	5651	1.40	8013	2.70
2C35A	7.95	6V6	1.25	724AB	.84	5654	1.25	8020	2.95
2C40	7.22	6D21	79.00	724A	.84	5656	1.25	8025A	2.95
2C41	6.98	12AU7	.50	724B	.80	5663	1.06	9001	.80
2C51	2.45	12AX7	.50	725A	2.60	5670	1.24	9002	.57
2D21	.39	YG17	2.70	729A	4.25	5672	2.59	9003	1.25
2E22	1.65	19BG6	1.34	801A	.42	5686	2.59	9006	.35
2E24	1.95	24G	2.70	807	.42	5687	2.59	9PE14	5.55
2E32	.89	HK24	2.70	807W	4.38	5691	2.59	9PE15	5.55
2G21	1.95	REL26	.49	814	2.48	5692	5.00	12DP1	2.75
2J30	15.00	RK14	.24	815	1.90	5693	2.75	13DP1A	6.50
2J42	99.00	1B25	.45	826	.70	5694	1.70	15P1	2.40
2K22	99.00	1Z4G	3.50	829B	3.60	5697	2.70	17P1	1.91
2K25	11.95	3QL6	.45	832A	5.00	5702	2.70	17P1A	1.91
2K28	28.00	HY69	5.49	836	1.49	5704	2.25	17P1	1.91
2K29	28.00	QK265	250.00	864	1.49	5706	1.95	19P1	1.95
2K33	100.00	QK282	250.00	866	.34	5727	1.77	20P1	1.95
2K34	100.00	2D1A	1.50	866A	1.26	5727	1.77	5HP1	2.55
2K35	100.00	211	10.35	872A	1.29	5732	2.85	6JP1	14.95
2K41	98.00	231A	2.52	876	.55	5744	1.85	5JP2	5.00
2K42	98.00	250B	15.00	878	.55	5749	1.10	6LP2	3.00
2K43	110.00	250TH	15.00	885	1.10	5750	1.10	5SP1	50.00
2K48	30.00	304TH	15.00	927	.90	5751	1.45	7EP1A	7.50
2K49	120.00	304TL	15.00	954	.34	5767	1.45	7EP7	4.50
2P21	89.00	310A	.48	955	.34	5787	4.25		
2P24W	5.00	349A	5.00	956	.25	5794	5.50	WRITE FOR FULL LIST	
2P28	75.00	350A	5.00	958	.25	5801	1.45		
2C24	3.15	388A	1.15	1006	.35	5814	.79		

PRECISION RESISTORS
1% ACCURACY GTD
SPECIAL 15c EA.
10 OF ONE VALUE 10¢ ea
100 of One Value $8.88
100 Asst'd Values $10.00
WRITE FOR FULL LISTING

IN23B Crystal Diode
"TAB" SPECIAL 75¢ ea; 10 FOR $7
IN21 ..... 6 FOR $1

WE BUY, SELL and SWAP AS WELL

INFRARED SNOOPERSCOPE SEE IN DARK TUBE
Selected GTD Image-Converter Tube Hi-Sensitivity simplified design 2" dia. Willemite screen—Resolution up to 350 lin'in Tube & Data. "TAB" Special $3.90; 2/$7.50
New Snooperscope Power Supply
MODEL PS2001—4500VDC/35MA. Using Dual Doubler Circuit. Housed in Metal Cabinet $21.95
KIT, Same as above, Less Cabinet .. $13.95

BANDPASS FILTER TRANSFORMERS. Sharp cutoff HiQ individually cased & shielded for 60 or 90 or 120 cycle ..... $1.50; 3/$4

LINEAR SAWTOOTH
Precision Line
DC POTENTIOMETER
#KS15138
"TAB" 89¢ ea; 6/$5

MERCURY THERMO REGULATOR
DUAL CKT. 100° F & 32° F. Extremely sensitive & accurate for most exacting requirements—Research, Fire Prev., Freeze, Pt Control, or Max Min Temp Control. Brand New, w/data & ckt. Regularly over $10.00 ..... EA. 98c; 12 for $10.00

GENUINE SANDVICK STEEL WOOD SAW, dble cutting edge $15 Reg. ..... @ $2.99

New CD #BT-14 Condenser—.012/25-000 WVDC, 1¾"x1¾" Dia. $4; 6 for $20

HI-MEG HI-VOLT RESISTORS
2 MEG 8W/10KV ..... 85c 12 for $9.00
2 MEG "MVP" 10W/10KV ..... 1.00 12 for $10.00
12 MEG 10W/10KV ..... 1.50 12 for $16.00
20 MEG "MVG" 15W/50KV ..... $2.00 12 for $20.00
40 MEG "MVE" 25W/40KV $2.50 12 for $25.00
10 MEG "MVP" 10W/10KV $2.00 12 for $20.00

DE JUR-AMSCO #310 Meter. 0-800MA. 3" Rd. New Reg. $12.50. "TAB" @ $2.95

NEW G.E. PHONO CARTRIDGES
Original Boxed—Money Back Gtd

RPX050A .001 & .003	$6.75
RPX652A Gold Treasure	19.25
RPX053A Gold Treasure	28.00
RPX040A Single (8) .003	5.98
RPX041A Single (8) .001	5.98

HI-FI RECORDING TAPE
Sold on Money Back Guarantee
7" REEL, 1200 FOOT High-est Quality Precision Coated & aligned FERRO-SHEEN processed, quality controlled, constant output. Noise Free, Plastic tape. Splice Free. Free 60-15EC Oxide Wnd Is. "TAB" SPECIAL @ $3.89EA: 5 @ $3.50 EA; 12 FOR $3.45 EA 1000's SOLD

EDISON TIME DELAY RELAY, Octal base, 28v/150 Sec. ..... 98¢ Ea: 12/$10

NEW THOR ELECTRIC TOOLS
2915 ¼" Electric Speed Drill w/Jacobs chuck 2400 RPM 115VAC/DC $21.95
4002 ¼" Electric Speed Drill w/Jacobs chuck 600 RPM 115VAC/DC $27.50
4071 New 7¼" Sawsaw, Depth of cut at 90°-2¼" at 45°-1⅝", 5500 RPM-115VAC/DC with Ripguide $44.95

MICROWAVE EQUIPMENT
Connectors, Tees, Waveguides — Antennas — Adapters, Varistors, Thermistors

● THAT'S A BUY **"TAB"** THAT'S A BUY ●
Dept. 7E6 111 Liberty St., New York 6, N. Y., U. S. A.
PH RECTOR 2-6245 CABLE: "TABPARTS"

Money Back Guarantee (Cost of Mdse. Only) $5 Min. Order FOB N. Y. C. Add shpg. charges or 25% Dep. Prices Subject to Change Without Notice.

INDEX TO ADVERTISERS

Ace Electronics Associates 244
Admiral Corp. 48
Aeronautical Communications Equipment, Inc. 80
Aerovox Corp., Crowley Div 317
Aircraft-Marine Products, Inc. 64A, 64B, 195
Air Express Division, Railway Express Agency 201
Airpax Products Co. 51, 89
Aladdin Radio Industries, Inc. 228
Alden Products Co. 28
Allegheny Ludlum Steel Corp. 78
Allen-Bradley Co. 64
American Lava Corporation 189
American Machine & Foundry Co. 34
American Television & Radio Co. 222
Amperex Electronic Corp. 430
Anaconda Wire & Cable Co. 227
Applied Physics Corp. 357
Arnold Engineering Co. 13
Associated Commodity Corp. 376
Astron Corporation 235
Atlas Precision Products Co. 366
Automatic Metal Products Corp. 363
Autonetics a Div. of North American Aviation 293

Babcock Relays, Inc. 60
Baker & Co., Inc. 370
Ballantine Laboratories, Inc. 192
Barry Controls, Inc. 21
Bausch & Lomb Optical Co. 76
Beaver Gear Works, Inc. 348
Bell Telephone Laboratories 110
Bendix Aviation Corporation, Pacific Div. 53
Pioneer Central Div. 202
Bentley Harris Mfg. Co. 32
Berkeley Div., Beckman Instruments, Inc. 70
Bird Electronic Corp. 362
Biwax Corporation 299
Bomac Laboratories, Inc. 67
Bourns Laboratories 305
Brew & Co., Inc., Richard D. 339
Bristol Co. 214
Brush Electronics Company 57
Burnell & Co., Inc. 49
Bussmann Mfg. Co. 50

CBS Hytron, A Div. of Columbia Broadcasting System, Inc. 29, 217
Caledonia Electronics & Transformer Corp. 359
Cambridge Thermionic Corp. 74
Cannon Electric Co. 97
Carolina Power & Light Co. 376
Celco-Constantine Engineering Laboratories Co. 240, 367
Centralab, A Division of Globe-Union, Inc. 307, 309
Chase Brass & Copper Co. 111
Chatham Electronics, Division of the Gera Corp. 241
Chicago Standard Transformer Corp. 306
Chicago Telephone Supply Corp. 39
Cinch Mfg. Corp. 175
Clarostat Mfg. Co., Inc. 203
Cleveland Container Co. 250
Clifton Precision Products Co., Inc. 193
Cohn Corp., Sigmund 338
Coil Winding Equipment Co. 297
Collectron Corp. 299
Color Television, Inc. 308
Communication Accessories Company 205
Communication Measurement Laboratory, Inc. 432
Communication Products, Inc. 373
Connecticut Hard Rubber Co. 297
Consolidated Vacuum Corp. 246
Constantin & Co., L. L. 291
Continental-Diamond Fibre Div. of the Budd Company, Inc. 42, 265
Cornell-Dubilier Electric Corp. 243
Corning Glass Works 237
Coto Coil Co., Inc. 353
Couch Company, Inc., S. H. 224
Craig Systems, Inc. 327
Cramer Controls Corp. 262
Crest Transformer Corp. 226
Croname Incorporated 33
Cross Co., H. 371
Crucible Steel Company of America 267
Curtiss-Wright Corp. 254, 323, 333

Dano Electric Co. 369
Daven Company ..... 3rd Cover
Daystrom Pacific Corp. 326
DeJur-Amsco Corporation 234
Delco Radio, Div. of General Motors 273
DeMornay-Bonardi 112
Dialight Corporation 359
Doelcam, A Division of Minneapolis-Honeywell 61
Diamonite Products Div. of U.S. Ceramic Tile Company 304
Douglas Aircraft Company, Inc. 68
Driver Co., Wilbur B. 190
Driver-Harris Company 94
duPont de Nemours & Co., (Inc.) E. I. Film Dept. 281
Polychemicals Dept. 223

Eagle Signal Corporation 270
Eastern Air Devices, Inc. 290
Edison, Inc., Thomas A. 371
Eitel-McCullough, Inc. 65, 278
Elco Sales Company 360
Electra Mfg. Co. 272
Electro Motive Mfg. Co., Inc. 77
Electro Tec Corporation 259
Electronic Associates, Inc. 328
Electronic Engineering Company of California 299
Electronic Instrument Co., Inc. (EICO) 370
Electronics 245
Electronic Systems Engineering Co. 371
Engineering Co., The 339
Erie Electronics Division, Erie Resistor Corp. 300, 301
Essex Electronics 429

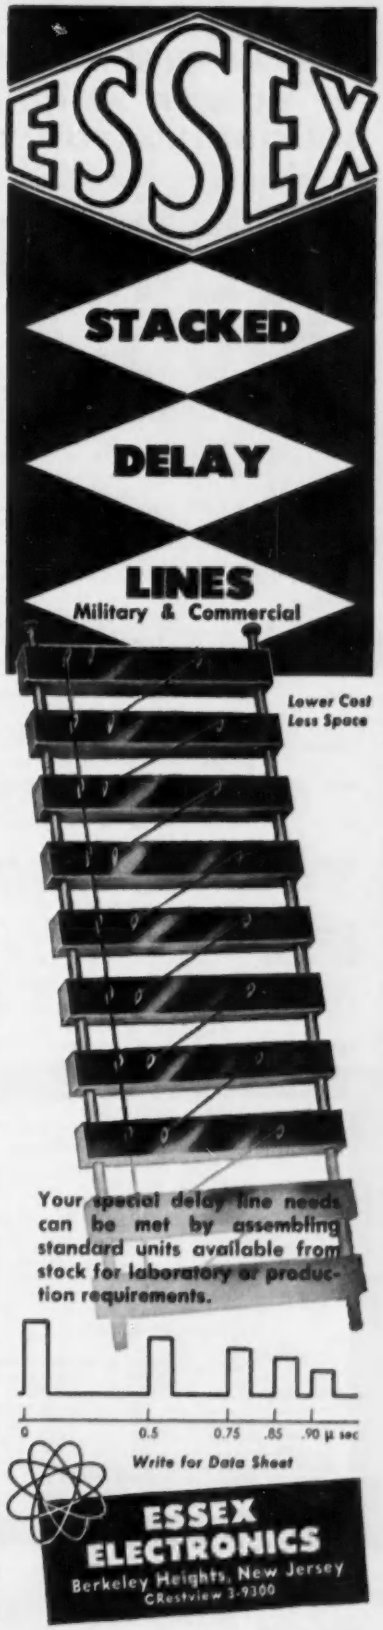

Want more information? Use post card on last page.

world's most modern **1 KW**
RF POWER AMPLIFIER
and **OSCILLATOR TRIODE**

. . . another **Amperex®** *exclusive*

5868/AX-9902

Even the quickest comparison of the AMPEREX Type 5868/AX-9902 with the nearest RF power triode in its class will immediately reveal its superiority in every respect.

	5868/AX-9902	Closest Equivalent Type
Design Philosophy	**Heavy-duty industrial** type for induction heaters, dielectric heaters and ultrasonic generators.	Strictly a transmitting type
Operating Frequency Range	**Up to 100 Mc at maximum ratings** —up to 120 Mc at reduced ratings.	Up to 30 Mc at maximum ratings.
Anode	Cylindrical "cotton-reel" construction in **Magnisorb***—will not warp, has superior gettering action, dissipates heat more uniformly and efficiently, has **enormous overload capacity.**	Flat metal structure—warps easily, resulting in characteristic changes; gives less heat dissipation.
Grid	**Platinum-clad** — lower grid emission, higher permissible grid dissipation.	Molybdenum — higher grid emission, lower grid dissipation.
Filament	Thoriated tungsten, helical construction.	"Hair-pin" structure.
Base	Strain-free **powdered-glass structure** — pioneered by AMPEREX, highly resistant to thermal and mechanical shock, requires minimum cooling.	Molded, Type 7052 glass structure —subject to cracks due to inherent strain.
Socket Requirements	Fits standard **plug-in socket**—supports itself on heavy, plated, low-contact-resistance **5-pin base;** adaptable to any layout.	Hangs from top and bottom supports—difficult to adapt to layout.
Filament and Plate Transformer Requirements	Identical	Identical

Without question, the AMPEREX Type 5868/AX-9902 is a thoroughly modern tube . . . the world's finest in its class!

*graphite-base material especially processed by Amperex

CLASS C OSCILLATOR
(Continuous Service†)
With Rectified, Unfiltered, Single-Phase, Full-Wave Plate Supply

MAXIMUM RATINGS —
Absolute Values (per tube)
For Frequencies up to 100 MC

Plate Voltage	3600 volts
Grid Voltage	–320 volts
Plate Current	475 ma
Plate Power Input	2200 watts
Plate Dissipation	450 watts
Grid Dissipation	50 watts

TYPICAL OPERATION

Transformer Secondary Voltage (RMS)	4000	3350 volts
Plate Voltage	3600	3000 volts
Plate Current	450	400 ma
Grid Current	100	85 ma
Grid Leak Resistance	3000	3000 ohms
Plate Power Input	2000	1480 watts
Plate Dissipation	450	400 watts
Plate Power Output	**1500**	**1040 watts**

†*For information on Intermittent Service, contact Amperex Applications Engineering Dept.*

Write for Detailed Data Sheets

Amperex ELECTRONIC CORP.
230 Duffy Ave., Hicksville, L. I., N. Y.
Canada: Rogers Majestic Electronics Ltd., 11-19 Brentcliffe Road, Leaside, Toronto 17,

Factory Enterprises, Inc. 352
Federal Telephone & Radio Co. 45, 353
Film Capacitors, Inc. 286
Filtron Company, Inc. 113
Firestone Guided Missile Div. 343
First Six 79
Fisher Radio Sales Co., Inc. 316
For the Field of Electronics 376
Freed Transformer Co., Inc. 363
Frenchtown Porcelain Co. 54
Frequency Standards 211

G-V Controls, Inc. 210
Gamewell Company, The 274
Garrett Corporation 285, 285
General Electric Co., Apparatus Dept. 23, 229
General Mills, Mechanical Div. 318
General Radio Co. 17
General Research & Supply Co. 368
Genisco, Inc. 345
Gilfillan 104
Good-all Electric Mfg. Co. 233
Grant Pulley & Hardware Corp. 106
Green Instrument Co. 352
Gries Reproducer Corp. 351
Gudebrod Bros. Silk Co., Inc. 354
Gudeman Company 93

Hammarlund Mfg. Co., Inc. 25
Handy & Harmon 200
Haydon Company, A. W. 310
Haydon Mfg. Co., Inc. 280
Haydu Brothers of New Jersey 275
Heath Company 362
Helipot Corp., Div. of Beckman Instruments, Inc. 181
Hewlett-Packard Company 43
Heyman Mfg. Co. 432
Hitemp Wires, Inc. 337
Hoyt Electrical Instruments 358
Hudson Tool & Die Company, Inc. 247
Hughes Products, a div. of Hughes Aircraft Co. 87, 249
Hughes Research & Development Laboratories 86, 269
Hycor, Div. of International Resistance Co. 349

I-T-E Circuit Breaker Company, Special Products Div. 62
Indiana Steel Products Company 255
Industrial Test Equipment Co. 361
International Business Machine Corp. 108
International Nickel Co., Inc. 44
International Rectifier Corp. 107
International Resistance Company 72, 73

J-V-M Engineering Co. 335
Jennings Radio Mfg. Corp. 329
Jet Propulsion Laboratory 207

Johns Hopkins University, Applied Physics Laboratory 266
Johnson Company, E. F. 332
Jones Div., Howard B., Cinch Mfg. Co. ... 299
Jones Electronics Co., Inc., M. C. 314
Joy Manufacturing Co. 221

Kahle Engineering Co. 15
Kay Electric Co. 27
Kay Lab 374
Kearfott Co., Inc. 204, 302
Kennedy & Co., D. S. 95
Kepco Laboratories 179
Kester Solder Co. 219
Kinney Mfg. Division, New York Air Brake Company 231
Knights Company, James 264
Koch Fiberglas 284

Lambda Electronics Corp. 90
Lampkin Laboratories, Inc. 372
Lapp Insulator Co., Inc. 216
Lavoie Laboratories, Inc. 349
Leach Corporation 105
Lewis Spring & Mfg. Co. 322
Librascope, a Sub. of General Precision Equipment Corp. 69
Los Alamos Scientific Laboratory 321

M. I. T. Lincoln Laboratory 330
MacLen Corp. 376
Magnatran, Inc. 351
Magnetic Metals Company 260
Magnetics, Inc. 185
Mallory and Co., Inc., P. R. 118, 177
Mandex Manufacturing Company, Inc. 198
Marconi Instruments, Ltd. 289
Marion Electrical Instrument Co. 226, 372
Markem Machine Co. 364
Martin Company, Glenn L. 253, 263
Maxson Instruments, Division of the Maxson Corp. 358
Measurements Corporation 365
Metals & Controls Corp., General Plate Div. 36
Metal Textile Corp. 242
Microwave Associates, Inc. 208
Midland Mfg. Co., Inc. 91
Millen Mfg. Co., Inc., James 336
Minneapolis-Honeywell Regulator Co., Industrial Div. 200
Moloney Electric Co. 225
Muirhead & Co., Ltd. 5
Mullard Overseas Ltd. 96
Mycalex Corp. of America 279

N J E Corporation 117
National Moldite Company 213
National Semiconductor a div. of Hoffman Electronics Corp. 109

75 INCHES PER SECOND

3 MSEC STARTS AND STOPS

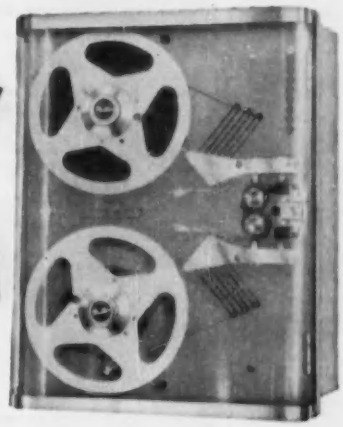

Model 905 Digital Magnetic Tape Handler

The Ultimate in Digital Tape Handlers for High-Speed Computers, Electronic Business Machines, Industrial Control and Other EDP Applications.

Regardless of cost, many features are exclusive with Potter

Speed and ease of operation—Up to 75"/sec in a variety of dual speed combinations, with 3 msec starts and stops. Tape widths from ¼" to 1 ¼" are accommodated. Automatic threading, fast rewind, end-of-tape sensing, and front panel or remote control provide unmatched flexibility and ease of operation.

Standard 19" Rack Mounting—Hinged front panel provides quick access to mechanical parts and plug-in electronic components. Transparent dust cover protects tape and moving parts without hindering visual observation of tape track.

Auxiliary Equipment—A complete line of digital data-handling accessories is available, including *record-playback heads* (Model 6400) in numerous channel number and tape width combinations. *Record-playback amplifiers* can be furnished as individual plug-in units (Models 52, 53) or in *complete systems* (Model 920) for return-to-zero or non-return-to-zero recording. *Shift registers, high speed printers and other data-handling components* are available separately or in integrated systems for solving specific data-processing problems.

WRITE FOR INFORMATIVE BULLETIN . . . and feel free to consult Potter engineers on your data-handling problems. No obligation, of course.

Potter

POTTER INSTRUMENT COMPANY, INC.

115 Cutter Mill Road — Great Neck, L. I., N. Y.

HEYCO NYLON STRAIN RELIEF BUSHINGS CUT PRODUCTION COSTS AND IMPROVE PRODUCT QUALITY

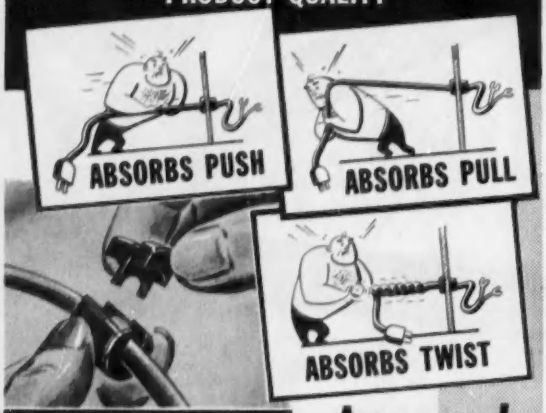

1—SLIP OVER WIRE
2—SNAP INTO HOLE

Approved

With Heycos it's no longer necessary to tie wire knots or use insulating grommets. Product life is increased and product appearance is greatly enhanced.

HEYMAN MANUFACTURING COMPANY
Kenilworth 2 New Jersey

HEYCO

Send wire sizes for free samples and specifications.

THREE PHASE
VARIABLE FREQUENCY POWER SUPPLY
CONTINUOUSLY VARIABLE FROM 360 TO 440 CPS

CML's Model 1450 Electronic Generator has a power output of 750 volt-amperes with output voltage regulation of better than 2% from no load to full load. Harmonic content is below 3% at full load.

Model 1450 is also available as a fixed frequency unit employing a tuning fork oscillator to give a frequency accuracy and stability of 1 part in 50,000. This stability is independent of line voltage or frequency.

Catalogue sheet "P" describes the Model 1450 and is available for the asking.



COMMUNICATION MEASUREMENTS LABORATORY, INC.
350 LELAND AVE., PLAINFIELD, N.J.

Natvar Corporation 81, 239
Nems-Clarke, Inc. 354
Ney Company, J. M. 368
North American Aviation, Inc. 356
Northeastern Engineering 296
North Electric Co. 355
Notheifer Winding Laboratories, Inc. 194
Nucleonic Products Co. 338

Oak Mfg. Co. 40, 41
Ohmite Manufacturing Co. 32A, 32B
Olin Mathieson Chemical Corp. 287
Oster Manufacturing Co., John 66
Otis Elevator Co. 103

Pacific Semiconductors, Inc. 63
Panoramic Radio Products, Inc. 350
Phalo Plastics Corp. 294
Phaostron Instrument & Electronic Co. 248
Phelps-Dodge Copper Products Corp., Inca Mfg. Div. 98, 99
Philamon Laboratories, Inc. 59
Philco Corporation 75
Phillips Control Corp. 230
Phillips Process Co., Inc. 335
Photocircuits Corp. 236
Pix Manufacturing Co., Inc. 348
Polarad Electronics Corporation 30, 31
Potter Company, The 276
Potter Instrument Co., Inc. 431
Precision Apparatus Co., Inc. 434

Quaker City Gear Works, Inc. 212

R-B-M Division, Essex Wire Corp. 191
Radiation, Inc. 297
Radio Corporation of America ..... 114, 115, 261, 4th Cover
Radio Engineering Products 357
Radio Industries, Inc. 238
Radio Materials Corp. 82
Radio Receptor Co., Inc. 85
Ramo-Wooldridge Corp. 341
Raytheon Mfg. Company 18, 19, 35
Reeves Instrument Corp. 83
Remington Rand Univac Div. of Sperry Rand Corp. 283
Resinite Corp., Div. of Precision Paper Tube Co. 320
Rome Cable Corp. 92
Rotron Mfg. Co., Inc. 315
Rutherford Electronics Co. 364

S W Electronics, a div. of Stewart-Warner Corp. 101
Sanders Associates, Inc. 350
Seamless Rubber Co., The 376
Sel-Rex Precious Metals, Inc. 186

Sigma Instruments, Inc. 232
Sola Electric Co. 52
Solar Manufacturing Corp. 282
Sorensen & Co., Inc. 4
Southern Electronic Corp. 197
Southwestern Industrial Electronics Co. . 271
Speer Resistor Division, Speer Carbon Co. 344
Spencer Kennedy Laboratories, Inc. 345
Sprague Electric Co. 11, 183
Stackpole Carbon Co. 71
Star Porcelain Co. 297
Sterling Transformer Corp. 373
Stevens Arnold, Inc. 334
Stoddart Aircraft Radio Co., Inc. 188, 311
Stokes Corporation, F. J. 46, 47
Stupakoff Ceramic & Mfg. Co., Div. of the Carborundum Company 312, 313
Superior Tube Co. 88
Sylvania Electric Products, Inc. 9, 257

Taylor Fibre Co. 100
Technitrol Engineering Co. 324
Technicraft Laboratories, Inc. 306
Technology Instrument Corp. 331
Teiner Engineering Corp. 334
Tektronix, Inc. 55
Telrex, Labs. 365
Texas Instruments, Inc. 187
Thompson Products, Electronics Division 319
Transco Products, Inc. 184
Transradio, Ltd. 360
Trans-Sonics, Inc. 298
Triplett Electrical Instrument Co. 116
Tung-Sol Electric, Inc. 56

Ucinite Co. 94
Union Switch & Signal Div. of Westinghouse Air Brake Company 325
U. S. Engineering Co., Inc. 268
United States Gasket Co. 433
United States Plywood Corp. 361
United Transformer Co. ..... 2nd Cover
Universal Winding Co. 277

Varflex Corporation 288
Veeder-Root, Inc. 199
Virginia Electric & Power Co. 292
Vitro Corporation of America 303

Waldes Kohinoor, Inc. 37
Waterman Products Co., Inc. 252
Waters Manufacturing, Inc. 346, 347
Weckesser Co. 369
Welwyn International, Inc. 297
Wenco Manufacturing Co. 336

precision

TEFLON and KEL-F

parts

Quality controlled "from powder to part"—U.S.G. precision-molded or machined parts from TEFLON*, KEL-F†, BAKELITE° Fluorothene and other plastics meet exacting specifications, cut assembly costs, assure uniform density and dimensional stability, uniform electrical, chemical and physical characteristics of the highest quality.

Come to "Fluorocarbon Plastics Headquarters" for all your requirements—for precision parts or for the world's largest stock of sheets, tape, tubing, rods, bars, cylinders, beading, electrical spaghetti, extruded shapes, and the new Cementable Teflon tape and sheets.

Write for Catalog No. 300.

U S G BELMONT

* duPont's Trademark for its tetrafluorothylene resin.
† Kellogg's Trademark for its trifluorochloroethylene resin.
° Bakelite Trademark.

UNITED STATES GASKET CO.

CAMDEN 1, NEW JERSEY

ENGINEERED
for those who expect much
PRICED
for those who must buy many

the
PRECISION
model
68
VTVM

METAL CASED

RUGGED

- **Peak-to-Peak Voltage Ranges**
  up to 3200 volts peak-to-peak
- **Extra-Large 5¼" Wide-Angle Meter**
  easy-reading, long scales
- **High-Impedance Voltage Ranges (AC and DC)**
  up to 1200 volts
- **Measures Resistance up to 1000 Megohms**
  in 5 overlapping ranges
- **Zero-Center Reference Ranges**
  simplify FM discriminator balancing

Model 68: In rugged, blue-gray ripple-finished steel cabinet. Size 5⅞"x7¾" x3½". Complete with tubes, internal ohmmeter battery and detailed instruction manual. **Net Price.....$54.50**

Accessories Available for Models 68 & 78

RF-12 High Freq. Probe. **Net Price: $10.95**

TV-4 High Volt. Probe. **Net Price: 14.75**

Send for free 1956 catalog with detailed descriptions and specifications of the entire precision line of test instruments for industry and electronic service-maintenance.

Model 78
Battery-Operated
VTVM

A must where power line is not available or where power line connection is undesirable. Provides **every** modern VTVM function. Metal cased. Rugged.

Net Price $62.50
(including Batteries)

PACE
THE MARK OF PRECISION

PRECISION **Apparatus Company, Inc.**
70-31 84th Street, Glendale 27, L. I., N. Y.
Export: 458 Broadway, New York 13, N.Y., U.S.A. • Cables: MORHANEX
Canada: Atlas Radio Corp. Ltd. • 50 Wingold Ave., Toronto 10, Ontario

Westinghouse Electric Corp.....38, 58, 102, 251, 295
Weston Electrical Instrument Corp.....215
Wheelock Signals, Inc.....367
White Dental Mfg. Co., S. S.....196
White Instrument Laboratories.....369
Whitso, Inc.....356

Zophar Mills, Inc.....336

MANUFACTURER'S REPRESENTATIVES.....376

PROFESSIONAL SERVICES.....375

CLASSIFIED ADVERTISING
F. J. Eberle, Business Mgr.

SEARCHLIGHT ADVERTISING.....417-428
ADVERTISERS INDEX.....416

EMPLOYMENT OPPORTUNITIES..377-417
ADVERTISERS INDEX.....414

This index is published as a service. Every care is taken to make it accurate, but ELECTRONICS assumes no responsibility for errors or omissions.

electronics

READER SERVICE SECTION

A method that provides readers with a . . .

"DIRECT-TO-THE-MANUFACTURER"

method of obtaining information on:

1. Products advertised in this issue
2. New Products and Literature covered in the editorial section of this issue

This direct method prevents loss of time in remailing your request from publication to manufacturer.

THESE POST CARDS ARE FOR YOUR USE

and

HERE IS WHAT YOU DO:

1. Fill in with ink or typewriter your name, company, address and title.

2. Then fill in the name of the specific product and the page number on which it appears.

3. Place a check mark in the box or boxes applicable to your needs.

4. Tear out the postcard on the perforated lines and address it to the manufacturer(s) whose products you are interested in. Place a stamp in the box indicated and drop into the mail.

THE MANUFACTURER WILL PROMPTLY SEE THAT YOU RECEIVE THE NECESSARY PRODUCT DATA OR THAT HIS REPRESENTATIVE CALLS UPON YOU, WHICHEVER YOU DESIRE.

If there is insufficient space on the postcard for describing your problem specifically, we suggest you write to the manufacturer, spelling out your requirements in detail. Be sure your filled in postcard accompanies your letter.

THIS SERVICE IS A CONVENIENCE FOR THE READERS OF ELECTRONICS.

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of July 1956 Issue

or, Check

New Product | ___

Literature | ___

..... on Page .....

(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

☐ Please contact me by telephone. Phone Number.....

electronics

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of July 1956 Issue

or, Check

New Product | ___

Literature | ___

..... on Page .....

(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

☐ Please contact me by telephone. Phone Number.....

electronics

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of July 1956 Issue

or, Check

New Product | ___

Literature | ___

..... on Page .....

(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

☐ Please contact me by telephone. Phone Number.....

electronics

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of July 1956 Issue

or, Check

New Product | ___

Literature | ___

..... on Page .....

(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

☐ Please contact me by telephone. Phone Number.....

electronics

ELECTRONICS
July 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

ELECTRONICS
July 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

ELECTRONICS
July 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

ELECTRONICS
July 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

To the Readers

of

electronics

A New Reader Service designed to provide prompt response

You, as a reader, may never have thought specifically of the viewpoint of the advertisers whose informative and up-to-date product news reaches you through the advertising pages of ELECTRONICS.

They are VITALLY interested in you and your needs. You and thousands like you constitute the market and without you they cannot continue to present their product story; indeed, they cannot remain in business.

These manufacturers whose products and services are shown in this issue welcome your inquiries and your desire for more information.

If your requirements are complicated and you require more space, we suggest that you write directly to the manufacturer, stating your problem in detail and asking for specific information or assistance. Be sure to include the postcard with your detailed request in order that your inquiry be given prompt and expeditious attention. Make certain that you specify which PRODUCT you are interested in if more than one appears in the advertisement.

On inquiries sent from foreign countries, please check mailing costs.

electronics

READER SERVICE SECTION

A method that provides readers with a . . .

"DIRECT-TO-THE-MANUFACTURER"

method of obtaining information on:

1. Products advertised in this issue
2. New Products and Literature covered in the editorial section of this issue

This direct method prevents loss of time in remailing your request from publication to manufacturer.

THESE POST CARDS ARE FOR YOUR USE

and

HERE IS WHAT YOU DO:

1. Fill in with ink or typewriter your name, company, address and title.

2. Then fill in the name of the specific product and the page number on which it appears.

3. Place a check mark in the box or boxes applicable to your needs.

4. Tear out the postcard on the perforated lines and address it to the manufacturer(s) whose products you are interested in. Place a stamp in the box indicated and drop into the mail.

THE MANUFACTURER WILL PROMPTLY SEE THAT YOU RECEIVE THE NECESSARY PRODUCT DATA OR THAT HIS REPRESENTATIVE CALLS UPON YOU, WHICHEVER YOU DESIRE.

If there is insufficient space on the postcard for describing your problem specifically, we suggest you write to the manufacturer, spelling out your requirements in detail. Be sure your filled in postcard accompanies your letter.

THIS SERVICE IS A CONVENIENCE FOR THE READERS OF ELECTRONICS.

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of July 1956 Issue

or, Check

New Product	
Literature	

..... on Page .....
(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

electronics

☐ Please contact me by telephone. Phone Number.....

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of July 1956 Issue

or, Check

New Product	
Literature	

..... on Page .....
(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

electronics

☐ Please contact me by telephone. Phone Number.....

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of July 1956 Issue

or, Check

New Product	
Literature	

..... on Page .....
(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

electronics

☐ Please contact me by telephone. Phone Number.....

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of July 1956 Issue

or, Check

New Product	
Literature	

..... on Page .....
(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

electronics

☐ Please contact me by telephone. Phone Number.....

ELECTRONICS
July 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

ELECTRONICS
July 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

ELECTRONICS
July 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

ELECTRONICS
July 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

For PRODUCTS and SERVICES

not specifically advertised

or described in the issue

of

Electronics

Consult your

1956-1957 ELECTRONICS BUYERS' GUIDE

or

Write to:

Reader Service Department

Electronics

330 West 42nd Street

New York 36, N. Y.

Time Means Nothing to a Daven Attenuator

Time and time again we hear that 10, 15, 20 . . . yes, even 25 years continuous use can be expected from **Daven** attenuators under normal conditions. A number of our customers expect 22-year life. This expectation is based on their experience with **Daven** attenuators still in operation which were purchased 25 years ago.

This kind of durability in electronic equipment isn't an accidental by-product at **Daven.** Skilled engineering at every step of design and production assures that **Daven** attenuators consistently outperform original equipment specifications. Check these exclusive **Daven** features that add up to leadership in the attenuator field:

"Knee-Action" Rotor

- Tamper proof
- Uniform contact pressure and low contact resistance over the life of every unit.
- Each rotor blade individually supported to give positive contact in operation under all types of conditions.

Low-Loss Molded Terminal Board

- For high resistance to leakage.

Rigidly Self-Supported Resistor Strips

- With air insulation.

Brass Case of 2-Piece Construction

- Greatly reduces clearance space required for removal of cover in rear of unit.

"Lock-Tite" Dust Cover

- Held by positive, bayonet-type lock which prevents cover from becoming detached under stress of vibration.

Enclosed Roller-Type Detent Mechanism

- For extra long life and positive indexing.
- Addition of detent does not increase depth of unit.

Write for catalog.

THE DAVEN CO.

191 Central Avenue, Newark 4, New Jersey

World's Largest Manufacturer of Attenuators

RCA TRANSISTORS

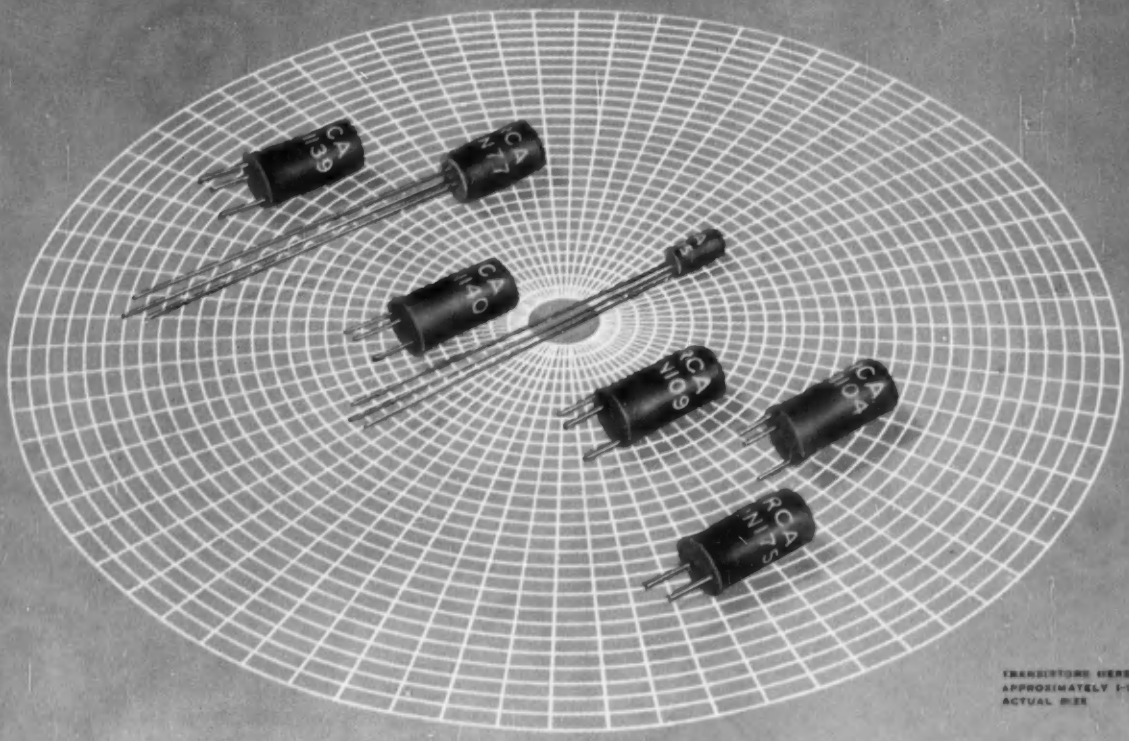

TRANSISTORS HERE SHOWN APPROXIMATELY 1-1/2 TIMES ACTUAL SIZE

Quality Performance

. . . NEXT TO PERFECTION!

With field returns reported by equipment manufacturers now running well under *one-tenth of one per cent*, RCA transistors are the No. 1 choice among circuit designers who are looking for the highest in quality. Savings in transistor testing, replacing, and handling are substantial. And the exceptional uniformity and extreme stability of RCA transistors—*stay that way throughout life!*

Manufactured under advanced production techniques—and held to tolerances among the strictest in the industry (through RCA's unique "in-process" quality control system)—all RCA commercial-type transistors meet rigid environmental requirements.

RCA TRANSISTORS—A STANDARD OF COMPARISON

RADIO CORPORATION of AMERICA
SEMICONDUCTOR DIVISION **SOMERVILLE, N. J.**

For sales information, call the RCA office nearest you. For technical data, write RCA, Commercial Engineering, Section G-19Q, Harrison, N. J.

EAST: HUmboldt 5-3900
744 Broad Street
Newark 2, N. J.

MIDWEST: WHitehall 4-2900
Suite 1181
Merchandise Mart Plaza
Chicago 54, Ill.

WEST: RAymond 3-8361
6355 East Washington Blvd.
Los Angeles 22, Calif.